

SERVICE AND APPLICATION NOTES

April 17, 2013

H-13-02

Alternate Condensate Trap Replacement Kit 10C90

Lennox is introducing an alternate condensate trap replacement kit (10C90) for use with with G41UF, G43UF, G51MP, G61MP, G61MPV and G71MPP units installed in upflow and downflow applications ONLY. For G41, G43, G51MP, G61MP and G61MPV installed in horizontal applications use kit 61M35. For G71MPP units installed in horizontal applications use kit 39W98.

The 10C90 kit includes an open trap design which will not cause the unit to shut down if the drain or drain trap is blocked. The furnace will continue to operate in the case of a blockage. The drain termination must be visible to the homeowner and the homeowner must be aware of the importance of free flowing condensate during unit operation. This kit should not be used in areas where water from an overflowing trap could cause property damage.

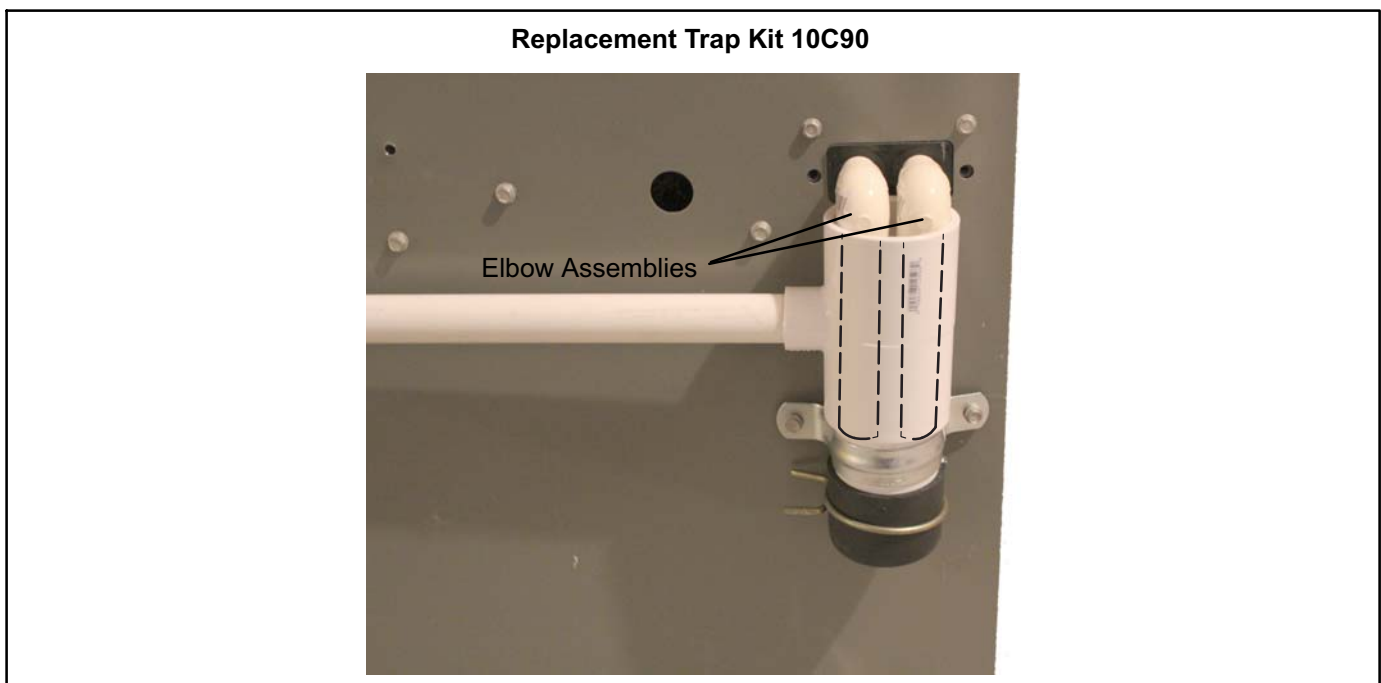


FIGURE 1