

**INSTALLATION INSTRUCTIONS FOR SECURING THE VESTIBULE PANEL TO BLOWER DECK IN 80% EFFICIENCY FURNACES**

**⚠ WARNING**

Improper installation, adjustment, alteration, service or maintenance can cause property damage, personal injury or loss of life. Installation and service must be performed by a licensed professional installer (or equivalent), service agency or the gas supplier.

**Application**

Use this instruction to secure the vestibule panel to blower deck in all 80% efficiency furnaces that is required.

**Installation**

**⚠ CAUTION**


Before attempting to perform any maintenance, turn the electrical power to unit OFF at the disconnect switch.

- 1 - Remove the blower access panel.
- 2 - Loosen screws and remove control box. Set aside.
- 3 - Use figure 1 as a guide and install a self tapping screw to secure the blower deck to the vestibule panel.
- 4 - Re-install control box and blower access panel.

**⚠ WARNING**

The blower access panel must be securely in place when the blower and burners are operating. Gas fumes, which could contain carbon monoxide, can be drawn into living space resulting in personal injury or death.

- 5 - Turn on power to furnace.
- 6 - Follow Start Up procedure found in the furnace instruction or the sticker found on the furnace cabinet.

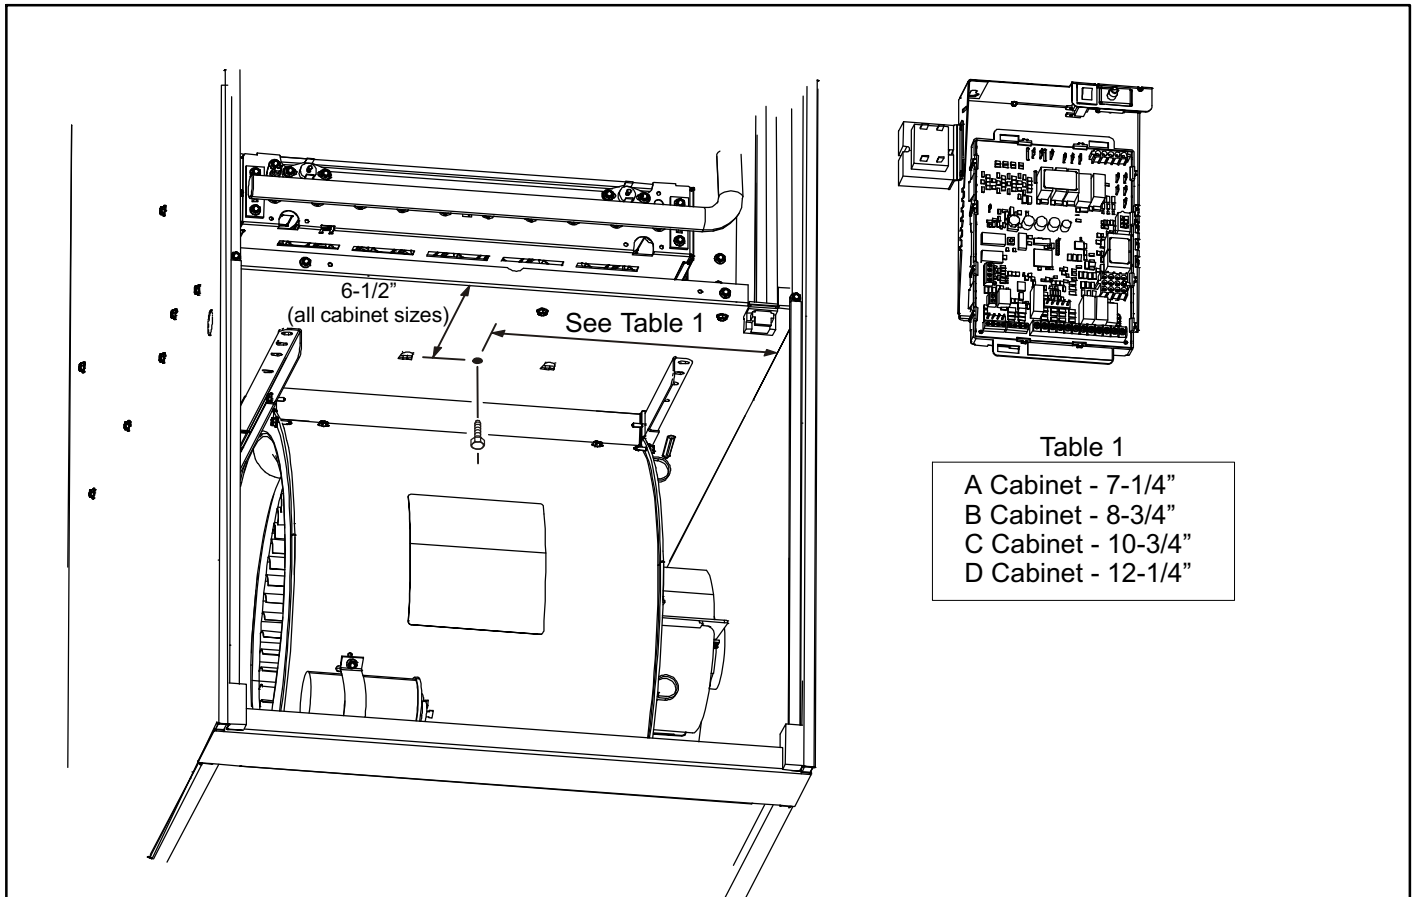

**FIGURE 1**

Table 1

A Cabinet	- 7-1/4"
B Cabinet	- 8-3/4"
C Cabinet	- 10-3/4"
D Cabinet	- 12-1/4"



