




Replacement Guide for iComfort S30 Smart Hub (12X98)

WARNING: Improper installation, adjustment, alteration, service or maintenance can cause property damage, personal injury or loss of life. Installation and service must be performed by a qualified installer, service agency or the gas supplier

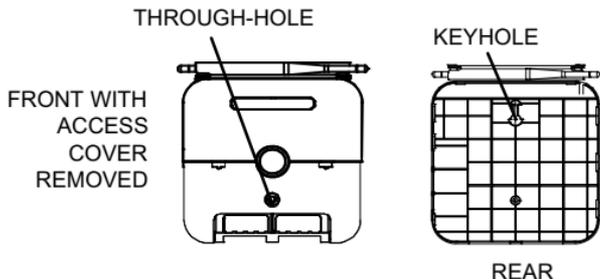

REMOVING EXISTING SMART HUB

1. Obtain a copy of the original installation report (available with S30 software version 3.1) from the dealer portal which can be used during commissioning once the Smart Hub has been replaced.
2. Make note of homeowner account information and home Wi-Fi access information.
3. Go to the homeowner web portal and remove the system from the account.
4. Disconnect power to the entire system.
5. Note the orientation of the antennas which will be needed during the replacement procedure.
6. Remove the access cover from Smart Hub.
7. Take a picture or make a drawing showing the control wires and what terminals they are connected to.
8. Disconnect control wiring.
9. Remove the screw (through-hole) securing the Smart Hub to wall.
10. Lift up and out to remove Smart Hub from the key hole.
11. Discard Smart Hub.


0716



507541-01



Replacement Guide for iComfort S30 Smart Hub (12X98)

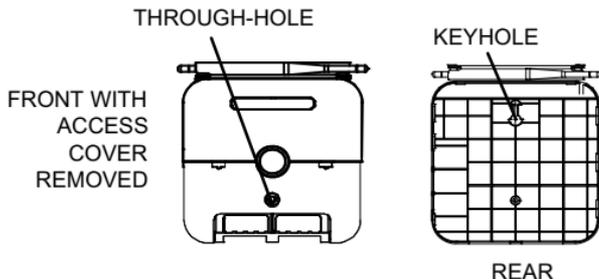

SMART HUB INSTALLATION

1. Remove new Smart Hub from shipping container.
2. Remove the access cover from the Smart Hub.
3. Mount the Smart Hub on the wall with key hole support.
4. Use the through-hole screw previously removed to secure the Smart Hub.
5. Reconnect all wiring that was documented during the removal of the old Smart Hub.
6. Replace the access cover.
7. Unfold the antenna and position as noted during removal of the original Smart Hub.
8. Restore power to system.
9. Use the previous mentioned installation report if available and any other additional information noted to recommission the system. Refer to the S30 Installation and Setup Guide for further details.