

GAS UNITS KITS & ACCESSORIES

507883-01
09/ 2018

VENT ADAPTOR KIT

INSTALLATION INSTRUCTIONS FOR VENT ADAPTOR KIT 17H92 USED ON 90% EFFICIENCY UPFLOW/ HORIZONTAL GAS FURNACES

⚠ WARNING

Improper installation, adjustment, alteration, service or maintenance can cause property damage, personal injury or loss of life. Installation and service must be performed by a licensed professional HVAC installer or equivalent, service agency, or the gas supplier

⚠ CAUTION

As with any mechanical equipment, contact with sharp sheet metal edges can result in personal injury. Take care while handling this equipment and wear gloves and protective clothing.

Shipping and Packing List

Package 1 of 1 contains:

- 1 - Vent adaptor
- 2- Bands

Application

Use kit 17H92 to install the vent adaptor to the exhaust on 90% efficiency upflow / horizontal furnaces.

Installation

The vent adaptor must be attached to the exhaust coupling on the furnace top panel. Use the provided adjustment bands .

NOTE - Kit 17H92 is approved for upflow/horizontal furnaces only. Do not install on downflow furnaces.

- 1 - Shut off power to the unit.
- 2 - Remove the caution tag from vent adaptor
- 3 - Fully insert vent adaptor with both bands loosely attached on the furnace exhaust coupling.
- 4 - Ensure vent pipe is fully seated into exhaust coupling.
- 5 - Tighten both top and bottom bands to 40in-lbs. See figure 1.

Continue following the unit installation instruction.

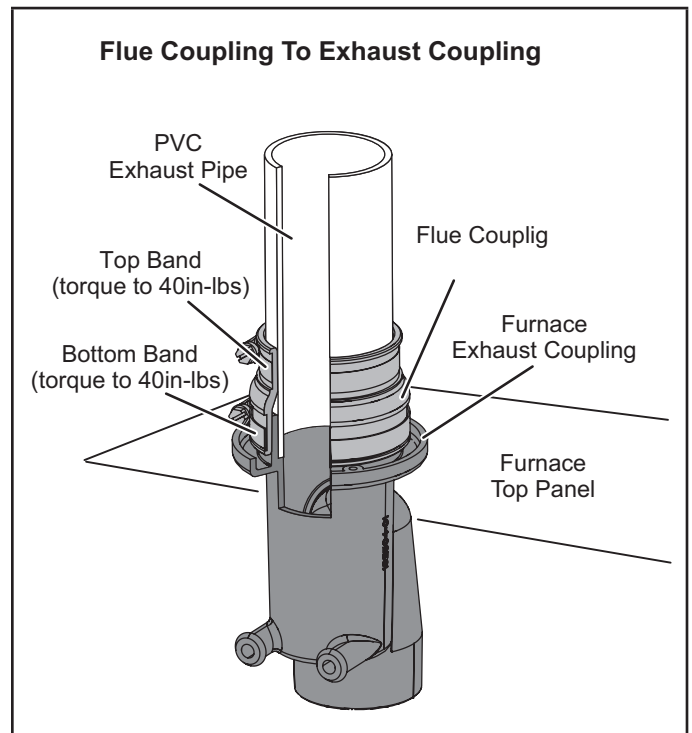


FIGURE 1