



Heat Pumps 13HPD

PRODUCT SPECIFICATIONS

- Nitrogen charged for replacement of R-22 components only
- High-quality condenser coil with copper tubing and enhanced louvered fin for maximum heat transfer capacity
- Top discharge directs hot air and sound away from living area and shrubbery
- All units run tested
- Available with wire panel coil protection
- Easy access to electrical panels, pre-wired for easy hook-up
- Bi-directional liquid line filter drier factory installed
- Discharge muffler for quiet operation
- Reliable time/temperature defrost control, with field selectable 30/60/90 minute intervals
- Integrated control with LED diagnostics
- Short cycle protection factory installed
- All units UL and ULC approved

NITROGEN CHARGED

**13 SEER
1.5 to 5 Tons**



Warranty

Compressor - 5 Year Limited
Parts - 5 Year Limited

Heat Pumps 13HPD


Sound Ratings

Model No.	Sound Rating dBA
13HPD-018	76
13HPD-024	76
13HPD-030	76
13HPD-036	76
13HPD-042	80
13HPD-048	80
13HPD-060	80

Dimensions

Model No.	13HPD-018	13HPD-024	13HPD-030	13HPD-036
Cabinet Width (A) in	24-1/4"	24-1/4"	24-1/4"	24-1/4"
Cabinet Depth (B) in	24-1/4"	24-1/4"	24-1/4"	24-1/4"
Height (C) in	33-1/2"	33-1/2"	29-1/2"	33-1/2"

Model No.	13HPD-042	13HPD-048	13HPD-060
Cabinet Width (A) in	28-1/4"	28-1/4"	32-1/4"
Cabinet Depth (B) in	28-1/4"	28-1/4"	32-1/4"
Height (C) in	33-1/2"	37-1/2"	37-1/2"

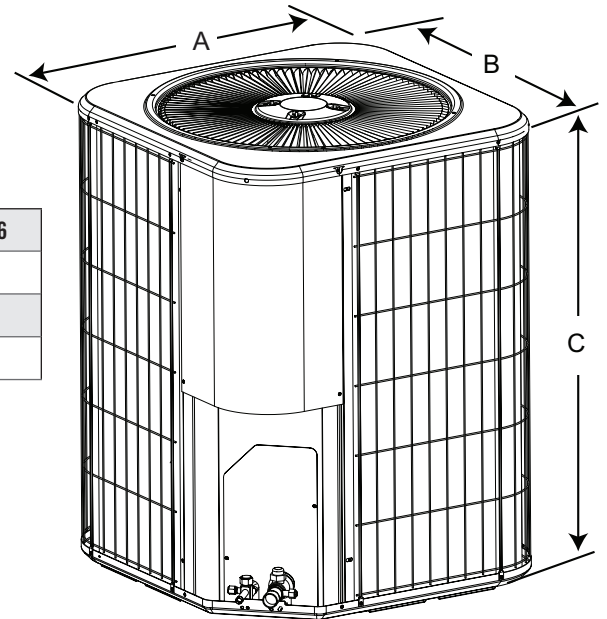

Heat Pumps 13HPD

Revisions

Sections	Description of Change
Electrical Data / Specifications	Updated.



1.800.982.2333
www.aireflo-hvac.com

