

SUBMITTAL DATA - CEILING CASSETTE

M33A024S4-2P

MULTI-ZONE MINI-SPLIT HEAT PUMP

| Job: | Engineer: | |
|---------------------|---|--|
| Location: | Architect: | |
| Schedule No.: | Date: | |
| System Designation: | For: □Reference □Approval □Review □Construction | |

FEATURES

Auto Restart

- Pre Heat Function
- 360° Airflow Panel
- Built-In Condensate Pump
- Flare Connections
- Refrigerant R-410A
- LED Readout Panel
- · Wireless Remote Controller included

Product Warranty

All covered components - Twelve year limited warranty. Product registration required.

| Product registration required. | | | |
|--|-----------------|--|--|
| SPECIFICATIONS | | | |
| PERFORMANCE | | | |
| Cooling Capacity ¹ (Btu/h) | | 23,000 | |
| Heating Capacity ¹ (Btu/h) | | 25,000 | |
| Airflow (CFM) | High | 820 | |
| | Medium | 740 | |
| | Low | 590 | |
| External Static Pressure (in. w.g.) | | | |
| Sound Pressure (dBA) | High | 51 | |
| | Medium | 47 | |
| | Low | 43 | |
| ELECTRICAL DATA | | | |
| | | | |
| Power Supply (V/Hz/Φ) | | 208-230/60/1 | |
| Power Supply (V/Hz/Φ) Rated load amps (RLA) | | 208-230/60/1 1.5 | |
| | | | |
| Rated load amps (RLA) | | 1.5 | |
| Rated load amps (RLA) Power Output (W) | Height | 1.5 | |
| Rated load amps (RLA) Power Output (W) DIMENSIONS | Height Width | 1.5 42 | |
| Rated load amps (RLA) Power Output (W) DIMENSIONS | - | 1.5 42 8-1/8 | |
| Rated load amps (RLA) Power Output (W) DIMENSIONS | Width | 1.5 42 8-1/8 33-1/8 | |
| Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) | Width | 1.5 42 8-1/8 33-1/8 33-1/8 | |
| Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) | Width Depth | 8-1/8 33-1/8 33-1/8 3/8 | |
| Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in) | Width Depth | 8-1/8 33-1/8 33-1/8 3/8 5/8 | |
| Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in) Condensate drain connection | Width Depth | 8-1/8 33-1/8 33-1/8 3/8 5/8 1-1/4 | |



OPTIONAL ACCESSORIES Non-Programmable Controller (M0STAT61Q-1): Wireless Remote Controller (M0STAT60Q-1): 1+ Programmable Controller (M0STAT64Q-1):

NOTES

- Cooling and Heating capacity data is rated at the following conditions:
 Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor
- 2. Cassette Panel (M0STAT63Q-1) ordered separately.












SUBMITTAL DATA - CEILING CASSETTE M33A024S4-2P


MULTI-ZONE MINI-SPLIT HEAT PUMP

DIMENSIONAL DRAWINGS - INCHES (MM)


M33A024S4

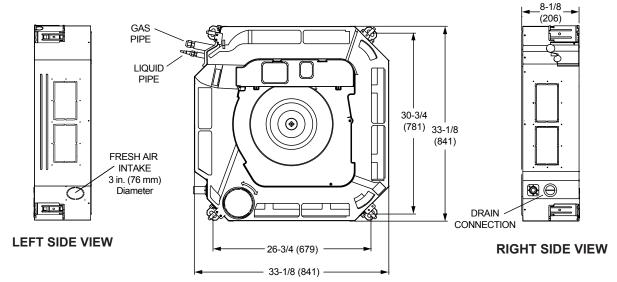

BOTTOM VIEW (Body)



SIDE VIEW



BOTTOM VIEW (Panel)