



SUBMITTAL DATA - ACCESSORIES

VOCTRL90P-1

VRF HEAT PUMP & HEAT RECOVERY

Job: _____
 Location: _____
 Schedule No.: _____
 System Designation: _____

Engineer: _____
 Architect: _____
 Date: _____
 For: Reference Approval Review Construction

Auxiliary Heat Interface

FEATURES AND FUNCTIONS

- Engages third-party auxiliary heat source when the zone temperature falls 3°F below the set point when the connected indoor unit is providing full heat capacity
- Installs inside of the cabinet for all indoor units except wall-mounted
- Refer to installation manual for connection details

COMPATIBLE INDOOR UNITS


Model Name	Model #
Compact 360° Cassette	V22A***S4-*P
360° Cassette	V33A****4-*P
Ceiling and Floor Mounted	VCFA***S4-*P
Medium-Static Ducted	VMDA****4-*P
High-Static Ducted	VHIA***S4 -*P
Vertical Air Handler	VVCA***S4-*P



SPECIFICATIONS

Relay Board Dimensions (in)	Height	1-1/2"
	Length	1-5/8"
	Width	2-3/8"
Wire Length (in)		11"

DIMENSIONAL DRAWING

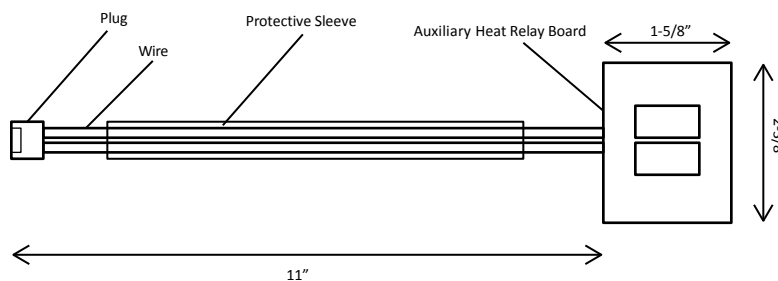

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

495464(201605)

©2016 Lennox Industries Inc.