

SUBMITTAL DATA - OUTDOOR UNIT **VPB036H4M-3P Mini-VRF Heat Pump**

Schedule No.: System Designation:	Locati	on:			
System Designation:	Date:				
Jost Bump Outdoor Unit	For:	Reference	Approval	Review	Construction

FEATURES

Two-pipe heat pump

• High efficiency twin toary compressor

- · Built-in base pan heater
- · Power meter interface
- · Intelligent soft start

WARRANTY

- Compressor 10-year limited warranty
- · All other components 10-year limited warranty *See warranty for details

ood marranty for dotallo			
SPECIFICATIONS			
PERFORMANCE			
Cooling Capacity ¹ (Btu/h)	Nominal	36,000	
coming capacity (214/11)	Rated ²	36,000	
EER	Ducted	11.9	
	Non-Ducted	12.1	
SEER	Ducted	17.8	
	Non-Ducted	19.2	
Heating Capacity¹ (Btu/h)		40,000	
HSPF	Ducted	10.4	
	Non-Ducted	11.4	
ELECTRICAL DATA			
Power Supply (Volts/Phase/Hertz)		208-230/1/60	
Minimum Circuit Ampacity (A)		36	
Maximum Overcurrent Protection (A)		60	
Compressor RLA (A)		26.5	
Number of Compressors		1	
Outdoor Fan Power Output (W)		90+90	
Outdoor Fan FLA (A)		1.2/1.2	
GENERAL DATA			
Connection Ratio		45% to 130%	
Maximum Number of Indoor Units		5	
Outdoor Fan Total Air Volume (cfm)		4100	
Sound Pressure Level (dBA)		61	
Refrigerant Type		R-410A	
Factory Refrigerant Charge (each unit)		8.6 lbs.	
NOTES			

NOTES

- Cooling and Heating capacity data is rated at the following conditions:
 - Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor
- Complies with AHRI 210/240 testing standards
- Operating Voltage Range 191V to 247V




DIMENSIONS		
Unit	Height	52-1/4
Dimensions (in)	Width	35-3/8
	Depth	13-1/4
Main System Piping (in)		
Liquid Pipe Connection		3/8
Gas Pipe Connection		3/4
Unit Net Weight (lb)		220
Unit Shipping Weight (lb.)		245






SUBMITTAL DATA - OUTDOOR UNIT VPB036H4M-3P Mini-VRF Heat Pump

DIMENSIONAL DRAWINGS - INCHES (MM)

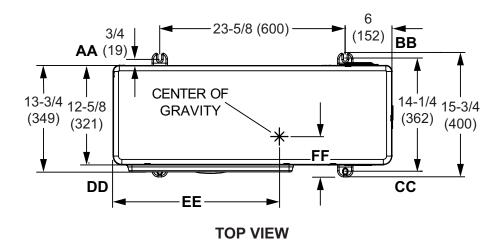

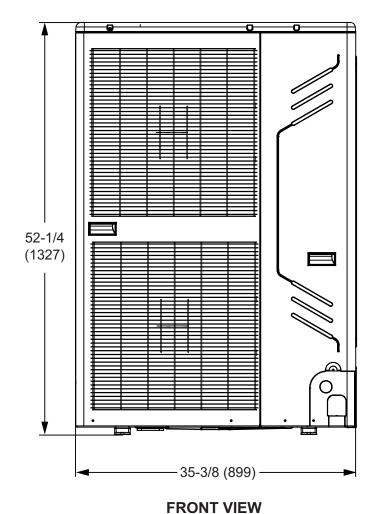

I INDIAI AILAA