

# SUBMITTAL DATA - INDOOR UNIT **VSCA012H4-3P**

VRF	Heat	Pump	ጼ	Heat	Recovery	V
A IZI	Heat	rump	G	Heat	MECOAEL	ı

Job:	Engineer:	
Location:	Architect:	
Schedule No.:	Location:	
System Designation:	Date:	
	For: Reference Approval Review Construction	

Air Filter

· Flare Connections

## Floor Standing Indoor Unit (Cased)

#### FEATURES

- · Pre Heat Function
- · Electronic Expansion Valve
- High-Efficiency DC Motor · Auto Addressing
- Auto Restart · Receiver/Display Panel

- Refrigerant R-410A
- Six Capacity Sizes from 7,500 to 24,000 Btu/h

#### WARRANTY

• 10-year limited warranty.\*See warranty for details.

SPECIFICATIONS						
PERFORMANCE						
Cooling Capacity <sup>1</sup> (Btu/h)	12,000					
Heating Capacity <sup>1</sup> (Btu/h)	13,500					
Airflow (CFM)	Low/Medium/High	249/288/319				
External Static Pressure (in. w	0					
Sound (dBA)	Low/Medium/High	32.4/35.3/37.7				
ELECTRICAL DATA						
Power Supply (Volts/Hertz/Ph	208-230/60/1					
Minimum Circuit Ampacity (Mo	0.5					
Maximum Overcurrent Protect	15					
Cooling Power Input (W)	40					
Cooling Rated Current (A)	0.3					
Heating Power Input (W)	41					
Heating Rated Current (A)	0.3					
Indoor Fan Motor Input (W)	30					
DIMENSIONS						
Unit Dimensions (in)	Width	40-1/8				
	Height	19-1/2				
	Depth	7-7/8				
Liquid Pipe Connection (in) (I.	1/4					
Gas Pipe Connection (in) (I.D.	1/2					
Drain Connection (in) (O.D.)	3/4					
Net Weight (lb)	49					
Shipping Weight (lb)	62					



OPTIONAL ACCESSORIES	
Wired Controller	V0STAT55P-3
Support Feet	V8VSA001-3P
Hotel Keycard Interface	V0CTRL88P-1

#### **NOTES**

Cooling and Heating capacity data is rated at the following

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB

Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB

Outdoor.








## SUBMITTAL DATA - INDOOR UNIT VSCA012H4-3P

**VRF Heat Pump & Heat Recovery** 

#### DIMENSIONAL DRAWINGS - INCHES (MM)

### VSCA012H4

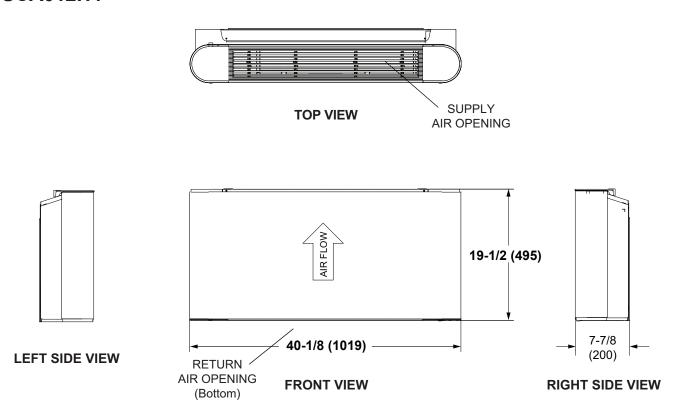

NOTE - Optional Feet (not shown) add 3-1/2 in. (89 mm) to the overall height

