

Job: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Schedule No.: \_\_\_\_\_  
 System Designation: \_\_\_\_\_

Engineer: \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 For:  Reference  Approval  Review  Construction

## Wall Mounted Ductless Indoor Unit

### FEATURES

- Pre Heat Function
- Auto Swing Louvers
- Flare Connections
- Refrigerant R-410A
- Auto Addressing
- Electronic Expansion Valve
- LED Display
- Seven capacity sizes from 7,000 to 30,000 Btu/h
- Auto Restart
- High-Efficiency DC Motor

### WARRANTY

- 10-year limited warranty.\*See warranty for details.

### SPECIFICATIONS

#### PERFORMANCE

Cooling Capacity <sup>1</sup> (Btu/h)		30,000
Heating Capacity <sup>1</sup> (Btu/h)		34,100
Airflow (CFM)	Low/Medium/High	480/600/700
External Static Pressure (in. WC)		0
Sound (dBA)	Low/Medium/High	39.1/43.2/46.5

#### ELECTRICAL DATA

Power Supply (Volts/Hertz/Phase)	208-230/60/1
Minimum Circuit Ampacity (MCA)	0.65
Maximum Overcurrent Protection (MOCP)	15
Cooling Power Input <sup>2</sup> (W)	60
Cooling Rated Current (A)	0.55
Heating Power Input <sup>2</sup> (W)	60
Heating Rated Current (A)	0.55
Indoor Fan Motor Input (W)	52(H:0Pa)

#### DIMENSIONS

Unit Dimensions (in)	Width	47
	Height	13-1/2
	Depth	10-5/16
Liquid Pipe Connection (in) (I.D.)		3/8
Gas Pipe Connection (in) (I.D.)		5/8
Condensate Drain Connection-Gravity in (O.D.)		5/8 (1)
Net Weight (lb)		38
Shipping Weight (lb)		51



### OPTIONAL ACCESSORIES

<input type="checkbox"/> Non-Programmable Controller	V0STAT54P-3
<input type="checkbox"/> Programmable Wired Controller	V0STAT51P-3
<input type="checkbox"/> Infrared Wireless Controller	V0STAT52P-1
<input type="checkbox"/> Occupancy Sensor	V0SNSR78P-3
<input type="checkbox"/> HHE Relay Kit	VOCTRL92P-3
<input type="checkbox"/> Hotel Keycard Interface	VOCTRL88P-1
<input type="checkbox"/> Condensate Pumps (Reference Condensate Pump Selection Guide)	-


### NOTES

1. Cooling and Heating capacity data is rated at the following conditions:  
 Cooling: 80°FDB / 67°FWB Indoor, 95°FDB  
 Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor.
2. Power Input values are rated at high fan speed.




**DIMENSIONAL DRAWINGS - INCHES (MM)**


**VWMB030H4**

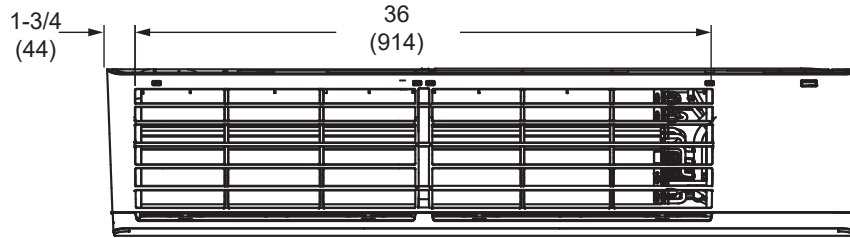


**TOP VIEW**




**SIDE VIEW**

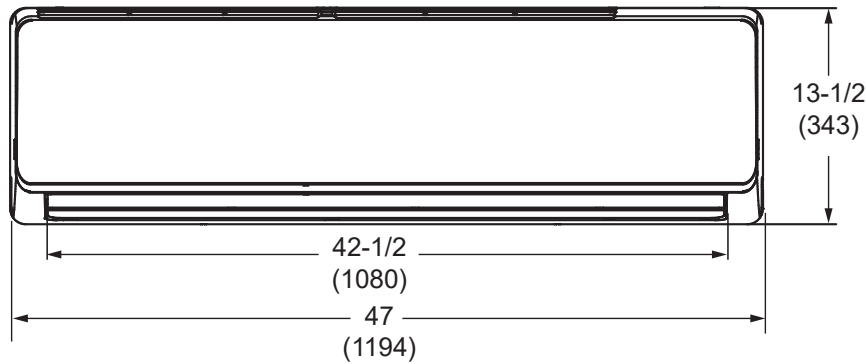

**FRONT VIEW**



**SIDE VIEW**

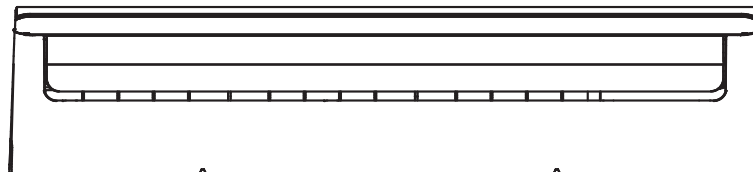

**BOTTOM VIEW**