



# SUBMITTAL DATA - MINI-SPLIT SYSTEMS

## (1) MS8-ZO-36P4 with (2) MS8-HI-12P1 Multi-Zone Heat Pump

Job: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Schedule No.: \_\_\_\_\_  
 System Designation: \_\_\_\_\_

Engineer: \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 For:  Reference  Approval  Review  Construction

### FEATURES

- Variable Frequency Rotary Compressor (R-410A)
- DC Inverter Control
- Compressor Crankcase Heater
- High Pressure Discharge Temperature Protection
- Reversing Valve
- Defrost Control
- Low Voltage Protection
- Indoor Coil Freeze Protection
- Indoor Unit Microprocessor
- Oscillating Air Deflection Louvers
- Turbo Function Blower
- Wireless Remote Control

### PRODUCT WARRANTY

Compressor - limited warranty for five years.  
 All other covered components - five years in residential installations and one year in non-residential installations.

### OUTDOOR UNIT - MS8-ZO-36P4

Number of Zones		2
SEER/EER		16.00 / 7.95
HSPF - Region IV		8.20
AHRI Reference No.		6484324
Cooling Capacity (Btuh)		34,400
Heating Capacity (Btuh)	High	37,200
	Low	22,000
Ambient Temp. Operating Range (°F)	Cooling	23 to 118
	Heating	5 to 80
Connections	Liquid line o.d. - flare	1/4
(in.)	Suction line o.d. - flare	3/8
Refrigerant (R-410A) furnished		6 lbs. 4 oz.
Outdoor	Diameter - in.	22
Fan Motor	No. of blades	3
	Cfm (High/Standard/Low)	2200/1600/1400
	Rpm (High/Standard/Low)	820/640/560
Shipping Data - lbs.		152

### ELECTRICAL DATA

	Line voltage data - 60 hz - 1ph	208 / 230V
	Maximum overcurrent protection (amps)	32
	Minimum circuit ampacity	20
Compressor	Rated load amps	21
Compressor Power Input (W)		2200
Outdoor	Rated load amps	0.59
Fan Motor	Output (W)	120

### OPTIONAL ACCESSORIES - OUTDOOR

Description	Cat. No.
Condenser Pad (18 x 36 x 2)	48X92
Disconnects	30 amp, fused, 1 ph 27P37
	60 amp, non-fused, 1 ph 27P39
Fuses	30A 83P75
	60A 83P77
Line Sets	1/4 in. x 3/8 in. x 25 ft. 90X53
	1/4 in. x 3/8 in. x 50 ft. X0258
Male Flare Adaptor	5/16 in. quick connect x 1/4 in. MF Y0576
Wall Bracket	36 in. Y5021
Whips	10 Gauge - 1/2 in. x 6 ft. 29P54
	8 Gauge - 3/4 in. x 6 ft. 27P44

### INDOOR UNIT - MS8-HI-12P1

Model No.	(2) MS8-HI-12P1
Connections	1/4 / 3/8
(in.) o.d. flare	
Liquid/Suction	
Line Sets Required	(2) 1/4 in. x 3/8 in.
Indoor Blower	Maximum 335
Air Volume	High 275
	Medium 255
	Low 220
Indoor Blower	D x L (in.) 3.6 x 25.4
Shipping Data - lbs.	29

### ELECTRICAL DATA

Line voltage data - 60 hz - 1ph	208/230V
Rated Load Amps	0.20
Output (W)	20


### OPTIONAL ACCESSORIES - INDOOR

Condensate Pump	
3.70 US gph, 26 ft. lift - 115V	X8250
3.70 US gph, 26 ft. lift, 230V	X8251
7.9 US gph, 35 ft. lift - 120/240V	Y5170
Condensate Mini-Split Drain Line - 5/8 in. I.D. 160 ft.	Y3401
Indoor/Outdoor Wiring Cable 14 Gauge, 4 conductor wire, THHN, 250 ft.	Y2067
Wireless Remote Control Holder	Y5073

### SOUND DATA (Sound Rating Number dBA)


Outdoor Unit Pressure	59
Indoor Unit	Low 33
Pressure	Medium 36
	High 39
	Maximum 42

### INDOOR UNIT

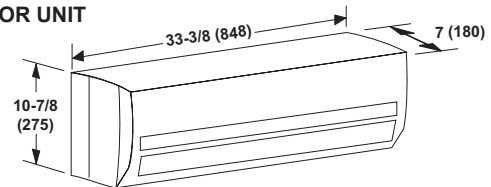

WIRELESS  
REMOTE  
CONTROL

### OUTDOOR UNIT

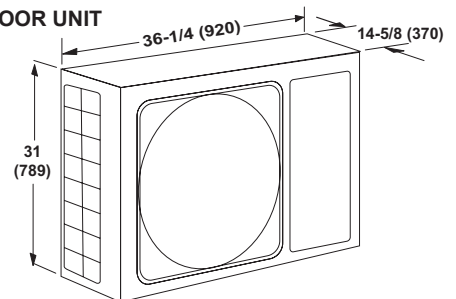

Intertek

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

495061 (201308)

©2013 Lennox Industries Inc.