
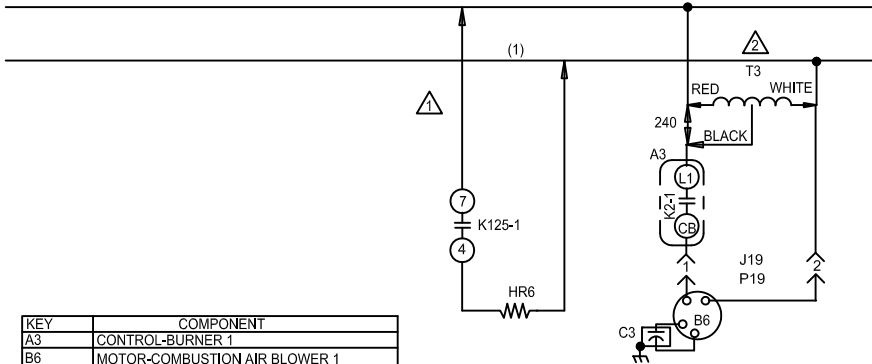



 CSA(-50C)LOW AMBIENT KIT (OPTIONAL)  
 T3 USED ON 480V AND 600V UNITS



KEY	COMPONENT
A3	CONTROL-BURNER 1
B6	MOTOR-COMBUSTION AIR BLOWER 1
C3	CAPACITOR-COMB AIR BLOWER, MOTOR 1
E1	IGNITOR-SPARK
FS1	SENSOR-FLAME
GV1	VALVE-GAS 1
HR6	HEATER, -50C LOW AMBIENT KIT
J1	JACK-GAS LIMIT
J19	JACK-COMBUSTION AIR BLOWER
J29	JACK-GAS 1
J229	JACK-VESTIBULE HEATER, CONTROL 1
K125-1	RELAY-HEAT SHUTOFF
P1	PLUG-GAS LIMIT
P2	PLUG-HEAT
P19	PLUG-COMBUSTION AIR BLOWER
P229	PLUG-VESTIBULE HEATER, CONTROL 1
S10	SWITCH-LIMIT, PRIMARY GAS
S18	SWITCH-COMB AIR BLOWER, PROVE
S47	SWITCH-FLAME ROLLOUT, BURNER 1
S59	THERMOSTAT-OPEN -20F. CLOSE 10F
S60	THERMOSTAT-OPEN 20F. CLOSE -10F
S61	THERMOSTAT-OPEN 50F. CLOSE 20F
T3	TRANSFORMER-COMB AIR BLOWER 1

 INDICATES MICRO PROCESSOR  
 DENOTES OPTIONAL COMPONENTS

	LANDMARK B-BOX WIRING DIAGRAM	11/11
	HEATING - GAS	
KGA UNITS - 130 THRU 240		
SECTION A		REV 0
Supersedes 537063-01	New Form No. 537063-02	