
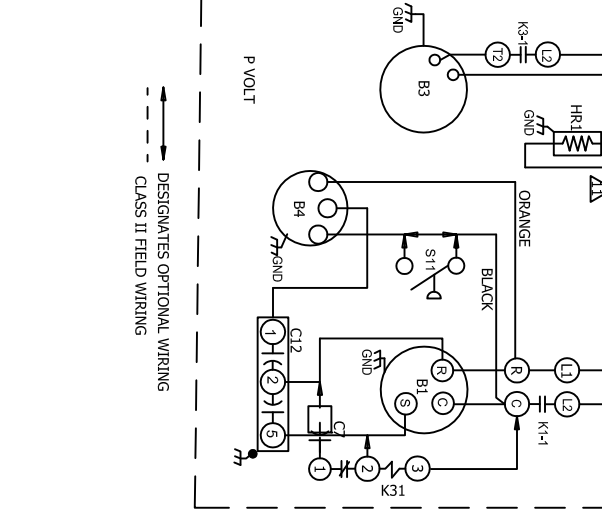
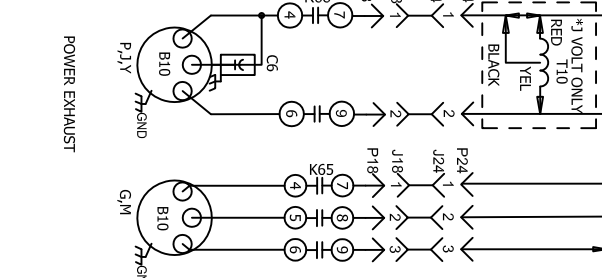
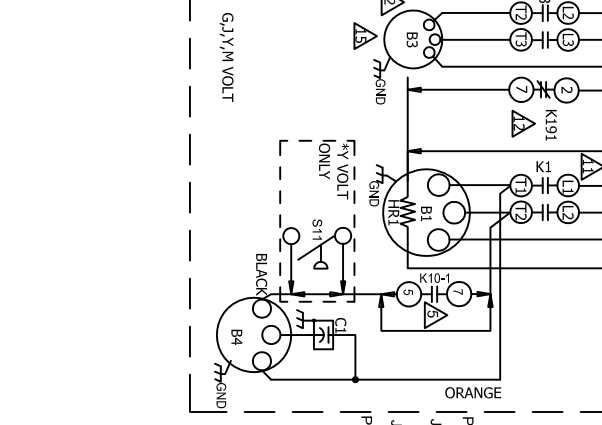


P	VOLT	KW	HE1	HE2	HE3
048,060	5	5			
96	7.5	7.5			
10	10	10			
15	15	15			
22.5	22.5	22.5			
	7.5	7.5			
	7.5	7.5			

G,J,M,Y	KW	HE1	HE2
072	5		
048,060	7.5		
96	10		
10	10		
15	15		
22.5	22.5		
30	30		

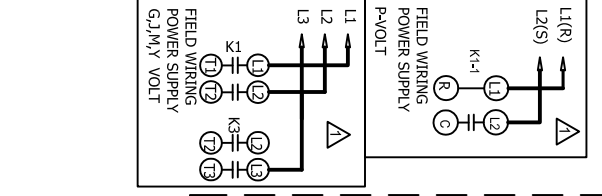

10/15

WIRING DIAGRAM 10/15

537646-03

UNIT DIAGRAM

ZCA - 036,048,060,072,074

ZCB - 036,048,060,074

SECTION ALL

Supersedes 537646-02

New Form No. 537646-03

REV 1

- ▲ NOTE - FOR USE WITH COPPER CONDUCTORS ONLY REFER TO UNIT RATING PLATE FOR MINIMUM CIRCUIT AMPACITY AND MAXIMUM OVERCURRENT PROTECTION SIZE.
- ▲ IMPORTANT: TO PREVENT MOTOR BURNOUT, NEVER CONNECT MORE THAN ONE MOTOR LEAD TO ANY ONE CONNECTION. TAPE UNUSED MOTOR LEADS
- ▲ P-Y VOLT T1 WITH 208V TAP
- ▲ ELECTRIC HEAT FIELD OPTION
- ▲ LOW AMBIENT KIT
- ▲ THERMOSTAT/SENSOR SUPPLIED BY USER
- ▲ REMOVE P3 WHEN ECONOMIZER OR OADM IS USED
- ▲ TIME CLOCK CONTACTS (OPT) CLOSED OCCUPIED
- ▲ A7 ENTHALPY SENSOR MAY BE USED INSTEAD OF S175 TEMPERATURE SWITCH AND RESISTOR
- ▲ REMOVE P2 WHEN ELECTRIC HEAT IS USED
- ▲ ZCA 036,048,060 MODELS ONLY
- ▲ ZCB MODELS ONLY
- ▲ ZCA 072,074, DL48 NOT USED
- ▲ DL49 & K25 USED ON ZCB 060 ONLY
- ▲ SEE SECTION E DIAGRAMS FOR 2 SPEED BELT DRIVE SYSTEMS