



# 2016 COMMERCIAL EQUIPMENT PRICE BOOK

Effective 1/2016  
Supersedes all previous dates

LIST (CAN) LIST



**ENERGENCE**  
Saving Energy with Intelligence™



**LANDMARK**®  
Performance Marked by Flexibility™

**RAIDER**®  
Value Without Compromise™



For instant access to the answers you need,  
visit **Commercial Quick Quote** on **DaveNet**® today.

**DaveNet**®  
No Boundaries™

Commercial Quick Quote





**FACTORY CONFIGURATION**

Model No.		Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
<b>PACKAGED GAS - 3 - 4 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZGA036S4BS P	3 ton	208/230v-1ph	65 Single	13.0	11.5	---	1.5	Z01			37x47.25x76	484	V9643	call	---
ZGB036S4BW P	3 ton	208/230v-1ph	*65 Single	14.0	11.5	---	1.5	Z01			37x47.25x76	524	AE827	call	---
ZGA036S4BM P	3 ton	208/230v-1ph	108 Single	13.0	11.5	---	1.5	Z01			37x47.25x76	484	V9639	call	---
ZGB036S4BY P	3 ton	208/230v-1ph	*108 Single	14.0	11.5	---	1.5	Z01			37x47.25x76	524	AE823	call	---
ZGA036S4BM P	3 ton	208/230v-1ph	108 Single	13.0	11.5	---	1.5	Z04			37x47.25x76	484	V9636	call	---
ZGB036S4BY P	3 ton	208/230v-1ph	*108 Single	14.0	11.5	---	1.5	Z04			37x47.25x76	524	AE825	call	---
ZGA036S4BS Y	3 ton	208/230v-3ph	65 Single	13.0	11.5	---	1	Z01			37x47.25x76	484	V9640	call	---
ZGB036S4BS Y	3 ton	208/230v-3ph	65 Single	14.0	11.5	---	1	Z01			37x47.25x76	484	AF374	call	---
ZGA036S4BM Y	3 ton	208/230v-3ph	108 Single	13.0	11.5	---	1	Z01			37x47.25x76	484	V9638	call	---
ZGA036S4BM Y	3 ton	208/230v-3ph	108 Single	13.0	11.5	---	1	Z04			37x47.25x76	484	V9637	call	---
ZGA036S4BM J	3 ton	575v-3ph	108 Single	13.0	11.5	---	1	Z04			37x47.25x76	499	V9635	call	---
ZGA048S4BS P	4 ton	208/230v-1ph	65 Single	13.0	10.8	---	1.5	Z02			37x47.25x76	498	V9654	call	---
ZGB048S4BW P	4 ton	208/230v-1ph	*65 Single	14.0	10.8	---	1.5	Z02			37x47.25x76	533	AE830	call	---
ZGA048S4BH P	4 ton	208/230v-1ph	150 Dual	13.0	10.8	---	1.5	Z02			37x47.25x76	498	V9652	call	---
ZGB048S4BX P	4 ton	208/230v-1ph	*150 Dual	14.0	10.8	---	1.5	Z02			37x47.25x76	533	AE824	call	---
ZGA048S4BH P	4 ton	208/230v-1ph	150 Dual	13.0	10.8	---	1.5	Z05			37x47.25x76	498	V9647	call	---
ZGB048S4BM Y	4 ton	208/230v-3ph	65 Single	14.0	10.8	---	1	Z02			37x47.25x76	498	AJ093	call	---
ZGA048S4BS Y	4 ton	208/230v-3ph	65 Single	13.0	10.8	---	1	Z02			37x47.25x76	498	V9650	call	---
ZGA048S4BS Y	4 ton	208/230v-3ph	65 Single	13.0	10.8	---	1	Z02		Y-T24	37x47.25x76	498	L2378	call	0
ZGA048S4BM Y	4 ton	208/230v-3ph	108 Single	13.0	10.8	---	1	Z02			37x47.25x76	498	V9649	call	---
ZGB048S4BM Y	4 ton	208/230v-3ph	108 Single	14.0	10.8	---	1	Z02			37x47.25x76	498	AJ093	call	---
ZGA048S4BH Y	4 ton	208/230v-3ph	150 Dual	13.0	10.8	---	1	Z02			37x47.25x76	498	V9648	call	---
ZGA048S4BH Y	4 ton	208/230v-3ph	150 Dual	13.0	10.8	---	1.5	Z05			37x47.25x76	498	V9645	call	---
ZGA048S4BH J	4 ton	575v-3ph	150 Dual	13.0	10.8	---	1.5	Z05			37x47.25x76	509	V9646	call	---
<b>PACKAGED GAS - 5 - 6 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZGB060S4BY P	5 ton	208/230v-1ph	*108 Single	14.0	10.7	---	1.5	Z03			45x47.25x76	592	AE821	call	---
ZGA060S4BH P	5 ton	208/230v-1ph	150 Dual	13.0	10.7	---	1.5	Z03			37x47.25x76	530	V9665	call	---
ZGA060S4BH P	5 ton	208/230v-1ph	*150 Dual	14.0	10.7	---	1.5	Z03			37x47.25x76	530	AE822	call	0
ZGA060S4BH P	5 ton	208/230v-1ph	150 Dual	13.0	10.7	---	1.5	Z06			37x47.25x76	530	V9658	call	---
ZGB060S4BX P	5 ton	208/230v-1ph	*150 Dual	14.0	10.7	---	1.5	Z06			45x47.25x76	592	AE828	call	---
ZGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	10.7	---	1	Z03			37x47.25x76	530	V9663	call	---
ZGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	10.7	---	1	Z03		Y-T24	37x47.25x76	530	AH581	call	---
ZGA060S4BM Y	5 ton	208/230v-3ph	108 Single	13.0	10.7	---	1	Z03			37x47.25x76	530	V9661	call	---
ZGB060S4BM Y	5 ton	208/230v-3ph	108 Single	14.0	10.7	---	1.5	Z03		Y	37x47.25x76	530	AJ094	call	---
ZGA060S4BU Y	5 ton	208/230v-3ph	108 Dual	13.0	10.7	---	1	Z03			37x47.25x76	530	V9662	call	---
ZGA060S4BH Y	5 ton	208/230v-3ph	150 Dual	13.0	10.7	---	1	Z03			37x47.25x76	530	V9660	call	---
ZGA060S4BH Y	5 ton	208/230v-3ph	150 Dual	13.0	10.7	---	1.5	Z06			37x47.25x76	530	V9656	call	---
ZGA060S4BH J	5 ton	575v-3ph	150 Dual	13.0	10.7	---	1	Z03			37x47.25x73.75	537	V9664	call	---
ZGA060S4BH J	5 ton	575v-3ph	150 Dual	13.0	10.7	---	1.5	Z06			37x47.25x73.75	537	V9657	call	---
ZGA072S4BM Y	6 ton	208/230v-3ph	108 Single	---	11.2	12.0	2	Z03			45x47.25x73.75	640	AE718	call	---
ZGA072S4BT Y	6 ton	208/230v-3ph	150 Single	---	11.2	12.0	1.5	Z03		Y	45x47.25x73.75	640	AJ095	call	---
ZGA072S4BH Y	6 ton	208/230v-3ph	150 Dual	---	11.2	12.0	2	Z03			45x47.25x73.75	640	AF068	call	---
ZGA072S4BH J	6 ton	575v-1ph	150 Dual	---	11.2	12.0	2	Z03			45x47.25x73.75	640	AF069	call	---
<i>*Low Nox models.</i>															
<b>PACKAGED ELECTRIC/ELECTRIC - 3 - 6 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZCA036S4BN P	3 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.3	---	1.5	Z01			37x47.25x76	451	V9626	call	---
ZCB036S4BN P	3 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.3	---	1.5	Z01			37x47.25x76	474	AE715	call	---
ZCA036S4BN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.3	---	1	Z01			37x47.25x76	451	V9625	call	---
ZCA048S4BN P	4 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.8	---	1.5	Z02			37x47.25x76	465	V9629	call	---
ZCB048S4BN P	4 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.8	---	1.5	Z02			37x47.25x76	483	AE829	call	---
ZCA048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.8	---	1	Z02			37x47.25x76	465	V9628	call	---
ZCA060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.7	---	1.5	Z03			37x47.25x76	497	V9632	call	---
ZCB060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.7	---	1.5	Z03			45x47.25x76	568	AE820	call	---
ZCA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.7	---	1	Z03			37x47.25x76	497	V9631	call	---
ZCA060S4BN J	5 ton	575v-3ph	Opt. Elec. Heat	13.0	10.7	---	1	Z03			37x47.25x73.75	506	V9634	call	---
ZCA072S4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	Z03			45x47.25x73.75	568	AF071	call	---
<b>PACKAGED HEAT PUMP - 3 - 5 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZHA036S4BN P	3 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.3	---	1.5	Z01			37x47.25x76	530	L1899	call	---



**FACTORY CONFIGURATION**

Model No.		Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price Stock	
														call	---
ZHB036S4BN P	3 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.3	---	1.5	Z01			45x47.25x76	580	AE717	call	---
ZHA036S4BN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.3	---	1	Z01			37x47.25x76	530	V9669	call	---
ZHB036S4BN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	14.0	11.3	---	1	Z01			45x47.25x76	580	AF380	call	---
ZHA048S4BN P	4 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.8	---	1.5	Z02			37x47.25x76	539	L1900	call	---
ZHB048S4BN P	4 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.8	---	1.5	Z02			45x47.25x76	585	AE831	call	---
ZHA048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.8	---	1	Z02			37x47.25x76	539	V9671	call	---
ZHB048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	14.0	10.8	---	1	Z02			45x47.25x76	585	AF381	call	---
ZHA060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.9	---	1.5	Z03			45x47.25x76	585	L1901	call	---
ZHB060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.9	---	1.5	Z02			45x47.25x76	610	AE826	call	---
ZHA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	Z03			45x47.25x76	585	V9673	call	---
ZHB060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	14.0	10.9	---	1	Z03		Y	45x47.25x76	610	AJ100	call	---
<b>PACKAGED GAS - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZGA092S4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1			49x61x96	902	L2507	call	---
ZGA092S4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1			49x61x96	902	L2513	call	---
ZGA092S4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1		Y	49x61x96	902	L2530	call	---
ZGA092S4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	11.0	11.8	2	1			49x61x96	902	L2522	call	---
ZGA092S4BM Y	7.5 ton	575v-3ph	180 Dual	---	11.0	11.8	2	1			49x61x96	902	L2512	call	---
ZGA092S4BM J	7.5 ton	575v-3ph	180 Dual	---	11.0	11.8	2	1		Y	49x61x96	902	L2529	call	---
ZGA092S4BH J	7.5 ton	575v-3ph	240 Dual	---	11.0	11.8	2	1			49x61x96	902	L2521	call	---
ZGA102S4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1			49x61x96	922	L2509	call	---
ZGA102S4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1			49x61x96	922	L2516	call	---
ZGA102S4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1		Y	49x61x96	922	L2635	call	---
ZGA102S4BM J	8.5 ton	575v-3ph	180 Dual	---	11.0	11.8	2	1			49x61x96	922	L2515	call	---
ZGA120S4BS Y	10 ton	208/230v-3ph	130 Dual	---	11.0	11.8	3	5			49x61x96	962	L2510	call	---
ZGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5			49x61x96	962	L2518	call	---
ZGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5		Y	49x61x96	962	L2531	call	---
ZGA120S4MM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5	Y	Y	49x61x96	962	M8190	call	---
ZGA120S4BH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5			49x61x96	962	L2525	call	---
ZGA120S4BH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5		Y	49x61x96	962	L2534	call	---
ZGA120S4BH J	10 ton	575v-3ph	240 Dual	---	11.0	11.8	3	5			49x61x96	962	L2524	call	---
ZGA120S4BH J	10 ton	575v-3ph	240 Dual	---	11.0	11.8	3	5		Y	49x61x96	962	L2533	call	---
ZGA150S4BM Y	12.5 ton	208/230v-3ph	180 Dual	---	10.8	11.4	5	11			49x61x96	1052	L2520	call	---
ZGA150S4MM Y	12.5 ton	208/230v-3ph	180 Dual	---	10.8	11.4	5	11	Y	Y	49x61x96	1052	M8192	call	---
ZGA150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	10.8	11.4	5	11			49x61x96	1052	L2528	call	---
ZGA150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	10.8	11.4	5	11		Y	49x61x96	1052	L2535	call	---
ZGA150S4BH J	12.5 ton	575v-3ph	240 Dual	---	10.8	11.4	5	11			49x61x96	1052	L2527	call	---
<b>PACKAGED ELECTRIC/ELECTRIC - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZCA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			49x61x96	854	L2497	call	---
ZCA092S4BN J	7.5 ton	575v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			49x61x96	854	L2496	call	---
ZCA102S4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			49x61x96	874	L2499	call	---
ZCA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	3	5			49x61x96	914	L2502	call	---
ZCA120S4BN J	10 ton	575v-3ph	Opt. Elec. Heat	---	11.2	12.0	3	5			49x61x96	914	L2501	call	---
ZCA150S4BN Y	12.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.6	5	11			49x61x96	1004	L2505	call	---
ZCA150S4BN J	12.5 ton	575v-3ph	Opt. Elec. Heat	---	11.0	11.6	5	11			49x61x96	1004	L2504	call	---
<b>PACKAGED HEAT PUMPS - 7.5 - 10 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZHA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.2	2	1			49x61x96	1036	AA858	call	---
ZHA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.2	2	1		Y	49x61x96	1036	AA859	call	---
ZHA102S4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.2	2	1			49x61x96	1068	AA861	call	---
ZHA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.3	3	5			49x61x96	1126	AA863	call	---
ZHA120S4MN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.5	3	5	Y		49x61x96	1126	AA865	call	---



Description	Order No.	Price
<b>RAIDER® - 3 - 5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	Z1CURB70A-1	<b>11F76</b> call
14 in. height	Z1CURB71A-1	<b>11F77</b> call
18 in. height	Z1CURB72A-1	<b>11F78</b> call
24 in. height	Z1CURB73A-1	<b>11F79</b> call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (SENSIBLE CONTROL) (NOT FOR TITLE 24)</b>		
<b>With Barometric Relief Dampers And Exhaust Hood</b>		
Downflow	Z1ECON30A-1	<b>98W09</b> call
Horizontal	Z1ECON16A-1	<b>98W68</b> call
<b>STANDARD ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR64FF1	<b>53W64</b> call
<b>HIGH PERFORMANCE ECONOMIZER (SENSIBLE CONTROL) (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Barometric Relief Dampers And Exhaust Hood</b>		
Downflow	Z1ECON32A-1	<b>10U51</b> call
Horizontal	Z1ECON33A-1	<b>10U52</b> call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR60FF1	<b>11G21</b> call
POWER EXHAUST - STANDARD STATIC		
Downflow	208/230V-1 or 3ph - Z1PWRE10A-1P	<b>21E01</b> call
Horizontal	208/230V-1 or 3ph - Z1PWRE15A-1P	<b>24E01</b> call
575V Transformer Kit	575V-3ph - Z1TRFM20A-1J	<b>59E02</b> call
<i>NOTE - Order 575V Transformer Kit with 208/230V Power Exhaust Fan for 575V applications.</i>		
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Motorized	Z1DAMP21A-1	<b>95W74</b> call
Manual	Z1DAMP11A-1	<b>95W73</b> call
CABINET ACCESSORIES		
Coil/Hail Guards	[ZCA/ZCB036] [ZCA/ZCB048] [ZCA060] Z1GARD52A-1	<b>12X19</b> call
	[ZCA072] [ZCB060] Z1GARD52AT-1	<b>12X20</b> call
CEILING DIFFUSERS		
Step-Down - Order one	[024 thru 060] RTD9-65-R	<b>27G87</b> call
	[072] RTD11-95	<b>29G04</b> call
Flush - Order one	[024 thru 060] FD9-65-R	<b>27G86</b> call
	[072] FD11-95	<b>29G08</b> call



Description	Order No.	Price
<b>RAIDER® - 3 - 5 TON ACCESSORIES (Field Installed)</b>		
<b>CONTROLS</b>		
SMOKE DETECTORS are not available and must be field provided by installer.		
THERMOSTATS - See Controls Tab Section		
<b>COOLING ACCESSORIES</b>		
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b> call
	Copper - C1TRAP10AD2	<b>76W27</b> call
Drain Pan Overflow Switch	Z1SNSR90A1	<b>99W59</b> call
Low Ambient Kit	[ZCA/ZGA] Z1SNSR33A-1	<b>99W67</b> call
	[ZHA] Z1SNSR34A-1	<b>99W68</b> call
<b>GAS HEAT (ZG MODELS)</b>		
LPG/Propane Conversion Kits	One-stage models - Z1PROP10A-1	<b>10B61</b> call
	Two-stage models - Z1PROP20A-1	<b>10B65</b> call
Vertical Vent Extension	C1EXTN20FF1	<b>31W62</b> call
<b>INDOOR AIR QUALITY</b>		
<b>CO2 Sensors</b>		
Sensor - white case CO2 display	C0SNSR50AE1L	<b>77N39</b> call
Sensor - duct mount, black case, no display	C0SNSR53AE1L	<b>87N54</b> call
CO2 Sensor Duct Mounting Kit	C0MISC19AE1-	<b>85L43</b> call
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (77N39)	C0MISC16AE1-	<b>90N43</b> call
<b>ELECTRIC HEAT (ZC AND ZH MODELS)</b>		
<b>NOTE - Unit Fuse Block is Required and Must Be Ordered Separately</b>		
5 kW	[036 thru 060] 208/230V-1ph - Z1EH0050AN1P	<b>98W96</b> call
	[036 thru 060] 208/230V-3ph - Z1EH0050AN1Y	<b>99W01</b> call
	[036 thru 060] 575V-3ph - Z1EH0050AN1J	<b>99W11</b> call
7.5 kW	[036 thru 060] 208/230V-1ph - Z1EH0075AN1P	<b>98W97</b> call
	[036 thru 072] 208/230V-3ph - Z1EH0075AN1Y	<b>99W02</b> call
	[036 thru 072] 575V-3ph - Z1EH0075AN1J	<b>99W12</b> call
10 kW	[036 thru 060] 208/230V-1ph - Z1EH0100AN1P	<b>98W98</b> call
	[036 thru 072] 208/230V-3ph - Z1EH0100AN1Y	<b>99W03</b> call
	[036 thru 072] 575V-3ph - Z1EH0100AN1J	<b>99W13</b> call
15 kW	[036 thru 060] 208/230V-1ph - Z1EH0150AN1P	<b>98W99</b> call
	[036 thru 072] 208/230V-3ph - Z1EH0150AN1Y	<b>99W04</b> call
	[036 thru 072] 575V-3ph - Z1EH0150AN1J	<b>99W14</b> call
22.5 kW	[048 thru 060] 208/230V-1ph - Z1EH0225AN1P	<b>99W00</b> call
	[048 thru 072] 208/230V-3ph - Z1EH0225AN1Y	<b>99W05</b> call
	[048 thru 072] 575V-3ph - Z1EH0225AN1J	<b>99W15</b> call
30 kW	[072] 208/230V-3ph - Z1EH0300AN1Y	<b>13U01</b> call
	[072] 575V-3ph - Z1EH0300AN1J	<b>13U03</b> call



Description	Order No.	Price
<b>RAIDER® - 3 - 5 TON ACCESSORIES (Field Installed)</b>		
ELECTRICAL		
Bottom Power Entry Kit	Z1PEKT01A-1	<b>98W08</b> call
Unit Fuse Block	[All] 208/230V - 1 Ph - 45/50/60 Amp	<b>10A26</b> call
(Required with Electric Heat)	[ZCA/ZCB036-048] [ZHA/ZHB036-048] 208/230V - 3 Ph - 25/30 Amp	<b>10A27</b> call
	[ZCA/ZHB060] [ZHA/ZHB060] 208/230V - 3 Ph - 35/40 Amp	<b>10A28</b> call
	[All] 460V/575V - 3 Ph - 15/20 Amp	<b>10A29</b> call
<b>RAIDER® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	Z1CURB40B-1	<b>10Z25</b> call
14 in. height	Z1CURB41B-1	<b>10Z26</b> call
18 in. height	Z1CURB42B-1	<b>10Z27</b> call
24 in. height	Z1CURB43B-1	<b>10Z28</b> call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood and Barometric Relief Dampers with Exhaust Hood</b>		
Standard Economizer (Single Temp. Control) Downflow	Z1ECON30B-1	<b>10Z29</b> call
Standard Economizer (Single Temp. Control) Horizontal	Z1ECON16B-1	<b>11G98</b> call
<b>STANDARD ECONOMIZER CONTROLS</b>		
Single Enthalpy Control	C1SNSR64FF1	<b>53W64</b> call
Differential Enthalpy Control	Order 2 - C1SNSR64FF1	<b>53W64</b> call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARDS)</b>		
<b>With Outdoor Air Hood and Barometric Relief Dampers with Exhaust Hood</b>		
High Performance Economizer (Single Temp. Control) Downflow	Z1ECON32B-1	<b>12B44</b> call
High Performance Economizer (Single Temp. Control) Horizontal	Z1ECON33B-1	<b>12B46</b> call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR61FF1	<b>11G21</b> call
Differential Enthalpy Control	Order 2 - C1SNSR61FF1	<b>11G21</b> call
<b>HORIZONTAL LOW PROFILE BAROMETRIC RELIEF DAMPERS WITH EXHAUST HOOD</b>		
Horizontal Low Profile Barometric Relief Dampers	LAGEDH03/15	<b>53K04</b> call
POWER EXHAUST - STANDARD STATIC		
Downflow	208/230V-3ph - Z1PWRE10B-1Y	<b>10Z70</b> call
Horizontal	208/230V-3ph - Z1PWRE15A-1P	<b>24E01</b> call
575V Transformer Kit	575V-3ph - Z1TRFM20A-1J	<b>59E02</b> call
<i>NOTE - Order 575V Transformer Kit with 208/230V Power Exhaust Fan for 575V applications.</i>		
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Motorized	Z1DAMP20B-2	<b>14G36</b> call
Manual	Z1DAMP10B-2	<b>14G37</b> call
CABINET ACCESSORIES		
Coil/Hail Guards	Z1GARD52B-1	<b>12X21</b> call



Description		Order No.	Price
<b>RAIDER® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	[092] RTD11-95	<b>29G04</b>	<b>call</b>
	[102 thru 120] RTD11-135	<b>29G05</b>	<b>call</b>
	[150] RTD11-185	<b>29G06</b>	<b>call</b>
Flush - Order one	[092] FD11-95	<b>29G08</b>	<b>call</b>
	[102 thru 120] FD11-135	<b>29G09</b>	<b>call</b>
	[150] FD11-185	<b>29G10</b>	<b>call</b>
<b>CONTROLS</b>			
BACnet®	K0CTRL31A-1	<b>96W15</b>	<b>call</b>
BACnet® Thermostat with Display	K0SNSR01FF1	<b>97W23</b>	<b>call</b>
BACnet Thermostat without Display	K0SNSR00FF1	<b>97W24</b>	<b>call</b>
Novar® 2051	K0CTRL30A-1	<b>96W12</b>	<b>call</b>
Plenum Cable (75 ft.)	K0MISC00FF1	<b>97W25</b>	<b>call</b>
SMOKE DETECTORS are not available and must be field provided by installer.			
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	Z1SNSR90A1	<b>99W59</b>	<b>call</b>
Low Ambient Kit (Includes Compressor Crankcase Heater)	[ZCA/ZGA092] 208/230V-3ph - Z1LOAM02B-1Y	<b>10Z35</b>	<b>call</b>
	[ZCA/ZGA092] 575V-3ph - Z1LOAM02B-1YJ	<b>10Z37</b>	<b>call</b>
	[ZCA/ZGA102 thru 150] 208/230V-3ph - Z1LOAM12B-1Y	<b>10Z50</b>	<b>call</b>
	[ZCA/ZGA102 thru 150] 575V-3ph - Z1LOAM12B-1YJ	<b>10Z52</b>	<b>call</b>
Low Ambient Kit (ZH only)	[ZHA092 thru 120] - Z1SNSR33B-1	<b>10Z34</b>	<b>call</b>
<b>GAS HEAT (ZG MODELS)</b>			
Combustion Air Intake Extensions	T1EXTN10AN1	<b>19W51</b>	<b>call</b>
LPG/Propane Conversion Kits	[Standard heat] C1PROP23BS1	<b>14N22</b>	<b>call</b>
	[Medium heat] Z1PROP24RS1	<b>14N27</b>	<b>call</b>
	[High heat] C1PROP21BS1	<b>14N25</b>	<b>call</b>
Vertical Vent Extension	C1EXTN20FF1	<b>31W62</b>	<b>call</b>
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters 20 x 24 x 2 (Order 4 per unit)	MERV 8 - Z1FLTR15B-1	<b>14C35</b>	<b>call</b>
	MERV 13 - Z1FLTR40B-1	<b>14C36</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30B-1-	<b>Y3063</b>	<b>call</b>
<b>CO2 Sensors</b>			
Sensor - white case CO2 display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - duct mount, black case, no display	C0SNSR53AE1L	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>





Description		Order No.	Price
<b>RAIDER® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
ELECTRIC HEAT (ZC MODELS)			
<b>NOTE - Unit Fuse Block is Required and Must Be Ordered Separately</b>			
7.5 kW	[ZCA092 thru 102] 208/230V-3ph - Z1EH0075B-1Y	<b>10Y97</b>	<b>call</b>
	[ZCA092 thru 102] 575V-3ph - Z1EH0075B-1J	<b>10Y99</b>	<b>call</b>
15 kW	[ZCA092 thru 150] 208/230V-3ph - Z1EH0150B-1Y	<b>10Z01</b>	<b>call</b>
	[ZCA092 thru 150] 575V-3ph - Z1EH0150B-1J	<b>10Z04</b>	<b>call</b>
22.5 kW	[ZCA092 thru 150] 208/230V-3ph - Z1EH0225B-1Y	<b>10Z05</b>	<b>call</b>
	[ZCA092 thru 150] 575V-3ph - Z1EH0225B-1J	<b>10Z07</b>	<b>call</b>
30 kW	[ZCA092 thru 150] 208/230V-3ph - Z1EH0300B-1Y	<b>10Z08</b>	<b>call</b>
	[ZCA092 thru 150] 575V-3ph - Z1EH0300B-1J	<b>10Z10</b>	<b>call</b>
45 kW	[ZCA092 thru 150] 208/230V-3ph - Z1EH0450B-1Y	<b>10Z11</b>	<b>call</b>
	[ZCA092 thru 150] 575V-3ph - Z1EH0450B-1J	<b>10Z13</b>	<b>call</b>
60 kW	[ZCA120 thru 150] 208/230V-3ph - Z1EH0600B-1Y	<b>10Z14</b>	<b>call</b>
	[ZCA120 thru 150] 575V-3ph - Z1EH0600B-1J	<b>10Z16</b>	<b>call</b>
ELECTRICAL			
Bottom Power Entry Kit	Z1PEKT01B-1	<b>11H66</b>	<b>call</b>
*Unit Fuse Block	[ZC] 208/230V - 3 Ph - 50/60 Amp	<b>10Z41</b>	<b>call</b>
(Required with Electric Heat)	[ZC] 208/230V - 3 Ph - 70/80 Amp	<b>10Z42</b>	<b>call</b>
	[ZC] 460V/575V - 3 Ph - 15/20 Amp	<b>10Z38</b>	<b>call</b>
	[ZC] 460V/575V - 3 Ph - 20/30 Amp	<b>10Z39</b>	<b>call</b>
	[ZC] 460V/575V - 3 Ph - 35/40 Amp	<b>10Z40</b>	<b>call</b>
	[ZH] 208/230V - 3 Ph - 50/60 Amp	<b>11M12</b>	<b>call</b>
	[ZH] 208/230V - 3 Ph - 70/80 Amp	<b>11M13</b>	<b>call</b>
	[ZH] 575V - 3 Ph - 15/20 Amp	<b>11M09</b>	<b>call</b>
	[ZH] 460V/575V - 3 Ph - 20/30 Amp	<b>11M10</b>	<b>call</b>
	[ZH] 460V/575V - 3 Ph - 35/40 Amp	<b>11M11</b>	<b>call</b>

\* See Product Specifications for Fuse Block usage.



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
-----------	---------	----------------	------	------	-----	------	-----------------	------------------------	-------	-----------------------------------	----------------------------	----------------	-----------	-------	-------

**PACKAGED GAS - 2 - 7.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KGB024S4DW P	2 ton	208/230v-1ph	65 Single	14.0	12.7	---	0.25	direct			40x47x86.25	531	AC294	call	---
KGB024S4DW P	2 ton	208/230v-1ph	65 Single	14.0	12.7	---	0.25	direct		Y	40x47x86.25	531	AC295	call	---
KGB030S4DW P	2.5 ton	208/230v-1ph	65 Single	14.0	11.5	---	0.25	direct			40x46x86.25	533	AC296	call	---
KGB036S4DW P	3 ton	208/230v-1ph	65 Single	14.0	12.5	---	0.5	direct			40x47x86.25	534	AC298	call	---
KGB036S4DY P	3 ton	208/230v-1ph	108 Single	14.0	12.5	---	0.5	direct			40x47x86.25	534	AC297	call	---
KGB036S4BS Y	3 ton	208/230v-1ph	65 Single	14.0	12.5	---	1	A01			40x47x86.25	534	AG907	call	0
KGB048S4DW P	4 ton	208/230v-1ph	65 Single	14.0	11.5	---	0.5	direct			40x47x86.25	571	AC300	call	---
KGB048S4DX P	4 ton	208/230v-1ph	150 Dual	14.0	11.5	---	0.5	direct			40x47x86.25	571	AC299	call	---
KGB048S4BM Y	4 ton	208/230v-3ph	108 Single	14.0	11.5	---	1	A02			40x47x86.25	571	AC316	call	0
KGA048S4DM Y	4 ton	208/230v-3ph	108 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	AC380	call	---
KGA048S4BM Y	4 ton	208/230v-3ph	108 Single	13.0	11.0	---	1	A02			40x47x86.25	571	AC379	call	---
KGB060S4DY P	5 ton	208/230v-1ph	108 Single	14.0	11.8	---	0.75	direct			40x47x86.25	601	AC306	call	---
KGB060S4DX P	5 ton	208/230v-1ph	150 Dual	14.0	11.8	---	0.75	direct			40x47x86.25	601	AC304	call	---
KGB060S4DX P	5 ton	208/230v-1ph	150 Dual	14.0	11.8	---	0.75	direct		Y	40x47x86.25	601	AC305	call	---
KGB060S4BW P	5 ton	208/230v-1ph	65 Single	14.0	11.8	---	1.5	A03			40x47x86.25	601	AC302	call	---
KGB060S4BW P	5 ton	208/230v-1ph	65 Single	14.0	11.8	---	1.5	A07			40x47x86.25	601	AC301	call	---
KGB060S4BM Y	5 ton	208/230v-3ph	108 Single	14.0	11.8	---	1	A03			40x47x86.25	601	AC317	call	0
KGB060S4BZ P	5 ton	208/230v-1ph	150 Single	14.0	11.8	---	1.5	A03			40x47x86.25	601	AC303	call	---
KGA072S4BM Y	6 ton	208/230v-3ph	108 Single	---	11.0	11.2	2	A04			48x47x86.25	700	AC320	call	---
*KGA090S4BM Y	7.5 ton	208/230v-3ph	108 Single	---	11.0	11.2	2	AA03		Y	48x47x98.25	805	L3266	call	---
*KGA090S4BH Y	7.5 ton	208/230v-3ph	150 Dual	---	11.0	11.2	2	AA03			48x47x98.25	805	V9867	call	---
*KGA090S4BH Y	7.5 ton	208/230v-3ph	150 Dual	---	11.0	11.2	2	AA03		Y	48x47x98.25	805	V9868	call	---

**PACKAGED GAS - 2 - 7.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

KGA024S4DS P	2 ton	208/230v-1ph	65 Single	13.0	11.4	---	0.25	direct			40x47x86.25	531	L0881	call	---
KGA024S4DS P	2 ton	208/230v-1ph	65 Single	13.0	11.4	---	0.25	direct		Y	40x47x86.25	531	L0882	call	---
KGA030S4DS P	2.5 ton	208/230v-1ph	65 Single	13.0	11.2	---	0.25	direct			40x46x86.25	533	L0883	call	---
KGA036S4DS P	3 ton	208/230v-1ph	65 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0892	call	---
KGA036S4DM P	3 ton	208/230v-1ph	105 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0890	call	---
KGA036S4DS Y	3 ton	208/230v-3ph	65 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0893	call	---
KGA036S4DM Y	3 ton	208/230v-3ph	108 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0891	call	---
KGA036S4DM J	3 ton	575v-3ph	108 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	AC378	call	---
KGA036S4DM J	3 ton	575v-3ph	108 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0889	call	---
KGA036S4DM Y	3 ton	208/230v-3ph	108 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	AC376	call	---
KGA036S4BM Y	3 ton	208/230v-3ph	108 Single	13.0	10.7	---	1	A01			40x47x86.25	534	AC374	call	---
KGA036S4BM J	3 ton	575v-3ph	108 Single	13.0	10.7	---	1	A01			40x47x86.25	534	AC375	call	---
KGA036S4BS Y	3 ton	208/230v-3ph	65 Single	13.0	10.7	---	1	A01			40x47x86.25	534	L0887	call	---
KGA036S4BM Y	3 ton	208/230v-3ph	105 Single	13.0	10.7	---	1	A01			40x47x86.25	534	L0885	call	---
KGA036S4BM J	3 ton	575v-3ph	108 Single	13.0	10.7	---	1	A01			40x47x86.25	534	L0884	call	---
KGA048S4DS P	4 ton	208/230v-1ph	65 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0905	call	---
KGA048S4DH P	4 ton	208/230v-1ph	150 Dual	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0901	call	---
KGA048S4DS Y	4 ton	208/230v-3ph	65 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0906	call	---
KGA048S4DM Y	4 ton	208/230v-3ph	108 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0903	call	---
KGA048S4DH Y	4 ton	208/230v-3ph	150 Dual	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0902	call	---
KGA048S4BH J	4 ton	575v-3ph	150 Dual	13.0	11.0	---	0.25	direct			40x47x86.25	571	L0995	call	---
KGA048S4DH J	4 ton	575v-3ph	150 Dual	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0900	call	---
KGA048S4BS Y	4 ton	208/230v-3ph	65 Single	13.0	11.0	---	1	A02			40x47x86.25	571	L0898	call	---
KGA048S4BS Y	4 ton	208/230v-3ph	65 Single	13.0	11.0	---	1	A03		Y-T24	40x47x86.25	571	AH575	call	0
KGA048S4BH Y	4 ton	208/230v-3ph	150 Dual	13.0	11.0	---	1	A02			40x47x86.25	571	L0895	call	---
KGA048S4BH J	4 ton	575v-3ph	150 Dual	13.0	11.0	---	1	A02			40x47x86.25	571	L0894	call	---
KGA060S4DM Y	5 ton	208/230v-3ph	108 Single	13.0	11.2	---	0.75	direct			40x47x86.25	601	AC383	call	---
KGA060S4BM Y	5 ton	208/230v-3ph	108 Single	13.0	11.2	---	1	A03			40x47x86.25	601	AC381	call	---
KGA060S4BM Y	5 ton	208/230v-3ph	108 Single	13.0	11.2	---	2	A07			40x47x86.25	601	AC382	call	---
KGA072S4BH Y	6 ton	208/230v-3ph	150 Dual	---	11.0	11.2	2	A04			48x47x86.25	700	AD584	call	---
KGA072S4BH J	6 ton	575v-3ph	150 Dual	---	11.0	11.2	2	A04			48x47x86.25	700	AD586	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
-----------	---------	----------------	------	------	-----	------	-----------------	------------------------	-------	-----------------------------------	----------------------------	----------------	-----------	-------	-------

**PACKAGED GAS - 2 - 7.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

KGA060S4DM P	5 ton	208/230v-1ph	105 Single	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0920	call	---
KGA060S4DH P	5 ton	208/230v-1ph	150 Dual	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0917	call	---
KGA060S4DH P	5 ton	208/230v-1ph	150 Dual	13.0	11.0	---	0.75	direct		Y	40x47x86.25	601	L0918	call	---
KGA060S4DS Y	5 ton	208/230v-3ph	65 Single	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0923	call	---
KGA060S4DM Y	5 ton	208/230v-3ph	105 Single	13.0	11.0	---	0.75	direct			40x47x86.25	601	L1100	call	---
KGA060S4DH Y	5 ton	208/230v-3ph	150 Dual	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0919	call	---
KGA060S4DH J	5 ton	575v-3ph	150 Dual	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0916	call	---
KGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	11.2	---	1	A03		Y	40x47x86.25	601	AH575	call	0
KGA060S4BH Y	5 ton	208/230v-3ph	150 Dual	13.0	11.2	---	1	A03			40x47x86.25	601	L0909	call	---
KGA060S4BH J	5 ton	575v-3ph	150 Dual	13.0	11.2	---	1	A03			40x47x86.25	601	L0907	call	---
KGA060S4BS P	5 ton	208/230v-1ph	65 Single	13.0	11.2	---	1.5	A03			40x47x86.25	601	L0913	call	---
KGA060S4BH P	5 ton	208/230v-1ph	150 Single	13.0	11.2	---	1.5	A03			40x47x86.25	601	L0908	call	---
KGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	11.2	---	1.5	A03			40x47x86.25	601	L0914	call	---
KGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	11.2	---	2	A03			40x47x86.25	601	L0998	call	---
KGA060S4BH Y	5 ton	208/230v-3ph	150 Dual	13.0	11.2	---	2	A03			40x47x86.25	601	J9648	call	---
KGA060S4BH J	5 ton	575v-3ph	150 Dual	13.0	11.0	---	2	A03			40x47x86.25	601	L0996	call	---
*KGA090S4BH Y	7.5 ton	208/230v-3ph	150 Dual	---	11.0	11.2	2	AA03		Y	48x47x98.25	805	L0931	call	---

**PACKAGED ELECTRIC/ELECTRIC - 2 - 7.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KCB024S4DN P	2 ton	208/230v-1ph	Opt. Elec. Heat	14.0	12.7	---	0.25	direct			40x47x86.25	495	AC289	call	---
KCB030S4DN P	2.5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.5	---	0.25	direct			40x47x86.25	497	AC290	call	---
KCB036S4DN P	3 ton	208/230v-1ph	Opt. Elec. Heat	14.0	12.5	---	0.5	direct			40x47x86.25	498	AC291	call	---
KCB048S4DN P	4 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.5	---	0.5	direct			40x47x86.25	535	AC292	call	---
KCB060S4DN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.8	---	1.5	A03			40x47x86.25	565	AC372	call	---
KCB060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.8	---	0.75	direct			40x47x86.25	565	AC293	call	---
KCA072S4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	11.4	2	A04			48x47x86.25	664	AD575	call	---
KCA072S4BN J	6 ton	575v-3ph	Opt. Elec. Heat	---	11.2	11.4	2	A08			48x47x86.25	664	AJ353	call	0
*KCA090S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	11.4	2	AA03			48x47x98.25	767	V9864	call	---

Note: KGA/KCA090 is a single-compressor model

**FIN/TUBE COIL**

KCA024S4DN P	2 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.4	---	0.25	direct			40x47x86.25	495	L0861	call	---
KCA030S4DN P	2.5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.2	---	0.25	direct			40x47x86.25	497	V0020	call	---
KCA036S4DN P	3 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.7	---	0.5	direct			40x47x86.25	498	L0864	call	---
KCA036S4DN J	3 ton	575v-3ph	Opt. Elec. Heat	13.0	10.7	---	0.5	direct			40x47x86.25	498	N8782	call	---
KCA048S4DN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.0	---	0.5	direct			40x47x86.25	535	L0870	call	---
KCA048S4DN J	4 ton	575v-3ph	Opt. Elec. Heat	13.0	11.0	---	0.5	direct			40x47x86.25	535	L0868	call	---
KCA048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.0	---	1	A02			40x47x86.25	535	L0866	call	---
KCA060S4DN P	5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.0	---	0.75	direct			40x47x86.25	565	L0875	call	---
KCA060S4DN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.0	---	0.75	direct			40x47x86.25	565	L0876	call	---
KCA060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.2	---	1.5	A03			40x47x86.25	565	L0872	call	---
KCA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.2	---	1.5	A03			40x47x86.25	565	L0873	call	---
KCA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.2	---	2	A07			40x47x86.25	565	L0994	call	---
KCA060S4BN J	5 ton	575v-3ph	Opt. Elec. Heat	13.0	11.2	---	1.5	A03			40x47x86.25	565	L0871	call	---

**PACKAGED HEAT PUMP - 2 - 6 TON - STANDARD EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

KHA024S4DN P	2 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.2	---	0.25	direct			40x47x86.25	531	L0935	call	---
KHA030S4DN P	2.5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.3	---	0.25	direct			40x46x86.25	533	L0936	call	---
KHA036S4DN P	3 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.9	---	0.5	direct			40x47x86.25	535	L0939	call	---
KHA036S4DN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	0.5	direct			40x47x86.25	535	L0940	call	---
KHA036S4BN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A01			40x47x86.25	535	L0938	call	---
KHA048S4DN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.7	---	0.5	direct			40x47x86.25	557	L0944	call	---
KHA048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.7	---	1	A02			40x47x86.25	557	L0942	call	---
KHA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A03			40x47x86.25	667	AA977	call	---
KHA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A03		Y-T24	40x47x86.25	667	L2367	call	---
KHA072S4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	1.5	A04			48x47x98.25	750	AA984	call	---



Model No.	Cooling	FACTORY CONFIGURATION										Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
		Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief						
KHB024S4DN P	2 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.7	---	0.25	direct				40x47x86.25	531	AC307	call	---
KHB030S4DN P	2.5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.9	---	0.25	direct				40x46x86.25	533	AC308	call	---
KHB036S4DN P	3 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.5	---	0.5	direct				40x47x86.25	535	AC309	call	---
KHB048S4DN P	4 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.4	---	0.5	direct				40x47x86.25	557	AC310	call	---
KHB060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.9	---	1.5	A03				48x47x86.25	667	L3282	call	---

**PACKAGED GAS - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

*KGA092H4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	12.5	13.0	2	1				48x60.5x101.5	990	V9819	call	---
*KGA092H4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	12.5	13.0	2	1		Y		48x60.5x101.5	990	V9820	call	---
*KGA092H4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	12.5	13.0	2	1				48x60.5x101.5	990	V9814	call	---
*KGA092H4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	12.5	13.0	2	1		Y		48x60.5x101.5	990	V9815	call	---
*KGA092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	2	1				48x60.5x101.5	990	V9808	call	---
*KGA092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	2	1		Y		48x60.5x101.5	990	V9809	call	---
*KGA092H4BS J	7.5 ton	575v-3ph	130 Dual	---	12.5	13.0	2	1			Y	48x60.5x101.5	990	V9818	call	---
*KGA092H4BM J	7.5 ton	575v-3ph	180 Dual	---	12.5	13.0	2	1				48x60.5x101.5	990	V9813	call	---
*KGA092H4BM J	7.5 ton	575v-3ph	180 Dual	---	12.5	13.0	2	1		Y		48x60.5x101.5	990	V9812	call	---
*KGA092H4BJ J	7.5 ton	575v-3ph	240 Dual	---	12.5	13.0	2	1		Y		48x60.5x101.5	990	V9807	call	---
KGA102H4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	12.2	12.9	2	1				48x60.5x101.5	1010	V9826	call	---
KGA102H4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	12.2	12.9	2	1		Y		48x60.5x101.5	1010	V9827	call	---
KGA102H4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	12.2	12.9	2	1				48x60.5x101.5	1010	V9824	call	---
KGA102H4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	12.2	12.9	2	1		Y		48x60.5x101.5	1010	V9823	call	---
KGA102H4BM J	8.5 ton	575v-3ph	180 Dual	---	12.2	12.9	2	1		Y		48x60.5x101.5	1010	V9822	call	---
KGA120H4BM Y	10 ton	208/230v-3ph	180 Dual	---	12.0	13.0	3	5				48x60.5x101.5	1050	V9838	call	---
KGA120H4BM Y	10 ton	208/230v-3ph	180 Dual	---	12.0	13.0	3	5		Y		48x60.5x101.5	1050	V9839	call	---
KGA120H4MM Y	10 ton	208/230v-3ph	180 Dual	---	12.0	13.0	3	5	Y	Y		48x60.5x101.5	1050	V9840	call	---
KGA120H4BH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3	5				48x60.5x101.5	1050	V9832	call	---
KGA120H4BH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3	5		Y		48x60.5x101.5	1050	V9833	call	---
KGA120H4BM J	10 ton	575v-3ph	180 Dual	---	12.0	13.0	3	5		Y		48x60.5x101.5	1050	V9837	call	---
KGA120H4BH J	10 ton	575v-3ph	240 Dual	---	12.0	13.0	3	5				48x60.5x101.5	1050	V9831	call	---
KGA120H4BH J	10 ton	575v-3ph	240 Dual	---	12.0	13.0	3	5		Y		48x60.5x101.5	1050	V9830	call	---

**PACKAGED ELECTRIC/ELECTRIC - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

*KCA092H4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	12.7	13.0	2	1				48x60.5x101.5	1052	V9800	call	---
*KCA092H4BN J	7.5 ton	575v-3ph	Opt. Elec. Heat	---	12.7	13.0	2	1		Y		48x60.5x101.5	1052	V9799	call	---
KCA102H4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	12.4	12.9	2	1				48x60.5x101.5	1059	V9803	call	---
KCA102H4BN J	8.5 ton	575v-3ph	Opt. Elec. Heat	---	12.4	12.9	2	1		Y		48x60.5x101.5	1059	V9802	call	---
KCA120H4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	12.3	13.2	3	5				48x60.5x101.5	1094	V9806	call	---
KCA120H4BN J	10 ton	575v-3ph	Opt. Elec. Heat	---	12.3	13.2	3	5		Y		48x60.5x101.5	1094	V9805	call	---

\*Note: KGA/KCA092 is two-compressor model

**PACKAGED GAS - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

*KGA092S4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1				48x60.5x101.5	918	V9166	call	---
*KGA092S4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1		Y		48x60.5x101.5	918	V9167	call	---
*KGA092S4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1		Y-T24		48x60.5x101.5	918	L2372	call	---
*KGA092S4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1				48x60.5x101.5	918	V9161	call	---
*KGA092S4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1		Y		48x60.5x101.5	918	V9162	call	---
*KGA092S4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	11.0	11.8	2	1				48x60.5x101.5	918	V9155	call	---
*KGA092S4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	11.0	11.8	2	1		Y		48x60.5x101.5	918	V9156	call	---
*KGA092S4BS J	7.5 ton	575v-3ph	130 Dual	---	11.0	11.8	2	1			Y	48x60.5x101.5	918	V9165	call	---
*KGA092S4BM J	7.5 ton	575v-3ph	180 Dual	---	11.0	11.8	2	1				48x60.5x101.5	918	V9160	call	---
*KGA092S4BM J	7.5 ton	575v-3ph	180 Dual	---	11.0	11.8	2	1		Y		48x60.5x101.5	918	V9159	call	---
*KGA092S4BJ J	7.5 ton	575v-3ph	240 Dual	---	11.0	11.8	2	1		Y		48x60.5x101.5	918	V9154	call	---
KGA102S4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1				48x60.5x101.5	938	V9173	call	---
KGA102S4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1		Y		48x60.5x101.5	938	V9174	call	---
KGA102S4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1				48x60.5x101.5	938	V9171	call	---
KGA102S4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1		Y		48x60.5x101.5	938	V9170	call	---
KGA102S4BM J	8.5 ton	575v-3ph	180 Dual	---	11.0	11.8	2	1		Y		48x60.5x101.5	938	V9169	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
KGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5			48x60.5x101.5	986	V9185	call	---
KGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5		Y	48x60.5x101.5	986	V9186	call	---
KGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5		Y-T24	48x60.5x101.5	986	L2371	call	---
KGA120S4MM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5	Y	Y	48x60.5x101.5	1050	V9187	call	---
KGA120S4BH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5			48x60.5x101.5	986	V9179	call	---
KGA120S4BH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5		Y	48x60.5x101.5	986	V9180	call	---
KGA120S4MH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5	Y	Y	48x60.5x101.5	986	M9635	call	---
KGA120S4BM J	10 ton	575v-3ph	180 Dual	---	11.0	11.8	3	5		Y	48x60.5x101.5	986	V9184	call	---
KGA120S4BH J	10 ton	575v-3ph	240 Dual	---	11.0	11.8	3	5			48x60.5x101.5	986	V9178	call	---
KGA120S4BH J	10 ton	575v-3ph	240 Dual	---	11.0	11.8	3	5		Y	48x60.5x101.5	986	V9177	call	---
KGA120S4MH J	10 ton	575v-3ph	240 Dual	---	11.0	11.8	3	5	Y	Y	48x60.5x101.5	986	M9636	call	---
KGA150S4BM Y	12.5 ton	208/230v-3ph	180 Dual	---	11.0	11.4	5	11			48x60.5x101.5	1140	V9198	call	---
KGA150S4BM Y	12.5 ton	208/230v-3ph	180 Dual	---	11.0	11.4	5	11		Y	48x60.5x101.5	1140	V9199	call	---
KGA150S4MM Y	12.5 ton	208/230v-3ph	180 Dual	---	11.0	11.4	5	11	Y	Y	48x60.5x101.5	1140	V9200	call	---
KGA150S4MH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5	11			48x60.5x101.5	1140	V9195	call	---
KGA150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5	11		Y	48x60.5x101.5	1140	V9194	call	---
KGA150S4MH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5	11	Y	Y	48x60.5x101.5	1140	M9637	call	---
KGA150S4BH J	12.5 ton	575v-3ph	240 Dual	---	11.0	11.4	5	11		Y	48x60.5x101.5	1140	V9193	call	---
KGA150S4MH J	12.5 ton	575v-3ph	240 Dual	---	11.0	11.4	5	11	Y	Y	48x60.5x101.5	1140	M9638	call	---

\*Note: KGA/KCA092 is two-compressor model

**PACKAGED ELECTRIC/ELECTRIC - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

*KCA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			48x60.5x101.5	870	V9147	call	---
*KCA092S4BN J	7.5 ton	575v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1		Y	48x60.5x101.5	870	V9146	call	---
KCA102S4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			48x60.5x101.5	890	V9150	call	---
KCA102S4BN J	8.5 ton	575v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1		Y	48x60.5x101.5	890	V9149	call	---
KCA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	3	5			48x60.5x101.5	938	V9153	call	---
KCA120S4BN J	10 ton	575v-3ph	Opt. Elec. Heat	---	11.2	12.0	3	5		Y	48x60.5x101.5	938	V9152	call	---
KCA150S4BN Y	12.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	11.6	5	11			48x60.5x101.5	1092	V9190	call	---
KCA150S4BN J	12.5 ton	575v-3ph	Opt. Elec. Heat	---	11.2	11.6	5	11		Y	48x60.5x101.5	1092	V9189	call	---

**PACKAGED HEAT PUMP - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

KHA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	2	1			48x60.5x101.5	1052	L0228	call	---
KHA102S4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	2	1			48x60.5x101.5	1084	L0240	call	---
KHA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	5			48x60.5x101.5	1150	L0257	call	---
KHA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	5		Y-T24	48x60.5x101.5	1150	L2369	call	---
KHA150S4BN Y	12.5 ton	208/230v-3ph	Opt. Elec. Heat	---	10.6	10.7	5	11			48x60.5x127	1350	L0269	call	---

\*Note: KGA/KCA092 is two-compressor model

**PACKAGED GAS - 13 - 25 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KGA156H4BS Y	13 ton	208/230v-3ph	260 Dual	---	12.0	13.6	3	2			55x91x107	1935	Z4103	call	---
KGA180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	3	2			55x91x133	2115	Z4109	call	---
KGA180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	3	2		Y	55x91x133	2115	Z4111	call	---
KGA180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	5	4		Y	55x91x133	2115	Z4110	call	---
KGA180H4MS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.7	5	4	Y		55x91x133	2115	Z4113	call	---
KGA180H4BM Y	15 ton	208/230v-3ph	360 Dual	---	12.0	13.5	5	4		Y	55x91x133	2115	Z4105	call	---
KGA180H4BM J	15 ton	575v-3ph	360 Dual	---	12.0	13.5	5	4		Y	55x91x133	2115	Z4107	call	---
KGA210H4BM Y	17.5 ton	208/230v-3ph	360 Dual	---	12.0	13.0	5	4		Y	55x91x133	2240	Z4118	call	---
KGA210H4BH Y	17.5 ton	208/230v-3ph	480 Dual	---	12.0	13.0	5	4		Y	55x91x133	2240	Z4115	call	---
KGA210H4BH J	17.5 ton	575v-3ph	480 Dual	---	12.0	13.0	5	4		Y	55x91x133	2240	Z4117	call	---
KGA240H4BS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4126	call	---
KGA240H4BS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	13.0	7.5	6			55x91x133	2610	Z4125	call	---
KGA240H4MS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	14.0	7.5	6	Y		55x91x133	2610	Z4137	call	---
KGA240H4BM Y	20 ton	208/230v-3ph	360 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4123	call	---
KGA240H4BH Y	20 ton	208/230v-3ph	480 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4120	call	---
KGA240H4BH J	20 ton	575v-3ph	480 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4122	call	---
KGA300H4BS Y	25 ton	208/230v-3ph	260 Dual	---	10.5	10.9	10	10			55x91x133	2430	Z4134	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
KGA300H4BM Y	25 ton	208/230v-3ph	360 Dual	---	10.5	10.9	10	7		Y	55x91x133	2430	Z4132	call	---
KGA300H4BH Y	25 ton	208/230v-3ph	480 Dual	---	10.5	10.9	10	10		Y	55x91x133	2430	Z4129	call	---
KGA300H4BH J	25 ton	575v-3ph	480 Dual	---	10.5	10.9	10	10		Y	55x91x133	2430	Z4131	call	---

**PACKAGED ELECTRIC/ELECTRIC - 13 - 25 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KCA156H4BN Y	13 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.6	3	2			55x91x107	1785	Z4091	call	---
KCA180H4BN Y	15 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.5	3	2			55x91x133	1965	Z4093	call	---
KCA180H4BN J	15 ton	575v-3ph	Opt. Elec. Heat	---	12.0	13.7	3	2		Y	55x91x133	1965	Z4095	call	---
KCA210H4BN Y	17.5 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.0	5	4			55x91x133	2090	Z4097	call	---
KCA240H4BN Y	20 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.2	7.5	6			55x91x133	2175	Z4099	call	---
KCA240H4BN J	20 ton	575v-3ph	Opt. Elec. Heat	---	12.0	14.5	7.5	6		Y	55x91x133	2175	Z4098	call	---
KCA300H4BN Y	25 ton	208/230v-3ph	Opt. Elec. Heat	---	10.5	10.9	10	10			55x91x133	2280	Z4101	call	---

**PACKAGED GAS - 15 - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KGA180S4BS Y	15 ton	208/230v-3ph	260 Dual	---	10.8	11.0	3	2			55x91x107	1790	Z3939	call	---
KGA180S4BS Y	15 ton	208/230v-3ph	260 Dual	---	10.8	11.0	3	2		Y	55x91x107	1790	L2253	call	---
KGA180S4BS Y	15 ton	208/230v-3ph	260 Dual	---	10.8	11.0	5	4 VFD		Y	55x91x107	1790	Z3943	call	---
KGA180S4BM Y	15 ton	208/230v-3ph	360 Dual	---	10.8	11.0	5	4		Y	55x91x107	1790	Z3937	call	---
KGA180S4MM Y	15 ton	208/230v-3ph	360 Dual	---	10.8	11.0	5	4	Y	Y	55x91x107	1790	M9639	call	---
KGA180S4BM J	15 ton	575v-3ph	360 Dual	---	10.8	11.0	5	4		Y	55x91x107	1790	Z3938	call	---
KGA180S4MM J	15 ton	575v-3ph	360 Dual	---	10.8	11.0	5	4	Y	Y	55x91x107	1790	M5831	call	---
KGA210S4BM Y	17.5 ton	208/230v-3ph	360 Dual	---	10.8	12.0	5	4 VFD		Y	55x91x107	1935	Z3950	call	---
KGA210S4BH Y	17.5 ton	208/230v-3ph	480 Dual	---	10.8	12.0	5	4		Y	55x91x107	1935	Z3948	call	---
KGA210S4BH J	17.5 ton	575v-3ph	480 Dual	---	10.8	12.0	5	4		Y	55x91x107	1935	Z3949	call	---
KGA240S4BS Y	20 ton	208/230v-3ph	260 Dual	---	10.8	11.0	7.5	6			55x91x133	2180	Z3957	call	---
KGA240S4BS Y	20 ton	208/230v-3ph	260 Dual	---	10.8	11.0	7.5	6		Y	55x91x133	2180	Z3960	call	---
KGA240S4BM Y	20 ton	208/230v-3ph	360 Dual	---	10.8	11.0	7.5	6 VFD		Y	55x91x133	2180	Z3961	call	---
KGA240S4BH Y	20 ton	208/230v-3ph	480 Dual	---	10.8	11.0	7.5	6		Y	55x91x133	2180	Z3958	call	---
KGA240S4MH Y	20 ton	208/230v-3ph	480 Dual	---	10.8	11.0	7.5	6	Y	Y	55x91x133	2180	M9640	call	---
KGA240S4BH J	20 ton	575v-3ph	480 Dual	---	10.8	11.0	7.5	6		Y	55x91x133	2180	Z3955	call	---
KGA240S4MH J	20 ton	575v-3ph	480 Dual	---	10.8	11.0	7.5	6	Y	Y	55x91x133	2180	M9641	call	---
KGA300S4BS Y	25 ton	208/230v-3ph	260 Dual	---	10.0	10.0	10	10			55x91x133	2180	Z3969	call	---
KGA300S4BM Y	25 ton	208/230v-3ph	360 Dual	---	10.0	10.0	10	7 VFD		Y	55x91x133	2180	Z3970	call	---
KGA300S4BH Y	25 ton	208/230v-3ph	480 Dual	---	10.0	10.0	10	10		Y	55x91x133	2180	Z3968	call	---
KGA300S4BH J	25 ton	575v-3ph	480 Dual	---	10.0	10.0	10	10		Y	55x91x133	2180	Z3967	call	---

**PACKAGED GAS - 15 - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

KGA180S4BS Y	15 ton	208/230v-3ph	260 Dual	---	10.8	11.0	5	4 VFD		Y	55x91x107	1855	V1445	call	---
KGA210S4BM Y	17.5 ton	208/230v-3ph	360 Dual	---	10.8	11.0	5	4 VFD		Y	55x91x107	2000	V1446	call	---
KGA300S4BH Y	25 ton	208/230v-3ph	360 Dual	---	10.0	9.9	10	7 VFD		Y	55x91x133	2270	V1448	call	---

**PACKAGED ELECTRIC/ELECTRIC - 15 - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KCA180S4BN Y	15 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	2			55x91x107	1705	Z3935	call	---
KCA180S4BN J	15 ton	575v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	2		Y	55x91x107	1705	Z3936	call	---
KCA210S4BN Y	17.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.2	5	4			55x91x107	1850	Z3946	call	---
KCA240S4BN Y	20 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	7.5	6			55x91x133	2120	Z3952	call	---
KCA240S4BN J	20 ton	575v-3ph	Opt. Elec. Heat	---	11.0	11.2	7.5	6		Y	55x91x133	2120	Z3954	call	---
KCA300S4BN Y	25 ton	208/230v-3ph	Opt. Elec. Heat	---	10.0	10.1	10	10			55x91x133	2120	Z3964	call	---

**CONVENTIONAL FIN/TUBE COIL**

KCA300S4BN Y	25 ton	208/230v-3ph	Opt. Elec. Heat	---	10.0	10.1	10	10			55x91x133	2120	L0357	call	---
--------------	--------	--------------	-----------------	-----	------	------	----	----	--	--	-----------	------	-------	------	-----

**PACKAGED HEAT PUMP - 15 - 20 TON - STANDARD EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

KHA180S4BN Y	15 ton	208/230v-3ph	Opt. Elec. Heat	---	10.6	10.7	3	2			55x91x129	1950	L0338	call	---
KHA240S4BN Y	20 ton	208/230v-3ph	Opt. Elec. Heat	---	10.6	10.7	7.5	6			55x91x129	2150	L0355	call	---
KHA240S4BN Y	20 ton	208/230v-3ph	Opt. Elec. Heat	---	10.6	10.7	7.5	6		Y-T24	55x91x129	2150	L2374	call	---



Description	Order No.	Price
<b>LANDMARK® - 2 - 7.5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height [KC/KG 024 thru *090] [KH 024 thru KH *072] C1CURB70A-1	11F50	call
14 in. height [KC/KG 024 thru *090] [KH 024 thru *072] C1CURB71A-1	11F51	call
18 in. height [KC/KG 024 thru *090] [KH 024 thru *072] C1CURB72A-1	11F52	call
24 in. height [KC/KG 024 thru *090] [KH 024 thru *072] C1CURB73A-1	11F53	call
<b>HYBRID - FULL PERIMETER</b>		
14 in. height [KCA/KGA090] [KHA072] K1CURB71AP1	11S48	call
<b>CLIP CURB - FULL PERIMETER</b>		
8 in. height [KCA/KGA090] [KHA072] K1CURB23AP1	52W20	call
18 in. height [KCA/KGA090] [KHA072] K1CURB21AP1	52W22	call
24 in. height [KCA/KGA090] [KHA072] K1CURB22AP1	52W23	call
<i>* KCA/KGA090 and KHA072 models will fit smaller C1CURB/T1CURB roof curbs with some unit overhang.</i>		
<b>ADJUSTABLE PITCHED CURB</b>		
14 in. height C1CURB55AT1	43W27	call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (SENSIBLE CONTROL) (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood And Barometric Relief Dampers With Exhaust Hood</b>		
Standard Economizer [All Models] K1ECON30A-2	90W61	call
<b>STANDARD ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control C1SNSR64FF1	53W64	call
Differential Enthalpy Control Order 2 - C1SNSR64FF1	53W64	call
<b>HIGH PERFORMANCE ECONOMIZER (SENSIBLE CONTROL) (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Outdoor Air Hood And Barometric Relief Dampers With Exhaust Hood</b>		
High Performance Economizer [All Models] K1ECON32A-1	10U56	call
<b>ECONOMIZER ACCESSORIES</b>		
Horizontal Economizer Conversion Kit T1HECK00AN1	17W45	call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control C1SNSR64FF1	10Z75	call
Differential Enthalpy Control Order 2 - C1SNSR64FF1	10Z75	call
POWER EXHAUST - STANDARD STATIC		
[KC/KG 036 thru 090] [KH 036 thru 072] 208/230V-1 or 3 ph - C1PWRE10A-1P	79W87	call
[KC/KG 036 thru 090] [KH 036 thru 072] 575V-3ph - C1PWRE10A-1J	79W89	call
BAROMETRIC RELIEF		
Barometric Relief Dampers with Exhaust Hood [All Models] C1DAMP50A-1-	74W38	call
NOTE - Order Barometric Relief Dampers with Exhaust Hood if unit is ordered with factory installed Economizer with "No Exhaust" option. Required when Economizer is factory installed (no exhaust option) with field installed Power Exhaust Fan option.		



Description	Order No.	Price
<b>LANDMARK® - 2 - 7.5 TON ACCESSORIES (Field Installed)</b>		
<b>OUTDOOR AIR DAMPERS</b>		
<b>Includes Outdoor Air Hood</b>		
Manual	[All Models] C1DAMP11A-1	<b>53W34</b> call
Motorized	[All Models] K1DAMP21A-1	<b>79W95</b> call
<b>CABINET ACCESSORIES</b>		
Coil/Hail Guards	[KCA/KGA036 thru 060] [KHA036 thru 048] C1GARD51A-1	<b>13R98</b> call
	[KCA/KGA072] [KHA060] C1GARD51AT1	<b>13T03</b> call
	[KCA/KGA090] [KHA072] K1GARD50AP1	<b>13T17</b> call
	[KCB/KGB024 thru 048] [KHB024 thru 036] C1GARD51A-1	<b>13R98</b> call
	[KCB/KGB060] [KHB048 thru 060] C1GARD51AT1	<b>13T03</b> call
<b>CEILING DIFFUSERS</b>		
Step-Down - Order one	[024 thru 060] RTD9-65-R	<b>27G87</b> call
	[072 thru 090] RTD11-95	<b>29G04</b> call
Flush - Order one	[024 thru 060] FD9-65-R	<b>27G86</b> call
	[072 thru 090] FD11-95	<b>29G08</b> call
Transitions (Supply and Return) - Order one	[024 thru 060] T1TRAN10AN1	<b>17W53</b> call
	[072 thru 090] T1TRAN20N-1	<b>17W54</b> call
<b>CONTROLS</b>		
BACnet®	[KCA/KGA036 thru 060] [KHA036 thru 048] K0CTRL31A-1	<b>96W14</b> call
	[KCA/KGA072-090] [KHA060 thru 072] K0CTRL31AP1	<b>12B99</b> call
	[KCB/KGB024 thru 048] [KHB024 thru 036] K0CTRL31A-1	<b>96W14</b> call
	[KCB/KGB060] [KHB048 thru 060] K0CTRL31AP1	<b>12B99</b> call
BACnet® Thermostat with Display	K0SNSR01FF1	<b>97W23</b> call
BACnet Thermostat without Display	K0SNSR00FF1	<b>97W24</b> call
Novar® 2051	[KCA/KGA036 thru 060] [KHA036 thru 048] K0CTRL30A-1	<b>96W11</b> call
	[KCA/KGA072-090] [KHA060 thru 072] K0CTRL30AP1	<b>12B98</b> call
	[KCB/KGB024 thru 048] [KHB024 thru 036] K0CTRL30A-1	<b>96W11</b> call
	[KCB/KGB060] [KHB048 thru 060] K0CTRL30AP1	<b>12B98</b> call
Plenum Cable (75 ft.)	K0MISC00FF1	<b>97W25</b> call
<b>SMOKE DETECTORS</b>		
Supply or Return (Power board and one sensor)	C1SNSR44AP1	<b>53W78</b> call
Supply and Return (Power board and two sensors)	C1SNSR43AP1	<b>53W79</b> call
THERMOSTATS - See Controls Tab Section		





Description	Order No.	Price
<b>LANDMARK® - 2 - 7.5 TON ACCESSORIES (Field Installed)</b>		
<b>COOLING ACCESSORIES</b>		
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b> call
	Copper - C1TRAP10AD2	<b>76W27</b> call
Compressor Crankcase Heater	[KCA/KGA036] 208/230V-1 or 3 ph - K1CCHT02A-1P	<b>39W04</b> call
	[KCA/KGA048 thru 060] 208/230V-1 or 3 ph - T1CCHT01AN1P	<b>95M07</b> call
	[KCA/KGA036] 575V-3ph - K1CCHT02A-1J	<b>39W06</b> call
	[KCA/KGA048 thru 060] 575V-3ph - T1CCHT01AN1J	<b>95M09</b> call
Drain Pan Overflow Switch	K1SNSR71AB1-	<b>74W42</b> call
Low Ambient Kit	[KCA/KGA] K1SNSR12A-1	<b>41W33</b> call
	[KHA] K1SNSR13A-1	<b>41W34</b> call
<b>GAS HEAT (KG MODELS)</b>		
Bottom Gas Piping Kit	T1GPKT01AN1	<b>19W50</b> call
Low Temperature Vestibule Heater	208/230V-1 or 3 ph - T1CWKT01AN1Y	<b>19W53</b> call
	[036 thru 090] 575V-3ph - T1CWKT01AN1J	<b>19W62</b> call
Combustion Air Intake Extensions	T1EXTN10AN1	<b>19W51</b> call
LPG/Propane Conversion Kits	One-stage models - C1PROP10AP2	<b>11U62</b> call
	[036 thru 090] Two-stage models - C1PROP20AP2	<b>11U63</b> call
Vertical Vent Extension	C1EXTN20FF1	<b>31W62</b> call
<b>INDOOR AIR QUALITY</b>		
<b>AIR FILTERS</b>		
Healthy Climate® High Efficiency Air Filters Order 4 per unit	[KCA/KGA036 thru 060] [KHA036 thru 048] MERV 8 (16 x 20 x 2) - C1FLTR15A-1-	<b>54W20</b> call
	[KCA/KGA036 thru 060] [KHA036 thru 048] MERV 13 (16 x 20 x 2) - T1FLTR40A-1-	<b>52W37</b> call
	[KCA072 thru 090] [KHA060 thru 072] MERV 8 (20 x 20 x 2) - C1FLTR15D-1-	<b>54W21</b> call
	[KCA072 thru 090] [KHA060 thru 072] MERV 13 (20 x 20 x 2) - C1FLTR40D-1-	<b>52W39</b> call
	[KCB/KGB024 thru 048] [KHB024 thru 036] MERV 8 (16 x 20 x 2) - C1FLTR15A-1-	<b>54W20</b> call
	[KCB/KGB024 thru 048] [KHB024 thru 036] MERV 13 (16 x 20 x 2) - T1FLTR40A-1-	<b>52W37</b> call
	[KCB/KGB060] [KHB048 thru 060] MERV 8 (20 x 20 x 2) - C1FLTR15D-1-	<b>54W21</b> call
	[KCB/KGB060] [KHB048 thru 060] MERV 13 (20 x 20 x 2) - C1FLTR40D-1-	<b>52W39</b> call
<b>CO2 SENSORS</b>		
Sensor - white case CO2 display	C0SNSR50AE1L	<b>77N39</b> call
Sensor - duct mount, black case, no display	C0SNSR53AE1L	<b>87N54</b> call
CO2 Sensor Duct Mounting Kit	C0MISC19AE1-	<b>85L43</b> call
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (77N39)	C0MISC16AE1-	<b>90N43</b> call
<b>UVC GERMICIDAL LAMPS</b>		
* Healthy Climate® UVC Light Kit (208/230v-1ph)	E1UVCL10AN1-	<b>50W90</b> call

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



Description	Order No.	Price
<b>LANDMARK® - 2 - 7.5 TON ACCESSORIES (Field Installed)</b>		
ELECTRIC HEAT (KC AND KH MODELS)		
<b>Includes Fuse Block</b>		
5 kW	[024 thru 030] 208/240V-1ph - K1EH0050A-1P	<b>12F06</b> call
7.5 kW	[024 thru 060] 208/240V-1ph - T1EH0075AN1P	<b>14W32</b> call
	[036 thru 090] 208/240V-3ph - T1EH0075AN1Y	<b>14W35</b> call
	[036 thru 090] 575V-3ph - T1EH0075AN1J	<b>14W43</b> call
10 kW	[024 thru 030] 208/240V-1ph - T1EH0100A1P	<b>30W26</b> call
15 kW	[036 thru 60] 208/240V-1ph - T1EH0150AN1P	<b>14W33</b> call
	[036 thru 090] 208/240V-3ph - T1EH0150AN1Y	<b>14W36</b> call
	[036 thru 090] 575V-3ph - T1EH0150AN1J	<b>14W44</b> call
22.5 kW	[060] 208/240V-1ph - T1EH0225AN1P	<b>14W34</b> call
	[060 thru 090] 208/240V-3ph - T1EH0225AN1Y	<b>14W37</b> call
	[060 thru 090] 575V-3ph - T1EH0225AN1J	<b>14W45</b> call
30 kW	[072 thru 090] 208/240V-3ph - T1EH0300N-1Y	<b>14W38</b> call
	[072 thru 090] 575V-3ph - T1EH0300N-1J	<b>14W46</b> call
ELECTRICAL		
<b>DISCONNECT</b>		
Standard Access Door (Short)	[KGA024-060] 80 AMP - T1DISC080A-1	<b>20W17</b> call
	[KCA024-060] [KHA024-048] 80 AMP - T2DISC080A-1	<b>20W15</b> call
	[KCA060] [KHA036-048] 150 AMP - T2DISC150A-1	<b>20W16</b> call
Standard Access Door (Tall)	[KGA072] [KGA090] 80 AMP - T1DISC080N-1	<b>20W20</b> call
	[KCA072-090] [KHA060-072] 80AMP - T2DISC080N-1	<b>20W18</b> call
	[KCA072-090] [KGA090] [KHA060-072] 150 AMP - T2DISC150N-1	<b>20W19</b> call
Hinged Access Door (Short)	[KGA024-060] 80 AMP - T1DISC080AH1	<b>20W23</b> call
	[KCA024-060] [KHA024-048] 80 AMP - T2DISC080AH1	<b>20W21</b> call
	[KCA036-060] [KHA036-048] 150 AMP - T2DISC150AH1	<b>20W22</b> call
Hinged Access Door (Tall)	[KGA072] [KGA090] 80 AMP - T1DISC080NH1	<b>20W26</b> call
	[KCA072-090] [KHA060-072] 80 AMP - T2DISC080NH1	<b>20W24</b> call
	[KCA072-090] [KGA090] [KHA060-072] 150 AMP - T2DISC150NH1	<b>20W25</b> call
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b> call
	20 amp non-powered, field-wired (575V only) C1GFCI20FF1	<b>67E01</b> call
Weatherproof Cover for GFI	C1GFCI99FF1	<b>10C89</b> call



Description	Order No.	Price
<b>LANDMARK® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70B-1	11F54 call
14 in. height	C1CURB71B-1	11F55 call
18 in. height	C1CURB72B-1	11F56 call
24 in. height	C1CURB73B-1	11F57 call
<b>ADJUSTABLE PITCHED CURB</b>		
14 in. height	C1CURB55B-1	54W50 call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood and Barometric Relief Dampers with Exhaust Hood</b>		
Standard Economizer (Single Temp. Control) Downflow or Horizontal	K1ECON20B-1	54W55 call
<b>STANDARD ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR64FF1	53W64 call
Differential Enthalpy Control	Order 2 - C1SNSR64FF1	53W64 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Outdoor Air Hood and Barometric Relief Dampers with Exhaust Hood</b>		
High Performance Economizer (Single Temp. Control) Downflow or Horizontal	K1ECON22B-1	10U58 call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR64FF1	10Z75 call
Differential Enthalpy Control	Order 2 - C1SNSR64FF1	10Z75 call
<b>HORIZONTAL LOW PROFILE BAROMETRIC RELIEF DAMPERS WITH EXHAUST HOOD</b>		
Horizontal Low Profile Barometric Relief Dampers	LAGEDH03/15	53K04 call
POWER EXHAUST - STANDARD STATIC		
	208/230V-3ph - K1PWRE10B-1Y	53W44 call
	575V-3ph - K1PWRE10B-1J	53W46 call
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Motorized	C1DAMP20B-1	14G28 call
Manual	C1DAMP10B-2	14G29 call
CABINET ACCESSORIES		
Coil/Hail Guards	[KCA/KGA] C1GARD52B-1	13T05 call
	[KHA092, 102, 120] K1GARD51BS1	13T24 call
	[KHA150] K1GARD51BP1	13T25 call
Horizontal Discharge Kit	K1HECK00B-1	51W25 call
Return Air Adaptor Plate (L Series® or T-Class™)	C1CONV10B-1	54W96 call
CEILING DIFFUSERS		
Step-Down - Order one	[092] RTD11-95	29G04 call
	[102 thru 120] RTD11-135	29G05 call
	[150] RTD11-185	29G06 call
Flush - Order one	[092] FD11-95	29G08 call
	[102 thru 120] FD11-135	29G09 call
	[150] FD11-185	29G10 call
Transitions (Supply and Return) - Order one	[092] C1DIFF30B-1	12X65 call
	[102 thru 120] C1DIFF31B-1	12X66 call
	[150] C1DIFF32B-1	12X67 call



Description		Order No.	Price
<b>LANDMARK® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
<b>CONTROLS</b>			
BACnet®	K0CTRL31A-1	96W15	call
BACnet® Thermostat with Display	K0SNSR01FF1	97W23	call
BACnet Thermostat without Display	K0SNSR00FF1	97W24	call
Novar® 2051	K0CTRL30A-1	96W12	call
Plenum Cable (75 ft.)	K0MISC00FF1	97W25	call
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44B-1	53W80	call
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43B-1	53W81	call
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	76W26	call
	Copper - C1TRAP10AD2	76W27	call
Drain Pan Overflow Switch	K1SNSR71AB1-	74W42	call
Low Ambient Kit	K1SNSR33B-1	54W16	call
<b>GAS HEAT (KG MODELS)</b>			
Bottom Gas Piping Kit	C1GPKT01B-01	54W95	call
Combustion Air Intake Extensions	T1EXTN10AN1	19W51	call
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10B-2Y	13X63	call
	575V-3ph - C1LTVH10B-2J	13X65	call
LPG/Propane Conversion Kits	[Standard heat] C1PROP23BS1	14N22	call
	[Medium heat] C1PROP22BS1	14N23	call
	[High heat] C1PROP21BS1	14N25	call
Vertical Vent Extension	C1EXTN20FF1	42W16	call
<b>ELECTRIC HEAT (KC AND KH MODELS)</b>			
7.5 kW	[KCA/KHA092 thru 102] 208/240V-3ph - C1EH0075B-1Y	56W38	call
	[KCA/KHA092 thru 102] 575V-3ph - C1EH0075B-1J	56W40	call
15 kW	[KCA/KHA092 thru 150] 208/240V-3ph - C1EH0015B-1Y	56W41	call
	[KCA/KHA092 thru 150] 575V-3ph - C1EH0150B-1J	56W43	call
22.5 kW	[KCA/KHA092 thru 150] 208/240V-3ph - C1EH0225B-1Y	56W44	call
	[KCA/KHA092 thru 150] 575V-3ph - C1EH0225B-1J	56W46	call
30 kW	[KCA/KHA092 thru 150] 208/240V-3ph - C1EH0300B-1Y	56W47	call
	[KCA/KHA092 thru 150] 575V-3ph - C1EH0300B-1J	56W49	call
45 kW	[KCA/KHA092 thru 150] 208/240V-3ph - C1EH0450B-1Y	56W50	call
	[KCA/KHA092 thru 150] 575V-3ph - C1EH0450B-1J	56W52	call
60 kW	[KCA/KHA120 thru 150] 208/240V-3ph - C1EH0600B-1Y	55W02	call
	[KCA/KHA120 thru 150] 575V-3ph - C1EH0600B-1J	55W04	call



Description		Order No.	Price
<b>LANDMARK® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
<b>ELECTRICAL</b>			
Disconnect	80 amp - C1DISC080B-1	<b>54W56</b>	<b>call</b>
	150 amp - C1DISC150B-1	<b>54W57</b>	<b>call</b>
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b>	<b>call</b>
	20 amp non-powered, field-wired (575V only) C1GFIC120FF1	<b>67E01</b>	<b>call</b>
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b>	<b>call</b>
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15B-1	<b>50W61</b>	<b>call</b>
20 x 25 x 2 (Order 4 per unit)	MERV 13 - C1FLTR40B-1	<b>52W41</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30B-1-	<b>Y3063</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b>	<b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b>	<b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (208/230v-1ph)	C1UVCL10B-1	<b>54W62</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



Description	Order No.	Price
<b>LANDMARK® - 13 - 25 TON ACCESSORIES (Field Installed)</b>		
<b>ROOF CURBS - DOWNFLOW</b>		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70C-1	11F58 call
14 in. height	C1CURB71C-1	11F59 call
18 in. height	C1CURB72C-1	11F60 call
24 in. height	C1CURB73C-1	11F61 call
<b>ADJUSTABLE PITCH CURB</b>		
14 in. height	L1CURB55C	43W26 call
<b>ROOF CURBS - HORIZONTAL (REQUIRES HORIZONTAL RETURN AIR PANEL KIT)</b>		
<b>STANDARD</b>		
26 in. height - slab applications	[156, 180 thru 240] C1CURB14C-1	11T89 call
37 in. height - rooftop applications	[156, 180 thru 240] C1CURB16C-1	11T96 call
30 in. height - slab applications	[300] C1CURB15C-1	11T90 call
41 in. height - rooftop applications	[300] C1CURB17C-1	11T97 call
<b>INSULATION KIT FOR STANDARD HORIZONTAL CURBS</b>		
for C1CURB14C-1	[156, 180 thru 240] C1INSU11C-1-	73K32 call
for C1CURB15C-1	[156, 180 thru 240] C1INSU13C-1-	73K34 call
for C1CURB16C-1	[300] C1INSU12C-1-	73K33 call
for C1CURB17C-1	[300] C1INSU14C-1-	73K35 call
<b>HORIZONTAL RETURN AIR PANEL KIT</b>		
Required for Horizontal Applications with Roof Curb	C1HRAP10C-1-	87M00 call
<b>BLOWER</b>		
VFD Manual Bypass Kit (for MSAV equipped units)	2, 3, 5 hp (208/230V) 2, 3, 5, 7.5, 10 hp (460V and 575V) KVFDB11C-1 [Not for 156H] 7.5 hp, 10 hp (208/230V) KVFDB10C-1	90W52 call 90W51 call
<b>ECONOMIZER</b>		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood</b>		
Standard Economizer - Downflow or Horizontal	K1ECON20C-3	13U48 call
<b>STANDARD ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy	C1SNSR64FF1	53W64 call
Differential Enthalpy	Order 2 - C1SNSR64FF1	53W64 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARDS)</b>		
<b>With Outdoor Air Hood</b>		
High Performance Economizer - Downflow or Horizontal	K1ECON22C-1	10U61 call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy	C1SNSR64FF1	10Z75 call
Differential Enthalpy	Order 2 - C1SNSR64FF1	10Z75 call
<b>BAROMETRIC RELIEF DAMPERS</b>		
Downflow Barometric Relief Dampers with Exhaust Hood	C1DAMP50C	54W78 call
Horizontal Barometric Relief Dampers with Exhaust Hood	LAGEDH18/24	16K99 call
Exhaust Hood for Factory Installed Downflow Barometric Relief Dampers	[KHA180 thru 240] C1HOOD20C-1	85M26 call



Description		Order No.	Price
<b>LANDMARK® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
<b>POWER EXHAUST (DOWNFLOW APPLICATIONS ONLY)</b>			
Standard Static	208/230V - C1PWRE11C-1Y	<b>75W90</b>	<b>call</b>
	575V - C1PWRE11C-1J	<b>75W92</b>	<b>call</b>
<b>OUTDOOR AIR DAMPERS</b>			
Motorized Dampers with Outdoor Air Hood	C1DAMP20C-1	<b>13U04</b>	<b>call</b>
Manual Dampers With Outdoor Air Hood	C1DAMP10C-2	<b>13U05</b>	<b>call</b>
<b>CABINET ACCESSORIES</b>			
Coil/Hail Guards	[KCA/KGA156H, 180S thru 210S] C1GARD52C11	<b>13T14</b>	<b>call</b>
	[KCA/KGA180H thru 300H, 240S thru 300S] C1GARD52C21	<b>13T13</b>	<b>call</b>
	[KHA180 thru 240] K1GARD51C-1-	<b>13T26</b>	<b>call</b>
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	[156, 180] RTD11-185	<b>29G06</b>	<b>call</b>
	[210 thru 300] RTD11-275-R	<b>29G07</b>	<b>call</b>
	[156, 180] RTD11-150/180S (Canada only)	<b>13K63</b>	<b>call</b>
	[210 thru 300] RTD11-275S (Canada only)	<b>13K64</b>	<b>call</b>
Flush - Order one	[156, 180] FD11-185	<b>29G10</b>	<b>call</b>
	[210 thru 300] FD11-275-R	<b>29G11</b>	<b>call</b>
	[156, 180] FD11-150/180S (Canada only)	<b>13K58</b>	<b>call</b>
	[210 thru 300] FD11-275S (Canada only)	<b>13K59</b>	<b>call</b>
Transitions (Supply and Return) - Order 1	[156, 180] C1DIFF33C-1	<b>12X68</b>	<b>call</b>
	[210 thru 300] C1DIFF34C-1	<b>12X70</b>	<b>call</b>
<b>CONTROLS</b>			
BACnet®	K0CTRL31C-1	<b>96W16</b>	<b>call</b>
BACnet® Thermostat with Display	K0SNSR01FF1	<b>97W23</b>	<b>call</b>
BACnet Thermostat without Display	K0SNSR00FF1	<b>97W24</b>	<b>call</b>
Novar® 2051	K0CTRL30C-1	<b>96W13</b>	<b>call</b>
Plenum Cable (75 ft.)	K0MISC00FF1	<b>97W25</b>	<b>call</b>
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44C-1	<b>83W40</b>	<b>call</b>
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43C-1	<b>83W41</b>	<b>call</b>
<b>THERMOSTATS - See Controls Tab Section</b>			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	C1SNSR71FF1-	<b>10C24</b>	<b>call</b>
Low Ambient Control	[KCA/KGA180S] K1LOAM52C11	<b>10T62</b>	<b>call</b>
	[KCA/KGA156H, 210S] K1LOAM53C11	<b>10T63</b>	<b>call</b>
	[KCA/KGA180H, 210H, 240S, 300S] K1LOAM53C21	<b>10T64</b>	<b>call</b>
	[KCA/KGA240H, 300H] K1LOAM54C21	<b>10T65</b>	<b>call</b>
Low Ambient Kit	[KHA] K1SNSR33CS1	<b>55W73</b>	<b>call</b>



Description	Order No.	Price
<b>LANDMARK® - 13 - 25 TON ACCESSORIES (Field Installed)</b>		
<b>GAS HEAT (KG MODELS)</b>		
Bottom Gas Piping Kit	C1GPKT01C-1	<b>85M31</b> call
Combustion Air Intake Extensions (order two)	LTACA1K10/15	<b>89L97</b> call
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10C-2Y	<b>13X66</b> call
	575V-3ph - C1LTVH10C-2J	<b>13X68</b> call
LPG/Propane Conversion Kits (Order 2 kits)	[Standard heat] C1PROP25C11	<b>14N28</b> call
	[Medium heat] C1PROP26C11	<b>14N29</b> call
	[Not for 156H] [High heat] C1PROP27C11	<b>14N30</b> call
Vertical Vent Extension Kit (Order two kits)	C1EXTN20FF1	<b>42W16</b> call
<b>ELECTRICAL</b>		
Disconnect Switch	[KCA/KHA] 80 amp - C1DISC080C-1	<b>54W85</b> call
	[KCA/KHA] 150 amp - C1DISC150C-1	<b>54W86</b> call
	[KCA/KHA] 250 amp - C1DISC250C-1	<b>54W87</b> call
	[KGA] 80 amp - K1DISC080C-1	<b>54W91</b> call
	[KGA] 150 amp - K1DISC150C-1	<b>54W92</b> call
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b> call
	20 amp non-powered, field-wired (575V only) C1GFIC120FF1	<b>67E01</b> call
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b> call
Phase Monitor	C1PHZM01FF1-	<b>10C25</b> call
<b>ELECTRIC HEAT (KC AND KH MODELS)</b>		
15 kW	[156 thru 300] 208/240V-3ph - C1EH0150C-1Y	<b>53W84</b> call
	[156 thru 300] 575V-3ph - C1EH0150C-1J	<b>53W87</b> call
30 kW	[156] 208/240V-3ph - C1EH0300C11Y	<b>53W88</b> call
	[156] 575V-3ph - C1EH0300C11J	<b>53W91</b> call
	[180 thru 300] 208/240V-3ph - C1EH0300C21Y	<b>53W92</b> call
	[180 thru 300] 575V-3ph - C1EH0300C21J	<b>53W95</b> call
45 kW	[156] 208/240V-3ph - C1EH0450C11Y	<b>53W96</b> call
	[156] 575V-3ph - C1EH0450C11J	<b>53W99</b> call
	[180 thru 300] 208/240V-3ph - C1EH0450C21Y	<b>54W00</b> call
	[180 thru 300] 575V-3ph - C1EH0450C21J	<b>54W03</b> call
60 kW	[156] 208/240V-3ph - C1EH0600C121Y	<b>54W04</b> call
	[156] 575V-3ph - C1EH0600C11J	<b>54W07</b> call
	[180 thru 300] 208/240V-3ph - C1EH0600C21Y	<b>54W08</b> call
	[180 thru 300] 575V-3ph - C1EH0600C21J	<b>54W11</b> call
90 kW	[210 thru 300] 208/240V-3ph - C1EH0900C-1Y	<b>54W12</b> call
	[210 thru 300] 575V-3ph - C1EH0900C-1J	<b>54W15</b> call





Description		Order No.	Price
<b>LANDMARK® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
INDOOR AIR QUALITY			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15C-1-	<b>54W67</b>	<b>call</b>
24 x 24 x 2 (Order 6 per unit)	MERV 13 - C1FLTR40C-1-	<b>52W40</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30C-1-	<b>44N61</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b>	<b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b>	<b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (110/230v-1ph)	C1UVCL10C-1	<b>54W65</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ/Single Enth/Baro. Relief	Humiditrol®	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
-----------	---------	----------------	------	------	-----	------	-----------------	------------------------	-------	-------------------------------	-------------	----------------------------	----------------	-----------	-------	-------

**PACKAGED GAS - 3 - 6 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LGH036H4ES P	3 ton	208/230v-1ph	65 Single	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	568	V8265	call	---
LGH036H4EU P	3 ton	208/230v-1ph	108 Dual	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	568	L3251	call	---
LGH036H4ES Y	3 ton	208/230v-3ph	65 Single	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	568	L1513	call	---
LGH036H4ES Y	3 ton	208/230v-3ph	65 Single	18.0	12.7	---	0.5 HP	Direct	Y	Y		40x47x85.25	568	L1514	call	---
LGH036H4EM Y	3 ton	208/230v-3ph	105 Single	18.0	12.7	---	0.75 HP	Direct	Y			40x47x85.25	598	L3249	call	---
LGH036H4EU Y	3 ton	208/230v-3ph	108 Dual	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	568	L3252	call	---
LGH036H4ES J	3 ton	575v-3ph	65 Single	17.0	12.5	---	0.5 HP	Direct	Y	Y		40x47x85.25	568	L1512	call	---
LGH036H4EM J	3 ton	575v-3ph	108 Single	17.0	12.5	---	0.5 HP	Direct	Y			40x47x85.25	568	L3250	call	---
LGH048H4EM P	4 ton	208/230v-1ph	108 Single	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	L3254	call	---
LGH048H4EH P	4 ton	208/230v-1ph	105 Dual	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	L3280	call	---
LGH048H4ES Y	4 ton	208/230v-3ph	65 Single	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	V9850	call	---
LGH048H4EM Y	4 ton	208/230v-3ph	108 Single	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	L3255	call	---
LGH048H4EU Y	4 ton	208/230v-3ph	105 Dual	17.6	12.8	---	0.75 HP	Direct	Y	Y		40x47x85.25	598	L3256	call	---
LGH048H4EH Y	4 ton	208/230v-3ph	150 Dual	17.6	12.8	---	0.75 HP	Direct	Y	Y		40x47x85.25	598	V9845	call	---
LGH048H4EH J	4 ton	575v-3ph	150 Dual	17.0	12.8	---	0.75 HP	Direct	Y	Y		40x47x85.25	598	V9846	call	---
LGH060H4EH P	5 ton	208/230v-1ph	150 Dual	17.1	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L3281	call	---
LGH060H4ES Y	5 ton	208/230v-3ph	65 Single	17.1	12.7	---	1 HP	Direct	Y			48x47x85.25	685	AA992	call	---
LGH060H4ES Y	5 ton	208/230v-3ph	65 Single	17.1	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L1525	call	---
LGH060H4ES Y	5 ton	208/230v-3ph	65 Single	17.1	12.7	---	1 HP	Direct	Y	Y-T24		48x47x85.25	685	L2364	call	---
LGH060H4EM Y	5 ton	208/230v-3ph	108 Single	17.1	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L3258	call	---
LGH060H4EM Y	5 ton	208/230v-3ph	108 Single	17.1	12.7	---	1 HP	Direct	Y	Y-T24		48x47x85.25	685	L3261	call	---
LGH060H4EH Y	5 ton	208/230v-3ph	150 Dual	17.1	12.7	---	1 HP	Direct	Y			48x47x85.25	685	AA986	call	---
LGH060H4EH Y	5 ton	208/230v-3ph	150 Dual	17.1	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L1520	call	---
LGH060H4EM J	5 ton	575v-3ph	108 Single	17.0	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L3260	call	---
LGH060H4EH J	5 ton	575v-3ph	150 Dual	17.0	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L1517	call	---
LGH072H4BH Y	6 ton	208/230v-3ph	150 Dual	---	12.0	13.5	2 HP	AA02				48x47x85.25	762	AA995	call	---
LGH072H4BH Y	6 ton	208/230v-3ph	150 Dual	---	12.0	13.5	2 HP	AA03				48x47x85.25	762	AA996	call	---
LGH072H4BH Y	6 ton	208/230v-3ph	150 Dual	---	12.0	13.5	2 HP	AA02		Y		48x47x85.25	762	V9857	call	---
LGH072H4BH J	6 ton	575v-3ph	150 Dual	---	12.0	13.5	2 HP	AA02				48x47x85.25	762	AA998	call	---
LGH072H4BH J	6 ton	575v-3ph	150 Dual	---	12.0	13.5	2 HP	AA02		Y		48x47x85.25	762	V9860	call	---
LGH072H4BH J	6 ton	575v-3ph	150 Dual	---	12.0	13.5	2 HP	AA03		Y		48x47x85.25	762	V9861	call	---

**PACKAGED GAS - 3 - 6 TON - HIGH EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

LGH036H4ES Y	3 ton	208/230v-3ph	65 Single	18.0	12.7	---	0.5 HP	Direct	Y	Y	Y	40x47x85.25	568	L0061	call	---
LGH036H4ES J	3 ton	575v-3ph	65 Single	17.0	12.5	---	0.5 HP	Direct	Y	Y		40x47x85.25	568	L0058	call	---
LGH048H4ES Y	4 ton	208/230v-3ph	65 Single	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	F0985	call	---
LGH048H4ES Y	4 ton	208/230v-3ph	65 Single	17.6	12.8	---	0.75 HP	Direct	Y		Y	40x47x85.25	598	L0070	call	---
LGH048H4EM Y	4 ton	208/230v-3ph	108 Single	17.6	12.8	---	0.75 HP	Direct	Y	Y	Y	40x47x85.25	598	L3263	call	---
LGH048H4EU Y	4 ton	208/230v-3ph	105 Dual	17.6	12.8	---	0.75 HP	Direct	Y	Y		40x47x85.25	598	L1001	call	---
LGH060H4EH Y	5 ton	208/230v-3ph	150 Dual	17.1	12.7	---	1 HP	Direct	Y		Y	48x47x85.25	685	AA987	call	---

**PACKAGED ELECTRIC/ELECTRIC - 3 - 6 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LCH036H4EN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	532	L1505	call	---
LCH048H4EN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	562	V9841	call	---
LCH060H4EN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	17.1	12.7	---	1 HP	Direct	Y			48x47x85.25	649	AA980	call	---
LCH060H4EN J	5 ton	575v-3ph	Opt. Elec. Heat	17.0	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	649	V7446	call	---
LCH072H4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.5	2 HP	AA02				48x47x85.25	726	AA983	call	---

**PACKAGED ELECTRIC/ELECTRIC - 3 - 6 TON - HIGH EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

LCH048H4EN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	562	L0050	call	---
LCH060H4EN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	17.1	12.7	---	1 HP	Direct	Y		Y	48x47x85.25	649	AA981	call	---
LCH072H4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.5	2 HP	AA02				48x47x85.25	726	L0096	call	---

**PACKAGED GAS - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A**



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ/Single Enth/Baro. Relief	Humiditrol®	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
<b>ENVIRON™ COIL SYSTEM</b>																
LGH092H4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	12.5	13.0	2 Std	1				48x60.5x101.5	1168	L1305	call	---
LGH092H4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	12.5	13.0	3 Std	5		Y		48x60.5x101.5	1168	L1303	call	---
LGH092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	2 Std	1		Y		48x60.5x101.5	1168	L1301	call	---
LGH092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	3 Std	4				48x60.5x101.5	1168	L1299	call	---
LGH092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	2 Std	2		Y		48x60.5x101.5	1168	L1302	call	---
LGH092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	3 Std	5		Y		48x60.5x101.5	1168	L1300	call	---
LGH092H4BH J	7.5 ton	575v-3ph	240 Dual	---	12.5	13.0	2 Std	1		Y		48x60.5x101.5	1168	L1297	call	---
LGH092H4BH J	7.5 ton	575v-3ph	240 Dual	---	12.5	13.0	2 Std	2		Y		48x60.5x101.5	1168	L1298	call	---
LGH102H4BH Y	8.5 ton	208/230v-3ph	240 Dual	---	12.2	12.9	2 Std	1		Y		48x60.5x101.5	1175	L1306	call	---
LGH102H4BH Y	8.5 ton	208/230v-3ph	240 Dual	---	12.2	12.9	3 Std	5		Y		48x60.5x101.5	1175	L1307	call	---
LGH102H4BH J	8.5 ton	575v-3ph	240 Dual	---	12.2	12.9	3 Std	5		Y		48x60.5x101.5	1175	L1309	call	---
LGH120H4BS Y	10 ton	208/230v-3ph	130 Dual	---	12.0	13.0	3 Std	4				48x60.5x101.5	1210	L1319	call	---
LGH120H4BS Y	10 ton	208/230v-3ph	130 Dual	---	12.0	13.0	3 Std	4		Y-T24		48x60.5x101.5	1210	L2365	call	---
LGH120H4MS Y	10 ton	208/230v-3ph	130 Dual	---	12.0	13.8	3 Std	4	Y			48x60.5x101.5	1210	L1329	call	---
LGH120H4BH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3 Std	5				48x60.5x101.5	1210	L1315	call	---
LGH120H4BH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3 Std	5		Y		48x60.5x101.5	1210	L1314	call	---
LGH120H4MM Y	10 ton	208/230v-3ph	180 Dual	---	12.0	13.8	3 Std	5	Y	Y		48x60.5x101.5	1210	L1337	call	---
LGH120H4BH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3 Hi	8		Y		48x60.5x101.5	1210	L1316	call	---
LGH120H4MH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.8	3 Std	5	Y	Y		48x60.5x101.5	1210	M4930	call	---
LGH120H4BH J	10 ton	575v-3ph	240 Dual	---	12.0	13.0	3 Std	5		Y		48x60.5x101.5	1210	L1321	call	---
LGH120H4MH J	10 ton	575v-3ph	240 Dual	---	12.0	13.8	3 Std	5	Y	Y		48x60.5x101.5	1210	M4815	call	---
LGH150S4BS Y	12.5 ton	208/230v-3ph	130 Dual	---	11.0	11.4	3 Std	5				48x60.5x101.5	1250	V9580	call	---
LGH150S4MS Y	12.5 ton	208/230v-3ph	130 Dual	---	11.0	13.1	5 Std	10	Y			48x60.5x101.5	1250	V9583	call	---
LGH150S4MM Y	12.5 ton	208/230v-3ph	180 Dual	---	11.0	13.1	5 Std	11	Y	Y		48x60.5x101.5	1250	V9581	call	---
LGH150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	3 Std	5				48x60.5x101.5	1250	V9576	call	---
LGH150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5 Std	11		Y		48x60.5x101.5	1250	V9577	call	---
LGH150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5 Std	11		Y-T24		48x60.5x101.5	1250	L2366	call	---
LGH150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	3 Std	5		Y	Y	48x60.5x101.5	1250	V9575	call	---
LGH150S4BH J	12.5 ton	575v-3ph	240 Dual	---	11.0	11.4	5 Std	11		Y		48x60.5x101.5	1250	V9579	call	---
<b>PACKAGED GAS - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A</b>																
<b>FIN/TUBE COIL</b>																
LGH092H4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	12.5	13.0	2 Std	1		Y	Y	48x60.5x101.5	1168	L0183	call	---
LGH102H4BH Y	8.5 ton	208/230v-3ph	240 Dual	---	12.2	12.9	3 Std	5		Y		48x60.5x101.5	1175	L0186	call	---
LGH120H4BH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3 Std	5		Y	Y	48x60.5x101.5	1210	L0197	call	---
LGH150S4BS Y	12.5 ton	208/230v-3ph	130 Dual	---	11.0	11.4	3 Std	5				48x60.5x101.5	1250	L0211	call	---
LGH150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	3 Std	5		Y	Y	48x60.5x101.5	1250	V9575	call	---
<b>PACKAGED ELECTRIC/ELECTRIC - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A</b>																
<b>ENVIRON™ COIL SYSTEM</b>																
LCH092H4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	12.7	13.0	2 Std	2				48x60.5x101.5	1120	L1292	call	---
LCH092H4BN J	7.5 ton	575v-3ph	Opt. Elec. Heat	---	12.7	13.0	2 Std	2		Y		48x60.5x101.5	1120	L1293	call	---
LCH120H4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	12.2	13.2	2 Std	1				48x60.5x101.5	1162	L1312	call	---
LCH120H4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	12.2	13.2	3 Std	4				48x60.5x101.5	1162	L1311	call	---
LCH120H4BN J	10 ton	575v-3ph	Opt. Elec. Heat	---	12.2	13.2	3 Std	5		Y		48x60.5x101.5	1162	L1313	call	---
LCH150S4BN Y	12.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	11.6	3 Std	4				48x60.5x101.5	1202	V9574	call	---
<b>FIN/TUBE COIL</b>																
LCH120H4BN J	10 ton	575v-3ph	Opt. Elec. Heat	---	12.2	13.2	3 Std	5		Y		48x60.5x101.5	1162	L0193	call	---
<b>PACKAGED GAS - 13 - 20 TON - HIGH EFFICIENCY COOLING - R-410A</b>																
<b>ENVIRON™ COIL SYSTEM</b>																
LGH156H4BS Y	13 ton	208/230v-3ph	260 Dual	---	12.0	13.6	3 Std	2				56x93x134	1935	Z0376	call	---
LGH180H4ML Y	15 ton	208/230v-3ph	169 Single	---	12.0	13.7	3 Std	1	Y			56x93x134	2115	L1331	call	---
LGH180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	3 Std	2		Y		56x93x134	2115	L1564	call	---
LGH180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	5 Std	3				56x93x134	2115	L1550	call	---
LGH180H4MS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.7	5 Std	4	Y	Y		56x93x134	2115	L1339	call	---
LGH180H4BH Y	15 ton	208/230v-3ph	480 Dual	---	12.0	13.5	3 Std	2		Y		56x93x134	2115	L1548	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ/Single Enth/Baro. Relief	Humiditrol®	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price		Stock	
															call	---	call	---
LGH180H4BH Y	15 ton	208/230v-3ph	480 Dual	---	12.0	13.5	5 Std	3				56x93x134	2115	L1549	call	---	---	---
LGH180H4MH Y	15 ton	208/230v-3ph	480 Dual	---	12.0	13.5	5 Std	4	Y	Y		56x93x134	2115	M4931	call	---	---	---
LGH180H4BH J	15 ton	575v-3ph	480 Dual	---	12.0	13.5	3 Std	2		Y		56x93x134	2115	L1553	call	---	---	---
LGH180H4BH J	15 ton	575v-3ph	480 Dual	---	12.0	13.5	5 Std	3		Y		56x93x134	2115	Z0655	call	---	---	---
LGH180H4MH J	15 ton	575v-3ph	480 Dual	---	12.0	13.5	5 Std	4	Y	Y		56x93x134	2115	M4928	call	---	---	---
LGH210H4BS Y	17.5 ton	208/230v-3ph	260 Dual	---	12.0	13.0	3 Std	2		Y		56x93x134	2240	Z0379	call	---	---	---
LGH240H4BM Y	20 ton	208/230v-3ph	260 Dual	---	12.0	14.5	5 Std	3	Y			56x93x134	2325	L1332	call	---	---	---
LGH240H4BS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	13.2	5 Std	3		Y		56x93x134	2325	L1559	call	---	---	---
LGH240H4MM Y	20 ton	208/230v-3ph	360 Dual	---	12.0	14.5	7.5 Std	7	Y	Y		56x93x134	2325	L1340	call	---	---	---
LGH240H4BY Y	20 ton	208/230v-3ph	480 Dual	---	12.0	13.2	5 Std	3				56x93x134	2325	L1560	call	---	---	---
LGH240H4BH Y	20 ton	208/230v-3ph	480 Dual	---	12.0	13.2	7.5 Std	6		Y		56x93x134	2325	L1561	call	---	---	---
LGH240H4MH Y	20 ton	208/230v-3ph	480 Dual	---	12.0	13.2	7.5 Std	7	Y	Y		56x93x134	2325	M4932	call	---	---	---
LGH240H4BH J	20 ton	575v-3ph	480 Dual	---	12.0	13.2	7.5 Std	7		Y		56x93x134	2325	L1565	call	---	---	---
LGH240H4MH J	20 ton	575v-3ph	480 Dual	---	12.0	13.2	7.5 Std	7	Y	Y		56x93x134	2325	M4929	call	---	---	---

**PACKAGED GAS - 13 - 20 TON - HIGH EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

LGH240H4BS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	13.2	7.5 Std	7			Y	56x93x134	2430	L0316	call	---	---	---
--------------	--------	--------------	----------	-----	------	------	---------	---	--	--	---	-----------	------	-------	------	-----	-----	-----

**PACKAGED GAS - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LGH300S4BH Y	25 ton	208/230v-3ph	480 Dual	---	10.5	10.9	5 Std	3				56x93x134	2430	Z0381	call	---	---	---
LGH300S4BH Y	25 ton	208/230v-3ph	480 Dual	---	10.5	10.9	7.5 Std	6		Y		56x93x134	2430	Z0382	call	---	---	---
LGH300S4BH J	25 ton	575v-3ph	480 Dual	---	10.5	10.9	10 Std	10		Y		56x93x134	2430	Z0385	call	---	---	---

**FIN/TUBE COIL**

LGH300S4BH J	25 ton	575v-3ph	480 Dual	---	10.5	10.9	10 Std	10		Y		56x93x134	2495	L0327	call	---	---	---
--------------	--------	----------	----------	-----	------	------	--------	----	--	---	--	-----------	------	-------	------	-----	-----	-----

**PACKAGED ELECTRIC/ELECTRIC - 13 - 25 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LCH180H4BN Y	15 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.5	3 Std	2				56x93x134	1965	L1544	call	---	---	---
--------------	--------	--------------	-----------------	-----	------	------	-------	---	--	--	--	-----------	------	-------	------	-----	-----	-----

**PACKAGED ELECTRIC/ELECTRIC - 25 - 30 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LCH300H4BN Y	25 ton	208/230v-3ph	Opt. Elec. Heat	---	11.8	12.5	7.5 Std	3				65x90x145	2997	L1374	call	---	---	---
--------------	--------	--------------	-----------------	-----	------	------	---------	---	--	--	--	-----------	------	-------	------	-----	-----	-----



Description	Order No.	Price
<b>ENERGENCE® - 3 - 6 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70A-1	11F50 call
14 in. height	C1CURB71A-1	11F51 call
18 in. height	C1CURB72A-1	11F52 call
24 in. height	C1CURB73A-1	11F53 call
<b>HINGED</b>		
8 in. height	T1CURB30AN1	17W46 call
18 in. height	T1CURB32AN1	17W47 call
24 in. height	T1CURB33AN1	17W48 call
<b>ADJUSTABLE PITCHED CURB</b>		
14 in. height	C1CURB55AT1	43W27 call
<b>TRANSITION CURB</b>		
Matches 036-072 to existing L Series® Curbs	E1CURB60A-1	20W06 call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (SENSIBLE CONTROL) (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood And Barometric Relief Dampers With Exhaust Hood</b>		
Standard Economizer	[All Models] E1ECON30A-2-	90W59 call
<b>HIGH PERFORMANCE ECONOMIZER (SENSIBLE CONTROL) (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Outdoor Air Hood And Barometric Relief Dampers With Exhaust Hood</b>		
High Performance Economizer	[All Models] E1ECON17A-1	10U54 call
<b>ECONOMIZER ACCESSORIES</b>		
Horizontal Economizer Conversion Kit	T1HECK00AN1	17W45 call
<b>ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Differential Enthalpy	Order 2 - C1SNSR64FF1	53W64 call
Single Enthalpy	C1SNSR64FF1	53W64 call
BAROMETRIC RELIEF DAMPERS (For Factory Installed Economizer)		
Barometric Relief Dampers with Hood	[All Models] C1DAMP50A-1-	74W38 call
Barometric Relief Dampers without Hood	[All Models] C1DAMP50A-2-	72W89 call
NOTE - Order Barometric Relief Dampers with Exhaust Hood if unit is ordered with factory installed Economizer with "No Exhaust" option. NOTE - Required when Economizer is factory installed (no exhaust option) with field installed Power Exhaust Fan option.		
NOTE - Order Barometric Relief Dampers without Exhaust Hood if unit is ordered with factory installed Power Exhaust Fan option.		
POWER EXHAUST - STANDARD STATIC		
	[All Models] 208/230V-1 or 3ph - C1PWRE10A-1P	79W87 call
	[All Models] 575V-3ph - C1PWRE10A-1J	79W89 call
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Manual	[All Models] C1DAMP11A-1-	53W34 call
Motorized	[All Models] E1DAMP21A-1-	53W35 call
CABINET ACCESSORIES		
Coil/Hail Guards	[036 thru 048] C1GARD51A-1	13R98 call
	[060 thru 072] C1GARD51AT1	13T03 call



Description		Order No.	Price
<b>ENERGENCE® - 3 - 6 TON ACCESSORIES (Field Installed)</b>			
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	[036 thru 060] RTD9-65-R	<b>27G87</b>	<b>call</b>
	[072] RTD11-95	<b>29G04</b>	<b>call</b>
	[072] (Canada Only) RTD11-95S	<b>13K61</b>	<b>call</b>
Flush - Order one	[036 thru 060] FD9-65-R	<b>27G86</b>	<b>call</b>
	[072] FD11-95	<b>29G08</b>	<b>call</b>
	[072] (Canada Only) FD11-95S	<b>13K56</b>	<b>call</b>
Transitions (Supply and Return) - Order one	[036 thru 060] T1TRAN10AN1	<b>17W53</b>	<b>call</b>
	[072] T1TRAN20N-1	<b>17W54</b>	<b>call</b>
<b>CONTROLS</b>			
Blower Proving Switch	C1SNSR35FF1	<b>53W65</b>	<b>call</b>
Prodigy® Control System - BACnet® Module	C0CTRL60AE1L	<b>59W51</b>	<b>call</b>
Prodigy® Control System - LonTalk® Module	C0CTRL65FF1	<b>54W27</b>	<b>call</b>
Novar® 2051	E0CTRL30A1	<b>64W72</b>	<b>call</b>
Dirty Filter Switch	E1SNSR55AP1	<b>53W66</b>	<b>call</b>
Fresh Air Tempering	C1SNSR75AD1	<b>58W63</b>	<b>call</b>
<b>HUMIDITROL® CONDENSER REHEAT OPTION</b>			
Humidity Sensor Kit, Remote mounted (required)	COSNSR31AE-1	<b>17M50</b>	<b>call</b>
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44AP1	<b>53W78</b>	<b>call</b>
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43AP1	<b>53W79</b>	<b>call</b>
L CONNECTION® NETWORK - See Controls Tab Section			
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	E1SNSR71AD1	<b>68W88</b>	<b>call</b>
<b>GAS HEAT (LGH MODELS)</b>			
Bottom Gas Piping Kit	T1GPKT01AN1	<b>19W50</b>	<b>call</b>
Combustion Air Intake Extensions	T1EXTN10AN1	<b>19W51</b>	<b>call</b>
Low Temperature Vestibule Heater	208/230V-3ph - E1LTVH10A-1Y	<b>54W23</b>	<b>call</b>
	575V-3ph - E1LTVH10A-1J	<b>54W25</b>	<b>call</b>
LPG/Propane Conversion Kits	For one-stage models - C1PROP10AP2	<b>11U62</b>	<b>call</b>
	For two-stage models - C1PROP20AP2	<b>11U63</b>	<b>call</b>
Vertical Vent Extension	C1EXTN20FF1	<b>31W62</b>	<b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 3 - 6 TON ACCESSORIES (Field Installed)</b>			
<b>ELECTRIC HEAT (LCH MODELS)</b>			
7.5 kW	[LCH036 thru 060] 208/240V-1ph - E1EH0075AN1P	<b>46W28</b>	<b>call</b>
	208/240V-3ph - E1EH0075AN1Y	<b>46W31</b>	<b>call</b>
	575V-3ph - E1EH0075AN1J	<b>46W39</b>	<b>call</b>
15 kW	[LCH036 thru 060] 208/240V-1ph - E1EH0150AN1P	<b>46W29</b>	<b>call</b>
	208/240V-3ph - E1EH0150AN1Y	<b>46W32</b>	<b>call</b>
	575V-3ph - E1EH0150AN1J	<b>46W40</b>	<b>call</b>
22.5 kW	[LCH060] 208/240V-1ph - E1EH0225N1P	<b>46W30</b>	<b>call</b>
	[LCH060 thru 072] 208/240V-3ph - E1EH0225N1Y	<b>46W33</b>	<b>call</b>
	[LCH060 thru 072] 575V-3ph - E1EH0225N1J	<b>46W41</b>	<b>call</b>
30 kW	[LCH072] 208/240V-3ph - E1EH0300N-1Y	<b>46W34</b>	<b>call</b>
	[LCH072] 575V-3ph - E1EH0300N-1J	<b>46W42</b>	<b>call</b>
<b>ELECTRICAL</b>			
Disconnect Switch	[LGH036 thru 048] 80 amp - T1DISC080AH1	<b>20W23</b>	<b>call</b>
	[LCH060 thru 072] 80 amp - T2DISC080NH1	<b>20W24</b>	<b>call</b>
	[LGH060 thru 072] 80 amp - T1DISC080NH1	<b>20W26</b>	<b>call</b>
	[LCH036 thru 048] 80 amp - T2DISC080AH1	<b>20W21</b>	<b>call</b>
	[LCH048] 150 amp - T2DISC150AH1	<b>20W22</b>	<b>call</b>
	[LCH060 thru 072] 150 amp - T2DISC150NH1	<b>20W25</b>	<b>call</b>
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b>	<b>call</b>
	20 amp non-powered, field-wired (575V only) C1GFIC120FF1	<b>67E01</b>	<b>call</b>
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b>	<b>call</b>



Description	Order No.	Price
<b>ENERGENCE® - 3 - 6 TON ACCESSORIES (Field Installed)</b>		
INDOOR AIR QUALITY		
<b>AIR FILTERS</b>		
Healthy Climate® High Efficiency Air Filters Order 4 per unit	[036 thru 048] MERV 8 (16 x 20 x 2) - C1FLTR15A-1-	<b>54W20</b> <b>call</b>
	[036 thru 048] MERV 13 (16 x 20 x 2) - T1FLTR40A-1-	<b>52W37</b> <b>call</b>
	[060 thru 072] MERV 8 (20 x 20 x 2) - C1FLTR15D-1-	<b>54W21</b> <b>call</b>
	[060 thru 072] MERV 13 (20 x 20 x 2) - C1FLTR40D-1-	<b>52W39</b> <b>call</b>
Replaceable Media Filter With Metal Mesh Frame (includes non- pleated filter media)	[036 thru 048] 16 x 20 x 2 (Order 4) - K1FLTR30A-1	<b>39W09</b> <b>call</b>
	[060 thru 072] 20 x 20 x 2 (Order 4) - K1FLTR30A-2	<b>39W10</b> <b>call</b>
<b>CO2 SENSORS</b>		
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b> <b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b> <b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b> <b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b> <b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b> <b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b> <b>call</b>
<b>UVC GERMICIDAL LAMPS</b>		
* Healthy Climate® UVC Light Kit (208/230v-1ph)	E1UVCL10AN1-	<b>50W90</b> <b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).





Description	Order No.	Price
<b>ENERGENCE® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>		
<b>ROOF CURBS - DOWNFLOW</b>		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70B-1	11F54 call
14 in. height	C1CURB71B-1	11F55 call
18 in. height	C1CURB72B-1	11F56 call
24 in. height	C1CURB73B-1	11F57 call
<b>ADJUSTABLE PITCHED CURB</b>		
14 in. height	C1CURB55B-1	54W50 call
<b>ECONOMIZER SECTIONS</b>		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood and Downflow Barometric Relief Dampers with Exhaust Hood</b>		
Standard Economizer Downflow or Horizontal	E1ECON15B-1	55W05 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Outdoor Air Hood and Downflow Barometric Relief Dampers with Exhaust Hood</b>		
High Performance Economizer Downflow or Horizontal	E1ECON17B-1	10U59 call
<b>HORIZONTAL BAROMETRIC RELIEF DAMPERS WITH EXHAUST HOOD</b>		
Horiz. Low Profile Barometric Relief Dampers with Hood	LAGEDH03/15	53K04 call
<b>ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR64FF1	53W64 call
Differential Enthalpy Control (order 2)	C1SNSR64FF1	53W64 call
<b>POWER EXHAUST - STANDARD STATIC</b>		
	208/230V-3ph - K1PWRE10B-1Y	53W44 call
	575V-3ph - K1PWRE10B-1J	53W46 call
<b>OUTDOOR AIR DAMPERS</b>		
<b>Includes Outdoor Air Hood</b>		
Motorized	C1DAMP20B-1	14G28 call
Manual	C1DAMP10B-2	14G29 call
<b>CABINET ACCESSORIES</b>		
Coil/Hail Guards	Environ™ Coil System - C1GARD52B-1	13T05 call
	Conventional Fin/Tube Condenser Coil - E1GARD51B-1	13T04 call
Horizontal Discharge Kit	K1HECK00B-1	51W25 call
Return Air Adaptor Plate (L Series® or T-Class™)	C1CONV10B-1	54W96 call
<b>CEILING DIFFUSERS</b>		
Step-Down - Order one	[092] RTD11-95	29G04 call
	[102 thru 120] RTD11-135	29G05 call
	[150] RTD11-185	29G06 call
Flush - Order one	[092] FD11-95	29G08 call
	[102 thru 120] FD11-135	29G09 call
	[150] FD11-185	29G10 call
Transitions (Supply and Return) - Order one	[092] C1DIFF30B-1	12X65 call
	[102 thru 120] C1DIFF31B-1	12X66 call
	[150] C1DIFF32B-1	12X67 call



Description	Order No.	Price
<b>ENERGENCE® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>		
<b>CONTROLS</b>		
Blower Proving Switch	C1SNSR35FF1	<b>53W65</b> call
Prodigy® Control System - BACnet® Module	C0CTRL60AE1L	<b>59W51</b> call
Prodigy® Control System - LonTalk® Module	C0CTRL65FF1	<b>54W27</b> call
Novar® 2051	E0CTRL30B1	<b>64W73</b> call
Dirty Filter Switch	E1SNSR55B-1	<b>53W67</b> call
Fresh Air Tempering	C1SNSR75AD1	<b>58W63</b> call
<b>HUMIDITROL® CONDENSER REHEAT OPTION</b>		
Humidity Sensor Kit, Remote mounted (required)	COSNSR31AE-1	<b>17M50</b> call
<b>SMOKE DETECTORS</b>		
Supply or Return (Power board and one sensor)	C1SNSR44B-2	<b>11K76</b> call
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43B-2	<b>11K80</b> call
L CONNECTION® NETWORK - See Controls Tab Section		
THERMOSTATS - See Controls Tab Section		
<b>COOLING ACCESSORIES</b>		
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b> call
	Copper - C1TRAP10AD2	<b>76W27</b> call
Drain Pan Overflow Switch	E1SNSR71AD1	<b>68W88</b> call
<b>GAS HEAT (LGH MODELS)</b>		
Bottom Gas Piping Kit	C1GPKT01B-01	<b>54W95</b> call
Combustion Air Intake Extensions	T1EXTN10AN1	<b>19W51</b> call
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10B-2Y	<b>13X63</b> call
	575V-3ph - C1LTVH10B-2J	<b>13X65</b> call
LPG/Propane Conversion Kits	[Standard heat] C1PROP23BS1	<b>14N22</b> call
	[Medium heat] C1PROP22BS1	<b>14N23</b> call
	[High heat] C1PROP21BS1	<b>14N25</b> call
Vertical Vent Extension	C1EXTN20FF1	<b>42W16</b> call
<b>ELECTRIC HEAT (LCH MODELS)</b>		
7.5 kW	[LCH092 thru 102] 208/240V-3ph - C1EH0075B-1Y	<b>56W38</b> call
	[LCH092 thru 102] 575V-3ph - C1EH0075B-1J	<b>56W40</b> call
15 kW	[LCH092 thru 150] 208/240V-3ph - C1EH0015B-1Y	<b>56W41</b> call
	[LCH092 thru 150] 575V-3ph - C1EH0150B-1J	<b>56W43</b> call
22.5 kW	[LCH092 thru 150] 208/240V-3ph - C1EH0225B-1Y	<b>56W44</b> call
	[LCH092 thru 150] 575V-3ph - C1EH0225B-1J	<b>56W46</b> call
30 kW	[LCH092 thru 150] 208/240V-3ph - C1EH0300B-1Y	<b>56W47</b> call
	[LCH092 thru 150] 575V-3ph - C1EH0300B-1J	<b>56W49</b> call
45 kW	[LCH092 thru 150] 208/240V-3ph - C1EH0450B-1Y	<b>56W50</b> call
	[LCH092 thru 150] 575V-3ph - C1EH0450B-1J	<b>56W52</b> call
60 kW	[LCH120 thru 150] 208/240V-3ph - C1EH0600B-1Y	<b>55W02</b> call
	[LCH120 thru 150] 575V-3ph - C1EH0600B-1J	<b>55W04</b> call



Description		Order No.	Price
<b>ENERGENCE® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
<b>ELECTRICAL</b>			
Disconnect	80 amp - C1DISC080B-1	<b>54W56</b>	<b>call</b>
	150 amp - C1DISC150B-1	<b>54W57</b>	<b>call</b>
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b>	<b>call</b>
	20 amp non-powered, field-wired (575V only) C1GFCI20FF1	<b>67E01</b>	<b>call</b>
Weatherproof Cover for GFI	C1GFCI99FF1	<b>10C89</b>	<b>call</b>
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters 20 x 25 x 2 (Order 4 per unit)	MERV 8 - C1FLTR15B-1	<b>50W61</b>	<b>call</b>
	MERV 13 - C1FLTR40B-1	<b>52W41</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30B-1-	<b>Y3063</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b>	<b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b>	<b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (208/230v-1ph)	C1UVCL10B-1	<b>54W62</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



Description	Order No.	Price
<b>ENERGENCE® - 13 - 25 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70C-1	11F58 call
14 in. height	C1CURB71C-1	11F59 call
18 in. height	C1CURB72C-1	11F60 call
24 in. height	C1CURB73C-1	11F61 call
<b>ADJUSTABLE PITCH CURB</b>		
14 in. height	L1CURB55C	43W26 call
ROOF CURBS - HORIZONTAL (REQUIRES HORIZONTAL RETURN AIR PANEL KIT)		
<b>STANDARD</b>		
26 in. height - slab applications	[156 thru 240] C1CURB14C-1	11T89 call
37 in. height - rooftop applications	[156 thru 240] C1CURB16C-1	11T96 call
30 in. height - slab applications	[300] C1CURB15C-1	11T90 call
41 in. height - rooftop applications	[300] C1CURB17C-1	11T97 call
<b>INSULATION KIT FOR STANDARD HORIZONTAL CURBS</b>		
for C1CURB14C-1	[156 thru 240] C1INSU11C-1-	73K32 call
for C1CURB15C-1	[156 thru 240] C1INSU13C-1-	73K34 call
for C1CURB16C-1	[300] C1INSU12C-1-	73K33 call
for C1CURB17C-1	[300] C1INSU14C-1-	73K35 call
<b>HORIZONTAL RETURN AIR PANEL KIT</b>		
Required for Horizontal Applications with Roof Curb	C1HRAP10C-1-	87M00 call
ECONOMIZER		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood</b>		
Standard Economizer - Downflow or Horizontal	E1ECON15C-2	13U47 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARDS)</b>		
<b>With Outdoor Air Hood</b>		
High Performance Economizer - Downflow or Horizontal	E1ECON17C-1	10U60 call
<b>BAROMETRIC RELIEF DAMPERS</b>		
Downflow Barometric Relief Dampers with Exhaust Hood	C1DAMP50C	54W78 call
Horizontal Barometric Relief Dampers with Exhaust Hood	LAGEDH18/24	16K99 call
<b>ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Differential Enthalpy	Order 2 - C1SNSR64FF1	53W64 call
Single Enthalpy	C1SNSR64FF1	53W64 call
POWER EXHAUST - STANDARD STATIC		
	208/230V - C1PWRE11C-1Y	75W90 call
	575V - C1PWRE11C-1J	75W92 call



Description		Order No.	Price
<b>ENERGENCE® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
<b>OUTDOOR AIR DAMPERS</b>			
Motorized Dampers with Outdoor Air Hood	C1DAMP20C-1	<b>13U04</b>	<b>call</b>
Manual Dampers With Outdoor Air Hood	C1DAMP10C-2	<b>13U05</b>	<b>call</b>
<b>CABINET ACCESSORIES</b>			
Coil/Hail Guards	Conventional Fin/Tube Condenser Coil - [156] C1GARD51C11	<b>13T08</b>	<b>call</b>
	Conventional Fin/Tube Condenser Coil - [180 thru 300] C1GARD51C21	<b>13T12</b>	<b>call</b>
	Environ™ Coil System -[180 and 240] C1GARD52C21	<b>13T13</b>	<b>call</b>
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	[156 thru 180] RTD11-185	<b>29G06</b>	<b>call</b>
	[210 thru 300] RTD11-275-R	<b>29G07</b>	<b>call</b>
	[156 thru 180] RTD11-150/180S (Canada only)	<b>13K63</b>	<b>call</b>
	[210 thru 300] RTD11-275S (Canada only)	<b>13K64</b>	<b>call</b>
Flush - Order one	[156 thru 180] FD11-185	<b>29G10</b>	<b>call</b>
	[210 thru 300] FD11-275-R	<b>29G11</b>	<b>call</b>
	[156 thru 180] FD11-150/180S (Canada only)	<b>13K58</b>	<b>call</b>
	[210 thru 300] FD11-275S (Canada only)	<b>13K59</b>	<b>call</b>
Transitions (Supply and Return) - Order 1	[156, 180] C1DIFF33C-1	<b>12X68</b>	<b>call</b>
	[210 thru 300] C1DIFF34C-1	<b>12X70</b>	<b>call</b>
<b>CONTROLS</b>			
Blower Proving Switch	C1SNSR35FF1	<b>53W65</b>	<b>call</b>
Prodigy® Control System - BACnet® Module	C0CTRL60AE1L	<b>59W51</b>	<b>call</b>
Prodigy® Control System - LonTalk® Module	C0CTRL65FF1	<b>54W27</b>	<b>call</b>
Novar® 2051	E0CTRL30C1	<b>64W74</b>	<b>call</b>
Dirty Filter Switch	E1SNSR55C-1	<b>53W68</b>	<b>call</b>
Fresh Air Tempering	C1SNSR75AD1	<b>58W63</b>	<b>call</b>
<b>HUMIDITROL® CONDENSER REHEAT OPTION</b>			
Humidity Sensor Kit, Remote mounted (required)	COSNSR31AE-1	<b>17M50</b>	<b>call</b>
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44C-1	<b>83W40</b>	<b>call</b>
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43C-1	<b>83W41</b>	<b>call</b>
L CONNECTION® NETWORK - See Controls Tab Section			
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	E1SNSR71AD1	<b>68W88</b>	<b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
<b>GAS HEAT (LGH MODELS)</b>			
Bottom Gas Piping Kit	C1GPKT01C-1	<b>85M31</b>	<b>call</b>
Combustion Air Intake Extensions (order two)	LTACA1K10/15	<b>89L97</b>	<b>call</b>
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10C-2Y	<b>13X66</b>	<b>call</b>
	575V-3ph - C1LTVH10C-2J	<b>13X68</b>	<b>call</b>
LPG/Propane Conversion Kits (Order 2 kits)	[Standard heat] C1PROP25C11	<b>14N28</b>	<b>call</b>
	[Medium heat] C1PROP26C11	<b>14N29</b>	<b>call</b>
	[High heat] C1PROP27C11	<b>14N30</b>	<b>call</b>
Vertical Vent Extension Kit (Order two kits)	C1EXTN20FF1	<b>42W16</b>	<b>call</b>
<b>ELECTRICAL</b>			
Disconnect Switch	[LGH] 80 amp - E1DISC080C-1	<b>54W88</b>	<b>call</b>
	[LGH] 150 amp - E1DISC150C-1	<b>54W89</b>	<b>call</b>
	[LCH] 80 amp - C1DISC080C-1	<b>54W85</b>	<b>call</b>
	[LCH] 150 amp - C1DISC150C-1	<b>54W86</b>	<b>call</b>
	[LCH] 250 amp - C1DISC250C-1	<b>54W87</b>	<b>call</b>
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V, 575V) LTAGFIK10/15	<b>74M70</b>	<b>call</b>
	20 amp non-powered, field-wired (575V only) C1GFIC120FF1	<b>67E01</b>	<b>call</b>
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b>	<b>call</b>
<b>ELECTRIC HEAT (LCH MODELS)</b>			
15 kW	208/240V-3ph - C1EH0150C-1Y	<b>53W84</b>	<b>call</b>
	575V-3ph - C1EH0150C-1J	<b>53W87</b>	<b>call</b>
30 kW	[156] 208/240V-3ph - C1EH0300C11Y	<b>53W88</b>	<b>call</b>
	[156] 575V-3ph - C1EH0300C11J	<b>53W91</b>	<b>call</b>
	[180 thru 300] 208/240V-3ph - C1EH0300C21Y	<b>53W92</b>	<b>call</b>
	[180 thru 300] 575V-3ph - C1EH0300C21J	<b>53W95</b>	<b>call</b>
45 kW	[156] 208/240V-3ph - C1EH0450C11Y	<b>53W96</b>	<b>call</b>
	[156] 575V-3ph - C1EH0450C11J	<b>53W99</b>	<b>call</b>
	[180 thru 300] 208/240V-3ph - C1EH0450C21Y	<b>54W00</b>	<b>call</b>
	[180 thru 300] 575V-3ph - C1EH0450C21J	<b>54W03</b>	<b>call</b>
60 kW	[156] 208/240V-3ph - C1EH0600C11Y	<b>54W04</b>	<b>call</b>
	[156] 575V-3ph - C1EH0600C11J	<b>54W07</b>	<b>call</b>
	[180 thru 300] 208/240V-3ph - C1EH0600C21Y	<b>54W08</b>	<b>call</b>
	[180 thru 300] 575V-3ph - C1EH0600C21J	<b>54W11</b>	<b>call</b>
90 kW	[210 thru 300] 208/240V-3ph - C1EH0900C-1Y	<b>54W12</b>	<b>call</b>
	[210 thru 300] 575V-3ph - C1EH0900C-1J	<b>54W15</b>	<b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
INDOOR AIR QUALITY			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15C-1-	<b>54W67</b>	<b>call</b>
24 x 24 x 2 (Order 6 per unit)	MERV 13 - C1FLTR40C-1-	<b>52W40</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30C-1-	<b>44N61</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b>	<b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b>	<b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (110/230v-1ph)	C1UVCL10C-1	<b>54W65</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



Description	Order No.	Price
<b>ENERGENCE® - 25 - 30 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURB</b>		
14 in. height	C1CURB71D-1	11F62 call
18 in. height	C1CURB72D-1	11F63 call
24 in. height	C1CURB73D-1	11F64 call
ROOF CURBS - HORIZONTAL (REQUIRES HORIZONTAL RETURN AIR PANEL KIT)		
<b>STANDARD</b>		
30 in. height - slab applications	LARMFH30/36-30	33K79 call
41 in. height - rooftop applications	LARMFH30/36-41	38K54 call
<b>INSULATION KIT FOR STANDARD HORIZONTAL CURBS</b>		
for LARMFH30/36-30	[300] C1INSU12C-1-	73K33 call
for LARMFH30/36-41	[300] C1INSU14C-1-	73K35 call
<b>HORIZONTAL RETURN AIR PANEL KIT</b>		
Required for Horizontal Applications with Roof Curb		38K48 call
ECONOMIZER		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood</b>		
Standard Economizer - Downflow or Horizontal	E1ECON15D-1	74W43 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARDS)</b>		
<b>With Outdoor Air Hood</b>		
High Performance Economizer - Downflow or Horizontal	E1ECON17D-1	10U62 call
<b>BAROMETRIC RELIEF DAMPERS</b>		
Downflow Barometric Relief Dampers with Exhaust Hood	E1DAMP60D-1	76W17 call
Horizontal Barometric Relief Dampers with Exhaust Hood	LAGEDH30/36	33K78 call
<b>ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Differential Enthalpy	Order 2 - C1SNSR64FF1	53W64 call
Single Enthalpy	C1SNSR64FF1	53W64 call





Description		Order No.	Price
<b>ENERGENCE® - 25 - 30 TON ACCESSORIES (Field Installed)</b>			
<b>POWER EXHAUST</b>			
Standard Static	208/230V - E1PWRE40D-1Y	<b>74W21</b>	<b>call</b>
	575V - E1PWRE40D-1J	<b>74W23</b>	<b>call</b>
High Static - 50%	208/230V - Drive Kit #1 (405-533 rpm) - LAPEB30/36AY	<b>83M83</b>	<b>call</b>
	208/230V - Drive Kit #2 (531-731 rpm) - LAPEB30/36BY	<b>84M34</b>	<b>call</b>
	208/230V - Drive Kit #3 (731-932 rpm) - LAPEB30/36CY	<b>84M35</b>	<b>call</b>
	575V - Drive Kit #1 (405-533 rpm) - LAPEB30/36AJ	<b>83M85</b>	<b>call</b>
	575V - Drive Kit #2 (531-731 rpm) - LAPEB30/36BJ	<b>84M38</b>	<b>call</b>
	575V - Drive Kit #3 (731-932 rpm) - LAPEB30/36CJ	<b>84M39</b>	<b>call</b>
	High Static - 100%	208/230V - Drive Kit #1 (406-533 rpm) - LAPEB30/36DY	<b>83M86</b>
208/230V - Drive Kit #2 (531-731 rpm) - LAPEB30/36EY		<b>84M40</b>	<b>call</b>
208/230V - Drive Kit #3 (731-932 rpm) - LAPEB30/36FY		<b>84M41</b>	<b>call</b>
575V - Drive Kit #1 (406-533 rpm) - LAPEB30/36DJ		<b>83M88</b>	<b>call</b>
575V - Drive Kit #2 (531-731 rpm) - LAPEB30/36EJ		<b>84M44</b>	<b>call</b>
575V - Drive Kit #3 (731-932 rpm) - LAPEB30/36FJ		<b>84M45</b>	<b>call</b>
100% with VFD		208/230V - LAPEV30/36GY	<b>83M89</b>
	575V - LAPEV30/36GJ	<b>83M91</b>	<b>call</b>
100% with VFD and Bypass	208/230V - LAPEV30/36HY	<b>83M92</b>	<b>call</b>
	575V - LAPEV30/36HJ	<b>83M94</b>	<b>call</b>
<b>OUTDOOR AIR DAMPERS</b>			
Motorized Dampers with Outdoor Air Hood	E1DAMP25D-1-	<b>74W44</b>	<b>call</b>
Manual Dampers With Outdoor Air Hood	E1DAMO15D-1-	<b>74W45</b>	<b>call</b>
<b>CABINET ACCESSORIES</b>			
Coil/Hail Guards	C1GARD52D-1	<b>13T16</b>	<b>call</b>
Grille Guards	C1GARD39D-1-	<b>86K30</b>	<b>call</b>
Horizontal Return Air Panel Kit		<b>38K48</b>	<b>call</b>



Description	Order No.	Price
<b>ENERGENCE® - 25 - 30 TON ACCESSORIES (Field Installed)</b>		
<b>CEILING DIFFUSERS</b>		
Step-Down - Order one	LARTD30/36	<b>35K25</b> call
	LARTD30/36S (Canada Only)	<b>45K74</b> call
Flush - Order one	LAFD30/36	<b>35K24</b> call
	LAFD30/36S (Canada Only)	<b>45K75</b> call
Transitions (Supply and Return) - Order one	LASRT30/36	<b>33K80</b> call
<b>CONTROLS</b>		
Blower Proving Switch	C1SNSR35FF1	<b>53W65</b> call
Prodigy® Control System - BACnet® Module	C0CTRL60AE1L	<b>59W51</b> call
Prodigy® Control System - LonTalk® Module	C0CTRL65FF1	<b>54W27</b> call
Novar® 2051	E0CTRL30C1	<b>64W74</b> call
Dirty Filter Switch	E1SNSR55C-1	<b>53W68</b> call
Fresh Air Tempering	C1SNSR75AD1	<b>58W63</b> call
<b>SMOKE DETECTORS</b>		
Supply or Return (Power board and one sensor)	C1SNSR44C-1	<b>83W40</b> call
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43C-1	<b>83W41</b> call
Supply Static Limit Switch	C0SNSR11AE1	<b>79M80</b> call
Supply Static Limit Switch - Mounting Kit	C0SNSR12AE1	<b>79M81</b> call
Supply Static Transducer	C0SNSR20AE1	<b>78M19</b> call
L CONNECTION® NETWORK - See Controls Tab Section		
THERMOSTATS - See Controls Tab Section		
<b>COOLING ACCESSORIES</b>		
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b> call
	Copper - C1TRAP10AD2	<b>76W27</b> call
Drain Pan Overflow Switch	E1SNSR71AD1	<b>68W88</b> call
Stainless Steel Condensate Drain Pan	C1DPAN10D-1-	<b>83W42</b> call
<b>GAS HEAT (LGH MODELS)</b>		
Combustion Air Intake Extensions (order two)	LTACA1K10/15	<b>89L97</b> call
LPG/Propane Conversion Kits (Order 2 kits)	Standard Heat - LTALPGK-130	<b>72M94</b> call
	Medium Heat - LTALPGK-180	<b>72M95</b> call
	High Heat - LTALPGK-240	<b>72M96</b> call
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10C-1Y	<b>58W28</b> call
	575V - C1LTVH10C-1J	<b>58W30</b> call
Vertical Vent Extension Kit (Order two kits)	C1EXTN20FF1	<b>42W16</b> call



Description		Order No.	Price
<b>ENERGENCE® - 25 - 30 TON ACCESSORIES (Field Installed)</b>			
<b>ELECTRICAL</b>			
Disconnect Switch	[LGH] 80 amp - E1DISC080C-1	54W88	call
	[LGH] 150 amp - E1DISC150C-1	54W89	call
	[LCH] 80 amp - C1DISC080C-1	54W85	call
	[LCH] 150 amp - C1DISC150C-1	54W86	call
	[LCH] 250 amp - C1DISC250C-1	54W87	call
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V, 575V) LTAGFIK10/15	74M70	call
	20 amp non-powered, field-wired (575V only) C1GFICI20FF1	67E01	call
Weatherproof Cover for GFI	C1GFICI99FF1	10C89	call
<b>ELECTRIC HEAT (LCH MODELS)</b>			
30 kW	208/230V-3ph - C1EH0300C21Y	53W92	call
	575V-3ph - C1EH0300C21J	53W95	call
45 kW	208/230V-3ph - C1EH0450C21Y	54W00	call
	575V-3ph - C1EH0450C21J	54W03	call
60 kW	208/230V-3ph - C1EH0600C21Y	54W08	call
	575V-3ph - C1EH0600C21J	54W11	call
90 kW	208/230V-3ph - C1EH0900C21Y	54W12	call
	575V-3ph - C1EH0900C21J	54W15	call
120 kW	208/230V-3ph - E1EH1200D-1Y	73W98	call
	575V-3ph - E1EH1200D-1J	74W00	call
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15D-1-	54W21	call
20 x 20 x 2 (Order 12 per unit)	MERV 13 - C1FLTR40D-1-	52W39	call
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30D-1-	44N60	call
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	77N39	call
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	87N53	call
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	87N52	call
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	87N54	call
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	85L43	call
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	90N43	call



**ADAPTOR CURBS - FOR CURRENT LENNOX ROOFTOP UNITS**



**Fully Assembled and Insulated - Fully Welded - Internal Transitions**

Mfr.	Old Rooftop Unit	Existing Roof Curb	New Rooftop Unit	Order No.	Price
Lennox	GCS10-261-410-650	RMFG10-65	K / Emergence A Box (3 to 6 Ton)	83W54	call
Lennox	GCS/CHA/CHP16-261/411	RMF16-41	K / Emergence A Box (3 to 6 Ton)	20W04	call
Lennox	GCS/CHA/CHP16-261/411	RMF16-41	Raider ZG/ZC/ZH036-060	10M03	call
Lennox	GCS/CHA/CHP16-511/653, GCS20/CHA20-411/653	RMF16-41 (Cant.) or RMF16-65	K / Emergence A Box (3 to 6 Ton)	20W05	call
Lennox	GCS/CHA/CHP16-511/653, GCS20/CHA20-411/653	RMF16-41 (Cant.) or RMF16-65	Raider ZG/ZC/ZH036-060	10M21	call
Lennox	GCS/CHA/CHP24-650/813	RMF24-81	K / Emergence A Box (3 to 6 Ton)	20W06	call
Lennox	GCS/CHA/CHP24-650/813	RMF24-81	Raider ZG/ZC/ZH036-060	10M02	call
Lennox	GCS/CHA/CHP16-1853	RMF16-185	K / Emergence C Box (15 to 25 Ton)	20W08	call
Lennox	GCS/CHA16-180/240	RMF16-18/24	K / Emergence C Box (15 to 25 Ton)	20W09	call
Lennox	GCS/CHA16-2553/2753	RMF16-300	K / Emergence C Box (15 to 25 Ton)	20W10	call
Lennox	GCS/CHA16,24-3003	RMF16-300	K / Emergence C Box (15 to 25 Ton)	20W11	call
Lennox	CHA/CHP9 & 10 - 261/651	RMF9-65	K / Emergence A Box (3 to 6 Ton)	20W12	call
Lennox	CHA/CHP11-953	RMF11-95	K / Emergence B Box (7.5 to 12 Ton)	22W61	call
Lennox	GCS11-953	RMFG11-95	K / Emergence B Box (7.5 to 12 Ton)	22W62	call
Lennox	CHA/CHP11-1353	RMF11-135	K / Emergence B Box (7.5 to 12 Ton)	22W63	call
Lennox	GCS11-1353	RMFG11-135	K / Emergence B Box (7.5 to 12 Ton)	22W64	call
Lennox	GCS3-1853/2753	RMF3-185/275	K / Emergence C Box (15 to 25 Ton)	22W65	call
Lennox	CHA/CHP/GCS11-2753	RMF11-275	K / Emergence C Box (15 to 25 Ton)	22W66	call
Lennox	CHA/CHP/GCS11-3003	RMF11-275	K / Emergence C Box (15 to 25 Ton)	22W67	call
Lennox	GCS4-261/311	RMF3-31	K / Emergence A Box (3 to 6 Ton)	26W88	call
Lennox	CHA/P8, GCS3-411/461	RMF3-46	K / Emergence A Box (3 to 6 Ton)	26W89	call
Lennox	CHA/P8, GCS3-511/651	RMF3-65	K / Emergence A Box (3 to 6 Ton)	26W90	call
Lennox	GCS9-411/651	RMFG9-65	K / Emergence A Box (3 to 6 Ton)	26W91	call
Lennox	GCS9-411/651	RMFG9-65	Raider ZG/ZC/ZH036-060	10M20	call
Lennox	GCS/CHA16-823/953, GCS/CHA24-953	RMF16-95 (09)	K A+ Box (KGA/KCA090, KHA072)	88W66	call
Lennox	GCS/CHA16-823/953, GCS/CHA24-953	RMF16-95 (09)	K / Emergence B Box (7.5 to 12 Ton)	92M73	call
Lennox	GCS/CHA16-1353, GCS/CHA24-1353	RMF16-135/160	K / Emergence B Box (7.5 to 12 Ton)	92M72	call
Lennox	GCS3-1353, CHA/CHP8 1353	RMF3-135	K / Emergence B Box (7.5 to 12 Ton)	92M74	call
Lennox	GCS3-953	RMF3-95	K / Emergence B Box (7.5 to 12 Ton)	92M75	call
Lennox	CHA/CHP/GCS11-1853	RMF11-185	K / Emergence C Box (15 to 25 Ton)	92M80	call

**ADAPTOR CURBS - FOR COMPETITOR'S ROOFTOP UNITS**



**Fully Assembled and Insulated - Fully Welded - Internal Transitions**

Mfr.	Old Rooftop Unit	Existing Roof Curb	New Rooftop Unit	Order No.	Price
Carrier	48/50DJD/DJE/LJ004-007	---	K / Emergence A Box (3 to 6 Ton)	64W81	call
Carrier	48HD007, 48HDT005-006, 48LDT004-006	---	K / Emergence A Box (3 to 6 Ton)	64W84	call
Carrier	48DP/DR012-020, 48THE016-020, 48TJD016-	---	K / Emergence B Box (7.5 to 12 Ton)	92M70	call
Carrier	48/50 DP/DR 012-020, 50PQ 012-020, 48/50 THE 016-020, 48/50TJD 016-020	---	K / Emergence C Box (15 to 25 Ton)	92M79	call
Carrier	48 HD/LD 004-006	---	K / Emergence A Box (3 to 6 Ton)	26W92	call
Carrier	48HD/HV/LD008	---	K / Emergence B Box (7.5 to 12 Ton)	92M71	call
* Singer	PGDA / PGMB036,060	---	K / Emergence A Box (3 to 6 Ton)	83W51	call
Trane	SACA753-A	---	K / Emergence B Box (7.5 to 12 Ton)	92M76	call
Trane	SACA C10, SACC C11, SFCA C10, SFCB C11	---	K / Emergence B Box (7.5 to 12 Ton)	92M77	call
Trane	SACA/SFCA/SFCB B50	---	K / Emergence A Box (3 to 6 Ton)	64W80	call
Trane	TCD102, 120, A&B	---	K / Emergence B Box (7.5 to 12 Ton)	83W55	call
Trane	YCD036~060A,C / TCD036~060C	---	K / Emergence A Box (3 to 6 Ton)	83W48	call
Trane	YCD036~060A,C / TCD036~060C	---	Raider ZG/ZC/ZH036-060	10M01	call
Trane	YCD075A, YCD090 A&B	---	K / Emergence B Box (7.5 to 12 Ton)	83W49	call
Trane	YCD/TCD180 A&B	---	K / Emergence C Box (15 to 25 Ton)	83W50	call
Trane	YCD181C, 240B	---	K / Emergence C Box (15 to 25 Ton)	83W56	call
York	B*CH/D*CE/D*CG036-072	---	K / Emergence A Box (3 to 6 Ton)	64W85	call
York	B*CH/D*CE/D*CG036-072	---	Raider ZG/ZC/ZH036-060	10L32	call
York	B*CH 090-150, D*EG 090- 150, D*CG 090-150	---	K / Emergence B Box (7.5 to 12 Ton)	92M78	call
York	SA42, 48, 60G	---	K / Emergence A Box (3 to 6 Ton)	83W53	call
York	SA24 - 30, 36	---	K / Emergence A Box (3 to 6 Ton)	83W57	call

\* Singer Curb - The supply and return to the existing curb are by installer. The bottom of this adaptor curb is panned.



**T-CLASS™ SEPARATED COMBUSTION UNIT HEATERS**

With Aluminized Steel Heat Exchanger



Model No.	Input Btuh	Order No.	Price	Stock
TUA045SNAF	45K	82M00	call	---
TUA100SNAF	100K	82M03	call	---
TUA125SNAF	125K	82M04	call	---
TUA150SNAF	150K	82M05	call	---
TUA250SNAF	240K	82M07	call	---
TUA300SNAF	300K	82M08	call	---

With Stainless Steel Heat Exchanger

TUA100SNSF	100K	82M42	call	---
TUA125SNSF	125K	82M43	call	---
TUA150SNSF	150K	82M44	call	---
TUA250SNSF	240K	82M46	call	---
TUA300SNSF	300K	82M47	call	---

**T-CLASS™ ACCESSORIES (Field Installed)**

LPG CONVERSION KITS

For 045 models	82M93	call	---
For 100, 125, 150, and 250 models	82M94	call	---
For 300 models	82M95	call	---

VERTICAL VENTING / AIR INLET TERMINATION CAP

3 inch	82M90	call	---
4 inch	82M91	call	---
5 inch	82M92	call	---
6 inch	82M96	call	---

**NOTE - Also see Horizontal Venting Components at end of this section.**



**LF24 SERIES HORIZONTAL UNIT HEATERS**

Low Profile



Model No.	Input Btuh	Order No.	Price	Stock
LF24-30A Low Profile	30K	<b>40K86</b>	call	---
LF24-45A Low Profile	45K	<b>40K87</b>	call	---
LF24-60A Low Profile	60K	<b>11L41</b>	call	---
LF24-75A Low Profile	75K	<b>11L42</b>	call	---

**LF24 MODELS**

With Aluminized Steel Heat Exchanger



Model No.	Input Btuh	Order No.	Price	Stock
LF24-100A	100K	<b>16J70</b>	call	---
LF24-115A	115K	<b>23W52</b>	call	---
LF24-145A	145K	<b>23W54</b>	call	---
LF24-175A	175K	<b>23W56</b>	call	---
LF24-200A	195K	<b>89K88</b>	call	---
LF24-230A	230K	<b>23W58</b>	call	---
LF24-250A	250K	<b>26J78</b>	call	---
LF24-300A	300K	<b>26J80</b>	call	---
LF24-345A	345K	<b>65K97</b>	call	---
LF24-400A	390K	<b>86K41</b>	call	---

With Stainless Steel Heat Exchanger

LF24-100S	100K	<b>16J71</b>	call	---
LF24-115S	115K	<b>23W53</b>	call	---
LF24-145S	145K	<b>23W55</b>	call	---
LF24-175S	175K	<b>23W57</b>	call	---
LF24-200S	195K	<b>89K89</b>	call	---
LF24-230S	230K	<b>23W59</b>	call	---
LF24-250S	250K	<b>26J79</b>	call	---
LF24-300S	300K	<b>26J81</b>	call	---
LF24-345S	345K	<b>65K98</b>	call	---
LF24-400S	390K	<b>86K42</b>	call	---

**NOTE - Also see Horizontal Venting Components at end of this section.**



**LF24 ACCESSORIES (Field Installed)**

Description	Order No.	Price	Stock
<b>HANGING BRACKET KIT</b>			
All models	<b>87277</b>	<b>call</b>	<b>---</b>
<b>HIGH ALTITUDE PRESSURE SWITCH KIT</b>			
LF24-175 - Required for proper operation at altitudes over 2500 ft. above sea level.	<b>36W49</b>	<b>call</b>	<b>---</b>
LF24-100 through 145 models - Required for proper operation at altitudes over 5500 ft. above sea level.			
<b>LPG CONVERSION KITS</b>			
For -30, -45, -60 & -75 models	<b>20L05</b>	<b>call</b>	<b>---</b>
For -100 models	<b>45L85</b>	<b>call</b>	<b>---</b>
For -115 thru -175 models	<b>63J56</b>	<b>call</b>	<b>---</b>
For -200 models	<b>20L07</b>	<b>call</b>	<b>---</b>
For -230 and-345 models	<b>63J57</b>	<b>call</b>	<b>---</b>
For -250 thru -300 models	<b>45L88</b>	<b>call</b>	<b>---</b>
For -400 models	<b>20L06</b>	<b>call</b>	<b>---</b>
<b>LF24 DISCHARGE NOZZLES (Field Installed)</b>			
30° discharge for LF24-100/115/145	<b>94K94</b>	<b>call</b>	<b>---</b>
30° discharge for LF24-175/200	<b>94K95</b>	<b>call</b>	<b>---</b>
30° discharge for LF24-230/250/300/345/400	<b>94K96</b>	<b>call</b>	<b>---</b>
45° discharge for LF24-100/115/145	<b>94K98</b>	<b>call</b>	<b>---</b>
45° discharge for LF24-175/200	<b>94K99</b>	<b>call</b>	<b>---</b>
45° discharge for LF24-230/250/300/345/400	<b>95K00</b>	<b>call</b>	<b>---</b>
60° discharge for LF24-100/115/145	<b>16L28</b>	<b>call</b>	<b>---</b>
60° discharge for LF24-175/200	<b>16L29</b>	<b>call</b>	<b>---</b>
60° discharge for LF24-230/250/300/345/400	<b>16L30</b>	<b>call</b>	<b>---</b>
90° discharge for LF24-100/115/145	<b>15L96</b>	<b>call</b>	<b>---</b>
90° discharge for LF24-175/200	<b>15L97</b>	<b>call</b>	<b>---</b>
90° discharge for LF24-230/250/300/345/400	<b>15L98</b>	<b>call</b>	<b>---</b>


**NOTE - Also see Horizontal Venting Components at end of this section.**





**LD24 SERIES DUCT FURNACES**

LD24 MODELS - With Aluminized Steel Heat Exchanger



Model No.	Input Btuh	Order No.	Price	Stock
LD24-75A	75K	<b>32K54</b>	call	---
LD24-100A	100K	<b>32K55</b>	call	---
LD24-125A	125K	<b>32K56</b>	call	---
LD24-150A	150K	<b>32K57</b>	call	---
LD24-200A	200K	<b>32K58</b>	call	---
LD24-250A	250K	<b>32K59</b>	call	---
LD24-300A	300K	<b>32K60</b>	call	---

LD24 MODELS - With Stainless Steel Heat Exchanger

LD24-100S	100K	<b>32K62</b>	call	---
LD24-125S	125K	<b>32K63</b>	call	---
LD24-150S	150K	<b>32K64</b>	call	---
LD24-200S	200K	<b>32K65</b>	call	---
LD24-250S	250K	<b>32K66</b>	call	---
LD24-300S	300K	<b>32K67</b>	call	---

**NOTE - Also see Horizontal Venting Components at end of this section.**



**HORIZONTAL VENTING**

HORIZONTAL VENT KITS - UPSLOPE

Description		Order No.	Price	Stock
3 in. - LF24-30-45, TUA045	C5VENT3KU	<b>75W62</b>	call	---
4 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4KU	<b>75W63</b>	call	---
5 in. - LD24-200-250-300, LF24-175-200-230-250-300, TUA100-125-150-250	C5VENT5KU	<b>75W64</b>	call	---
6 in. - LF24-345-400, TUA300	C5VENT6KU	<b>75W65</b>	call	---

HORIZONTAL VENT KITS - DOWNSLOPE

3 in. - LF24-30-45, TUA045	C5VENT3KD	<b>75W66</b>	call	---
4 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4KD	<b>75W67</b>	call	---
5 in. - LD24-200-250-300, LF24-175-200-230-250-300 TUA100-125-150-250	C5VENT5KD	<b>75W68</b>	call	---
6 in. - LF24-345-400, TUA300	C5VENT6KD	<b>75W69</b>	call	---

45° ELBOW

3 in. - LF24-30-45, TUA045 (optional)	C5VENT3E45	<b>87W79</b>	call	---
4 in. - LD24-75-100-125-150, LF24-60-75-100-115-145 (optional)	C5VENT4E45	<b>87W80</b>	call	---
5 in. - LD24-200-250-300, LF24-375-200-230-250-300 (required) TUA100-125-150-250 (optional)	C5VENT5E45	<b>87W81</b>	call	---
6 in. - LF24-345-400 (required) TUA300 (optional)	C5VENT6E45	<b>87W82</b>	call	---

90° ELBOW

3 in. - LF24-30-45, TUA045 (optional)	C5VENT3E	<b>75W70</b>	call	---
4 in. - LD24-75-100-125-150, LF24-60-75-100-115-145 (optional)	C5VENT4E	<b>75W71</b>	call	---
5 in. - LD24-200-250-300, LF24-375-200-230-250-300 (required) TUA100-125-150-250 (optional)	C5VENT5E	<b>75W72</b>	call	---
6 in. - LF24-345-400 (required) TUA300 (optional)	C5VENT6E	<b>75W73</b>	call	---

STRAIGHT VENT PIPE FOR HORIZONTAL VENTING

3 x 6 in. - LF24-30-45, TUA045	C5VENT3P6	<b>75W74</b>	call	---
3 x 12 in. - LF24-30-45, TUA045	C5VENT3P12	<b>75W75</b>	call	---
3 x 36 in. - LF24-30-45, TUA045	C5VENT3P36	<b>75W76</b>	call	---
4 x 6 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4P6	<b>75W77</b>	call	---
4 x 12 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4P12	<b>75W78</b>	call	---
4 x 36 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4P36	<b>75W79</b>	call	---
5 x 6 in. - LD24-200-250-300, LF24-175-200-230-250-300 TUA100-125-150-250	C5VENT5P6	<b>75W80</b>	call	---
5 x 12 in. - LD24-200-250-300, LF24-175-200-230-250-300 TUA100-125-150-250	C5VENT5P12	<b>75W81</b>	call	---
5 x 36 in. - LD24-200-250-300, LF24-175-200-230-250-300 TUA100-125-150-250	C5VENT5P36	<b>75W82</b>	call	---
6 x 12 in. - LF24-345-400, TUA300	C5VENT6P12	<b>75W83</b>	call	---
6 x 36 in. - LF24-345-400, TUA300	C5VENT6P36	<b>75W84</b>	call	---

**ENERGY RECOVERY SYSTEMS**

Designed for applications requiring outdoor air to be utilized in a HVAC system.

**300 to 6200 CFM - Constant Volume - For Use With Lennox Packaged Rooftop Units (Except 35-50 ton) - Fixed or Pivoting Dessicant Wheel - Metal-Mesh, Mist-Eliminator Type Filters Furnished - Heavy-Duty Intake and Exhaust Blowers**



**NOTE – Contact your local Lennox Commercial Sales Representative for ordering information.**

**HIGH PERFORMANCE ECONOMIZER DAMPERS**

Approved for California Title 24 building standards



Model No.	Order No.	Price	Stock
C2ECON23K	10U53	call	---
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>			
Single Enthalpy Control - C1SNSR64FF1	10Z75	call	---
Differential Enthalpy Control - Order 2 - C1SNSR64FF1	10Z75	call	---

*NOTE - An IAQ sensor is used when demand control ventilation (DCV) is required.  
Use Honeywell C7232 or C7632, 2-10 Vdc control signal; minimum impedance >50k ohm.*



**T-CLASS™ - 3 - 5 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Model No.	Voltage	Tons	SEER	Order No.	Price	Stock
					call	---
TSA036S4	208/230v-3ph	3	13.00	<b>40W79</b>	call	---
TSA036S4	575v-3ph	3	13.00	<b>44W44</b>	call	---
TSA042S4	208/230v-3ph	3.5	13.00	<b>41W75</b>	call	---
TSA048S4	208/230v-3ph	4	13.00	<b>41W78</b>	call	---
TSA048S4	575v-3ph	4	13.00	<b>41W77</b>	call	---
TSA060S4	208/230v-3ph	5	13.00	<b>41W81</b>	call	---
TSA060S4	575v-3ph	5	13.00	<b>41W80</b>	call	---

**T-CLASS™ - 3 - 5 TON - HIGH EFFICIENCY - 3 PHASE - R-410A**

TSA036H4	208/230v-3ph	3	14.00	<b>33W66</b>	call	---
TSA042H4	208/230v-3ph	3.5	14.00	<b>33W68</b>	call	---
TSA048H4	208/230v-3ph	4	14.00	<b>33W70</b>	call	---
TSA060H4	208/230v-3ph	5	14.00	<b>33W72</b>	call	---

**T-CLASS™ - 3 - 5 TON ACCESSORIES (Field Installed)**

CABINET ACCESSORIES						
Hail Guards	24 x 24 x 28 in. - For TSA036S4	<b>92M88</b>	call	---		
	28 x 28 x 28 x in. - For TSA042H4, TSA042S4	<b>92M93</b>	call	---		
	28 x 28 x 36 x in. - For TSA036H4, TSA048H4, TSA048S4	<b>92M90</b>	call	---		
	28 x 28 x 32 in. - For TSA060S4	<b>12W21</b>	call	---		
	32 x 32 x 32 in. - For TSA060H4	<b>27W35</b>	call	---		
Plastic Mounting Base	TSA036S4	<b>69J06</b>	call	---		
	For TSA036H4, TSA042H4, TSA048H4, TSA060H4, TSA042S4, TSA048S4, TSA060S4	<b>69J07</b>	call	---		
Unit Stand-Off Kit	4 mounting feet - adds 2 inches to height	<b>94J45</b>	call	---		

**CONTROLS**

L CONNECTION® NETWORK - See Controls Tab Section



**T-CLASS™ 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Note - Also See Next Page for Units With Factory Corrosion Protection

	Model No.	Voltage	Tons	EER	Order No.	Price	Stock
	TSA072S4S	208/230/3	6 (single)	11.2	45W00	call	---
	TSA072S4S	575/3	6 (single)	11.2	45W03	call	---
	TSA090S4S	208/230/3	7.5 (single)	11.3	45W04	call	---
	TSA090S4S	575/3	7.5 (single)	11.3	45W07	call	---
	TSA120S4S	208/230/3	10 (single)	11.2	45W08	call	---
	TSA120S4S	575/3	10 (single)	11.2	45W11	call	---
	TSA120S4D	208/230/3	10 (dual)	11.2	45W12	call	---
	TSA120S4D	575/3	10 (dual)	11.2	45W15	call	---
	TSA150S4D	208/230/3	12.5 (dual)	11.2	45W16	call	---
	TSA150S4D	575/3	12.5 (dual)	11.2	45W19	call	---
	TSA180S4D	208/230/3	15 (dual)	11.4	45W20	call	---
	TSA180S4D	575/3	15 (dual)	11.4	45W23	call	---
	TSA240S4D	208/230/3	20 (dual)	11.3	45W24	call	---
	TSA240S4D	575/3	20 (dual)	11.3	45W27	call	---

**T-CLASS™ - 6 - 20 TON ACCESSORIES (Field Installed)**

CABINET ACCESSORIES

Coil Guards	[072S4S, 090S4S] T2GARD20L-1	47W12	call	---
	[120S4S, 120S4D] T2GARDD20M-1	47W13	call	---
	[150S4D] T2GARDD21M-1	47W14	call	---
	180S4D, 240S4D] T2GARD20N-1	47W15	call	---
Hail Guards	[072S4S, 090S4S] T2GARDD10L-1	47W16	call	---
	[120S4S, 120S4D] T2GARDD10M-1	47W17	call	---
	[150S4D] T2GARDD11M-1	47W18	call	---
	180S4D, 240S4D] T2GARD10N-1	47W19	call	---

CONTROLS

L CONNECTION® NETWORK - See Controls Tab Section

THERMOSTATS - See Controls Tab Section

COOLING ACCESSORIES



Low Ambient Control (0°F)	[072S4S, 090S4S, 120S4S] T2CWKT01LM1-	44W17	call	---
	[120S4D, 150S4D] T2CWKT02LM1-	44W18	call	---
	[180S4D, 240S4D] T2CWKT02LM1-	44W19	call	---



**T-CLASS™ 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

WITH FACTORY CORROSION PROTECTION

**8-10 week lead times - Includes painted unit base with E-coat coils**


	Model No.	Voltage	Tons	EER	Order No.	Price	Stock
	TSA072S4SN	208/230/3	6 (single)	11.2	<b>63W64</b>	call	---
	TSA072S4SN	575/3	6 (single)	11.2	<b>63W66</b>	call	---
	TSA090S4SN	208/230/3	7.5 (single)	11.3	<b>63W67</b>	call	---
	TSA090S4SN	575/3	7.5 (single)	11.3	<b>63W69</b>	call	---
	TSA120S4SN	208/230/3	10 (single)	11.2	<b>63W70</b>	call	---
	TSA120S4SN	575/3	10 (single)	11.2	<b>63W72</b>	call	---
	TSA120S4DN	208/230/3	10 (dual)	11.2	<b>63W73</b>	call	---
	TSA120S4DN	575/3	10 (dual)	11.2	<b>63W75</b>	call	---
	TSA150S4DN	208/230/3	12.5 (dual)	11.2	<b>63W76</b>	call	---
	TSA150S4DN	575/3	12.5 (dual)	11.2	<b>63W78</b>	call	---
	TSA180S4DN	208/230/3	15 (dual)	11.4	<b>63W79</b>	call	---
	TSA180S4DN	575/3	15 (dual)	11.4	<b>63W81</b>	call	---
	TSA240S4DN	208/230/3	20 (dual)	11.3	<b>63W82</b>	call	---
	TSA240S4DN	575/3	20 (dual)	11.3	<b>63W84</b>	call	---



COMMERCIAL SPLIT SYSTEMS

AIR CONDITIONERS

**S-CLASS™ - 3 - 5 TON - TWO-STAGE COOLING - 3 PHASE - R-410A**

	<b>Model No.</b>	<b>Voltage</b>	<b>Tons</b>	<b>SEER</b>	<b>Order No.</b>	<b>Price</b>	<b>Stock</b>
	SSB036H4	208/230/3	3	16	<b>10P66</b>	call	---
	SSB048H4	208/230/3	4	16	<b>15W60</b>	call	---
	SSB060H4	208/230/3	5	16	<b>10P70</b>	call	---

COOLING ACCESSORIES

Low Ambient Control (30°F)	<b>34M72</b>	call	---
----------------------------	--------------	------	-----

CONTROLS

THERMOSTATS - See Controls Tab Section

**2SCU13 - DRY CHARGE - 3 - 5 TON - 3 PHASE**

	<b>Model No.</b>	<b>Voltage</b>	<b>Tons</b>	<b>SEER</b>	<b>Order No.</b>	<b>Price</b>	<b>Stock</b>
	2SCU13LC136T	208/230/3	3	13	<b>92W09</b>	call	---
	2SCU13LC148T	208/230/3	4	13	<b>92W10</b>	call	---
	2SCU13LC160T	208/230/3	5	13	<b>92W11</b>	call	---

COOLING ACCESSORIES

Low Ambient Control (30°F)	<b>24H77</b>	call	---
----------------------------	--------------	------	-----

CONTROLS

THERMOSTATS - See Controls Tab Section



COMMERCIAL SPLIT SYSTEMS

HEAT PUMP OUTDOOR UNITS

**T-CLASS™ - 3 - 5 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Model No.	Voltage	Tons	SEER	Order No.	Price	Stock
TPA036S4	208/230v-3ph	3	13.00	<b>99M25</b>	call	---
TPA042S4	208/230v-3ph	3.5	13.00	<b>99M28</b>	call	---
TPA048S4	208/230v-3ph	4	13.00	<b>99M31</b>	call	---
TPA060S4	208/230v-3ph	5	13.00	<b>99M35</b>	call	---

**T-CLASS™ - 3 - 5 TON - HIGH EFFICIENCY - 3 PHASE - R-410A**

TPA036H4	208/230v-3ph	3	15.00	<b>33W74</b>	call	---
TPA042H4	208/230v-3ph	3.5	15.00	<b>33W76</b>	call	---
TPA048H4	208/230v-3ph	4	15.00	<b>33W78</b>	call	---
TPA060H4	208/230v-3ph	5	15.00	<b>33W80</b>	call	---

**T-CLASS™ - 3 - 5 TON ACCESSORIES (Field Installed)**

**CABINET ACCESSORIES**

Hail Guards	For TPA036H4	<b>27W34</b>	call	---
	For TPA036S4	<b>92M89</b>	call	---
	For TPA048S4	<b>92M90</b>	call	---
	For TPA042H4, TPA048H4	<b>27W36</b>	call	---
	For TPA042S4	<b>12W21</b>	call	---
	For TPA060H4	<b>94M94</b>	call	---
	For TPA060S4	<b>92M94</b>	call	---
Plastic Mounting Base	TPA036S4	<b>69J06</b>	call	---
	For TPA036H4, TPA042H4, TPA048H4, TPA060H4, TPA042S4, TPA048S4, TPA060S4	<b>69J07</b>	call	---
Unit Stand-Off Kit	4 mounting feet - adds 2 inches to height	<b>94J45</b>	call	---

**CONTROLS**

L CONNECTION® NETWORK - See Controls Tab Section





**T-CLASS™ 7.5 - 10 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Note - Also See Below for Units With Factory Corrosion Protection

	Model No.	Voltage	Tons	EER	Order No.	Price	Stock
	TPA090S4	208/230/3	7.5 (single)	11.3	<b>45W28</b>	call	---
	TPA090S4	575/3	7.5 (single)	11.3	<b>45W31</b>	call	---
	TPA120S4	208/230/3	10 (single)	11	<b>45W32</b>	call	---
	TPA120S4	575/3	10 (single)	11	<b>45W35</b>	call	---

WITH FACTORY CORROSION PROTECTION

**8-10 week lead times - Includes painted unit base with E-coat coils**

	Model No.	Voltage	Tons	EER	Order No.	Price	Stock
	TPA090S4	208/230/3	7.5 (single)	11.3	<b>63W85</b>	call	---
	TPA090S4	575/3	7.5 (single)	11.3	<b>63W87</b>	call	---
	TPA120S4	208/230/3	10 (single)	11	<b>63W88</b>	call	---
	TPA120S4	575/3	10 (single)	11	<b>63W90</b>	call	---

**T-CLASS™ - 7.5 - 10 TON ACCESSORIES (Field Installed)**

CABINET ACCESSORIES

Coil Guards	[090S4S] T2GARDD20M-1	<b>47W13</b>	call	---
	[120S4S] T2GARDD21M-1	<b>47W14</b>	call	---
Hail Guards	[090S4S] T2GARDD10M-1	<b>47W17</b>	call	---
	[120S4S] T2GARDD11M-1	<b>47W18</b>	call	---

CONTROLS

L CONNECTION® NETWORK - See Controls Tab Section

THERMOSTATS - See Controls Tab Section

COOLING ACCESSORIES


Low Ambient Control (0°F)	T2CWKT04M-1-	<b>60W35</b>	call	---
---------------------------	--------------	--------------	------	-----



COMMERCIAL SPLIT SYSTEMS

HEAT PUMP OUTDOOR UNITS

**S-CLASS™ - 3 - 5 TON - TWO-STAGE COOLING - 3 PHASE - R-410A**

	<b>Model No.</b>	<b>Voltage</b>	<b>Tons</b>	<b>SEER</b>	<b>Order No.</b>	<b>Price</b>	<b>Stock</b>
	SPB036H4 - 3 Ton	208/230/3	3	16	<b>10T38</b>	call	---
	SPB048H4 - 4 Ton	208/230/3	4	16	<b>10T43</b>	call	---
	SPB060H4 - 5 Ton	208/230/3	5	16	<b>10T44</b>	call	---


COOLING ACCESSORIES

Low Ambient Control (30°F)	<b>54M89</b>	call	---
----------------------------	--------------	------	-----

CONTROLS

THERMOSTATS - See Controls Tab Section

**2SHP13 - DRY CHARGE - 3 - 5 TON - 3 PHASE**

	<b>Model No.</b>	<b>Voltage</b>	<b>Tons</b>	<b>SEER</b>	<b>Order No.</b>	<b>Price</b>	<b>Stock</b>
	2SHP13LC136T	208/230/3	3	13	<b>92W12</b>	call	---
	2SHP13LC148T	208/230/3	4	13	<b>92W13</b>	call	---
	2SHP13LC160T	208/230/3	5	13	<b>92W14</b>	call	---

COOLING ACCESSORIES

Low Ambient Control (30°F)	<b>27J00</b>	call	---
----------------------------	--------------	------	-----



CONTROLS

THERMOSTATS - See Controls Tab Section



**T-CLASS™ - 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Note - Also See Page 71 for Units With Factory Corrosion Protection

	Model No.	Tons	Static Range	Voltage	HP	RPM Range	Order No.	Price	Stock
	TAA072S4S	6 (single)	Low	208/230/3	1.5	552-780	<b>45W36</b>	call	---
	TAA072S4S	6 (single)	Low	575/3	1.5	552-780	<b>45W39</b>	call	---
	TAA090S4D	7.5 (dual)	Low	208/230/3	2	644-874	<b>45W40</b>	call	---
	TAA090S4D	7.5 (dual)	Low	575/3	2	644-874	<b>45W43</b>	call	---
	TAA120S4D	10 (dual)	Low	208/230/3	2	690-893	<b>45W44</b>	call	---
	TAA120S4D	10 (dual)	Low	575/3	2	690-893	<b>45W47</b>	call	---
	TAA150S4D	12.5 (dual)	Low	208/230/3	3	782-1012	<b>45W48</b>	call	---
	TAA150S4D	12.5 (dual)	Low	575/3	3	782-1012	<b>45W51</b>	call	---
	TAA180S4D	15 (dual)	Low	208/230/3	3	591-838	<b>45W52</b>	call	---
	TAA180S4D	15 (dual)	Low	575/3	3	591-838	<b>45W55</b>	call	---
	TAA240S4D	20 (dual)	Low	208/230/3	5	679-863	<b>45W56</b>	call	---
	TAA240S4D	20 (dual)	Low	575/3	5	679-863	<b>45W59</b>	call	---
	TAA072S4S	6 (single)	Standard	208/230/3	1.5	690-936	<b>45W60</b>	call	---
	TAA072S4S	6 (single)	Standard	575/3	1.5	690-936	<b>45W63</b>	call	---
	TAA090S4D	7.5 (dual)	Standard	208/230/3	2	782-1012	<b>45W64</b>	call	---
	TAA090S4D	7.5 (dual)	Standard	575/3	2	782-1012	<b>45W67</b>	call	---
	TAA120S4D	10 (dual)	Standard	208/230/3	2	852-1055	<b>45W68</b>	call	---
	TAA120S4D	10 (dual)	Standard	575/3	2	852-1055	<b>45W71</b>	call	---
TAA150S4D	12.5 (dual)	Standard	208/230/3	3	920-1150	<b>45W72</b>	call	---	
TAA150S4D	12.5 (dual)	Standard	575/3	3	920-1150	<b>45W75</b>	call	---	



**T-CLASS™ - 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Note - Also See Page 71 for Units With Factory Corrosion Protection

	Model No.	Tons	Static Range	Voltage	HP	RPM Range	Order No.	Price	Stock
	TAA180S4D	15 (dual)	Standard	208/230/3	5	782-1012	<b>45W76</b>	call	---
	TAA180S4D	15 (dual)	Standard	575/3	5	782-1012	<b>45W79</b>	call	---
	TAA240S4D	20 (dual)	Standard	208/230/3	7.5	808-1026	<b>45W80</b>	call	---
	TAA240S4D	20 (dual)	Standard	575/3	7.5	808-1026	<b>45W83</b>	call	---
	TAA072S4S	6 (single)	High	208/230/3	2	906-1121	<b>45W84</b>	call	---
	TAA072S4S	6 (single)	High	575/3	2	906-1121	<b>45W87</b>	call	---
	TAA090S4D	7.5 (dual)	High	208/230/3	3	966-1196	<b>45W88</b>	call	---
	TAA090S4D	7.5 (dual)	High	575/3	3	966-1196	<b>45W91</b>	call	---
	TAA120S4D	10 (dual)	High	208/230/3	3	986-1232	<b>45W92</b>	call	---
	TAA120S4D	10 (dual)	High	575/3	3	986-1232	<b>45W95</b>	call	---
	TAA150S4D	12.5 (dual)	High	208/230/3	5	1134-1380	<b>45W96</b>	call	---
	TAA150S4D	12.5 (dual)	High	575/3	5	1134-1380	<b>45W99</b>	call	---
	TAA180S4D	15 (dual)	High	208/230/3	5	920-1150	<b>46W00</b>	call	---
	TAA180S4D	15 (dual)	High	575/3	5	920-1150	<b>46W03</b>	call	---
	TAA240S4D	20 (dual)	High	208/230/3	7.5	1002-1282	<b>46W04</b>	call	---
	TAA240S4D	20 (dual)	High	575/3	7.5	1002-1282	<b>46W07</b>	call	---



**T-CLASS™ - 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

WITH FACTORY CORROSION PROTECTION

Includes painted blower housing(s) with E-coat coils



Model No.	Tons	Static Range	Voltage	HP	RPM Range	Order No.	Price	Stock
TAA072S4S	6 (single)	Standard	208/230/3	1.5	690-936	<b>63W91</b>	call	---
TAA072S4S	6 (single)	Standard	575/3	1.5	690-936	<b>63W93</b>	call	---
TAA090S4D	7.5 (dual)	Standard	208/230/3	2	782-1012	<b>63W94</b>	call	---
TAA090S4D	7.5 (dual)	Standard	575/3	2	782-1012	<b>63W96</b>	call	---
TAA120S4D	10 (dual)	Standard	208/230/3	2	852-1055	<b>63W97</b>	call	---
TAA120S4D	10 (dual)	Standard	575/3	2	852-1055	<b>63W99</b>	call	---
TAA150S4D	12.5 (dual)	Standard	208/230/3	3	920-1150	<b>64W00</b>	call	---
TAA150S4D	12.5 (dual)	Standard	575/3	3	920-1150	<b>64W02</b>	call	---
TAA180S4D	15 (dual)	Standard	208/230/3	5	782-1012	<b>64W03</b>	call	---
TAA180S4D	15 (dual)	Standard	575/3	5	782-1012	<b>64W05</b>	call	---
TAA240S4D	20 (dual)	Standard	208/230/3	7.5	808-1026	<b>64W06</b>	call	---
TAA240S4D	20 (dual)	Standard	575/3	7.5	808-1026	<b>64W08</b>	call	---



**T-CLASS™ - 6 TO 20 TON ACCESSORIES (Field Installed)**

Description		Order No.	Price	Stock
<b>ELECTRIC HEAT SECTIONS</b>				
<b>072 - 150 Models</b>				
10 kW	208/240-3ph - T3H0010LM1Y	<b>46W50</b>	call	---
	575V-3ph - T3H0010LM1J	<b>46W60</b>	call	---
15 kW	208/240-3ph - T3H0015LM1Y	<b>46W51</b>	call	---
	575V-3ph - T3H0015LM1J	<b>46W61</b>	call	---
25 kW	208/240-3ph - T3H0025LM1Y	<b>46W52</b>	call	---
	575V-3phT3H0025LM1J	<b>46W62</b>	call	---
35 kW	[090 thru 150] 208/240/3 - T3H0035LM1Y	<b>46W53</b>	call	---
	[090 thru 150] 575V-3ph - T3H0035LM1J	<b>46W63</b>	call	---
<b>180 - 240 Models</b>				
20 kW	208/240-3ph - T3EH0020N-1Y	<b>46W65</b>	call	---
	575V-3ph - T3EH0020N-1J	<b>46W73</b>	call	---
30 kW	208/240-3ph - T3EH0030N-1Y	<b>46W66</b>	call	---
	575V-3ph - T3EH0030N-1J	<b>46W74</b>	call	---
40 kW	208/240-3ph - T3EH0040N-1Y	<b>49W39</b>	call	---
	575V-3ph - T3EH0040N-1J	<b>49W41</b>	call	---
50 kW	208/240-3ph - T3EH0050N-1Y	<b>46W67</b>	call	---
	575V-3ph - T3EH0050N-1J	<b>46W75</b>	call	---




T-CLASS™ - 6 TO 20 TON ACCESSORIES (Field Installed)				
Description	Order No.	Price	Stock	
<b>MSAV® (MULTI-STAGE AIR VOLUME) SUPPLY AIR BLOWER VFD KIT</b>				
<b>090 Models</b>				
2 HP	208/240V-3ph - T2MSAV20LM1Y	<b>92W63</b>	call	---
	575V-3ph - T2MSAV20LM1J	<b>92W65</b>	call	---
<b>090 - 180 Models</b>				
3 HP	208/240V-3ph - T2MSAV20LN1Y	<b>92W66</b>	call	---
	575V-3ph - T2MSAV20LN1J	<b>92W68</b>	call	---
<b>150 - 240 Models</b>				
5 HP	208/240V-3ph - T2MSAV20MN1Y	<b>92W69</b>	call	---
	575V-3ph - T2MSAV20MN1J	<b>92W71</b>	call	---
<b>240 Models</b>				
7.5 HP	208/240V-3ph - T2MSAV20N-1Y	<b>92W72</b>	call	---
	575V-3ph - T2MSAV20N-1J	<b>92W74</b>	call	---
<b>HOT WATER COIL</b>				
	(072 thru 150) T2HWCL10LM1-	<b>44W20</b>	call	---
	[180 thru 240] T2HWCL10N-1-	<b>44W21</b>	call	---
<b>CABINET</b>				
Float Switch	T2SNSR71LN1-	<b>91W69</b>	call	---
<b>ECONOMIZER DAMPERS (Upflow and Horizontal)</b>				
Standard Economizer (Not for Title 24)	[072 thru 090] T2ECON31L-1-	<b>44W94</b>	call	---
	[120 thru 150] T2ECON31M-1-	<b>44W95</b>	call	---
	[180 thru 240] T2ECON31N-1-	<b>44W96</b>	call	---
High Performance Economizer (Approved for California Title 24 Building Standards)	[072 thru 090] T2ECON34L-1	<b>10U48</b>	call	---
	[120 thru 150] T2ECON34M-1	<b>10U49</b>	call	---
	[180 thru 240] T2ECON34N-1	<b>10U50</b>	call	---
Differential Enthalpy Control (Not for Title 24)	T1SNSR60AN1	<b>17W71</b>	call	---
<b>INDOOR AIR QUALITY</b>				
<b>HEALTHY CLIMATE® HIGH EFFICIENCY AIR FILTERS - Requires 5 In. Filter Mounting Kit Below</b>				
Order 3 for 072-090. order 4 for 120-150 and order 6 for 180-240 (16 x 25 x 5)	MERV 10 - HCF16-10	<b>X6670</b>	call	---
	MERV 16 - HCF16-16	<b>X6672</b>	call	---
<b>5 IN. FILTER MOUNTING KITS</b>				
	[072 thru 090] T2FLTR70L-1-	<b>47W71</b>	call	---
	[120 thru 150] T2FLTR70M-1-	<b>47W72</b>	call	---
	[180 thru 240] T2FLTR70N-1-	<b>47W73</b>	call	---
<b>HEALTHY CLIMATE® UVC LIGHT KIT</b>				
	[072 thru 150] 208/230V-1ph - T2UVCL10LM1	<b>46W43</b>	call	---
	[180 thru 240] 208/230V-1ph - T2UVCL10N-1	<b>46W44</b>	call	---
	Step-Down Transformer - 575/230V (for 575V air handlers)	<b>96M08</b>	call	---
<b>COOLING SYSTEM</b>				
Freezestat	T2SNSR70LN1	<b>91W70</b>	call	---
Heat Pump Check Valve Kit	[180] T2CVLV10N-1-	<b>47W48</b>	call	---
	[240] T2CVLV11N-1-	<b>50W73</b>	call	---
<b>RETURN AIR GRILLE</b>				
	[072 thru 090] T2GARD30L-1	<b>47W49</b>	call	---
	[120 thru 150] T2GARD30M-1	<b>47W50</b>	call	---
	[180 thru 240] T2GARD30N-1	<b>47W51</b>	call	---



**CBX32M - MULTI-POSITION**


**R-410A**

	Model No.	Tons	Voltage	Order No.	Price	Stock
	CBX32M-036	3	*460V-1ph	<b>34M16</b>	call	---
	CBX32M-048	4	*460V-1ph	<b>34M17</b>	call	---
	CBX32M-060	5	*460V-1ph	<b>34M18</b>	call	---

\*Blower motor is 460V – 1 phase. Optional electric heat is 460V or 575V – 3 phase

**CBX27UH - UPFLOW/HORIZONTAL**

**R-410A**

	Model No.	Tons	Voltage	Order No.	Price	Stock
	CBX27UH-030	3	208/230V-1ph	<b>24W78</b>	call	---
	CBX27UH-036	3	*460V-1ph	<b>53W03</b>	call	---
	CBX27UH-048	4	*460V-1ph	<b>53W04</b>	call	---
	CBX27UH-060	5	*460V-1ph	<b>53W05</b>	call	---

\*Blower motor is 460V – 1 phase. Optional electric heat is 460V or 575V – 3 phase

**ELECTRIC HEAT**

**CBX27UH AND CBX32M**

Model No.	Order No.	Price	Stock
20 kW [048 thru 060] Terminal Block - 575V-3ph - ECB29-20	<b>28K51</b>	call	---
25 kW [048 thru 060] Terminal Block - 575V-3ph - ECB29-25	<b>28K52</b>	call	---

NOTE - 575V models shipped with 575V to 460V step-down transformer for use with 460V air handlers





AIR HANDLER ACCESSORIES			
Description and Usage	Order No.	Price	Stock
<b>CABINET</b>			
<b>DOWNFLOW COMBUSTIBLE FLOORING BASE</b>			
All CBX27UH models	44K15	call	---
<b>DOWNFLOW CONVERSION KIT</b>			
All CBX27UH models	83M57	call	---
<b>FILTERS</b>			
<b>Filter Base (filter not furnished)</b>			
3 in. base height for 1 or 2 in. filters - 16 x 20 CBX32M-036	32X54	call	---
3 in. base height for 1 or 2 in. filters - 20 x 20 CBX27UH-018-024-030-036-042	32X55	call	---
3 in. base height for 1 or 2 in. filters - 25 x 20 CBX27UH, CBX32M-048-060	32X57	call	---
6 in. base height for 1, 2 or 4 in. filters - 20 x 20 CBX27UH, CBX32M-036	62N01	call	---
6 in. base height for 1, 2 or 4 in. filters - 25 x 20 CBX27UH, CBX32M-048-060	32X58	call	---



**PROGRAMMABLE DIGITAL THERMOSTATS**

**COMFORTSENSE® 7500 COMMERCIAL TOUCHSCREEN THERMOSTAT - 7 Day Programmable**



Four-Stage Heating / Two-Stage Cooling Universal Multi-Stage with Humidification/Dehumidification and Economizer Relay Control

Description	Order No.	Price
Thermostat - White	C0STAT06FF1L	<b>13H15</b> call
<b>OPTIONAL ACCESSORIES</b>		
* Remote non-adjustable wall mount 20k temperature sensor - White - C0SNZN01AE2-	<b>47W36</b>	call
* Remote non-adjustable wall mount 10k temperature sensor - White - C0SNZN73AE2-	<b>47W37</b>	call
Remote non-adjustable discharge air (duct mount) temperature sensor - C0SNDC00AE1-	<b>19L22</b>	call
Outdoor Temperature Sensor - C0SNSR03AE1-	<b>X2658</b>	call
Locking Cover (Clear) - C0MISC15AE1-	<b>39P21</b>	call

\*Remote sensors can be applied in any of the following combinations:

- One Sensor - (1) 47W36
- Two Sensors - (2) 47W37
- Three Sensors - (2) 47W36 and (1) 47W37
- Four Sensors - (4) 47W36
- Five Sensors - (3) 47W36 and (2) 47W37

**COMFORTSENSE® 3000 COMMERCIAL 5-2 Day Programmable**



Two-Stage Heating / Two-Stage Cooling Conventional Systems with Economizer Relay Control

Description	Order No.	Price
Thermostat - White	C0STAT05FF1L	<b>11Y05</b> call
<b>OPTIONAL ACCESSORIES</b>		
Remote non-adjustable wall mount 10k temperature sensor - White - C0SNZN73AE2-	<b>47W37</b>	call
Optional wall mounting plate - C0MISC17AE1-	<b>X2659</b>	call

**NON-PROGRAMMABLE DIGITAL THERMOSTATS**

**DIGITAL THERMOSTATS**



One-Stage Heating / Cooling Conventional Systems - Auto Changeover
























Description	Order No.	Price
Thermostat - White	C0STAT12AE1L	<b>51M32</b> call
<b>OPTIONAL ACCESSORIES</b>		
Outdoor Temperature Sensor - C0SNSR03AE1-	<b>X2658</b>	call
Optional wall mounting plate - C0MISC17AE1-	<b>X2659</b>	call

**L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM**

Communicate with Prodigy™ Control System on Lennox' Premium Rooftop Units, non-Prodigy Control Lennox or aftermarket equipment with optional Network Thermostat Controller, and other building functions with the Building Controller.








NOTE - SEE COMPONENT SELECTION FLOWCHARTS AT THE END OF THIS SECTION

NOTE - FOR MORE DETAILS ON L CONNECTION NETWORK COMPONENTS, PLEASE SEE ENGINEERING HANDBOOK AND SELECTION SOFTWARE BELOW

Description	Order No.	Price
<b>* SOFTWARE</b>		
 Network Control Panel PC Software	C0SOFT11AE1-	96L82 call
<a href="#">Unit Controller PC Software - Free download</a>		
<b>CONTROLLERS</b>		
 Building Controller	C0CTRL80AE1L	17M12 call
 Network Control Panel	C0CTRL10AE1L	59L21 call
 Network Thermostat Controller	C0CTRL07AE1L	17M10 call
 Landmark Wiring Harness For Network Thermostat Controller	COMISC08BC1-	24W68 call
 I/O Module Kit	C0CTRL10AE1L	86M39 call
 Zone Link - Bus expander for networks greater than 31 devices, each Zone Link adds up to 36 additional devices to a maximum of 93 total HVAC units	C0CTRL11AE1L	11W27 call
<b>COMFORT SENSOR (NON-ZONING)</b>		
<b>Comfort Sensors With Display and Setpoint Adjustment</b>		
 Temperature, Display, Setpoint/Fan Control, After Hours Override	C0SNAJ02AE1L	18W68 call
 Temperature, Relative Humidity, Display, Setpoint/Fan Control, After Hours Override	C0SNMT10AE1L	18W66 call
 Temperature, CO2, Display, Setpoint/Fan Control, After Hours Override	C0SNMT20AE1L	18W67 call
 Temperature, Relative Humidity, CO2, Display, Setpoint/Fan Control, After Hours Override	C0SNMT30AE1L	18W65 call
<b>Comfort Sensors - No Display or Setpoint Adjustment</b>		
 Temperature, After Hours Override	C0SNZN09AE1-	18W72 call
 Temperature, Relative Humidity, After Hours Override	C0SNMT11AE1-	18W69 call
 Temperature, CO2, After Hours Override	C0SNMT21AE1L	18W70 call
 Temperature, Relative Humidity, CO2, After Hours Override	C0SNMT31AE1L	18W71 call
<b>ZONING</b>		
<b>COMFORT SENSORS - ZONING</b>		
<b>Comfort Sensors For Zoning - With Display and Setpoint Adjustment</b>		
 Temperature, Display, Setpoint/Fan Control, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT01AE1L	18W58 call
 Temperature, Relative Humidity, Display, Setpoint/Fan Control, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT10AE1L	18W56 call
 Temperature, CO2, Display, Setpoint/Fan Control, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT20AE1L	18W57 call
 Temperature, Relative Humidity, CO2, Display, Setpoint/Fan Control, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT30AE1L	18W55 call
<b>Comfort Sensors For Zoning - No Display or Setpoint Adjustment</b>		
 Temperature, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT00AE1L	18W59 call
 Temperature, Relative Humidity, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT11AE1L	18W60 call
 Temperature, CO2, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT21AE1L	18W61 call
 Temperature, Relative Humidity, CO2, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT31AE1L	18W62 call

\* Computer system requirements: IBM compatible PC with Pentium or higher processor, Microsoft® Windows® 95, 98, Me, 2000, XP, NT®, Vista. (Windows® 95, Windows® 98, Windows® Me, Windows® 2000, Windows® XP, Windows NT® and Windows Vista™ are registered trademarks of Microsoft Corp.), 256 MB RAM (more memory may be required to run additional applications simultaneously), requires at least 20 MB of free hard drive space, VGA or higher resolution monitor (screen resolution must be 800 X 600 or higher and 256 colors), CD-ROM drive, mouse or compatible pointing device, serial COM port, Network Modem or Ethernet Converter Kit for remote connections.

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

Description	Order No.	Price
<b>ZONING (Continued)</b>		
<b>ZONE LINK</b>		
 Zone Link	Zoning coordinator for one HVAC unit and up to 31 Comfort Sensors - Zoning	C0CTRL11AE1L <b>11W27</b> call
<b>ZONING ACCESSORIES</b>		
<b>Supply Static Differential Pressure Sensor</b>		
	Three Operating Ranges, Three Output Options	C0SNSR20AE1 <b>78M19</b> call
<b>IMC VAV Module</b>		
	For constant volume bypass applications with Prodigy™ Unit Controller	C0CTRL02AE1L <b>86M71</b> call
<b>ZoneBus Network Cable</b>		
 ZoneBus Network Cable	ZoneBus Cable - 500 ft. Box (Purple Jacket)	C0MISC05AE1- <b>23W99</b> call
	ZoneBus Cable - 1000 ft. Box (Purple Jacket)	C0MISC06AE1- <b>24W00</b> call
	ZoneBus Cable - 2500 ft. Roll (Purple Jacket)	C0MISC07AE1- <b>24W01</b> call
<b>Duct Pressure Limit Switch</b>		
	For use with variable frequency drive	C0SNSR11AE1 <b>79M80</b> call
	Mounting Kit for Duct Pressure Limit Switch - 18 in. vinyl tubing and connectors	C0SNSR12AE1 <b>79M81</b> call
<b>Duct Temperature Sensor</b>		
	For use with Network Thermostat Controller - 12 in. Probe	C0SNDC04AE1- <b>99K64</b> call
<b>Network Thermostat Controller - Bypass Controller</b>		
	For constant volume bypass applications with the Network Thermostat Controller	C0CTRL70AE1L <b>11W31</b> call
<b>Zone and Bypass Dampers</b>		
	Zone and Bypass Dampers	See Damper Pages
	Damper Actuator	C0MISC21AE1L <b>12W98</b> call
<b>SENSORS</b>		
<b>TEMPERATURE</b>		
<b>Outdoor Temperature Sensor</b>		
 Outdoor Temperature Sensor	For use with Network Thermostat Controller or Building Controller	C0SNSR02AE1- <b>59M05</b> call
	Water-Proof Wiring Junction Box, Vented Aluminum Cover	
<b>Remote Discharge Temperature Kit</b>		
 Wall-Mount Sensor	For use with Prodigy™ Unit Controller for fresh air tempering - Includes 15 ft. of Cable	C1SNSR75AD1 <b>58W63</b> call
<b>Temperature Sensor Probe</b>		
	General Purpose 3 in. Sensor	C0SNSR05AE1- <b>14K92</b> call
<b>Zone Sensors</b>		
 Zone Sensor Miniature	Wall-Mount - With Warmer/Cooler Setpoint Adjustment	C0SNAJ01AE1- <b>56L80</b> call
	Wall-Mount - No Adjustment	C0SNZN07AE1- <b>94L60</b> call
	Wall-Mount - Miniature	C0SNZN08AE1- <b>94L61</b> call
	Wall-Mount - Miniature, For use with Building Controller	C0SNZN03AE1- <b>59M04</b> call
 Zone Sensor Averaging	Wall-Mount - Averaging Sensor Kit (Two Sensors)	C0SNZN71AE1- <b>23M20</b> call
	Wall-Mount - Flush	C0SNZN04AE1- <b>76M32</b> call
	Return Air Duct Mount	C0SNDC02AE1- <b>56L81</b> call

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

Description	Order No.	Price
<b>SENSORS (Continued)</b>		
<b>CARBON DIOXIDE (CO2)</b>		
<p>CO<sub>2</sub> Sensor (With Display)</p>	Wall-Mount - Off-White Plastic Cover, No Display	C0SNSR52AE1L 87N53 call
	Wall-Mount - Off-White Plastic Cover With LCD Display	C0SNSR50AE1L 77N39 call
	Wall-Mount - Black Plastic Case, No Display, rated for plenum mounting	C0SNSR53AE1L 87N54 call
	Wall-Mount - Black Plastic Case With LCD Display, rated for plenum mounting	C0SNSR51AE1L 87N52 call
	Aspiration Box For Duct Mounting Non-Plenum Rated CO <sub>2</sub> Sensors (87N53 or 77N39)	C0MISC16AE1- 90N43 call
<b>RELATIVE HUMIDITY (RH)</b>		
<p>Relative Humidity Sensor</p>	Wall-Mount - Off-White Plastic Case	C0SNSR31AE1- 17M50 call
	Return Air Duct Mount	C0SNSR30AE1- 76M31 call
<b>OTHER</b>		
<b>Outdoor Air Control Sensor Kit</b>		
<p>Outdoor Air Control Sensor Kit</p>	Includes I/O Module	C0SNSR23DE1- 98M61 call
	<b>Building (Return) Static Differential Pressure Sensor</b>	
	For use with Prodigy™ Unit Controller and power exhaust fans, Three Operating Ranges, Three Output Options	C0SNSR21AE1- 78M20 call
<p>Ambient Light Sensor</p>	Outdoor Air Weather-Head - Used with 78M20 to minimize effects of wind on pressure readings	C0SNSR22AE1- 79M21 call
	<b>Ambient Light Sensor</b>	
	For use with Building Controller	C0SNSR60AE1- 34M67 call
<b>MISCELLANEOUS</b>		
<b>NETWORK</b>		
<p>Network Modem Kit</p>	Ethernet Converter Kit	C0MISC43AE1L 76M77 call
	Network Bus to PC Converter	C0MISC47AE1- 96L78 call
	Network Modem Kit	C0MISC46AE1- 94L62 call
	Network Repeater	C0CTRL51AE1L 11W30 call
	Phone Line Auto-Router	C0MISC41AE1- 34M22 call
<p>SysBus Cable</p>	Surge Protector	C0MISC92AE1- 23W22 call
	<b>SysBus</b>	
	SysBus Cable - 500 ft. Box (Yellow Jacket)	C0MISC00AE1- 27M19 call
	SysBus Cable - 1000 ft. Box (Yellow Jacket)	C0MISC04AE1- 94L63 call
	SysBus Cable - 2500 ft. Roll (Yellow Jacket)	C0MISC01AE1- 68M25 call
<b>NEMA ENCLOSURES</b>		
<p>NEMA 4 Enclosure</p>	NEMA 1 - Hinged, For Network Thermostat Controller, Building Controller, Zone Link or Network Modem Kit and Auto-Router	C0MISC14AE1- 34M24 call
	NEMA 1 - Hinged, For Network Control Panel, Network Modem Kit and Ethernet Converter Kit	C0MISC13AE1- 34M23 call
	NEMA 4 - Hinged, For Network Thermostat Controller, Building Controller or Zone Link	C0MISC10AE1- 17M11 call
<b>OTHER</b>		
<p>After-Hours Override Button</p>	After-Hours Override Button	C0SWCH20AE1- 56L16 call
	Blower Airflow Proving Switch Kit	C0SWCH01AE1- 53W65 call
<p>Plug-In Transformer</p>	Dirty Filter Switch	C0SWCH00AE1- 53W66 call
	Pressure Switch - For use with Prodigy™ Unit Controller and power exhaust	C0SNSR10AE1 79M79 call
	Network Control Panel Service Pack	C0SOFT50AE1- 26W28 call
	Transformer - 120, 208, 240 and 480VAC, 60HZ Primary / 24VAC Secondary, 75VA	C0MISC32AE1- 27W14 call
	Transformer - 120, 240, 277 and 480VAC, 60HZ Primary / 24VAC Secondary, 100VA	C0MISC33AE1- 27W15 call
	Transformer - 24V, Plug-in	C0MISC30AE1- 18M13 call



L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

ZONE DAMPERS - Round Damper Shells



Diameter (in.)	Length (in.)	Order No.	Price	Diameter (in.)	Length (in.)	Order No.	Price
6	12	21M90	call	11	14	21M95	call
7	13	21M91	call	12	14	21M96	call
8	13	21M92	call	14	17	21M97	call
9	14	21M93	call	16	17	21M98	call
10	14	21M94	call	18	17	34M44	call

ZONE DAMPERS - Rectangular Damper Shells



Width (in.)	Height (in.)	Order No.	Price	Width (in.)	Height (in.)	Order No.	Price
8	10	22M02	call	14	10	22M38	call
8	12	22M03	call	14	14	22M40	call
8	14	22M04	call	14	16	22M41	call
8	16	22M05	call	14	18	22M42	call
8	18	22M06	call	14	20	22M43	call
8	20	22M07	call	14	22	22M44	call
8	22	22M08	call	14	24	22M45	call
8	24	22M09	call	14	26	22M46	call
8	26	22M10	call	14	28	22M47	call
8	28	22M11	call	14	30	22M48	call
8	30	22M12	call	16	8	22M49	call
10	8	22M13	call	16	14	22M52	call
10	10	22M14	call	16	18	22M54	call
10	12	22M15	call	16	22	22M56	call
10	16	22M17	call	16	24	22M57	call
10	18	22M18	call	16	26	22M58	call
10	20	22M19	call	16	28	22M59	call
10	22	22M20	call	16	30	22M60	call
10	24	22M21	call	18	8	22M61	call
10	26	22M22	call	18	10	22M62	call
10	28	22M23	call	18	12	22M63	call
10	30	22M24	call	18	20	22M67	call
12	8	22M25	call	18	22	22M68	call
12	10	22M26	call	18	24	22M69	call
12	12	22M27	call	18	26	22M70	call
12	14	22M28	call	18	28	22M71	call
12	18	22M30	call	18	30	22M72	call
12	20	22M31	call				
12	22	22M32	call				
12	24	22M33	call				
12	26	22M34	call				
12	28	22M35	call				
12	30	22M36	call				



L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

ZONE DAMPERS - Rectangular Damper Shells




Width (in.)	Height (in.)	Order No.	Price	Width (in.)	Height (in.)	Order No.	Price
20	8	22M73	call	28	8	23M06	call
20	10	22M74	call	28	10	23M07	call
20	12	22M75	call	28	12	23M08	call
20	14	22M76	call	28	14	23M09	call
20	20	22M79	call	28	16	23M10	call
20	24	22M81	call	28	20	23M12	call
20	26	22M82	call	30	8	23M13	call
20	30	22M84	call	30	10	23M14	call
22	8	22M85	call	30	12	23M15	call
22	10	22M86	call	30	14	23M16	call
22	14	22M88	call	30	18	23M18	call
22	16	22M89	call	30	20	23M19	call
24	8	22M92	call	32	8	30M68	call
24	10	22M93	call	32	12	30M86	call
24	12	22M94	call	32	14	30M95	call
24	16	22M96	call	32	16	31M04	call
24	18	22M97	call	32	18	31M13	call
26	8	22M99	call	32	20	31M22	call
26	10	23M00	call	34	12	30M87	call
26	12	23M01	call	36	8	30M70	call
26	14	23M02	call	36	14	30M97	call
26	16	23M03	call	38	10	30M80	call
26	20	23M05	call	38	12	30M89	call
				40	12	30M90	call
				42	8	30M73	call
				48	18	31M21	call

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

**SYSTEM COMPONENT SELECTION EXAMPLE - BASIC OVERVIEW**

Lennox Rooftop Units With Prodigy® Unit Controller

(NOTE - Prodigy and Network Thermostat Controller controlled units can be combined on the same system)

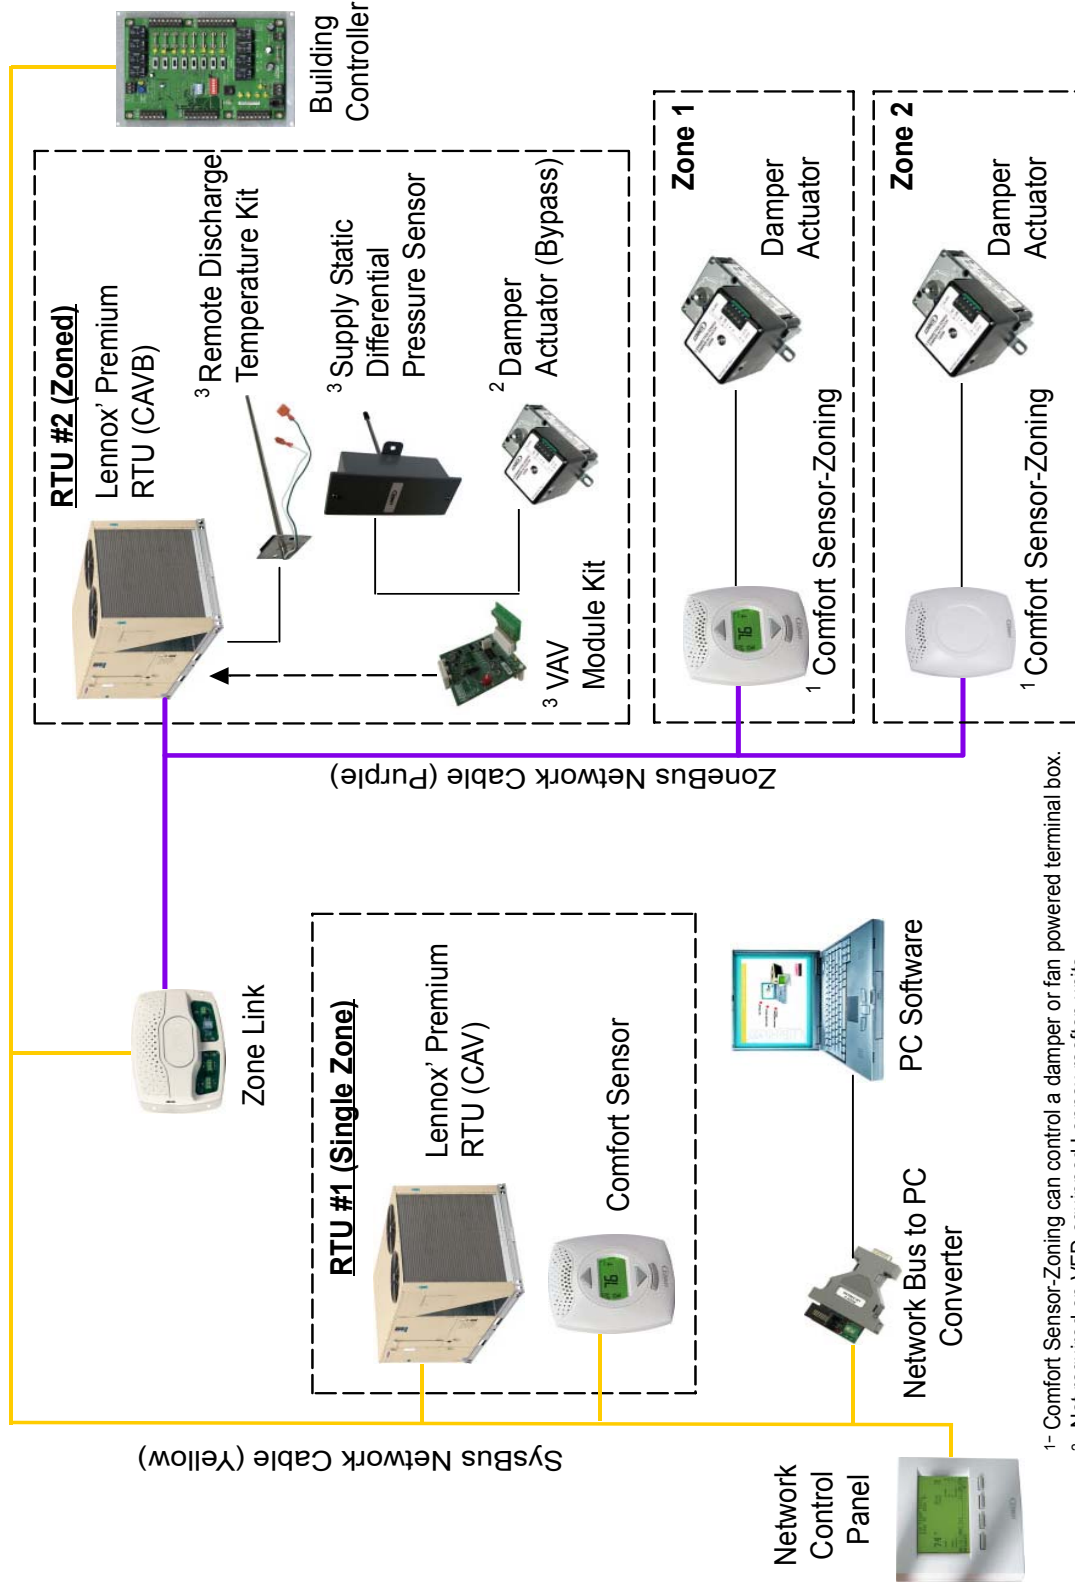

1- Comfort Sensor-Zoning can control a damper or fan powered terminal box.


2- Not required on VFD equipped Lennox rooftop units.

3- Automatically included with VFD equipped Lennox rooftop units.




L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

**BASIC COMPONENT SELECTION EXAMPLE**  
**Lennox Rooftop Units With Prodigy® Unit Controller**  
**(NOTE – Prodigy and Network Thermostat Controller controlled units can be combined on the same system)**

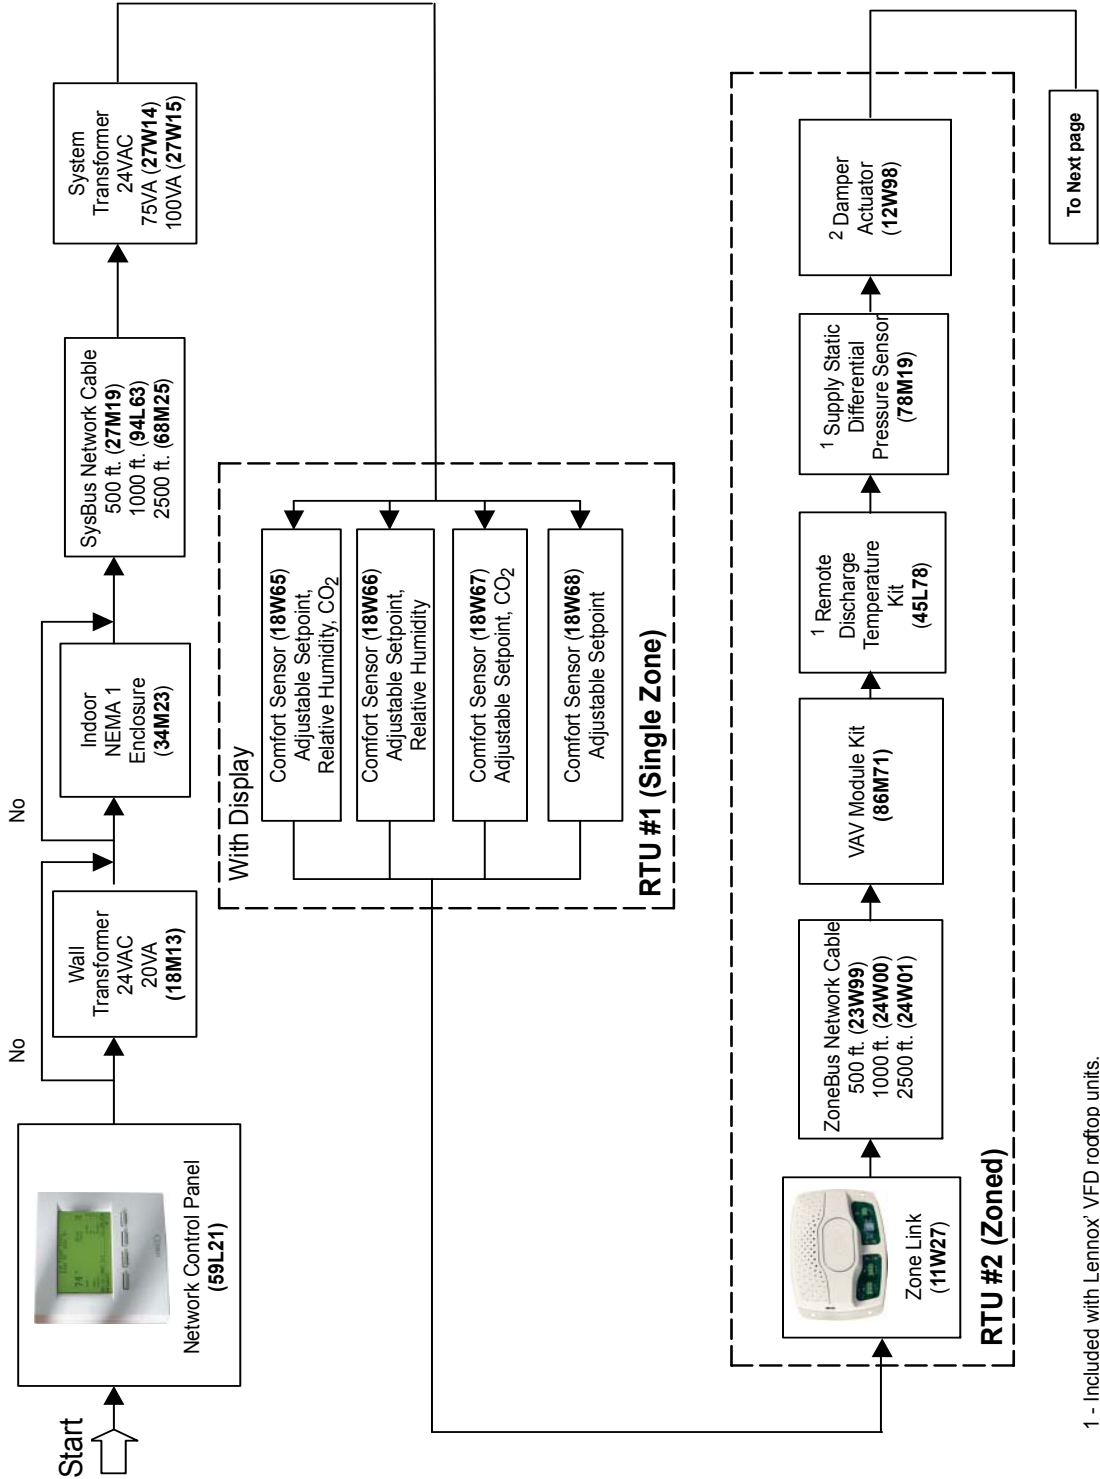

- 1 - Included with Lennox® VFD rooftop units.
- 2 - See Pages 79-81 for damper selection.
- 3 - 75VA and 100VA Transformers shown are recommended for powering Damper Actuators.


**BASIC COMPONENT SELECTION EXAMPLE**  
**Lennox Rooftop Units With Prodigy® Unit Controller**  
**(NOTE – Prodigy and Network Thermostat Controller controlled units can be combined on the same system)**

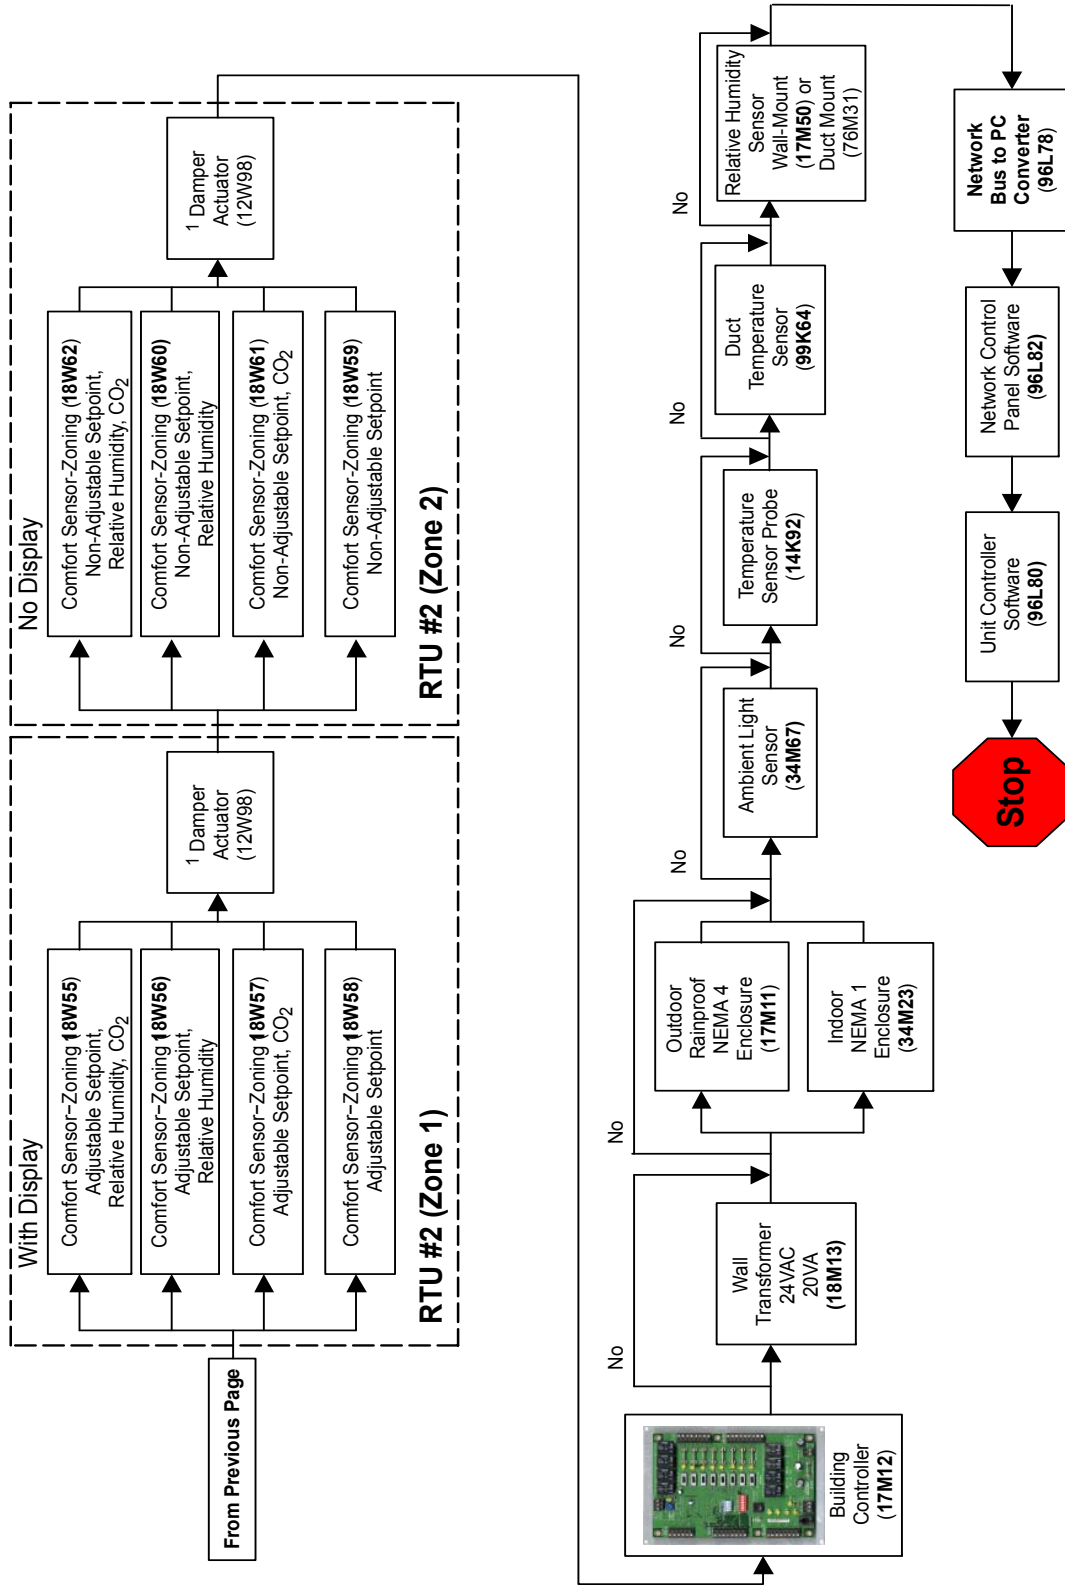

1 - 75VA and 100VA Transformers shown are recommended for powering Damper Actuators.


L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

**COMPONENT SELECTION EXAMPLE - BASIC OVERVIEW**  
**Network Thermostat Controller Version - For Lennox' Rooftop Units Without The Prodigy® Unit Controller**  
**and Split Systems or Electro-Mechanically Controlled Third-Party Rooftop Units**

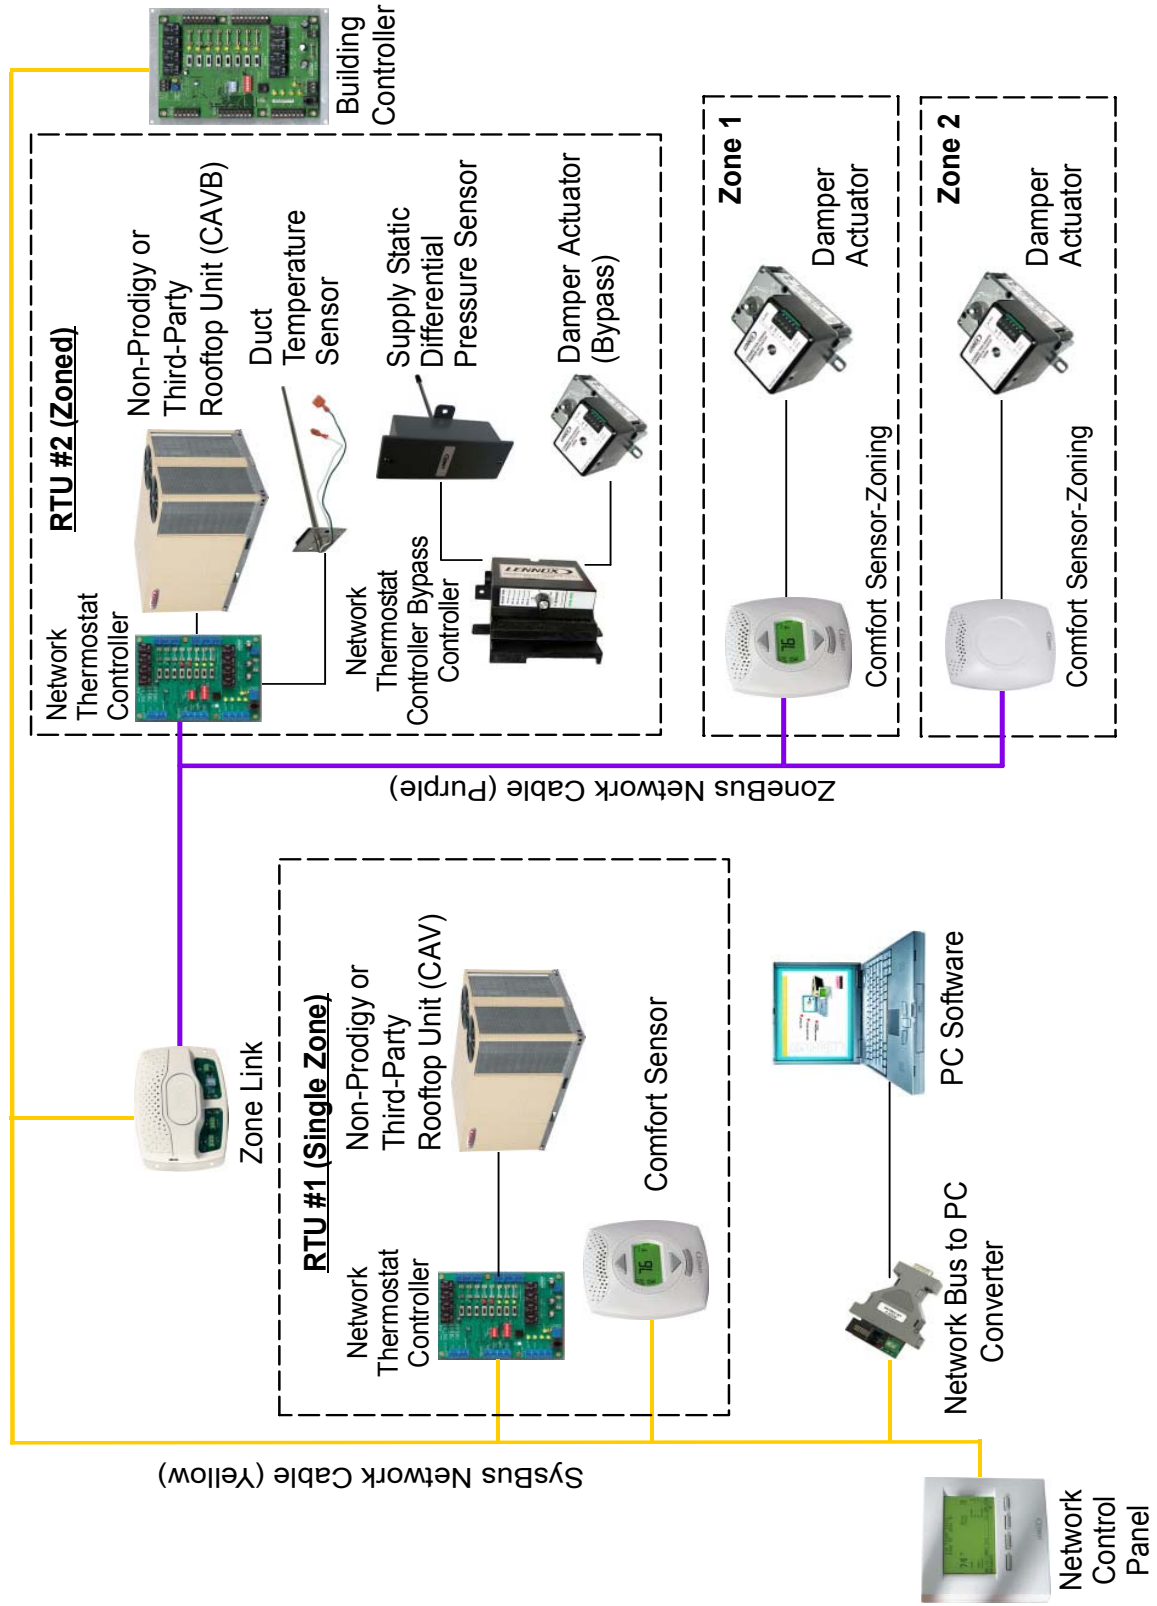

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM


**BASIC COMPONENT SELECTION EXAMPLE**  
**Network Thermostat Controller Version - For Lennox' Rooftop Units Without The Prodigy® Unit Controller**  
**and Split Systems or Electro-Mechanically Controlled Third-Party Rooftop Units**

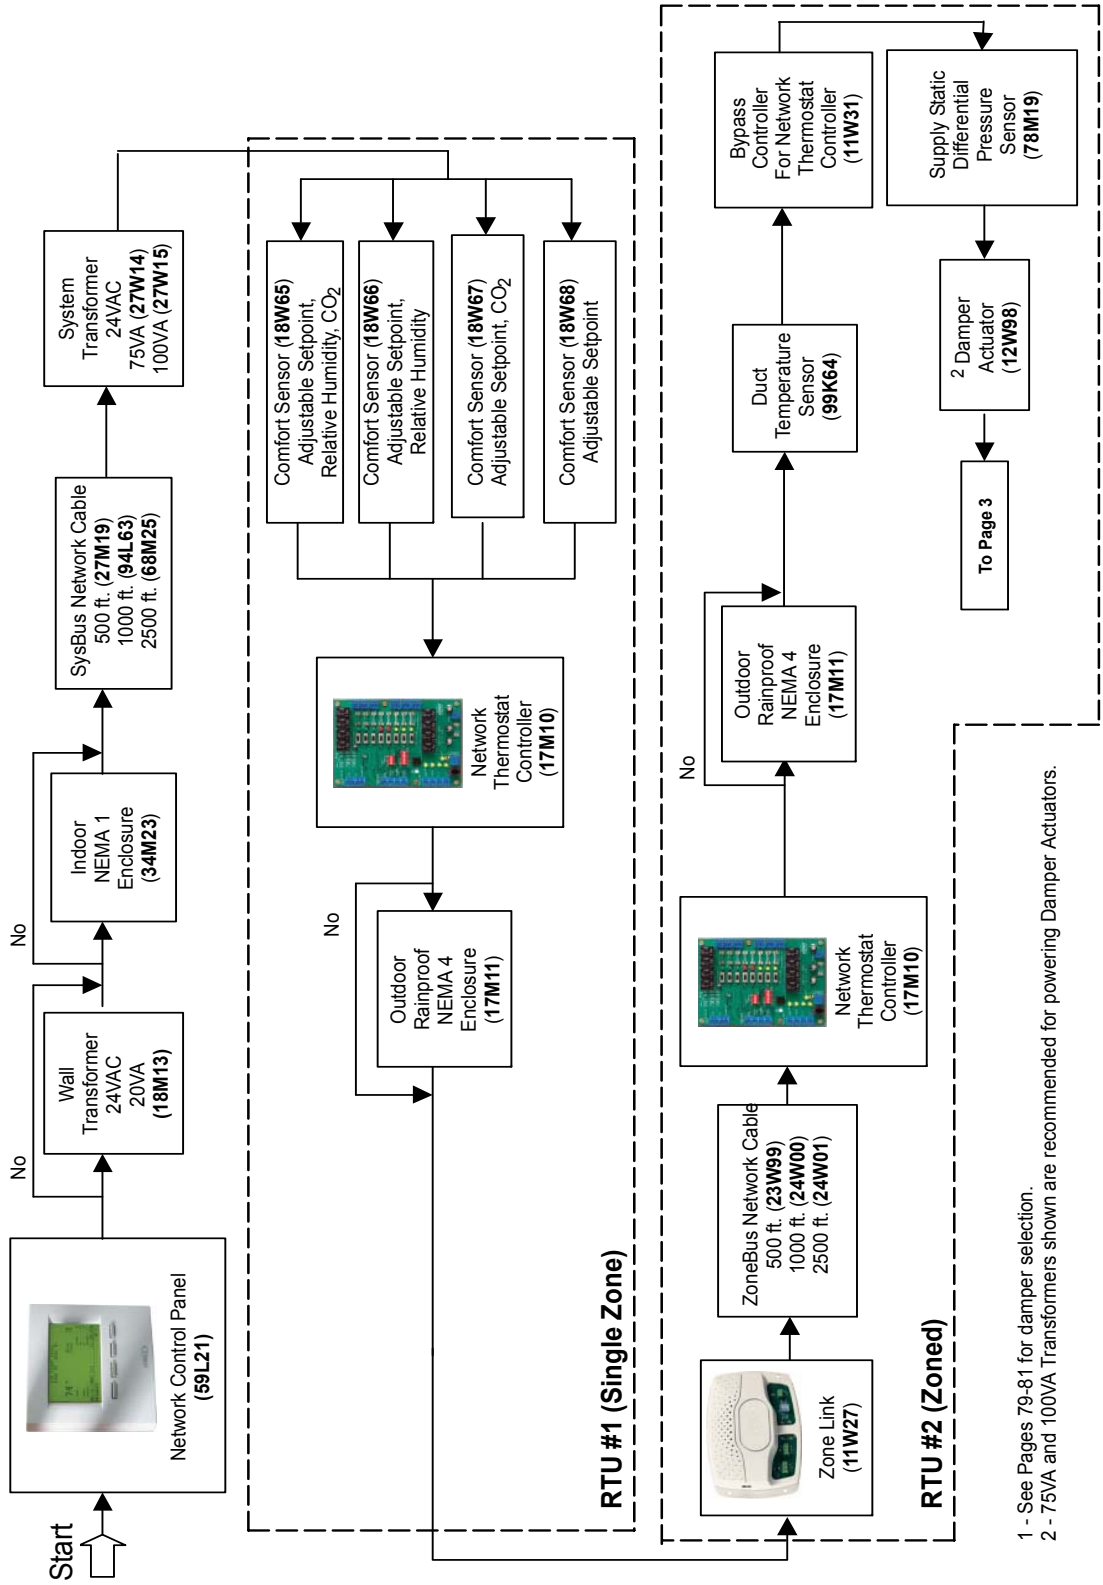

1 - See Pages 79-81 for damper selection.  
 2 - 75VA and 100VA Transformers shown are recommended for powering Damper Actuators.

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

**BASIC COMPONENT SELECTION EXAMPLE**  
**Network Thermostat Controller Version - For Lennox® Rooftop Units Without The Prodigy® Unit Controller**  
**and Split Systems or Electro-Mechanically Controlled Third-Party Rooftop Units**

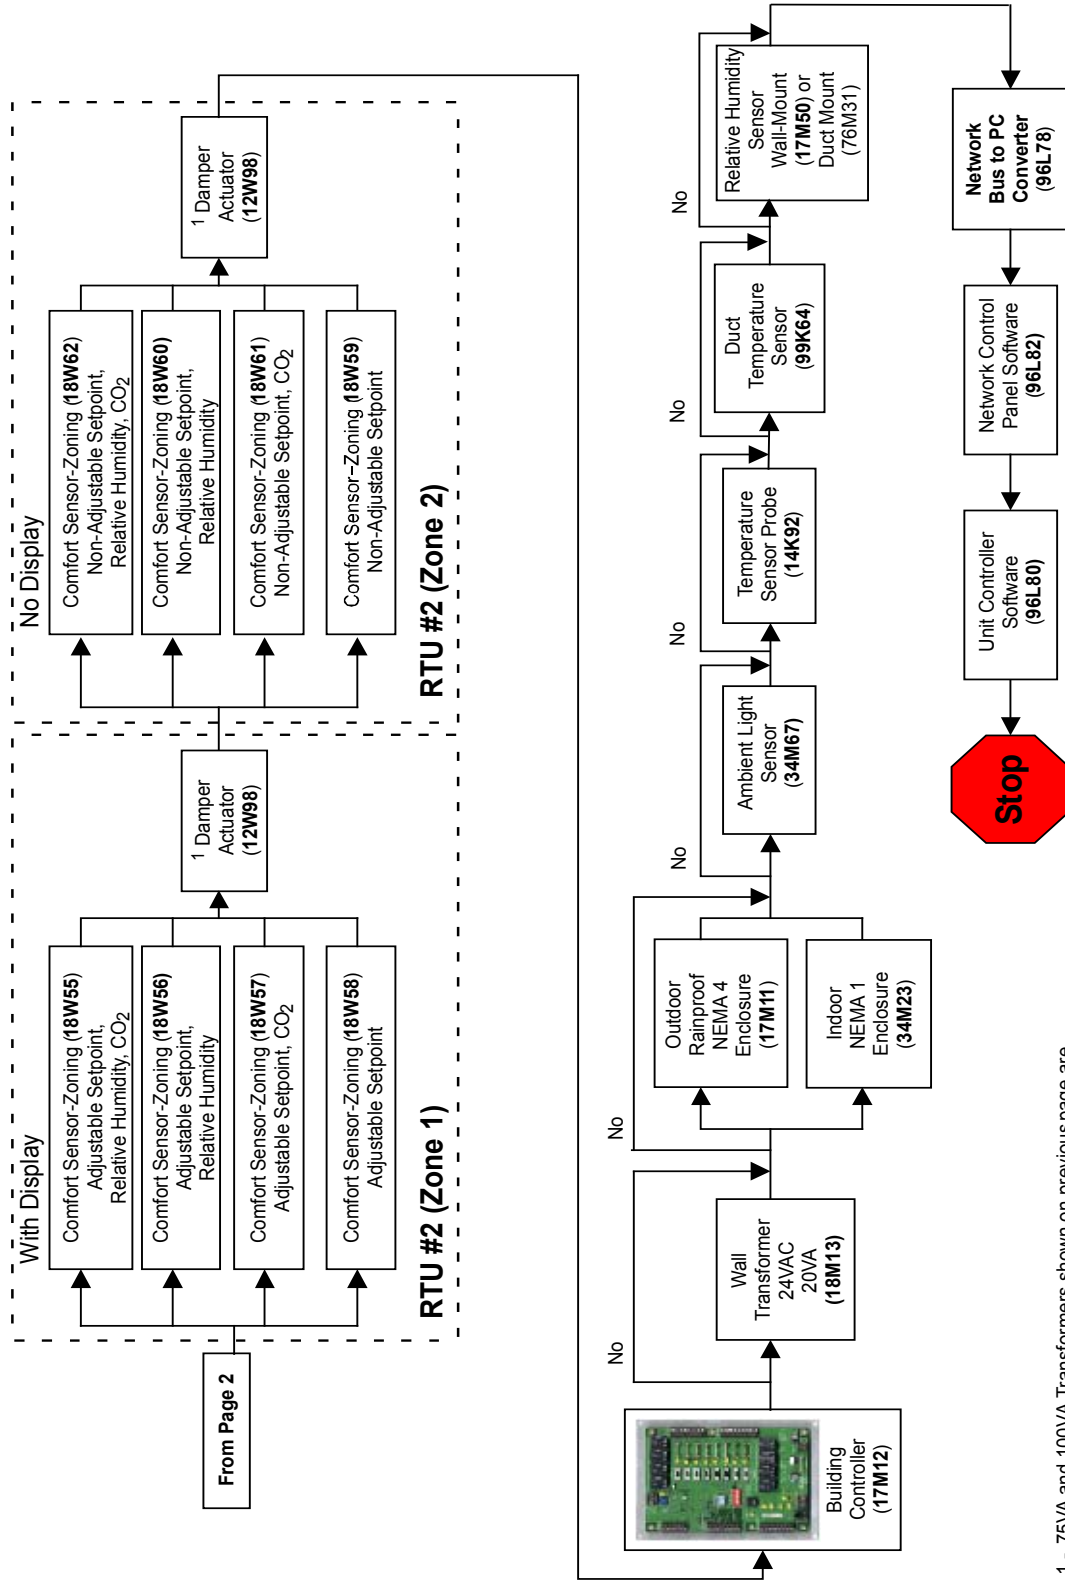

1 - 75VA and 100VA Transformers shown on previous page are recommended for powering DamperActuators.