



OIL FURNACES

SL0183BV

DAVE LENNOX SIGNATURE® COLLECTION

Lo-Boy - Variable Speed Blower

PRODUCT SPECIFICATIONS

Bulletin No. 210627

August 2015

Supersedes September 2014




AFUE - 83%

Heating Input - 101,000 to 151,000 Btuh

Nominal Add-on Cooling - 3 to 5 Ton

MODEL NUMBER IDENTIFICATION

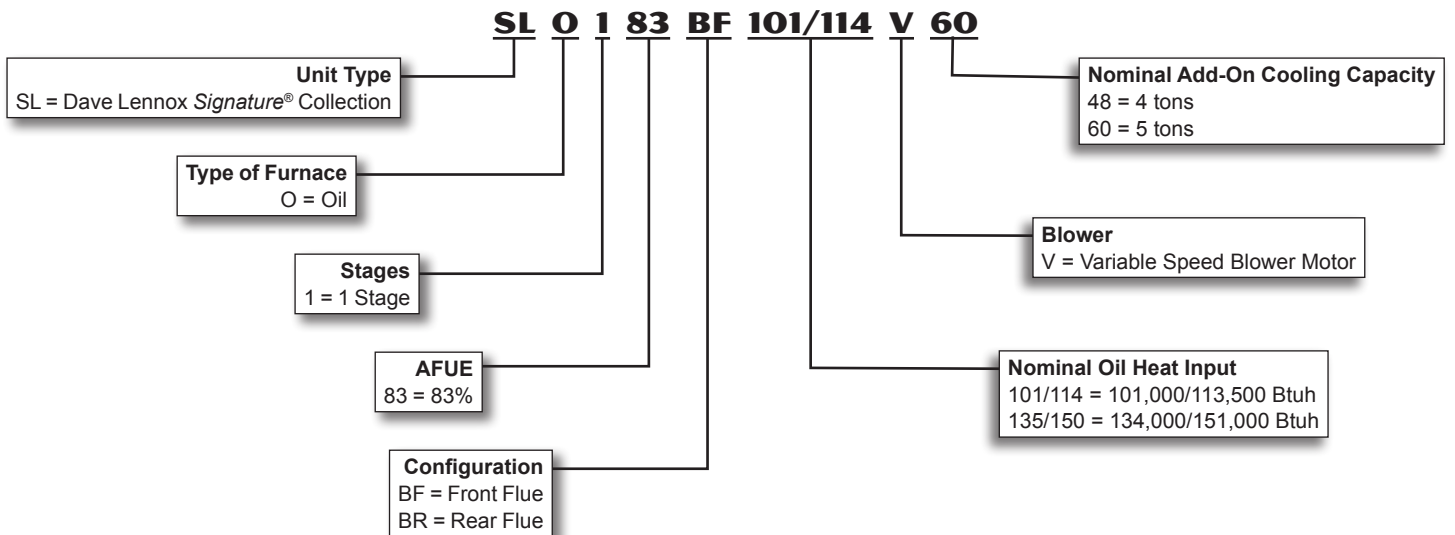

FEATURES

CONTENTS

| | |
|----------------------------------|---|
| Blower Data | 6 |
| Dimensions | 7 |
| Features..... | 2 |
| Installation Clearances | 5 |
| Model Number Identification..... | 1 |
| Optional Accessories | 5 |
| Specifications..... | 5 |

EQUIPMENT WARRANTY

Heat Exchanger - Limited lifetime warranty in residential applications, ten years in non-residential applications.

Oil Burners and all other covered components - Ten year limited warranty in residential applications, one year in non-residential applications.

Refer to the Lennox Equipment Limited Warranty certificate included with the equipment for details.

APPROVALS

Units have been rated and tested according to U.S. Department of Energy (DOE) test procedures and are labeled according Federal Trade Commission (FTC) labeling requirements.

Units are certified by AHRI.

Units are ETL-Intertek listed.

APPLICATIONS

Suitable for installation in a residence, small business or commercial establishment.

Compact, rugged cabinet.

Allows installation in a basement, closet, recreation or utility room.

Approved for reduced clearances to combustibles.

Lennox add-on indoor coils, powered air cleaners and humidifiers can be added to the furnace.

Quiet operating blowers have sufficient capacity to handle add-on cooling air volume requirements.

Shipped factory assembled including the oil burner, with all controls installed and wired.

Factory test operated ensuring proper operation after shipment.

Feature large front and rear doors providing complete service access.

Zoning Applications

Units are not approved for zoning applications.



HEATING SYSTEM

- Beckett™ Flame-Retention AFG Oil Burner**
Smooth operating, high-pressure atomizing type burner blends oil and air to attain maximum efficiency.
Heavy duty motor drives quiet operating blower wheel and fuel pump.
Air turbo injector directs combustion air for smooth ignition.
Flame retention head is designed to agitate and mix oil and air for complete combustion and highest efficiency.
Burner has 120VAC primary safety control and ceramic glazed electrodes which provide a safe continuous flame.
Equipped with a factory installed cadmium sulfide cell flame detector and primary safety control that provides complete shutdown in case of flame failure.
All burner parts are easily removable for servicing.
Burner is U.L. approved, C.S.A. certified and certified according to ANSI Standard 296.6.
Burner is factory installed in the unit, wired and fire tested. Units are shipped for lower heating capacity operation.
Nozzle is provided for field conversion to higher heating capacity.

FEATURES

HEATING SYSTEM (continued)

2 Advanced Burner Control



120 VAC primary safety control.

Controls the oil burner motor and igniter.

Control features:

- Welded Relay Protection
- Limited Reset and Limited Recycle
- Reset Button - Resets burner if a restricted lockout is present
- 3 Status Lights for System Monitoring and Diagnostics
 - Yellow - Pump Prime Mode
 - Green - Flame sensing (flashing = 60 second recycle)
 - Red - Restricted Lockout (flashing = Soft lockout) "Strike three" lockout protection to avoid nuisance calls
- Valve-On Delay / Motor-Off Delay
- 15 Second Lockout Time
- Interrupted or Intermittent Duty Ignition
- Technician Pump Priming Mode
- Disable Function

3 EZ Clean Heat Exchanger

Streamlined drum type heat exchanger exposes maximum surface area to the air stream with minimum air resistance.

Constructed of heavy gauge steel for maximum service life.

4 Strategically placed ports allow easy cleaning.

Heavy gauge mounting channels are provided in cabinet base for support of heat exchanger.

Combustion Chamber

All models have a factory installed, specially designed alumina silica ceramic fiber combustion chamber.

Combustion chamber can withstand temperatures of up to 2550°F resulting in more complete combustion and higher efficiencies.

Flame Inspection Tube

Conveniently located at the front of the unit.

Opening is large enough for normal inspection mirror.

Barometric Draft Control

Furnished as standard equipment and field installed in flue pipe.

Optional Accessories

Combustion Air Boot

Provides 4 in. air inlet connection to burner for outdoor combustion air.

Damper furnished for installation in air inlet pipe for adjustment.

Oil Filter

Recommended for proper oil filtration. See Specifications table for order number.

Two-Stage Oil Pump

Two-stage oil pump is available.

See Specifications table for order number.

5 BLOWER

Variable Speed Direct Drive Blower

Each blower assembly statically and dynamically balanced.

Change in blower speed is easily accomplished by simple jumper change on blower control.

See Blower Performance tables.

Blower assembly easily removed for servicing.

6 CABINET

Constructed of heavy gauge steel with a pre-painted, textured finish.

Entire heating section is lined with foil faced fiberglass insulation keeping cabinet surface temperatures low.

Large blower access door gives complete service access to blower.

Blower compartment is completely insulated.

Removal of louvered heating section door allows access to oil burner, inspection door and control compartment.

Door is equipped with handhold for ease of removal.

Control compartment is totally enclosed to provide a safe, compact and clean area.

Oil line and electrical inlet openings are provided in sides of cabinet, see dimension drawing.

Lo-boy units have a lower profile than standard upflow oil furnaces. They are configured with both the supply and return air openings on the top of the unit.

Flue Outlet

Flue outlet is located on top of cabinet on front flue models and can be relocated to either side of cabinet. See dimension drawing.

Rear flue models allow the flue to be installed away from indoor coils and air cleaners. See dimension drawing.

FEATURES

CONTROLS

Electronic Blower Control

HEAT and COOL settings (with four different air volume selections for cooling and two selection for heating) are made by jumper pins on board.

ADJUST jumper pin allows approximately 15% higher, normal or 15% lower motor speed selection within COOL speeds selected for fine tuning air volume. See Blower Data Tables.

Single Stage Cooling Airflow Ramp Up - At the beginning of a call for cooling, the variable speed blower will run at 82% of rated airflow for 7.5 minutes (passive dehumidification mode). After 7.5 minutes, the motor will increase to 100% of the rated airflow. When the call for cooling is satisfied, the blower ramps back down to 82% of the selected cooling airflow for 1 minute, then shuts off.

Two-Stage Cooling Airflow Ramp Up - At the beginning of a call for 1st stage cooling, the variable speed blower will run at 57% of rated airflow for 7.5 minutes of the 1st stage cooling demand (passive dehumidification mode). After 7.5 minutes, the motor will increase to 70% of the rated airflow until 1st stage cooling demand is satisfied. If 1st stage cooling is not satisfied a call for 2nd stage cooling is made. The blower motor runs for 100% of rated air volume until the demand is satisfied. When the call for cooling is satisfied, the blower ramps back down to 57% of the selected cooling airflow for 1 minute, then shuts off.

Passive and Active Dehumidification - For situations where humidity control is an issue, the variable speed motor can operate at 82% of the rated airflow for 7.5 minutes. After 7.5 minutes the blower operates at 100% of rated air volume.

For additional dehumidification the variable speed motor control provides for connection of a thermostat with humidity control or a humidistat on the HUM terminal. When connected, the dehumidify jumper on the control must be removed. The control should be wired to open during high humidity, which will reduce blower airflow.

Continuous Blower Operation

Continuous blower operation allows the blower to operate at 50% of rated cooling air volume without any cooling or heating demand (Fan "On" setting on thermostat).

Powered Air Cleaner Connections

Terminals are provided on the control for connection of a 120-volt powered air cleaner. The "EAC" terminal is energized whenever the thermostat calls for heat, cooling, or continuous blower.

Limit Control

Factory installed on vestibule panel.

Control has fixed temperature setting and protects unit from abnormal operating conditions.

Transformer

24 volt (40VA) control transformer with circuit breaker is furnished as standard and factory installed.

Optional Accessories

ComfortSense® 7500 Touchscreen Thermostat

Electronic 7-day, universal, multi-stage, programmable, touchscreen thermostat.

4 Heat/2 Cool.

Auto-changeover.

Dual-fuel control with optional outdoor sensor.

Controls dehumidification during cooling mode and humidification during heating mode.

Offers enhanced capabilities including humidification / dehumidification / dewpoint measurement and control, *Humiditrol*® control, and equipment maintenance reminders.

Easy-to-use, menu driven thermostat with a back-lit, LCD touchscreen.

See the ComfortSense® 7500 Product Specifications bulletin in the Controls section for more information.


Remote Outdoor Temperature Sensor for ComfortSense® 7500 Thermostat

Allows the thermostat to display outdoor temperature. Required in dual-fuel and *Humiditrol*® applications.

Thermostat

Thermostat (programmable/non-programmable) is not furnished with unit.

See Thermostat bulletins in Controls Section and Lennox Price Book for selection.



INDOOR AIR QUALITY

Filter

Units are equipped with large, cleanable, frame-type filters. Can be easily removed when service is required.

SPECIFICATIONS

| Oil Heating Performance | Model Number | Front Flue Rear Flue | SLO183BF101/114V42 | SLO183BF135/150V60 |
|----------------------------------|--|--------------------------|---|--------------------|
| | | | SLO183BR101/114V42 | SLO183BR135/150V60 |
| | Input - Btuh | Low Fire | 101,000 | 135,000 |
| | | ¹ High Fire | 113,500 | 151,000 |
| | Output - Btuh | Low Fire | 84,000 | 113,500 |
| | | ¹ High Fire | 95,000 | 126,000 |
| | | ² AFUE | 83% | 83% |
| | | Flue Size Diameter - in. | 6 | 6 |
| | Temperature rise range | 50 - 80°F | 45 - 70°F Front Flue 50 - 80°F Rear Flue | |
| Oil Burner | Nozzle rating - US gph | Low Fire | .65 | .85 |
| | | ¹ High Fire | .75 | 1.00 |
| | Nozzle spray angle | | 80° solid | 80° solid |
| | Oil Burner Pump | | 1 Stage | 1 Stage |
| | Oil Burner Pump Pressure - psig | | 140 | 140 |
| Indoor Blower | Blower Motor Output - hp | | 1/2 | 1 |
| | Nominal add-on cooling - Tons | | 2.5 thru 3.5 | 3 thru 5 |
| | Blower wheel nom. diameter x width - in. | | 10 x 9 | 12 x 10 |
| ³ Filter | Number of filters | | 1 | 1 |
| | Size of filters - in. | | 18 x 19 x 1 | 19 x 21 x 1 |
| Shipping weight - lbs. 1 package | | | 250 | 290 |
| Electrical | Characteristics | | 120V-60hz-1ph | 120V-60hz-1ph |
| | Maximum Overcurrent Protection (amps) | | 15 | 15 |

OPTIONAL ACCESSORIES - ORDER SEPARATELY

| | | | |
|--|---|-------|-------|
| Combustion Air Boot (4 in. diameter) | | 83W32 | 83W32 |
| ComfortSense® 7500 Thermostat | | 13H14 | 13H14 |
| Remote Outdoor Temperature Sensor (for dual fuel and Humiditrol® control) | | X2658 | X2658 |
| Oil Filters | 10 micron without mounting bracket | 81P89 | 81P89 |
| | 10 micron with mounting bracket | 53P92 | 53P92 |
| | Replacement cartridge - 10 micron, 45 gph | 53P93 | 53P93 |
| | Filter restriction indicator gauge | 53P90 | 53P90 |
| Two-Stage Oil Pump | without solenoid | 65A44 | 65A44 |
| | with solenoid | 71M18 | 71M18 |

¹ Nozzle must be field provided for field conversion to higher heating input.

² Annual Fuel Utilization Efficiency based on U.S. DOE test procedures and FTC labeling regulations. Isolated combustion system rating for non-weatherized furnaces.

³ Cleanable flame type filters furnished.

INSTALLATION CLEARANCES

Approved for closet or alcove installation. When installing in a confined space, two ventilation openings must be provided into the space; one 6 in. (152 mm.) from the top and one 6 in. (152 mm.) from the bottom. Each opening should be 8 x 16 inches (203 x 406 mm).

| | | |
|---|--------|--------|
| Sides of cabinet | 6 in. | 152 mm |
| Rear of cabinet | 24 in. | 610 mm |
| Front of cabinet | 4 in. | 102 mm |
| Service Clearance (Front) | 24 in. | 610 mm |
| Service Clearance (Rear) | 24 in. | 610 mm |
| Floor | 0 in. | 0 mm |
| Top of plenum | 2 in. | 51 mm |
| Plenum sides | 3 in. | 76 mm |
| Flue pipe horizontal | 9 in. | 229 mm |
| Horizontal warm air duct within 3 feet (1 m) of furnace | 2 in. | 51 mm |

BLOWER DATA

SLO183BR101/114V42 and SLO183BF101/114V42 BLOWER PERFORMANCE 0 through 0.80 in. w.g. External Static Pressure Range

| "ADJUST" Jumper Setting | Jumper Speed Positions | | | | | |
|-------------------------------|------------------------|------|--------------|------|------|-----|
| | "HEAT" Speed | | "COOL" Speed | | | |
| | B | D | A | B | C | D |
| | cfm | cfm | cfm | cfm | cfm | cfm |
| + | N/A | N/A | 1500 | 1400 | 1200 | 950 |
| NORM | 1450 | 1200 | 1400 | 1200 | 1000 | 800 |
| - | N/A | N/A | 1200 | 1050 | 860 | 650 |



NOTE - Continuous Fan air volume is 50% of COOL speed.

SLO183BR135/150V60 and SLO183BF135/150V60 BLOWER PERFORMANCE 0 through 0.80 in. w.g. External Static Pressure Range

| "ADJUST" Jumper Setting | Jumper Speed Positions | | | | | |
|-------------------------------|------------------------|------|--------------|------|------|------|
| | "HEAT" Speed | | "COOL" Speed | | | |
| | B | D | A | B | C | D |
| | cfm | cfm | cfm | cfm | cfm | cfm |
| + | N/A | N/A | 2100 | 2000 | 1800 | 1350 |
| NORM | 1730 | 1450 | 2000 | 1800 | 1600 | 1200 |
| - | N/A | N/A | 1650 | 1500 | 1350 | 950 |

NOTE - Continuous Fan air volume is 50% of COOL speed.

DIMENSIONS - INCHES (MM)

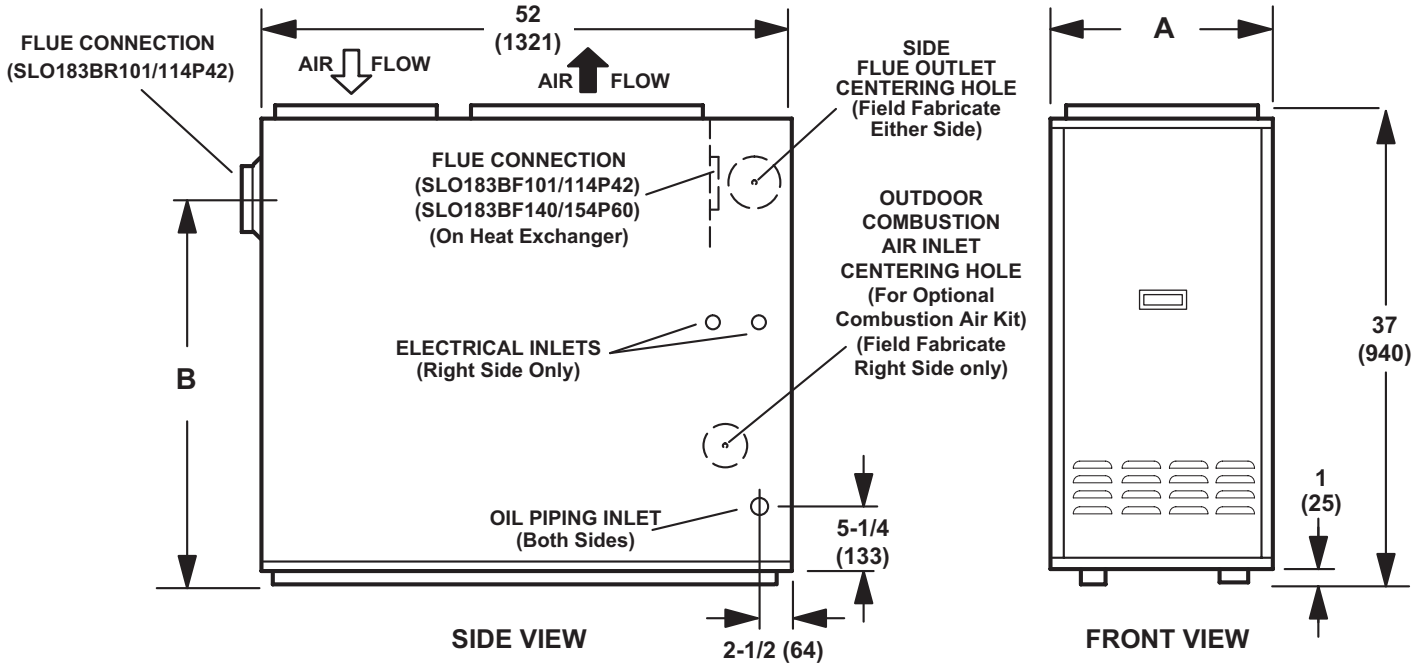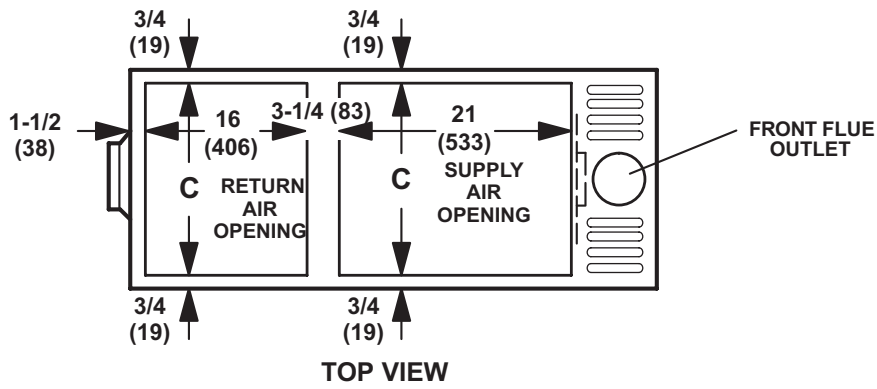

| Model No. | A | | B | | C | |
|--------------------|--------|-----|--------|-----|-----|-----|
| | in. | mm | in. | mm | in. | mm |
| SLO183BF101/114P42 | 19-1/2 | 495 | --- | --- | 18 | 457 |
| SLO183BR101/114P42 | 19-1/2 | 495 | 27-5/8 | 702 | 18 | 457 |
| SLO183BF135/150P60 | 22-1/2 | 572 | --- | --- | 21 | 533 |
| SLO183BR135/150P60 | 22-1/2 | 572 | 27-5/8 | 702 | 21 | 533 |

REVISIONS

| Sections | Description of Change |
|----------------------|--|
| Optional Accessories | Added new ComfortSense® 7500 thermostat. |



Visit us at www.lennox.com

For the latest technical information, www.lennoxravenet.com

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2015 Lennox Industries, Inc.