



SUBMITTAL DATA  
 MODE **SELECTION BOX**  
**V8MSBB03**  
**VRF HEAT RECOVERY**

**Job:** \_\_\_\_\_  
**Location:** \_\_\_\_\_  
**Schedule No.:** \_\_\_\_\_  
**System Designation:** \_\_\_\_\_

**Engineer:** \_\_\_\_\_  
**Architect:** \_\_\_\_\_  
**Date:** \_\_\_\_\_  
**For:** Reference Approval Review Construction

**FEATURES**

Allows simultaneous heating and cooling of multiple zones on VRF Heat Recovery outdoor units.

- Brazed fittings for outdoor unit pipe connections
- Removable panels for ease of maintenance
- Flare fittings for indoor unit pipe connection
- Dedicated sub-cooling circuit for each port

**Product Warranty**

All covered components – one year limited warranty.

**SPECIFICATIONS**

Number of Ports	4
Maximum Indoor Units per Port	4
Maximum Capacity per Port (Btu/h)	54,000
Total Connected Capacity (Btu/h)	≤ 154,000

**ELECTRICAL DATA**

Power Supply (V/Hz/Φ)	208-230/60/1
-----------------------	--------------

**DIMENSIONS**

Unit Dimensions (in)	Height	9
	Width	23-5/8
	Depth	37-3/4

**Connections to Outdoor Unit**

Liquid Pipe Connection (in)	5/8
High Pressure Gas Pipe Connection (in)	7/8
Low Pressure Gas Pipe Connection (in)	1-1/8

**Connections to Indoor Unit(s)**

Liquid Pipe Connection (in)	3/8
Gas Pipe Connection (in)	5/8
Condensate drain connection (in)	3/4
Shipping Weight (lb)	88
Net Weight (lb)	69




NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.



SUBMITTAL DATA  
 MODE **SELECTION BOX**  
**V8MSBB03**  
**VRF HEAT RECOVERY**

**DIMENSIONAL DRAWINGS**

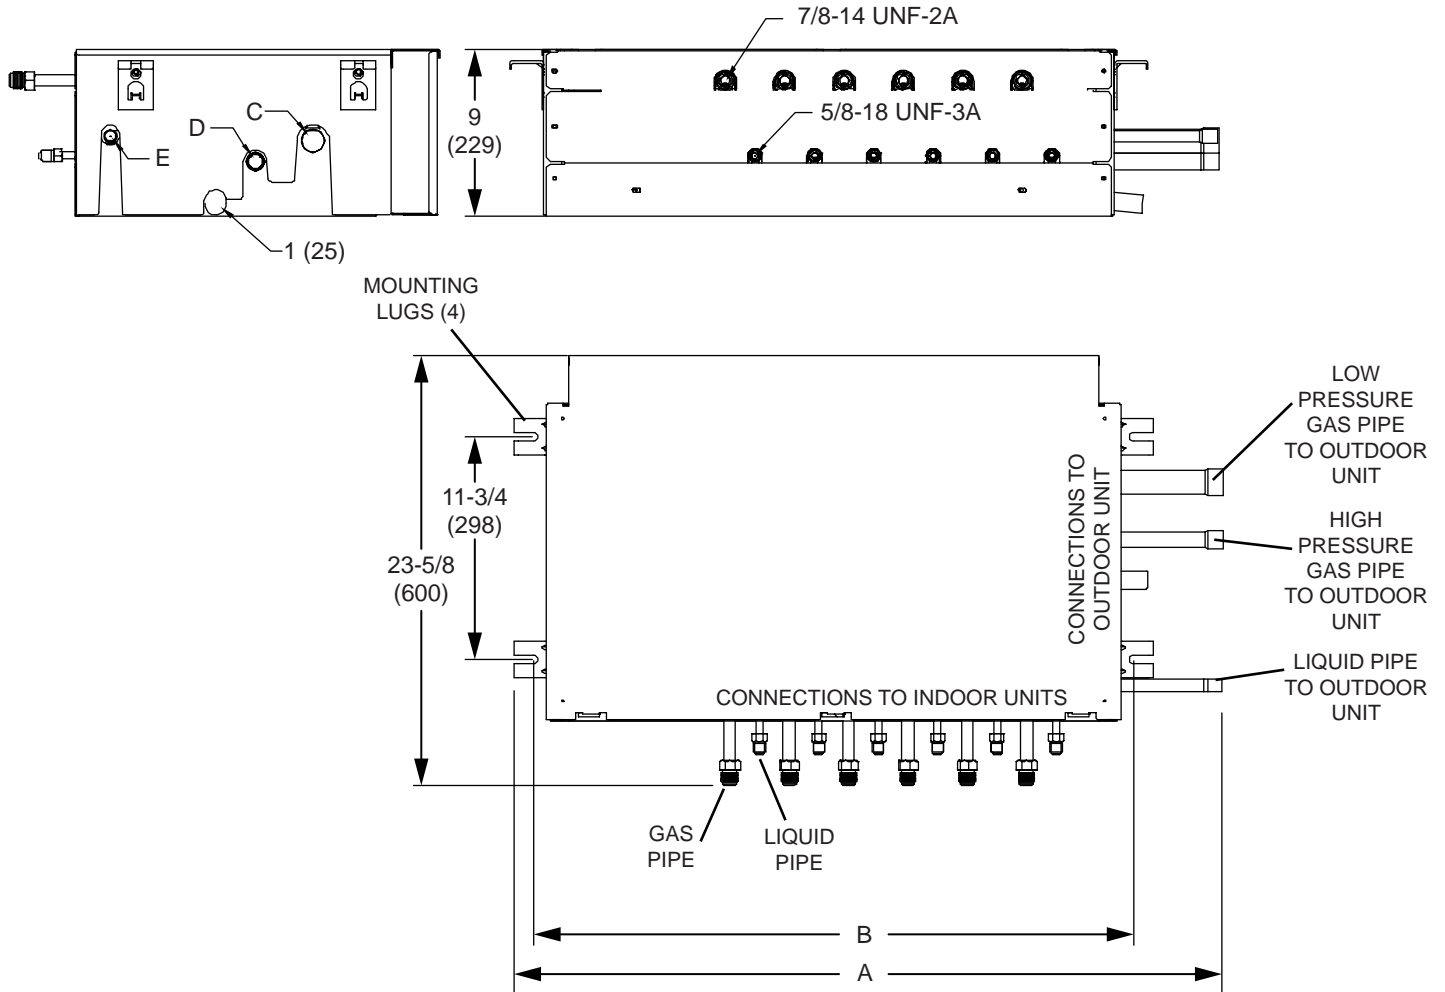

Model No.	A		B		C		D		E	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
V8MSBB01	24-3/4	629	19-1/4	489	1-1/8	29	3/4	19	1/2	13
V8MSBB02	24-3/4	629	19-1/4	489	1-1/8	29	3/4	19	1/2	13
V8MSBB03	37-3/4	959	32-1/4	819	1-1/4	32	7/8	22	5/8	16
V8MSBB04	37-3/4	959	32-1/4	819	1-1/4	32	7/8	22	5/8	16

NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.