



# 2016 COMMERCIAL EQUIPMENT PRICE BOOK

Effective 1/2016  
Supersedes all previous dates

LIST (US)    LIST



**ENERGENCE**  
Saving Energy with Intelligence™



**LANDMARK**®  
Performance Marked by Flexibility™

**RAIDER**®  
Value Without Compromise™



For instant access to the answers you need,  
visit **Commercial Quick Quote** on **DaveNet**® today.

**DaveNet**®  
No Boundaries™

Commercial Quick Quote





**FACTORY CONFIGURATION**

Model No.		Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
<b>PACKAGED GAS - 3 - 4 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZGA036S4BS P	3 ton	208/230v-1ph	65 Single	13.0	11.5	---	1.5	Z01			37x47.25x76	484	V9643	call	---
ZGB036S4BW P	3 ton	208/230v-1ph	*65 Single	14.0	11.5	---	1.5	Z01			37x47.25x76	524	AE827	call	---
ZGA036S4BM P	3 ton	208/230v-1ph	108 Single	13.0	11.5	---	1.5	Z01			37x47.25x76	484	V9639	call	---
ZGB036S4BY P	3 ton	208/230v-1ph	*108 Single	14.0	11.5	---	1.5	Z01			37x47.25x76	524	AE823	call	---
ZGA036S4BM P	3 ton	208/230v-1ph	108 Single	13.0	11.5	---	1.5	Z04			37x47.25x76	484	V9636	call	---
ZGB036S4BY P	3 ton	208/230v-1ph	*108 Single	14.0	11.5	---	1.5	Z04			37x47.25x76	524	AE825	call	---
ZGA036S4BS Y	3 ton	208/230v-3ph	65 Single	13.0	11.5	---	1	Z01			37x47.25x76	484	V9640	call	---
ZGB036S4BS Y	3 ton	208/230v-3ph	65 Single	14.0	11.5	---	1	Z01			37x47.25x76	484	AF374	call	---
ZGA036S4BM Y	3 ton	208/230v-3ph	108 Single	13.0	11.5	---	1	Z01			37x47.25x76	484	V9638	call	---
ZGA036S4BM Y	3 ton	208/230v-3ph	108 Single	13.0	11.5	---	1	Z04			37x47.25x76	484	V9637	call	---
ZGB036S4BS G	3 ton	460v-3ph	65 Single	14.0	11.5	---	1	Z01			37x47.25x76	484	AJ096	call	---
ZGA036S4BS G	3 ton	460v-3ph	65 Single	13.0	11.5	---	1	Z01			37x47.25x76	484	V9644	call	---
ZGA036S4BM G	3 ton	460v-3ph	108 Single	13.0	11.5	---	1	Z01			37x47.25x76	484	V9642	call	---
ZGA048S4BS P	4 ton	208/230v-1ph	65 Single	13.0	10.8	---	1.5	Z02			37x47.25x76	498	V9654	call	---
ZGB048S4BW P	4 ton	208/230v-1ph	*65 Single	14.0	10.8	---	1.5	Z02			37x47.25x76	533	AE830	call	---
ZGA048S4BH P	4 ton	208/230v-1ph	150 Dual	13.0	10.8	---	1.5	Z02			37x47.25x76	498	V9652	call	---
ZGB048S4BX P	4 ton	208/230v-1ph	*150 Dual	14.0	10.8	---	1.5	Z02			37x47.25x76	533	AE824	call	---
ZGA048S4BH P	4 ton	208/230v-1ph	150 Dual	13.0	10.8	---	1.5	Z05			37x47.25x76	498	V9647	call	---
ZGB048S4BM Y	4 ton	208/230v-3ph	65 Single	14.0	10.8	---	1	Z02			37x47.25x76	498	AJ093	call	---
ZGA048S4BS Y	4 ton	208/230v-3ph	65 Single	13.0	10.8	---	1	Z02			37x47.25x76	498	V9650	call	---
ZGA048S4BS Y	4 ton	208/230v-3ph	65 Single	13.0	10.8	---	1	Z02		Y-T24	37x47.25x76	498	L2378	call	0
ZGA048S4BM Y	4 ton	208/230v-3ph	108 Single	13.0	10.8	---	1	Z02			37x47.25x76	498	V9649	call	---
ZGB048S4BM Y	4 ton	208/230v-3ph	108 Single	14.0	10.8	---	1	Z02			37x47.25x76	498	AJ093	call	---
ZGA048S4BH Y	4 ton	208/230v-3ph	150 Dual	13.0	10.8	---	1.5	Z02			37x47.25x76	498	V9648	call	---
ZGA048S4BH Y	4 ton	208/230v-3ph	150 Dual	13.0	10.8	---	1.5	Z05			37x47.25x76	498	V9645	call	---
ZGA048S4BS G	4 ton	460v-3ph	65 Single	13.0	10.8	---	1	Z02			37x47.25x76	498	V9653	call	---
ZGA048S4BM G	4 ton	460v-3ph	108 Single	13.0	10.8	---	1	Z02			37x47.25x76	498	L1898	call	---
ZGB048S4BM G	4 ton	460v-3ph	108 Single	14.0	10.8	---	1	Z02			37x47.25x76	498	AJ097	call	---
ZGA048S4BH G	4 ton	460v-3ph	150 Dual	13.0	10.8	---	1	Z02			37x47.25x76	498	V9655	call	---
<b>PACKAGED GAS - 5 - 6 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZGB060S4BY P	5 ton	208/230v-1ph	*108 Single	14.0	10.7	---	1.5	Z03			45x47.25x76	592	AE821	call	---
ZGA060S4BH P	5 ton	208/230v-1ph	150 Dual	13.0	10.7	---	1.5	Z03			37x47.25x76	530	V9665	call	---
ZGA060S4BH P	5 ton	208/230v-1ph	*150 Dual	14.0	10.7	---	1.5	Z03			37x47.25x76	530	AE822	call	0
ZGA060S4BH P	5 ton	208/230v-1ph	150 Dual	13.0	10.7	---	1.5	Z06			37x47.25x76	530	V9658	call	---
ZGB060S4BX P	5 ton	208/230v-1ph	*150 Dual	14.0	10.7	---	1.5	Z06			45x47.25x76	592	AE828	call	---
ZGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	10.7	---	1	Z03			37x47.25x76	530	V9663	call	---
ZGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	10.7	---	1	Z03		Y-T24	37x47.25x76	530	AH581	call	---
ZGA060S4BM Y	5 ton	208/230v-3ph	108 Single	13.0	10.7	---	1	Z03			37x47.25x76	530	V9661	call	---
ZGB060S4BM Y	5 ton	208/230v-3ph	108 Single	14.0	10.7	---	1.5	Z03		Y	37x47.25x76	530	AJ094	call	---
ZGA060S4BU Y	5 ton	208/230v-3ph	108 Dual	13.0	10.7	---	1	Z03			37x47.25x76	530	V9662	call	---
ZGA060S4BH Y	5 ton	208/230v-3ph	150 Dual	13.0	10.7	---	1	Z03			37x47.25x76	530	V9660	call	---
ZGA060S4BH Y	5 ton	208/230v-3ph	150 Dual	13.0	10.7	---	1.5	Z06			37x47.25x76	530	V9656	call	---
ZGA060S4BS G	5 ton	460v-3ph	65 Single	13.0	10.7	---	1	Z03			37x47.25x76	530	V9667	call	---
ZGA060S4BS G	5 ton	460v-3ph	65 Single	13.0	10.7	---	1	Z03		Y-T24	37x47.25x76	530	AH582	call	---
ZGA060S4BM G	5 ton	460v-3ph	108 Single	13.0	10.7	---	1	Z03			37x47.25x76	530	L1897	call	---
ZGB060S4BM G	5 ton	460v-3ph	108 Single	14.0	10.7	---	1.5	Z03		Y	37x47.25x76	530	AJ098	call	---
ZGA060S4BH G	5 ton	460v-3ph	150 Dual	13.0	10.7	---	1	Z03			37x47.25x76	530	V9668	call	---
ZGA060S4BH G	5 ton	460v-3ph	150 Dual	13.0	10.7	---	1.5	Z06			37x47.25x76	530	V9659	call	---
ZGA072S4BM Y	6 ton	208/230v-3ph	108 Single	---	11.2	12.0	2	Z03			45x47.25x73.75	640	AE718	call	---
ZGA072S4BT Y	6 ton	208/230v-3ph	150 Single	---	11.2	12.0	1.5	Z03		Y	45x47.25x73.75	640	AJ095	call	---
ZGA072S4BT J	6 ton	460v-3ph	150 Single	---	11.2	12.0	1.5	Z03		Y	45x47.25x73.75	640	AJ099	call	---
ZGA072S4BH Y	6 ton	208/230v-3ph	150 Dual	---	11.2	12.0	2	Z03			45x47.25x73.75	640	AF068	call	---
ZGA072S4BH G	6 ton	460v-3ph	150 Dual	---	11.2	12.0	2	Z03			45x47.25x73.75	640	AF070	call	---

\*Low Nox models.

**PACKAGED ELECTRIC/ELECTRIC - 3 - 6 TON - STANDARD EFFICIENCY COOLING - R-410A**

ZCA036S4BN P	3 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.3	---	1.5	Z01			37x47.25x76	451	V9626	call	---
ZCB036S4BN P	3 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.3	---	1.5	Z01			37x47.25x76	474	AE715	call	---
ZCA036S4BN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.3	---	1	Z01			37x47.25x76	451	V9625	call	---



**FACTORY CONFIGURATION**

Model No.	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
ZCA036S4BN G	3 ton	460v-3ph	Opt. Elec. Heat	13.0	11.3	---	1	Z01		37x47.25x76	451	V9627	call	---
ZCA048S4BN P	4 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.8	---	1.5	Z02		37x47.25x76	465	V9629	call	---
ZCB048S4BN P	4 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.8	---	1.5	Z02		37x47.25x76	483	AE829	call	---
ZCA048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.8	---	1	Z02		37x47.25x76	465	V9628	call	---
ZCA048S4BN G	4 ton	460v-3ph	Opt. Elec. Heat	13.0	10.8	---	1	Z02		37x47.25x76	465	V9630	call	---
ZCA060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.7	---	1.5	Z03		37x47.25x76	497	V9632	call	---
ZCB060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.7	---	1.5	Z03		45x47.25x76	568	AE820	call	---
ZCA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.7	---	1	Z03		37x47.25x76	497	V9631	call	---
ZCA060S4BN G	5 ton	460v-3ph	Opt. Elec. Heat	13.0	10.7	---	1	Z03		37x47.25x76	497	V9633	call	---
ZCA072S4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	Z03		45x47.25x73.75	568	AF071	call	---
ZCA072S4BN G	6 ton	460v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	Z03		45x47.25x73.75	568	AF072	call	---

**PACKAGED HEAT PUMP - 3 - 5 TON - STANDARD EFFICIENCY COOLING - R-410A**

ZHA036S4BN P	3 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.3	---	1.5	Z01		37x47.25x76	530	L1899	call	---
ZHB036S4BN P	3 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.3	---	1.5	Z01		45x47.25x76	580	AE717	call	---
ZHA036S4BN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.3	---	1	Z01		37x47.25x76	530	V9669	call	---
ZHB036S4BN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	14.0	11.3	---	1	Z01		45x47.25x76	580	AF380	call	---
ZHA036S4BN G	3 ton	460v-3ph	Opt. Elec. Heat	13.0	11.3	---	1	Z01		37x47.25x76	530	V9670	call	---
ZHB036S4BN G	3 ton	460v-3ph	Opt. Elec. Heat	14.0	11.3	---	1	Z01		45x47.25x76	580	AJ101	call	---
ZHA048S4BN P	4 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.8	---	1.5	Z02		37x47.25x76	539	L1900	call	---
ZHB048S4BN P	4 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.8	---	1.5	Z02		45x47.25x76	585	AE831	call	---
ZHA048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.8	---	1	Z02		37x47.25x76	539	V9671	call	---
ZHB048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	14.0	10.8	---	1	Z02		45x47.25x76	585	AF381	call	---
ZHA048S4BN G	4 ton	460v-3ph	Opt. Elec. Heat	13.0	10.8	---	1	Z02		37x47.25x76	539	V9672	call	---
ZHB048S4BN G	4 ton	460v-3ph	Opt. Elec. Heat	14.0	10.8	---	1	Z02		45x47.25x76	585	AJ102	call	---
ZHA060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.9	---	1.5	Z03		45x47.25x76	585	L1901	call	---
ZHB060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.9	---	1.5	Z02		45x47.25x76	610	AE826	call	---
ZHA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	Z03		45x47.25x76	585	V9673	call	---
ZHB060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	14.0	10.9	---	1	Z03	Y	45x47.25x76	610	AJ100	call	---
ZHA060S4BN G	5 ton	460v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	Z03		45x47.25x76	585	V9674	call	---
ZHB060S4BN G	5 ton	460v-3ph	Opt. Elec. Heat	14.0	10.9	---	1	Z03	Y	45x47.25x76	610	AJ103	call	---

**PACKAGED GAS - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

ZGA092S4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1		49x61x96	902	L2507	call	---
ZGA092S4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1		49x61x96	902	L2513	call	---
ZGA092S4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1	Y	49x61x96	902	L2530	call	---
ZGA092S4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	11.0	11.8	2	1		49x61x96	902	L2522	call	---
ZGA092S4BS G	7.5 ton	460v-3ph	130 Dual	---	11.0	11.8	2	1		49x61x96	902	L2506	call	---
ZGA092S4BM G	7.5 ton	460v-3ph	180 Dual	---	11.0	11.8	2	1		49x61x96	902	L2511	call	---
ZGA092S4BM G	7.5 ton	460v-3ph	180 Dual	---	11.0	11.8	2	1	Y	49x61x96	902	L2636	call	---
ZGA102S4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1		49x61x96	922	L2509	call	---
ZGA102S4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1		49x61x96	922	L2516	call	---
ZGA102S4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1	Y	49x61x96	922	L2635	call	---
ZGA102S4BS G	8.5 ton	460v-3ph	130 Dual	---	11.0	11.8	2	1		49x61x96	922	L2508	call	---
ZGA102S4BM G	8.5 ton	460v-3ph	180 Dual	---	11.0	11.8	2	1		49x61x96	922	L2514	call	---
ZGA102S4BM G	8.5 ton	460v-3ph	180 Dual	---	11.0	11.8	2	1	Y	49x61x96	922	L2637	call	---
ZGA120S4BS Y	10 ton	208/230v-3ph	130 Dual	---	11.0	11.8	3	5		49x61x96	962	L2510	call	---
ZGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5		49x61x96	962	L2518	call	---
ZGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5	Y	49x61x96	962	L2531	call	---
ZGA120S4MM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5	Y	49x61x96	962	M8190	call	---
ZGA120S4BH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5		49x61x96	962	L2525	call	---
ZGA120S4BH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5	Y	49x61x96	962	L2534	call	---
ZGA120S4MM G	10 ton	460v-3ph	180 Dual	---	11.0	11.8	3	5		49x61x96	962	L2517	call	---
ZGA120S4BM G	10 ton	460v-3ph	180 Dual	---	11.0	11.8	3	5	Y	49x61x96	962	M8191	call	---
ZGA120S4BH G	10 ton	460v-3ph	240 Dual	---	11.0	11.8	3	5		49x61x96	962	L2523	call	---
ZGA120S4BH G	10 ton	460v-3ph	240 Dual	---	11.0	11.8	3	5	Y	49x61x96	962	L2532	call	---
ZGA150S4BM Y	12.5 ton	208/230v-3ph	180 Dual	---	10.8	11.4	5	11		49x61x96	1052	L2520	call	---
ZGA150S4MM Y	12.5 ton	208/230v-3ph	180 Dual	---	10.8	11.4	5	11	Y	49x61x96	1052	M8192	call	---
ZGA150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	10.8	11.4	5	11		49x61x96	1052	L2528	call	---
ZGA150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	10.8	11.4	5	11	Y	49x61x96	1052	L2535	call	---
ZGA150S4BM G	12.5 ton	460v-3ph	180 Dual	---	10.8	11.4	5	11		49x61x96	1052	L2519	call	---



FACTORY CONFIGURATION															
Model No.		Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
ZGA150S4BM G	12.5 ton	460v-3ph	180 Dual	---	10.8	11.4	5	11	Y	Y	49x61x96	1052	M8193	call	---
ZGA150S4BH G	12.5 ton	460v-3ph	240 Dual	---	10.8	11.4	5	11			49x61x96	1052	L2526	call	---
ZGA150S4BG H	12.5 ton	460v-3ph	240 Dual	---	10.8	11.4	5	11		Y	49x61x96	1052	L2638	call	---
<b>PACKAGED ELECTRIC/ELECTRIC - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZCA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			49x61x96	854	L2497	call	---
ZCA092S4BN G	7.5 ton	460v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			49x61x96	854	L2495	call	---
ZCA102S4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			49x61x96	874	L2499	call	---
ZCA102S4BN G	8.5 ton	460v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			49x61x96	874	L2498	call	---
ZCA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	3	5			49x61x96	914	L2502	call	---
ZCA120S4BN G	10 ton	460v-3ph	Opt. Elec. Heat	---	11.2	12.0	3	5			49x61x96	914	L2500	call	---
ZCA150S4BN Y	12.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.6	5	11			49x61x96	1004	L2505	call	---
ZCA150S4BN G	12.5 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.6	5	11			49x61x96	1004	L2503	call	---
<b>PACKAGED HEAT PUMPS - 7.5 - 10 TON - STANDARD EFFICIENCY COOLING - R-410A</b>															
ZHA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.2	2	1			49x61x96	1036	AA858	call	---
ZHA092S4BN G	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.2	2	1		Y	49x61x96	1036	AA859	call	---
ZHA092S4BN Y	7.5 ton	460v-3ph	Opt. Elec. Heat	---	11.0	12.2	2	1			49x61x96	1036	AA857	call	---
ZHA102S4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.2	2	1			49x61x96	1068	AA861	call	---
ZHA102S4BN G	8.5 ton	460v-3ph	Opt. Elec. Heat	---	11.0	12.2	2	1			49x61x96	1068	AA860	call	---
ZHA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.3	3	5			49x61x96	1126	AA863	call	---
ZHA120S4MN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.5	3	5	Y		49x61x96	1126	AA865	call	---
ZHA120S4BN G	10 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.3	3	5			49x61x96	1126	AA862	call	---
ZHA120S4MN G	10 ton	460v-3ph	Opt. Elec. Heat	---	11.0	12.5	3	5	Y		49x61x96	1126	AA864	call	---



Description	Order No.	Price
<b>RAIDER® - 3 - 5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	Z1CURB70A-1	11F76 call
14 in. height	Z1CURB71A-1	11F77 call
18 in. height	Z1CURB72A-1	11F78 call
24 in. height	Z1CURB73A-1	11F79 call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (SENSIBLE CONTROL) (NOT FOR TITLE 24)</b>		
<b>With Barometric Relief Dampers And Exhaust Hood</b>		
Downflow	Z1ECON30A-1	98W09 call
Horizontal	Z1ECON16A-1	98W68 call
<b>STANDARD ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR64FF1	53W64 call
<b>HIGH PERFORMANCE ECONOMIZER (SENSIBLE CONTROL) (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Barometric Relief Dampers And Exhaust Hood</b>		
Downflow	Z1ECON32A-1	10U51 call
Horizontal	Z1ECON33A-1	10U52 call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR60FF1	11G21 call
POWER EXHAUST - STANDARD STATIC		
Downflow	208/230V-1 or 3ph - Z1PWRE10A-1P	21E01 call
	460V-3ph - Z1PWRE10A-1G	23E01 call
Horizontal	208/230V-1 or 3ph - Z1PWRE15A-1P	24E01 call
	460V-3ph - Z1PWRE10A-1G	28E01 call
<i>NOTE - Order 575V Transformer Kit with 208/230V Power Exhaust Fan for 575V applications.</i>		
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Motorized	Z1DAMP21A-1	95W74 call
Manual	Z1DAMP11A-1	95W73 call
CABINET ACCESSORIES		
Coil/Hail Guards	[ZCA/ZCB036] [ZCA/ZCB048] [ZCA060] Z1GARD52A-1	12X19 call
	[ZCA072] [ZCB060] Z1GARD52AT-1	12X20 call
CEILING DIFFUSERS		
Step-Down - Order one	[024 thru 060] RTD9-65-R	27G87 call
	[072] RTD11-95	29G04 call
Flush - Order one	[024 thru 060] FD9-65-R	27G86 call
	[072] FD11-95	29G08 call



Description	Order No.	Price
<b>RAIDER® - 3 - 5 TON ACCESSORIES (Field Installed)</b>		
<b>CONTROLS</b>		
SMOKE DETECTORS are not available and must be field provided by installer.		
THERMOSTATS - See Controls Tab Section		
<b>COOLING ACCESSORIES</b>		
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b> call
	Copper - C1TRAP10AD2	<b>76W27</b> call
Drain Pan Overflow Switch	Z1SNSR90A1	<b>99W59</b> call
Low Ambient Kit	[ZCA/ZGA] Z1SNSR33A-1	<b>99W67</b> call
	[ZHA] Z1SNSR34A-1	<b>99W68</b> call
<b>GAS HEAT (ZG MODELS)</b>		
LPG/Propane Conversion Kits	One-stage models - Z1PROP10A-1	<b>10B61</b> call
	Two-stage models - Z1PROP20A-1	<b>10B65</b> call
Vertical Vent Extension	C1EXTN20FF1	<b>31W62</b> call
<b>INDOOR AIR QUALITY</b>		
<b>CO2 Sensors</b>		
Sensor - white case CO2 display	C0SNSR50AE1L	<b>77N39</b> call
Sensor - duct mount, black case, no display	C0SNSR53AE1L	<b>87N54</b> call
CO2 Sensor Duct Mounting Kit	C0MISC19AE1-	<b>85L43</b> call
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (77N39)	C0MISC16AE1-	<b>90N43</b> call
<b>ELECTRIC HEAT (ZC AND ZH MODELS)</b>		
<b>NOTE - Unit Fuse Block is Required and Must Be Ordered Separately</b>		
5 kW	[036 thru 060] 208/230V-1ph - Z1EH0050AN1P	<b>98W96</b> call
	[036 thru 060] 208/230V-3ph - Z1EH0050AN1Y	<b>99W01</b> call
	[036 thru 060] 460V-3ph - Z1EH0050AN1G	<b>99W06</b> call
7.5 kW	[036 thru 060] 208/230V-1ph - Z1EH0075AN1P	<b>98W97</b> call
	[036 thru 072] 208/230V-3ph - Z1EH0075AN1Y	<b>99W02</b> call
	[036 thru 072] 460V-3ph - Z1EH0075AN1G	<b>99W07</b> call
10 kW	[036 thru 060] 208/230V-1ph - Z1EH0100AN1P	<b>98W98</b> call
	[036 thru 072] 208/230V-3ph - Z1EH0100AN1Y	<b>99W03</b> call
	[036 thru 072] 460V-3ph - Z1EH0100AN1G	<b>99W08</b> call
15 kW	[036 thru 060] 208/230V-1ph - Z1EH0150AN1P	<b>98W99</b> call
	[036 thru 072] 208/230V-3ph - Z1EH0150AN1Y	<b>99W04</b> call
	[036 thru 072] 460V-3ph - Z1EH0150AN1G	<b>99W09</b> call
22.5 kW	[048 thru 060] 208/230V-1ph - Z1EH0225AN1P	<b>99W00</b> call
	[048 thru 072] 208/230V-3ph - Z1EH0225AN1Y	<b>99W05</b> call
	[048 thru 072] 460V-3ph - Z1EH0225AN1G	<b>99W10</b> call
30 kW	[072] 208/230V-3ph - Z1EH0300AN1Y	<b>13U01</b> call
	[072] 460V-3ph - Z1EH0300AN1G	<b>13U02</b> call





Description	Order No.	Price
<b>RAIDER® - 3 - 5 TON ACCESSORIES (Field Installed)</b>		
ELECTRICAL		
Bottom Power Entry Kit	Z1PEKT01A-1	<b>98W08</b> call
Unit Fuse Block	[All] 208/230V - 1 Ph - 45/50/60 Amp	<b>10A26</b> call
(Required with Electric Heat)	[ZCA/ZCB036-048] [ZHA/ZHB036-048] 208/230V - 3 Ph - 25/30 Amp	<b>10A27</b> call
	[ZCA/ZHB060] [ZHA/ZHB060] 208/230V - 3 Ph - 35/40 Amp	<b>10A28</b> call
	[All] 460V/575V - 3 Ph - 15/20 Amp	<b>10A29</b> call
<b>RAIDER® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	Z1CURB40B-1	<b>10Z25</b> call
14 in. height	Z1CURB41B-1	<b>10Z26</b> call
18 in. height	Z1CURB42B-1	<b>10Z27</b> call
24 in. height	Z1CURB43B-1	<b>10Z28</b> call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood and Barometric Relief Dampers with Exhaust Hood</b>		
Standard Economizer (Single Temp. Control) Downflow	Z1ECON30B-1	<b>10Z29</b> call
Standard Economizer (Single Temp. Control) Horizontal	Z1ECON16B-1	<b>11G98</b> call
<b>STANDARD ECONOMIZER CONTROLS</b>		
Single Enthalpy Control	C1SNSR64FF1	<b>53W64</b> call
Differential Enthalpy Control	Order 2 - C1SNSR64FF1	<b>53W64</b> call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARDS)</b>		
<b>With Outdoor Air Hood and Barometric Relief Dampers with Exhaust Hood</b>		
High Performance Economizer (Single Temp. Control) Downflow	Z1ECON32B-1	<b>12B44</b> call
High Performance Economizer (Single Temp. Control) Horizontal	Z1ECON33B-1	<b>12B46</b> call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR61FF1	<b>11G21</b> call
Differential Enthalpy Control	Order 2 - C1SNSR61FF1	<b>11G21</b> call
<b>HORIZONTAL LOW PROFILE BAROMETRIC RELIEF DAMPERS WITH EXHAUST HOOD</b>		
Horizontal Low Profile Barometric Relief Dampers	LAGEDH03/15	<b>53K04</b> call
POWER EXHAUST - STANDARD STATIC		
Downflow	208/230V-3ph - Z1PWRE10B-1Y	<b>10Z70</b> call
	460V-3ph - Z1PWRE10B-1G	<b>10Z71</b> call
Horizontal	208/230V-3ph - Z1PWRE15A-1P	<b>24E01</b> call
	460V-3ph - Z1PWRE15A-1G	<b>28E01</b> call
<i>NOTE - Order 575V Transformer Kit with 208/230V Power Exhaust Fan for 575V applications.</i>		
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Motorized	Z1DAMP20B-2	<b>14G36</b> call
Manual	Z1DAMP10B-2	<b>14G37</b> call
CABINET ACCESSORIES		
Coil/Hail Guards	Z1GARD52B-1	<b>12X21</b> call





Description		Order No.	Price
<b>RAIDER® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	[092] RTD11-95	<b>29G04</b>	<b>call</b>
	[102 thru 120] RTD11-135	<b>29G05</b>	<b>call</b>
	[150] RTD11-185	<b>29G06</b>	<b>call</b>
Flush - Order one	[092] FD11-95	<b>29G08</b>	<b>call</b>
	[102 thru 120] FD11-135	<b>29G09</b>	<b>call</b>
	[150] FD11-185	<b>29G10</b>	<b>call</b>
<b>CONTROLS</b>			
BACnet®	K0CTRL31A-1	<b>96W15</b>	<b>call</b>
BACnet® Thermostat with Display	K0SNSR01FF1	<b>97W23</b>	<b>call</b>
BACnet Thermostat without Display	K0SNSR00FF1	<b>97W24</b>	<b>call</b>
Novar® 2051	K0CTRL30A-1	<b>96W12</b>	<b>call</b>
Plenum Cable (75 ft.)	K0MISC00FF1	<b>97W25</b>	<b>call</b>
SMOKE DETECTORS are not available and must be field provided by installer.			
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	Z1SNSR90A1	<b>99W59</b>	<b>call</b>
Low Ambient Kit (Includes Compressor Crankcase Heater)	[ZCA/ZGA092] 208/230V-3ph - Z1LOAM02B-1Y	<b>10Z35</b>	<b>call</b>
	[ZCA/ZGA092] 460v-3ph - Z1LOAM02B-1G	<b>10Z36</b>	<b>call</b>
	[ZCA/ZGA102 thru 150] 208/230V-3ph - Z1LOAM12B-1Y	<b>10Z50</b>	<b>call</b>
	[ZCA/ZGA102 thru 150] 460v-3ph - Z1LOAM12B-1G	<b>10Z51</b>	<b>call</b>
Low Ambient Kit (ZH only)	[ZHA092 thru 120] - Z1SNSR33B-1	<b>10Z34</b>	<b>call</b>
<b>GAS HEAT (ZG MODELS)</b>			
Combustion Air Intake Extensions	T1EXTN10AN1	<b>19W51</b>	<b>call</b>
LPG/Propane Conversion Kits	[Standard heat] C1PROP23BS1	<b>14N22</b>	<b>call</b>
	[Medium heat] Z1PROP24RS1	<b>14N27</b>	<b>call</b>
	[High heat] C1PROP21BS1	<b>14N25</b>	<b>call</b>
Vertical Vent Extension	C1EXTN20FF1	<b>31W62</b>	<b>call</b>
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters 20 x 24 x 2 (Order 4 per unit)	MERV 8 - Z1FLTR15B-1	<b>14C35</b>	<b>call</b>
	MERV 13 - Z1FLTR40B-1	<b>14C36</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30B-1-	<b>Y3063</b>	<b>call</b>
<b>CO2 Sensors</b>			
Sensor - white case CO2 display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - duct mount, black case, no display	C0SNSR53AE1L	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>



Description		Order No.	Price
<b>RAIDER® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
ELECTRIC HEAT (ZC MODELS)			
<b>NOTE - Unit Fuse Block is Required and Must Be Ordered Separately</b>			
7.5 kW	[ZCA092 thru 102] 208/230V-3ph - Z1EH0075B-1Y	<b>10Y97</b>	<b>call</b>
	[ZCA092 thru 102] 460V-3ph - Z1EH0075B-1G	<b>10Y98</b>	<b>call</b>
15 kW	[ZCA092 thru 150] 208/230V-3ph - Z1EH0150B-1Y	<b>10Z01</b>	<b>call</b>
	[ZCA092 thru 150] 460V-3ph - Z1EH0150B-1G	<b>10Z03</b>	<b>call</b>
22.5 kW	[ZCA092 thru 150] 208/230V-3ph - Z1EH0225B-1Y	<b>10Z05</b>	<b>call</b>
	[ZCA092 thru 150] 460V-3ph - Z1EH0225B-1G	<b>10Z06</b>	<b>call</b>
30 kW	[ZCA092 thru 150] 208/230V-3ph - Z1EH0300B-1Y	<b>10Z08</b>	<b>call</b>
	[ZCA092 thru 150] 460V-3ph - Z1EH0300B-1G	<b>10Z09</b>	<b>call</b>
45 kW	[ZCA092 thru 150] 208/230V-3ph - Z1EH0450B-1Y	<b>10Z11</b>	<b>call</b>
	[ZCA092 thru 150] 460V-3ph - Z1EH0450B-1G	<b>10Z12</b>	<b>call</b>
60 kW	[ZCA120 thru 150] 208/230V-3ph - Z1EH0600B-1Y	<b>10Z14</b>	<b>call</b>
	[ZCA120 thru 150] 460V-3ph - Z1EH0600B-1G	<b>10Z15</b>	<b>call</b>
ELECTRICAL			
Bottom Power Entry Kit	Z1PEKT01B-1	<b>11H66</b>	<b>call</b>
*Unit Fuse Block	[ZC] 208/230V - 3 Ph - 50/60 Amp	<b>10Z41</b>	<b>call</b>
(Required with Electric Heat)	[ZC] 208/230V - 3 Ph - 70/80 Amp	<b>10Z42</b>	<b>call</b>
	[ZC] 460V/575V - 3 Ph - 15/20 Amp	<b>10Z38</b>	<b>call</b>
	[ZC] 460V/575V - 3 Ph - 20/30 Amp	<b>10Z39</b>	<b>call</b>
	[ZC] 460V/575V - 3 Ph - 35/40 Amp	<b>10Z40</b>	<b>call</b>
	[ZH] 208/230V - 3 Ph - 50/60 Amp	<b>11M12</b>	<b>call</b>
	[ZH] 208/230V - 3 Ph - 70/80 Amp	<b>11M13</b>	<b>call</b>
	[ZH] 460V/575V - 3 Ph - 20/30 Amp	<b>11M10</b>	<b>call</b>
	[ZH] 460V/575V - 3 Ph - 35/40 Amp	<b>11M11</b>	<b>call</b>

\* See Product Specifications for Fuse Block usage.



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSA <sup>®</sup>	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
-----------	---------	----------------	------	------	-----	------	-----------------	------------------------	------------------	-----------------------------------	----------------------------	----------------	-----------	-------	-------

**PACKAGED GAS - 2 - 7.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KGB024S4DW P	2 ton	208/230v-1ph	65 Single	14.0	12.7	---	0.25	direct			40x47x86.25	531	AC294	call	---
KGB024S4DW P	2 ton	208/230v-1ph	65 Single	14.0	12.7	---	0.25	direct		Y	40x47x86.25	531	AC295	call	---
KGB030S4DW P	2.5 ton	208/230v-1ph	65 Single	14.0	11.5	---	0.25	direct			40x46x86.25	533	AC296	call	---
KGB036S4DW P	3 ton	208/230v-1ph	65 Single	14.0	12.5	---	0.5	direct			40x47x86.25	534	AC298	call	---
KGB036S4DY P	3 ton	208/230v-1ph	108 Single	14.0	12.5	---	0.5	direct			40x47x86.25	534	AC297	call	---
KGB036S4BS Y	3 ton	208/230v-1ph	65 Single	14.0	12.5	---	1	A01			40x47x86.25	534	AG907	call	0
KGB036S4BS G	3 ton	460v-1ph	65 Single	14.0	12.5	---	1	A01			40x47x86.25	534	AG909	call	0
KGB048S4DW P	4 ton	208/230v-1ph	65 Single	14.0	11.5	---	0.5	direct			40x47x86.25	571	AC300	call	---
KGB048S4DX P	4 ton	208/230v-1ph	150 Dual	14.0	11.5	---	0.5	direct			40x47x86.25	571	AC299	call	---
KGB048S4BM Y	4 ton	208/230v-3ph	108 Single	14.0	11.5	---	1	A02			40x47x86.25	571	AC316	call	0
KGB048S4BM G	4 ton	460v-1ph	108 Single	14.0	11.5	---	1	A02			40x47x86.25	571	AG910	call	0
KGA048S4DM Y	4 ton	208/230v-3ph	108 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	AC380	call	---
KGA048S4BM Y	4 ton	208/230v-3ph	108 Single	13.0	11.0	---	1	A02			40x47x86.25	571	AC379	call	---
KGB060S4DY P	5 ton	208/230v-1ph	108 Single	14.0	11.8	---	0.75	direct			40x47x86.25	601	AC306	call	---
KGB060S4DX P	5 ton	208/230v-1ph	150 Dual	14.0	11.8	---	0.75	direct			40x47x86.25	601	AC304	call	---
KGB060S4DX P	5 ton	208/230v-1ph	150 Dual	14.0	11.8	---	0.75	direct		Y	40x47x86.25	601	AC305	call	---
KGB060S4BW P	5 ton	208/230v-1ph	65 Single	14.0	11.8	---	1.5	A03			40x47x86.25	601	AC302	call	---
KGB060S4BW P	5 ton	208/230v-1ph	65 Single	14.0	11.8	---	1.5	A07			40x47x86.25	601	AC301	call	---
KGB060S4BM Y	5 ton	208/230v-3ph	108 Single	14.0	11.8	---	1	A03			40x47x86.25	601	AC317	call	0
KGB060S4BM G	5 ton	460v-3ph	108 Single	14.0	11.8	---	1	A03			40x47x86.25	601	L3317	call	0
KGB060S4BZ P	5 ton	208/230v-1ph	150 Single	14.0	11.8	---	1.5	A03			40x47x86.25	601	AC303	call	---
KGA072S4BM Y	6 ton	208/230v-3ph	108 Single	---	11.0	11.2	2	A04			48x47x86.25	700	AC320	call	---
*KGA090S4BM Y	7.5 ton	208/230v-3ph	108 Single	---	11.0	11.2	2	AA03		Y	48x47x98.25	805	L3266	call	---
*KGA090S4BH Y	7.5 ton	208/230v-3ph	150 Dual	---	11.0	11.2	2	AA03			48x47x98.25	805	V9867	call	---
*KGA090S4BH Y	7.5 ton	208/230v-3ph	150 Dual	---	11.0	11.2	2	AA03		Y	48x47x98.25	805	V9868	call	---
*KGA090S4BM G	7.5 ton	460v-3ph	108 Single	---	11.0	11.2	2	AA03			48x47x98.25	805	L3267	call	---
*KGA090S4BM G	7.5 ton	460v-3ph	108 Single	---	11.0	11.2	2	AA03		Y	48x47x98.25	805	L3268	call	---
*KGA090S4BH G	7.5 ton	460v-3ph	150 Dual	---	11.0	11.2	2	AA03			48x47x98.25	805	V9865	call	---
*KGA090S4BH G	7.5 ton	460v-3ph	150 Dual	---	11.0	11.2	2	AA03		Y	48x47x98.25	805	V9866	call	---

**PACKAGED GAS - 2 - 7.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

KGA024S4DS P	2 ton	208/230v-1ph	65 Single	13.0	11.4	---	0.25	direct			40x47x86.25	531	L0881	call	---
KGA024S4DS P	2 ton	208/230v-1ph	65 Single	13.0	11.4	---	0.25	direct		Y	40x47x86.25	531	L0882	call	---
KGA030S4DS P	2.5 ton	208/230v-1ph	65 Single	13.0	11.2	---	0.25	direct			40x46x86.25	533	L0883	call	---
KGA036S4DS P	3 ton	208/230v-1ph	65 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0892	call	---
KGA036S4DM P	3 ton	208/230v-1ph	105 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0890	call	---
KGA036S4DS Y	3 ton	208/230v-3ph	65 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0893	call	---
KGA036S4DM Y	3 ton	208/230v-3ph	108 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0891	call	---
KGA036S4DS G	3 ton	460v-3ph	65 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	K6083	call	0
KGA036S4DM G	3 ton	460v-3ph	108 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	L0888	call	---
KGA036S4DM G	3 ton	460v-3ph	108 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	AC377	call	---
KGA036S4DM Y	3 ton	208/230v-3ph	108 Single	13.0	10.7	---	0.5	direct			40x47x86.25	534	AC376	call	---
KGA036S4BM Y	3 ton	208/230v-3ph	108 Single	13.0	10.7	---	1	A01			40x47x86.25	534	AC374	call	---
KGA036S4BS Y	3 ton	208/230v-3ph	65 Single	13.0	10.7	---	1	A01			40x47x86.25	534	L0887	call	---
KGA036S4BS G	3 ton	460v-3ph	65 Single	13.0	10.7	---	1	A01			40x47x86.25	534	L0886	call	---
KGA036S4BM Y	3 ton	208/230v-3ph	105 Single	13.0	10.7	---	1	A01			40x47x86.25	534	L0885	call	---
KGA048S4DS P	4 ton	208/230v-1ph	65 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0905	call	---
KGA048S4DH P	4 ton	208/230v-1ph	150 Dual	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0901	call	---
KGA048S4DS Y	4 ton	208/230v-3ph	65 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0906	call	---
KGA048S4DM Y	4 ton	208/230v-3ph	108 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0903	call	---
KGA048S4DH Y	4 ton	208/230v-3ph	150 Dual	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0902	call	---
KGA048S4DS G	4 ton	460v-3ph	65 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0904	call	---
KGA048S4DU G	4 ton	460v-3ph	108 Single	13.0	11.0	---	0.5	direct			40x47x86.25	571	AL073	call	0
KGA048S4DH G	4 ton	460v-3ph	150 Dual	13.0	11.0	---	0.5	direct			40x47x86.25	571	L0899	call	---
KGA048S4BS Y	4 ton	208/230v-3ph	65 Single	13.0	11.0	---	1	A02			40x47x86.25	571	L0898	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
KGA048S4BS Y	4 ton	208/230v-3ph	65 Single	13.0	11.0	---	1	A03		Y-T24	40x47x86.25	571	AH575	call	0
KGA048S4BH Y	4 ton	208/230v-3ph	150 Dual	13.0	11.0	---	1	A02			40x47x86.25	571	L0895	call	---
KGA048S4BS G	4 ton	460v-3ph	65 Single	13.0	11.0	---	1	A02			40x47x86.25	571	L0897	call	---
KGA060S4DM Y	5 ton	208/230v-3ph	108 Single	13.0	11.2	---	0.75	direct			40x47x86.25	601	AC383	call	---
KGA060S4BM Y	5 ton	208/230v-3ph	108 Single	13.0	11.2	---	1	A03			40x47x86.25	601	AC381	call	---
KGA060S4BM Y	5 ton	208/230v-3ph	108 Single	13.0	11.2	---	2	A07			40x47x86.25	601	AC382	call	---
KGA060S4BS G	5 ton	460v-3ph	65 Single	13.0	11.2	---	1	A03		Y-T24	40x47x86.25	571	AH576	call	0
KGA060S4DU G	5 ton	460v-3ph	108 Single	13.0	11.2	---	0.75	direct			40x47x86.25	571	AL074	call	0
KGA072S4BH Y	6 ton	208/230v-3ph	150 Dual	---	11.0	11.2	2	A04			48x47x86.25	700	AD584	call	---
KGA072S4BM G	6 ton	460v-3ph	108 Single	---	11.0	11.2	1	A04		Y	48x47x86.25	700	AG911	call	0
KGA072S4BH G	6 ton	460v-3ph	150 Dual	---	11.0	11.2	2	A04			48x47x86.25	700	AD585	call	---

**PACKAGED GAS - 2 - 7.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

KGA060S4DM P	5 ton	208/230v-1ph	105 Single	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0920	call	---
KGA060S4DH P	5 ton	208/230v-1ph	150 Dual	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0917	call	---
KGA060S4DH P	5 ton	208/230v-1ph	150 Dual	13.0	11.0	---	0.75	direct		Y	40x47x86.25	601	L0918	call	---
KGA060S4DS Y	5 ton	208/230v-3ph	65 Single	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0923	call	---
KGA060S4DM Y	5 ton	208/230v-3ph	105 Single	13.0	11.0	---	0.75	direct			40x47x86.25	601	L1100	call	---
KGA060S4DH Y	5 ton	208/230v-3ph	150 Dual	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0919	call	---
KGA060S4DS G	5 ton	460v-3ph	65 Single	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0922	call	---
KGA060S4DH G	5 ton	460v-3ph	150 Dual	13.0	11.0	---	0.75	direct			40x47x86.25	601	L0915	call	---
KGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	11.2	---	1	A03		Y	40x47x86.25	601	AH575	call	0
KGA060S4BS G	5 ton	460v-3ph	65 Single	13.0	11.2	---	1	A03			40x47x86.25	601	L0911	call	---
KGA060S4BS Y	5 ton	460v-3ph	65 Single	13.0	11.2	---	1	A03		Y	40x47x86.25	601	AH576	call	0
KGA060S4BH Y	5 ton	208/230v-3ph	150 Dual	13.0	11.2	---	1	A03			40x47x86.25	601	L0909	call	---
KGA060S4BS P	5 ton	208/230v-1ph	65 Single	13.0	11.2	---	1.5	A03			40x47x86.25	601	L0913	call	---
KGA060S4BH P	5 ton	208/230v-1ph	150 Single	13.0	11.2	---	1.5	A03			40x47x86.25	601	L0908	call	---
KGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	11.2	---	1.5	A03			40x47x86.25	601	L0914	call	---
KGA060S4BS Y	5 ton	208/230v-3ph	65 Single	13.0	11.2	---	2	A03			40x47x86.25	601	L0998	call	---
KGA060S4BH Y	5 ton	208/230v-3ph	150 Dual	13.0	11.2	---	2	A03			40x47x86.25	601	J9648	call	---
KGA060S4BH G	5 ton	460v-3ph	150 Dual	13.0	11.0	---	2	A03			40x47x86.25	601	L0999	call	---
*KGA090S4BH Y	7.5 ton	208/230v-3ph	150 Dual	---	11.0	11.2	2	AA03		Y	48x47x98.25	805	L0931	call	---

**PACKAGED ELECTRIC/ELECTRIC - 2 - 7.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KCB024S4DN P	2 ton	208/230v-1ph	Opt. Elec. Heat	14.0	12.7	---	0.25	direct			40x47x86.25	495	AC289	call	---
KCB030S4DN P	2.5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.5	---	0.25	direct			40x47x86.25	497	AC290	call	---
KCB036S4DN P	3 ton	208/230v-1ph	Opt. Elec. Heat	14.0	12.5	---	0.5	direct			40x47x86.25	498	AC291	call	---
KCB048S4DN P	4 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.5	---	0.5	direct			40x47x86.25	535	AC292	call	---
KCB060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.8	---	1.5	A03			40x47x86.25	565	AC372	call	---
KCB060S4DN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.8	---	0.75	direct			40x47x86.25	565	AC293	call	---
KCA072S4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	11.4	2	A04			48x47x86.25	664	AD575	call	---
KCA072S4BN G	6 ton	460v-3ph	Opt. Elec. Heat	---	11.2	11.4	2	A04			48x47x86.25	664	AD583	call	---
*KCA090S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	11.4	2	AA03			48x47x98.25	767	V9864	call	---
*KCA090S4BN G	7.5 ton	460v-3ph	Opt. Elec. Heat	---	11.2	11.4	2	AA03			48x47x98.25	767	V9863	call	---

Note: KGA/KCA090 is a single-compressor model

**FIN/TUBE COIL**

KCA024S4DN P	2 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.4	---	0.25	direct			40x47x86.25	495	L0861	call	---
KCA030S4DN P	2.5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.2	---	0.25	direct			40x47x86.25	497	V0020	call	---
KCA036S4DN P	3 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.7	---	0.5	direct			40x47x86.25	498	L0864	call	---
KCA036S4DN G	3 ton	460v-3ph	Opt. Elec. Heat	13.0	10.7	---	0.5	direct			40x47x86.25	498	L0863	call	---
KCA048S4DN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.0	---	0.5	direct			40x47x86.25	535	L0870	call	---
KCA048S4DN G	4 ton	460v-3ph	Opt. Elec. Heat	13.0	11.0	---	0.5	direct			40x47x86.25	535	L0867	call	---
KCA048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.0	---	1	A02			40x47x86.25	535	L0866	call	---
KCA060S4DN P	5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.0	---	0.75	direct			40x47x86.25	565	L0875	call	---
KCA060S4DN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.0	---	0.75	direct			40x47x86.25	565	L0876	call	---
KCA060S4DN G	5 ton	460v-3ph	Opt. Elec. Heat	13.0	11.0	---	0.75	direct			40x47x86.25	565	L0874	call	---
KCA060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.2	---	1.5	A03			40x47x86.25	565	L0872	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
KCA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.2	---	1.5	A03			40x47x86.25	565	L0873	call	---
KCA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	11.2	---	2	A07			40x47x86.25	565	L0994	call	---

**PACKAGED HEAT PUMP - 2 - 6 TON - STANDARD EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

KHA024S4DN P	2 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.2	---	0.25	direct			40x47x86.25	531	L0935	call	---
KHA030S4DN P	2.5 ton	208/230v-1ph	Opt. Elec. Heat	13.0	11.3	---	0.25	direct			40x46x86.25	533	L0936	call	---
KHA036S4DN P	3 ton	208/230v-1ph	Opt. Elec. Heat	13.0	10.9	---	0.5	direct			40x47x86.25	535	L0939	call	---
KHA036S4DN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	0.5	direct			40x47x86.25	535	L0940	call	---
KHA036S4BN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A01			40x47x86.25	535	L0938	call	---
KHA036S4BN G	3 ton	460v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A01			40x47x86.25	535	L0937	call	---
KHA048S4DN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.7	---	0.5	direct			40x47x86.25	557	L0944	call	---
KHA048S4BN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.7	---	1	A02			40x47x86.25	557	L0942	call	---
KHA048S4BN G	4 ton	460v-3ph	Opt. Elec. Heat	13.0	10.7	---	1	A02			40x47x86.25	557	L0941	call	---
KHA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A03			40x47x86.25	667	AA977	call	---
KHA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A03			48x47x86.25	667	AA977	call	---
KHA060S4BN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A03		Y-T24	40x47x86.25	667	L2367	call	---
KHA060S4BN G	5 ton	460v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A03			48x47x86.25	667	AA978	call	---
KHA060S4BN G	5 ton	460v-3ph	Opt. Elec. Heat	13.0	10.9	---	1	A03		Y-T24	48x47x86.25	667	L2368	call	---
KHA072S4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	1.5	A04			48x47x98.25	750	AA984	call	---
KHA072S4BN G	6 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.2	1.5	A04			48x47x98.25	750	AA979	call	---
KHB024S4DN P	2 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.7	---	0.25	direct			40x47x86.25	531	AC307	call	---
KHB030S4DN P	2.5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.9	---	0.25	direct			40x46x86.25	533	AC308	call	---
KHB036S4DN P	3 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.5	---	0.5	direct			40x47x86.25	535	AC309	call	---
KHB048S4DN P	4 ton	208/230v-1ph	Opt. Elec. Heat	14.0	11.4	---	0.5	direct			40x47x86.25	557	AC310	call	---
KHB060S4BN P	5 ton	208/230v-1ph	Opt. Elec. Heat	14.0	10.9	---	1.5	A03			48x47x86.25	667	L3282	call	---

**PACKAGED GAS - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

*KGA092H4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	12.5	13.0	2	1			48x60.5x101.5	990	V9819	call	---
*KGA092H4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	12.5	13.0	2	1		Y	48x60.5x101.5	990	V9820	call	---
*KGA092H4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	12.5	13.0	2	1			48x60.5x101.5	990	V9814	call	---
*KGA092H4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	12.5	13.0	2	1		Y	48x60.5x101.5	990	V9815	call	---
*KGA092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	2	1			48x60.5x101.5	990	V9808	call	---
*KGA092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	2	1		Y	48x60.5x101.5	990	V9809	call	---
*KGA092H4BS G	7.5 ton	460v-3ph	130 Dual	---	12.5	13.0	2	1			48x60.5x101.5	990	V9816	call	---
*KGA092H4BS G	7.5 ton	460v-3ph	130 Dual	---	12.5	13.0	2	1		Y	48x60.5x101.5	990	V9817	call	---
*KGA092H4BM G	7.5 ton	460v-3ph	180 Dual	---	12.5	13.0	2	1			48x60.5x101.5	990	V9811	call	---
*KGA092H4BM G	7.5 ton	460v-3ph	180 Dual	---	12.5	13.0	2	1		Y	48x60.5x101.5	990	V9810	call	---
KGA102H4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	12.2	12.9	2	1			48x60.5x101.5	1010	V9826	call	---
KGA102H4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	12.2	12.9	2	1		Y	48x60.5x101.5	1010	V9827	call	---
KGA102H4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	12.2	12.9	2	1			48x60.5x101.5	1010	V9824	call	---
KGA102H4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	12.2	12.9	2	1		Y	48x60.5x101.5	1010	V9823	call	---
KGA102H4BS G	8.5 ton	460v-3ph	130 Dual	---	12.2	12.9	2	1			48x60.5x101.5	1010	V9825	call	---
KGA102H4BM G	8.5 ton	460v-3ph	180 Dual	---	12.2	12.9	2	1		Y	48x60.5x101.5	1010	V9821	call	---
KGA120H4BM Y	10 ton	208/230v-3ph	180 Dual	---	12.0	13.0	3	5			48x60.5x101.5	1050	V9838	call	---
KGA120H4BM Y	10 ton	208/230v-3ph	180 Dual	---	12.0	13.0	3	5		Y	48x60.5x101.5	1050	V9839	call	---
KGA120H4MM Y	10 ton	208/230v-3ph	180 Dual	---	12.0	13.0	3	5	Y	Y	48x60.5x101.5	1050	V9840	call	---
KGA120H4BH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3	5			48x60.5x101.5	1050	V9832	call	---
KGA120H4BH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3	5		Y	48x60.5x101.5	1050	V9833	call	---
KGA120H4BM G	10 ton	460v-3ph	180 Dual	---	12.0	13.0	3	5			48x60.5x101.5	1050	V9834	call	---
KGA120H4BM G	10 ton	460v-3ph	180 Dual	---	12.0	13.0	3	5		Y	48x60.5x101.5	1050	V9835	call	---
KGA120H4MM G	10 ton	460v-3ph	180 Dual	---	12.0	13.0	3	5	Y	Y	48x60.5x101.5	1050	V9836	call	---
KGA120H4BH G	10 ton	460v-3ph	240 Dual	---	12.0	13.0	3	5			48x60.5x101.5	1050	V9829	call	---
KGA120H4BH G	10 ton	460v-3ph	240 Dual	---	12.0	13.0	3	5		Y	48x60.5x101.5	1050	V9828	call	---

**PACKAGED ELECTRIC/ELECTRIC - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

*KCA092H4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	12.7	13.0	2	1			48x60.5x101.5	1052	V9800	call	---
*KCA092H4BN G	7.5 ton	460v-3ph	Opt. Elec. Heat	---	12.7	13.0	2	1			48x60.5x101.5	1052	V9798	call	---





**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
KCA102H4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	12.4	12.9	2	1			48x60.5x101.5	1059	V9803	call	---
KCA102H4BN G	8.5 ton	460v-3ph	Opt. Elec. Heat	---	12.4	12.9	2	1			48x60.5x101.5	1059	V9801	call	---
KCA120H4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	12.3	13.2	3	5			48x60.5x101.5	1094	V9806	call	---
KCA120H4BN G	10 ton	460v-3ph	Opt. Elec. Heat	---	12.3	13.2	3	5			48x60.5x101.5	1094	V9804	call	---

\*Note: KGA/KCA092 is two-compressor model

**PACKAGED GAS - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

*KGA092S4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1			48x60.5x101.5	918	V9166	call	---
*KGA092S4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1		Y	48x60.5x101.5	918	V9167	call	---
*KGA092S4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1		Y-T24	48x60.5x101.5	918	L2372	call	---
*KGA092S4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1			48x60.5x101.5	918	V9161	call	---
*KGA092S4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1		Y	48x60.5x101.5	918	V9162	call	---
*KGA092S4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	11.0	11.8	2	1			48x60.5x101.5	918	V9155	call	---
*KGA092S4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	11.0	11.8	2	1		Y	48x60.5x101.5	918	V9156	call	---
*KGA092S4BS G	7.5 ton	460v-3ph	130 Dual	---	11.0	11.8	2	1			48x60.5x101.5	918	V9163	call	---
*KGA092S4BS G	7.5 ton	460v-3ph	130 Dual	---	11.0	11.8	2	1		Y	48x60.5x101.5	918	V9164	call	---
*KGA092S4BM G	7.5 ton	460v-3ph	180 Dual	---	11.0	11.8	2	1			48x60.5x101.5	918	V9158	call	---
*KGA092S4BM G	7.5 ton	460v-3ph	180 Dual	---	11.0	11.8	2	1		Y	48x60.5x101.5	918	V9157	call	---
KGA102S4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1			48x60.5x101.5	938	V9173	call	---
KGA102S4BS Y	8.5 ton	208/230v-3ph	130 Dual	---	11.0	11.8	2	1		Y	48x60.5x101.5	938	V9174	call	---
KGA102S4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1			48x60.5x101.5	938	V9171	call	---
KGA102S4BM Y	8.5 ton	208/230v-3ph	180 Dual	---	11.0	11.8	2	1		Y	48x60.5x101.5	938	V9170	call	---
KGA102S4BS G	8.5 ton	460v-3ph	130 Dual	---	11.0	11.8	2	1			48x60.5x101.5	938	V9172	call	---
KGA102S4BM G	8.5 ton	460v-3ph	180 Dual	---	11.0	11.8	2	1		Y	48x60.5x101.5	938	V9168	call	---
KGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5			48x60.5x101.5	986	V9185	call	---
KGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5		Y	48x60.5x101.5	986	V9186	call	---
KGA120S4BM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5		Y-T24	48x60.5x101.5	986	L2371	call	---
KGA120S4MM Y	10 ton	208/230v-3ph	180 Dual	---	11.0	11.8	3	5	Y	Y	48x60.5x101.5	1050	V9187	call	---
KGA120S4BH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5			48x60.5x101.5	986	V9179	call	---
KGA120S4BH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5		Y	48x60.5x101.5	986	V9180	call	---
KGA120S4MH Y	10 ton	208/230v-3ph	240 Dual	---	11.0	11.8	3	5	Y	Y	48x60.5x101.5	986	M9635	call	---
KGA120S4BM G	10 ton	460v-3ph	180 Dual	---	11.0	11.8	3	5			48x60.5x101.5	986	V9181	call	---
KGA120S4BM G	10 ton	460v-3ph	180 Dual	---	11.0	11.8	3	5		Y	48x60.5x101.5	986	V9182	call	---
KGA120S4MM G	10 ton	460v-3ph	180 Dual	---	11.0	11.8	3	5	Y	Y	48x60.5x101.5	1050	V9183	call	---
KGA120S4BH G	10 ton	460v-3ph	240 Dual	---	11.0	11.8	3	5			48x60.5x101.5	986	V9176	call	---
KGA120S4BH G	10 ton	460v-3ph	240 Dual	---	11.0	11.8	3	5		Y	48x60.5x101.5	986	V9175	call	---
KGA150S4BM Y	12.5 ton	208/230v-3ph	180 Dual	---	11.0	11.4	5	11			48x60.5x101.5	1140	V9198	call	---
KGA150S4BM Y	12.5 ton	208/230v-3ph	180 Dual	---	11.0	11.4	5	11		Y	48x60.5x101.5	1140	V9199	call	---
KGA150S4MM Y	12.5 ton	208/230v-3ph	180 Dual	---	11.0	11.4	5	11	Y	Y	48x60.5x101.5	1140	V9200	call	---
KGA150S4MH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5	11			48x60.5x101.5	1140	V9195	call	---
KGA150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5	11		Y	48x60.5x101.5	1140	V9194	call	---
KGA150S4MH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5	11	Y	Y	48x60.5x101.5	1140	M9637	call	---
KGA150S4BM G	12.5 ton	460v-3ph	180 Dual	---	11.0	11.4	5	11			48x60.5x101.5	1140	V9196	call	---
KGA150S4MM Y	12.5 ton	460v-3ph	180 Dual	---	11.0	11.4	5	11	Y	Y	48x60.5x101.5	1140	V9197	call	---
KGA150S4BH G	12.5 ton	460v-3ph	240 Dual	---	11.0	11.4	5	11			48x60.5x101.5	1140	V9192	call	---
KGA150S4BH G	12.5 ton	460v-3ph	240 Dual	---	11.0	11.4	5	11		Y	48x60.5x101.5	1140	V9191	call	---

\*Note: KGA/KCA092 is two-compressor model

**PACKAGED ELECTRIC/ELECTRIC - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

*KCA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			48x60.5x101.5	870	V9147	call	---
*KCA092S4BN G	7.5 ton	460v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			48x60.5x101.5	870	V9145	call	---
KCA102S4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			48x60.5x101.5	890	V9150	call	---
KCA102S4BN G	8.5 ton	460v-3ph	Opt. Elec. Heat	---	11.2	12.0	2	1			48x60.5x101.5	890	V9148	call	---
KCA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	12.0	3	5			48x60.5x101.5	938	V9153	call	---
KCA120S4BN G	10 ton	460v-3ph	Opt. Elec. Heat	---	11.2	12.0	3	5			48x60.5x101.5	938	V9151	call	---
KCA150S4BN Y	12.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	11.6	5	11			48x60.5x101.5	1092	V9190	call	---
KCA150S4BN G	12.5 ton	460v-3ph	Opt. Elec. Heat	---	11.2	11.6	5	11			48x60.5x101.5	1092	V9188	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
-----------	---------	----------------	------	------	-----	------	-----------------	------------------------	-------	-----------------------------------	----------------------------	----------------	-----------	-------	-------

**PACKAGED HEAT PUMP - 7.5 - 12.5 TON - STANDARD EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

KHA092S4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	2	1			48x60.5x101.5	1052	L0228	call	---
KHA092S4BN G	7.5 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.2	2	1			48x60.5x101.5	1052	L0229	call	---
KHA102S4BN Y	8.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	2	1			48x60.5x101.5	1084	L0240	call	---
KHA102S4BN G	8.5 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.2	2	1			48x60.5x101.5	1084	L0241	call	---
KHA102S4BN G	8.5 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	5		Y-T24	48x60.5x101.5	1084	L2370	call	---
KHA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	5			48x60.5x101.5	1150	L0257	call	---
KHA120S4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	5		Y-T24	48x60.5x101.5	1150	L2369	call	---
KHA120S4BN G	10 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	5			48x60.5x101.5	1150	L0256	call	---
KHA150S4BN Y	12.5 ton	208/230v-3ph	Opt. Elec. Heat	---	10.6	10.7	5	11			48x60.5x127	1350	L0269	call	---
KHA150S4BN G	12.5 ton	460v-3ph	Opt. Elec. Heat	---	10.6	10.7	5	11			48x60.5x127	1350	L0270	call	---

\*Note: KGA/KCA092 is two-compressor model

**PACKAGED GAS - 13 - 25 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KGA156H4BS Y	13 ton	208/230v-3ph	260 Dual	---	12.0	13.6	3	2			55x91x107	1935	Z4103	call	---
KGA156H4BS G	13 ton	460v-3ph	260 Dual	---	12.0	13.6	3	2		Y	55x91x107	1935	Z4104	call	---
KGA180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	3	2			55x91x133	2115	Z4109	call	---
KGA180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	3	2		Y	55x91x133	2115	Z4111	call	---
KGA180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	5	4		Y	55x91x133	2115	Z4110	call	---
KGA180H4MS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.7	5	4		Y	55x91x133	2115	Z4113	call	---
KGA180H4BM Y	15 ton	208/230v-3ph	360 Dual	---	12.0	13.5	5	4		Y	55x91x133	2115	Z4105	call	---
KGA180H4BS G	15 ton	460v-3ph	260 Dual	---	12.0	13.5	3	2			55x91x133	2115	Z4112	call	---
KGA180H4BS G	15 ton	460v-3ph	260 Dual	---	12.0	13.5	5	4		Y	55x91x133	2115	Z4108	call	---
KGA180H4MS G	15 ton	460v-3ph	260 Dual	---	12.0	13.7	5	4		Y	55x91x133	2115	Z4114	call	---
KGA180H4BM G	15 ton	460v-3ph	360 Dual	---	12.0	13.5	5	4		Y	55x91x133	2115	Z4106	call	---
KGA210H4BM Y	17.5 ton	208/230v-3ph	360 Dual	---	12.0	13.0	5	4		Y	55x91x133	2240	Z4118	call	---
KGA210H4BH Y	17.5 ton	208/230v-3ph	480 Dual	---	12.0	13.0	5	4		Y	55x91x133	2240	Z4115	call	---
KGA210H4BM G	17.5 ton	460v-3ph	360 Dual	---	12.0	13.0	5	4		Y	55x91x133	2240	Z4119	call	---
KGA210H4BH G	17.5 ton	460v-3ph	480 Dual	---	12.0	13.0	5	4		Y	55x91x133	2240	Z4116	call	---
KGA240H4BS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4126	call	---
KGA240H4BS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	13.0	7.5	6			55x91x133	2610	Z4125	call	---
KGA240H4MS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	14.0	7.5	6		Y	55x91x133	2610	Z4137	call	---
KGA240H4BM Y	20 ton	208/230v-3ph	360 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4123	call	---
KGA240H4BH Y	20 ton	208/230v-3ph	480 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4120	call	---
KGA240H4BS G	20 ton	460v-3ph	260 Dual	---	12.0	13.0	7.5	6			55x91x133	2610	Z4127	call	---
KGA240H4MS G	20 ton	460v-3ph	260 Dual	---	12.0	14.0	7.5	6		Y	55x91x133	2610	Z4128	call	---
KGA240H4BM G	20 ton	460v-3ph	360 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4124	call	---
KGA240H4BH G	20 ton	460v-3ph	480 Dual	---	12.0	13.0	7.5	6		Y	55x91x133	2610	Z4121	call	---
KGA300H4BS Y	25 ton	208/230v-3ph	260 Dual	---	10.5	10.9	10	10			55x91x133	2430	Z4134	call	---
KGA300H4BM Y	25 ton	208/230v-3ph	360 Dual	---	10.5	10.9	10	7		Y	55x91x133	2430	Z4132	call	---
KGA300H4BH Y	25 ton	208/230v-3ph	480 Dual	---	10.5	10.9	10	10		Y	55x91x133	2430	Z4129	call	---
KGA300H4BS G	25 ton	460v-3ph	260 Dual	---	10.5	10.9	10	10			55x91x133	2430	Z4135	call	---
KGA300H4BM G	25 ton	460v-3ph	360 Dual	---	10.5	10.9	10	7		Y	55x91x133	2430	Z4133	call	---
KGA300H4BH G	25 ton	460v-3ph	480 Dual	---	10.5	10.9	10	10		Y	55x91x133	2430	Z4130	call	---

**PACKAGED ELECTRIC/ELECTRIC - 13 - 25 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KCA156H4BN Y	13 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.6	3	2			55x91x107	1785	Z4091	call	---
KCA156H4BN G	13 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.6	3	2			55x91x107	1785	Z4092	call	---
KCA180H4BN Y	15 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.5	3	2			55x91x133	1965	Z4093	call	---
KCA180H4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.5	3	2			55x91x133	1965	Z4094	call	---
KCA210H4BN Y	17.5 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.0	5	4			55x91x133	2090	Z4097	call	---
KCA210H4BN G	17.5 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.0	5	4			55x91x133	2090	Z4096	call	---
KCA240H4BN Y	20 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.2	7.5	6			55x91x133	2175	Z4099	call	---
KCA240H4BN G	20 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.2	7.5	6			55x91x133	2175	Z4100	call	---
KCA300H4BN Y	25 ton	208/230v-3ph	Opt. Elec. Heat	---	10.5	10.9	10	10			55x91x133	2280	Z4101	call	---
KCA300H4BN G	25 ton	460v-3ph	Opt. Elec. Heat	---	10.5	10.9	10	10			55x91x133	2280	Z4102	call	---





**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
-----------	---------	----------------	------	------	-----	------	-----------------	------------------------	-------	-----------------------------------	----------------------------	----------------	-----------	-------	-------

**PACKAGED GAS - 15 - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KGA180S4BS Y	15 ton	208/230v-3ph	260 Dual	---	10.8	11.0	3	2			55x91x107	1790	Z3939	call	---
KGA180S4BS Y	15 ton	208/230v-3ph	260 Dual	---	10.8	11.0	3	2		Y	55x91x107	1790	L2253	call	---
KGA180S4BS Y	15 ton	208/230v-3ph	260 Dual	---	10.8	11.0	5	4 VFD		Y	55x91x107	1790	Z3943	call	---
KGA180S4BM Y	15 ton	208/230v-3ph	360 Dual	---	10.8	11.0	5	4		Y	55x91x107	1790	Z3937	call	---
KGA180S4MM Y	15 ton	208/230v-3ph	360 Dual	---	10.8	11.0	5	4	Y	Y	55x91x107	1790	M9639	call	---
KGA180S4BS G	15 ton	460v-3ph	260 Dual	---	10.8	11.0	3	2			55x91x107	1790	Z3941	call	---
KGA180S4BS G	15 ton	460v-3ph	260 Dual	---	10.8	11.0	5	4 VFD		Y	55x91x107	1790	Z3944	call	---
KGA180S4BM G	15 ton	460v-3ph	360 Dual	---	10.8	11.0	5	4		Y	55x91x107	1790	Z3940	call	---
KGA210S4BM Y	17.5 ton	208/230v-3ph	360 Dual	---	10.8	12.0	5	4 VFD		Y	55x91x107	1935	Z3950	call	---
KGA210S4BH Y	17.5 ton	208/230v-3ph	480 Dual	---	10.8	12.0	5	4		Y	55x91x107	1935	Z3948	call	---
KGA210S4BM G	17.5 ton	460v-3ph	360 Dual	---	10.8	12.0	5	4 VFD		Y	55x91x107	1935	Z3951	call	---
KGA210S4BH G	17.5 ton	460v-3ph	480 Dual	---	10.8	12.0	5	4		Y	55x91x107	1935	Z3947	call	---
KGA240S4BS Y	20 ton	208/230v-3ph	260 Dual	---	10.8	11.0	7.5	6			55x91x133	2180	Z3957	call	---
KGA240S4BS Y	20 ton	208/230v-3ph	260 Dual	---	10.8	11.0	7.5	6		Y	55x91x133	2180	Z3960	call	---
KGA240S4BM Y	20 ton	208/230v-3ph	360 Dual	---	10.8	11.0	7.5	6 VFD		Y	55x91x133	2180	Z3961	call	---
KGA240S4BH Y	20 ton	208/230v-3ph	480 Dual	---	10.8	11.0	7.5	6		Y	55x91x133	2180	Z3958	call	---
KGA240S4MH Y	20 ton	208/230v-3ph	480 Dual	---	10.8	11.0	7.5	6	Y	Y	55x91x133	2180	M9640	call	---
KGA240S4BS G	20 ton	460v-3ph	260 Dual	---	10.8	11.0	7.5	6			55x91x133	2180	Z3959	call	---
KGA240S4BM G	20 ton	460v-3ph	360 Dual	---	10.8	11.0	7.5	6 VFD		Y	55x91x133	2180	Z3962	call	---
KGA240S4BH G	20 ton	460v-3ph	480 Dual	---	10.8	11.0	7.5	6		Y	55x91x133	2180	Z3956	call	---
KGA300S4BS Y	25 ton	208/230v-3ph	260 Dual	---	10.0	10.0	10	10			55x91x133	2180	Z3969	call	---
KGA300S4BM Y	25 ton	208/230v-3ph	360 Dual	---	10.0	10.0	10	7 VFD		Y	55x91x133	2180	Z3970	call	---
KGA300S4BH Y	25 ton	208/230v-3ph	480 Dual	---	10.0	10.0	10	10		Y	55x91x133	2180	Z3968	call	---
KGA300S4BS G	25 ton	460v-3ph	260 Dual	---	10.0	10.0	10	10			55x91x133	2180	Z3965	call	---
KGA300S4BM G	25 ton	460v-3ph	360 Dual	---	10.0	10.0	10	7 VFD		Y	55x91x133	2180	Z3971	call	---
KGA300S4BH G	25 ton	460v-3ph	480 Dual	---	10.0	10.0	10	10		Y	55x91x133	2180	Z3966	call	---

**PACKAGED GAS - 15 - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

KGA180S4BS Y	15 ton	208/230v-3ph	260 Dual	---	10.8	11.0	5	4 VFD		Y	55x91x107	1855	V1445	call	---
KGA180S4BS G	15 ton	460v-3ph	260 Dual	---	10.8	11.0	5	4 VFD		Y	55x91x107	1855	V1451	call	---
KGA180S4BM G	15 ton	460v-3ph	360 Dual	---	10.8	11.0	5	4		Y	55x91x107	1855	L0335	call	---
KGA210S4BM Y	17.5 ton	208/230v-3ph	360 Dual	---	10.8	11.0	5	4 VFD		Y	55x91x107	2000	V1446	call	---
KGA210S4BH G	17.5 ton	460v-3ph	480 Dual	---	10.8	11.0	5	4		Y	55x91x107	2000	L0342	call	---
KGA300S4BH Y	25 ton	208/230v-3ph	360 Dual	---	10.0	9.9	10	7 VFD		Y	55x91x133	2270	V1448	call	---
KGA300S4BH G	25 ton	460v-3ph	360 Dual	---	10.0	9.9	10	7 VFD		Y	55x91x133	2270	V1454	call	---
KGA300S4BH G	25 ton	460v-3ph	480 Dual	---	10.0	9.9	10	10		Y	55x91x133	2270	L0359	call	---

**PACKAGED ELECTRIC/ELECTRIC - 15 - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

KCA180S4BN Y	15 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	2			55x91x107	1705	Z3935	call	---
KCA180S4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.2	3	2			55x91x107	1705	Z3972	call	---
KCA210S4BN Y	17.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	12.2	5	4			55x91x107	1850	Z3946	call	---
KCA210S4BN G	17.5 ton	460v-3ph	Opt. Elec. Heat	---	11.0	12.2	5	4			55x91x107	1850	Z3945	call	---
KCA240S4BN Y	20 ton	208/230v-3ph	Opt. Elec. Heat	---	11.0	11.2	7.5	6			55x91x133	2120	Z3952	call	---
KCA240S4BN G	20 ton	460v-3ph	Opt. Elec. Heat	---	11.0	11.2	7.5	6			55x91x133	2120	Z3953	call	---
KCA300S4BN Y	25 ton	208/230v-3ph	Opt. Elec. Heat	---	10.0	10.1	10	10			55x91x133	2120	Z3964	call	---
KCA300S4BN G	25 ton	460v-3ph	Opt. Elec. Heat	---	10.0	10.1	10	10			55x91x133	2120	Z3963	call	---

**CONVENTIONAL FIN/TUBE COIL**

KCA300S4BN Y	25 ton	208/230v-3ph	Opt. Elec. Heat	---	10.0	10.1	10	10			55x91x133	2120	L0357	call	---
--------------	--------	--------------	-----------------	-----	------	------	----	----	--	--	-----------	------	-------	------	-----

**PACKAGED HEAT PUMP - 15 - 20 TON - STANDARD EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

KHA180S4BN Y	15 ton	208/230v-3ph	Opt. Elec. Heat	---	10.6	10.7	3	2			55x91x129	1950	L0338	call	---
KHA180S4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	10.6	10.7	3	2			55x91x129	1950	L0339	call	---
KHA180S4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	10.6	10.7	3	2		Y-T24	55x91x129	1950	L2373	call	---
KHA240S4BN Y	20 ton	208/230v-3ph	Opt. Elec. Heat	---	10.6	10.7	7.5	6			55x91x129	2150	L0355	call	---
KHA240S4BN Y	20 ton	208/230v-3ph	Opt. Elec. Heat	---	10.6	10.7	7.5	6		Y-T24	55x91x129	2150	L2374	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ. /Single Temp. /Baro. Relief	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price Stock	
														Price	Stock
KHA240S4BN G	20 ton	460v-3ph	Opt. Elec. Heat	- - -	10.6	10.7	7.5	6			55x91x129	2150	L0354	call	---



Description	Order No.	Price
<b>LANDMARK® - 2 - 7.5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height [KC/KG 024 thru *090] [KH 024 thru KH *072] C1CURB70A-1	11F50	call
14 in. height [KC/KG 024 thru *090] [KH 024 thru *072] C1CURB71A-1	11F51	call
18 in. height [KC/KG 024 thru *090] [KH 024 thru *072] C1CURB72A-1	11F52	call
24 in. height [KC/KG 024 thru *090] [KH 024 thru *072] C1CURB73A-1	11F53	call
<b>HYBRID - FULL PERIMETER</b>		
14 in. height [KCA/KGA090] [KHA072] K1CURB71AP1	11S48	call
<b>CLIP CURB - FULL PERIMETER</b>		
8 in. height [KCA/KGA090] [KHA072] K1CURB23AP1	52W20	call
18 in. height [KCA/KGA090] [KHA072] K1CURB21AP1	52W22	call
24 in. height [KCA/KGA090] [KHA072] K1CURB22AP1	52W23	call
<i>* KCA/KGA090 and KHA072 models will fit smaller C1CURB/T1CURB roof curbs with some unit overhang.</i>		
<b>ADJUSTABLE PITCHED CURB</b>		
14 in. height C1CURB55AT1	43W27	call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (SENSIBLE CONTROL) (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood And Barometric Relief Dampers With Exhaust Hood</b>		
Standard Economizer [All Models] K1ECON30A-2	90W61	call
<b>STANDARD ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control C1SNSR64FF1	53W64	call
Differential Enthalpy Control Order 2 - C1SNSR64FF1	53W64	call
<b>HIGH PERFORMANCE ECONOMIZER (SENSIBLE CONTROL) (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Outdoor Air Hood And Barometric Relief Dampers With Exhaust Hood</b>		
High Performance Economizer [All Models] K1ECON32A-1	10U56	call
<b>ECONOMIZER ACCESSORIES</b>		
Horizontal Economizer Conversion Kit T1HECK00AN1	17W45	call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control C1SNSR64FF1	10Z75	call
Differential Enthalpy Control Order 2 - C1SNSR64FF1	10Z75	call
POWER EXHAUST - STANDARD STATIC		
[KC/KG 036 thru 090] [KH 036 thru 072] 208/230V-1 or 3 ph - C1PWRE10A-1P	79W87	call
[KC/KG 036 thru 090] [KH 036 thru 072] 460V-3ph - C1PWRE10A-1G	79W88	call
BAROMETRIC RELIEF		
Barometric Relief Dampers with Exhaust Hood [All Models] C1DAMP50A-1-	74W38	call
NOTE - Order Barometric Relief Dampers with Exhaust Hood if unit is ordered with factory installed Economizer with "No Exhaust" option. Required when Economizer is factory installed (no exhaust option) with field installed Power Exhaust Fan option.		



Description	Order No.	Price
<b>LANDMARK® - 2 - 7.5 TON ACCESSORIES (Field Installed)</b>		
<b>OUTDOOR AIR DAMPERS</b>		
<b>Includes Outdoor Air Hood</b>		
Manual	[All Models] C1DAMP11A-1	<b>53W34</b> call
Motorized	[All Models] K1DAMP21A-1	<b>79W95</b> call
<b>CABINET ACCESSORIES</b>		
Coil/Hail Guards	[KCA/KGA036 thru 060] [KHA036 thru 048] C1GARD51A-1	<b>13R98</b> call
	[KCA/KGA072] [KHA060] C1GARD51AT1	<b>13T03</b> call
	[KCA/KGA090] [KHA072] K1GARD50AP1	<b>13T17</b> call
	[KCB/KGB024 thru 048] [KHB024 thru 036] C1GARD51A-1	<b>13R98</b> call
	[KCB/KGB060] [KHB048 thru 060] C1GARD51AT1	<b>13T03</b> call
<b>CEILING DIFFUSERS</b>		
Step-Down - Order one	[024 thru 060] RTD9-65-R	<b>27G87</b> call
	[072 thru 090] RTD11-95	<b>29G04</b> call
Flush - Order one	[024 thru 060] FD9-65-R	<b>27G86</b> call
	[072 thru 090] FD11-95	<b>29G08</b> call
Transitions (Supply and Return) - Order one	[024 thru 060] T1TRAN10AN1	<b>17W53</b> call
	[072 thru 090] T1TRAN20N-1	<b>17W54</b> call
<b>CONTROLS</b>		
BACnet®	[KCA/KGA036 thru 060] [KHA036 thru 048] K0CTRL31A-1	<b>96W14</b> call
	[KCA/KGA072-090] [KHA060 thru 072] K0CTRL31AP1	<b>12B99</b> call
	[KCB/KGB024 thru 048] [KHB024 thru 036] K0CTRL31A-1	<b>96W14</b> call
	[KCB/KGB060] [KHB048 thru 060] K0CTRL31AP1	<b>12B99</b> call
BACnet® Thermostat with Display	K0SNSR01FF1	<b>97W23</b> call
BACnet Thermostat without Display	K0SNSR00FF1	<b>97W24</b> call
Novar® 2051	[KCA/KGA036 thru 060] [KHA036 thru 048] K0CTRL30A-1	<b>96W11</b> call
	[KCA/KGA072-090] [KHA060 thru 072] K0CTRL30AP1	<b>12B98</b> call
	[KCB/KGB024 thru 048] [KHB024 thru 036] K0CTRL30A-1	<b>96W11</b> call
	[KCB/KGB060] [KHB048 thru 060] K0CTRL30AP1	<b>12B98</b> call
Plenum Cable (75 ft.)	K0MISC00FF1	<b>97W25</b> call
<b>SMOKE DETECTORS</b>		
Supply or Return (Power board and one sensor)	C1SNSR44AP1	<b>53W78</b> call
Supply and Return (Power board and two sensors)	C1SNSR43AP1	<b>53W79</b> call
THERMOSTATS - See Controls Tab Section		



Description		Order No.	Price
<b>LANDMARK® - 2 - 7.5 TON ACCESSORIES (Field Installed)</b>			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Compressor Crankcase Heater	[KCA/KGA036] 208/230V-1 or 3 ph - K1CCHT02A-1P	<b>39W04</b>	<b>call</b>
	[KCA/KGA048 thru 060] 208/230V-1 or 3 ph - T1CCHT01AN1P	<b>95M07</b>	<b>call</b>
	[KCA/KGA036] 460V-3ph - K1CCHT012A-1G	<b>39W05</b>	<b>call</b>
	[KCA/KGA048 thru 060] 460V-3ph - T1CCHT01AN1G	<b>95M08</b>	<b>call</b>
Drain Pan Overflow Switch	K1SNSR71AB1-	<b>74W42</b>	<b>call</b>
Low Ambient Kit	[KCA/KGA] K1SNSR12A-1	<b>41W33</b>	<b>call</b>
	[KHA] K1SNSR13A-1	<b>41W34</b>	<b>call</b>
<b>GAS HEAT (KG MODELS)</b>			
Bottom Gas Piping Kit	T1GPKT01AN1	<b>19W50</b>	<b>call</b>
Low Temperature Vestibule Heater	208/230V-1 or 3 ph - T1CWKT01AN1Y	<b>19W53</b>	<b>call</b>
	[036 thru 090] 460V-3ph - T1CWKT01AN1G	<b>19W54</b>	<b>call</b>
Combustion Air Intake Extensions	T1EXTN10AN1	<b>19W51</b>	<b>call</b>
LPG/Propane Conversion Kits	One-stage models - C1PROP10AP2	<b>11U62</b>	<b>call</b>
	[036 thru 090] Two-stage models - C1PROP20AP2	<b>11U63</b>	<b>call</b>
Vertical Vent Extension	C1EXTN20FF1	<b>31W62</b>	<b>call</b>
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters Order 4 per unit	[KCA/KGA036 thru 060] [KHA036 thru 048] MERV 8 (16 x 20 x 2) - C1FLTR15A-1-	<b>54W20</b>	<b>call</b>
	[KCA/KGA036 thru 060] [KHA036 thru 048] MERV 13 (16 x 20 x 2) - T1FLTR40A-1-	<b>52W37</b>	<b>call</b>
	[KCA072 thru 090] [KHA060 thru 072] MERV 8 (20 x 20 x 2) - C1FLTR15D-1-	<b>54W21</b>	<b>call</b>
	[KCA072 thru 090] [KHA060 thru 072] MERV 13 (20 x 20 x 2) - C1FLTR40D-1-	<b>52W39</b>	<b>call</b>
	[KCB/KGB024 thru 048] [KHB024 thru 036] MERV 8 (16 x 20 x 2) - C1FLTR15A-1-	<b>54W20</b>	<b>call</b>
	[KCB/KGB024 thru 048] [KHB024 thru 036] MERV 13 (16 x 20 x 2) - T1FLTR40A-1-	<b>52W37</b>	<b>call</b>
	[KCB/KGB060] [KHB048 thru 060] MERV 8 (20 x 20 x 2) - C1FLTR15D-1-	<b>54W21</b>	<b>call</b>
	[KCB/KGB060] [KHB048 thru 060] MERV 13 (20 x 20 x 2) - C1FLTR40D-1-	<b>52W39</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - white case CO2 display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - duct mount, black case, no display	C0SNSR53AE1L	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (208/230v-1ph)	E1UVCL10AN1-	<b>50W90</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



Description	Order No.	Price
<b>LANDMARK® - 2 - 7.5 TON ACCESSORIES (Field Installed)</b>		
ELECTRIC HEAT (KC AND KH MODELS)		
<b>Includes Fuse Block</b>		
5 kW	[024 thru 030] 208/240V-1ph - K1EH0050A-1P	<b>12F06</b> call
7.5 kW	[024 thru 060] 208/240V-1ph - T1EH0075AN1P	<b>14W32</b> call
	[036 thru 090] 208/240V-3ph - T1EH0075AN1Y	<b>14W35</b> call
	[036 thru 090] 460V-3ph - T1EH0075AN1G	<b>14W39</b> call
10 kW	[024 thru 030] 208/240V-1ph - T1EH0100A1P	<b>30W26</b> call
15 kW	[036 thru 60] 208/240V-1ph - T1EH0150AN1P	<b>14W33</b> call
	[036 thru 090] 208/240V-3ph - T1EH0150AN1Y	<b>14W36</b> call
	[036 thru 090] 460V-3ph - T1EH0150AN1G	<b>14W40</b> call
22.5 kW	[060] 208/240V-1ph - T1EH0225AN1P	<b>14W34</b> call
	[060 thru 090] 208/240V-3ph - T1EH0225AN1Y	<b>14W37</b> call
	[060 thru 090] 460V-3ph - T1EH0225AN1G	<b>14W41</b> call
30 kW	[072 thru 090] 208/240V-3ph - T1EH0300N-1Y	<b>14W38</b> call
	[072 thru 090] 460V-3ph - T1EH0300N-1G	<b>14W42</b> call
ELECTRICAL		
<b>DISCONNECT</b>		
Standard Access Door (Short)	[KGA024-060] 80 AMP - T1DISC080A-1	<b>20W17</b> call
	[KCA024-060] [KHA024-048] 80 AMP - T2DISC080A-1	<b>20W15</b> call
	[KCA060] [KHA036-048] 150 AMP - T2DISC150A-1	<b>20W16</b> call
Standard Access Door (Tall)	[KGA072] [KGA090] 80 AMP - T1DISC080N-1	<b>20W20</b> call
	[KCA072-090] [KHA060-072] 80AMP - T2DISC080N-1	<b>20W18</b> call
	[KCA072-090] [KGA090] [KHA060-072] 150 AMP - T2DISC150N-1	<b>20W19</b> call
Hinged Access Door (Short)	[KGA024-060] 80 AMP - T1DISC080AH1	<b>20W23</b> call
	[KCA024-060] [KHA024-048] 80 AMP - T2DISC080AH1	<b>20W21</b> call
	[KCA036-060] [KHA036-048] 150 AMP - T2DISC150AH1	<b>20W22</b> call
Hinged Access Door (Tall)	[KGA072] [KGA090] 80 AMP - T1DISC080NH1	<b>20W26</b> call
	[KCA072-090] [KHA060-072] 80 AMP - T2DISC080NH1	<b>20W24</b> call
	[KCA072-090] [KGA090] [KHA060-072] 150 AMP - T2DISC150NH1	<b>20W25</b> call
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b> call
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b> call



Description	Order No.	Price
<b>LANDMARK® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70B-1	11F54 call
14 in. height	C1CURB71B-1	11F55 call
18 in. height	C1CURB72B-1	11F56 call
24 in. height	C1CURB73B-1	11F57 call
<b>ADJUSTABLE PITCHED CURB</b>		
14 in. height	C1CURB55B-1	54W50 call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood and Barometric Relief Dampers with Exhaust Hood</b>		
Standard Economizer (Single Temp. Control) Downflow or Horizontal	K1ECON20B-1	54W55 call
<b>STANDARD ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR64FF1	53W64 call
Differential Enthalpy Control	Order 2 - C1SNSR64FF1	53W64 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Outdoor Air Hood and Barometric Relief Dampers with Exhaust Hood</b>		
High Performance Economizer (Single Temp. Control) Downflow or Horizontal	K1ECON22B-1	10U58 call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR64FF1	10Z75 call
Differential Enthalpy Control	Order 2 - C1SNSR64FF1	10Z75 call
<b>HORIZONTAL LOW PROFILE BAROMETRIC RELIEF DAMPERS WITH EXHAUST HOOD</b>		
Horizontal Low Profile Barometric Relief Dampers	LAGEDH03/15	53K04 call
POWER EXHAUST - STANDARD STATIC		
	208/230V-3ph - K1PWRE10B-1Y	53W44 call
	460V-3ph - K1PWRE10B-1G	53W45 call
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Motorized	C1DAMP20B-1	14G28 call
Manual	C1DAMP10B-2	14G29 call
CABINET ACCESSORIES		
Coil/Hail Guards	[KCA/KGA] C1GARD52B-1	13T05 call
	[KHA092, 102, 120] K1GARD51BS1	13T24 call
	[KHA150] K1GARD51BP1	13T25 call
Horizontal Discharge Kit	K1HECK00B-1	51W25 call
Return Air Adaptor Plate (L Series® or T-Class™)	C1CONV10B-1	54W96 call
CEILING DIFFUSERS		
Step-Down - Order one	[092] RTD11-95	29G04 call
	[102 thru 120] RTD11-135	29G05 call
	[150] RTD11-185	29G06 call
Flush - Order one	[092] FD11-95	29G08 call
	[102 thru 120] FD11-135	29G09 call
	[150] FD11-185	29G10 call
Transitions (Supply and Return) - Order one	[092] C1DIFF30B-1	12X65 call
	[102 thru 120] C1DIFF31B-1	12X66 call
	[150] C1DIFF32B-1	12X67 call





Description		Order No.	Price
<b>LANDMARK® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
<b>CONTROLS</b>			
BACnet®	K0CTRL31A-1	96W15	call
BACnet® Thermostat with Display	K0SNSR01FF1	97W23	call
BACnet Thermostat without Display	K0SNSR00FF1	97W24	call
Novar® 2051	K0CTRL30A-1	96W12	call
Plenum Cable (75 ft.)	K0MISC00FF1	97W25	call
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44B-1	53W80	call
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43B-1	53W81	call
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	76W26	call
	Copper - C1TRAP10AD2	76W27	call
Drain Pan Overflow Switch	K1SNSR71AB1-	74W42	call
Low Ambient Kit	K1SNSR33B-1	54W16	call
<b>GAS HEAT (KG MODELS)</b>			
Bottom Gas Piping Kit	C1GPKT01B-01	54W95	call
Combustion Air Intake Extensions	T1EXTN10AN1	19W51	call
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10B-2Y	13X63	call
	460V-3ph - C1LTVH10B-2G	13X64	call
LPG/Propane Conversion Kits	[Standard heat] C1PROP23BS1	14N22	call
	[Medium heat] C1PROP22BS1	14N23	call
	[High heat] C1PROP21BS1	14N25	call
Vertical Vent Extension	C1EXTN20FF1	42W16	call
<b>ELECTRIC HEAT (KC AND KH MODELS)</b>			
7.5 kW	[KCA/KHA092 thru 102] 208/240V-3ph - C1EH0075B-1Y	56W38	call
	[KCA/KHA092 thru 102] 460V-3ph - C1EH0075B-1G	56W39	call
15 kW	[KCA/KHA092 thru 150] 208/240V-3ph - C1EH0015B-1Y	56W41	call
	[KCA/KHA092 thru 150] 460V-3ph - C1EH0150B-1G	56W42	call
22.5 kW	[KCA/KHA092 thru 150] 208/240V-3ph - C1EH0225B-1Y	56W44	call
	[KCA/KHA092 thru 150] 460V-3ph - C1EH0225B-1G	56W45	call
30 kW	[KCA/KHA092 thru 150] 208/240V-3ph - C1EH0300B-1Y	56W47	call
	[KCA/KHA092 thru 150] 460V-3ph - C1EH0300B-1G	56W48	call
45 kW	[KCA/KHA092 thru 150] 208/240V-3ph - C1EH0450B-1Y	56W50	call
	[KCA/KHA092 thru 150] 460V-3ph - C1EH0450B-1G	56W51	call
60 kW	[KCA/KHA120 thru 150] 208/240V-3ph - C1EH0600B-1Y	55W02	call
	[KCA/KHA120 thru 150] 460V-3ph - C1EH0600B-1G	55W03	call



Description		Order No.	Price
<b>LANDMARK® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
<b>ELECTRICAL</b>			
Disconnect	80 amp - C1DISC080B-1	<b>54W56</b>	<b>call</b>
	150 amp - C1DISC150B-1	<b>54W57</b>	<b>call</b>
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b>	<b>call</b>
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b>	<b>call</b>
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15B-1	<b>50W61</b>	<b>call</b>
20 x 25 x 2 (Order 4 per unit)	MERV 13 - C1FLTR40B-1	<b>52W41</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30B-1-	<b>Y3063</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b>	<b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b>	<b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (208/230v-1ph)	C1UVCL10B-1	<b>54W62</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



Description	Order No.	Price
<b>LANDMARK® - 13 - 25 TON ACCESSORIES (Field Installed)</b>		
<b>ROOF CURBS - DOWNFLOW</b>		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70C-1	11F58 call
14 in. height	C1CURB71C-1	11F59 call
18 in. height	C1CURB72C-1	11F60 call
24 in. height	C1CURB73C-1	11F61 call
<b>ADJUSTABLE PITCH CURB</b>		
14 in. height	L1CURB55C	43W26 call
<b>ROOF CURBS - HORIZONTAL (REQUIRES HORIZONTAL RETURN AIR PANEL KIT)</b>		
<b>STANDARD</b>		
26 in. height - slab applications	[156, 180 thru 240] C1CURB14C-1	11T89 call
37 in. height - rooftop applications	[156, 180 thru 240] C1CURB16C-1	11T96 call
30 in. height - slab applications	[300] C1CURB15C-1	11T90 call
41 in. height - rooftop applications	[300] C1CURB17C-1	11T97 call
<b>INSULATION KIT FOR STANDARD HORIZONTAL CURBS</b>		
for C1CURB14C-1	[156, 180 thru 240] C1INSU11C-1-	73K32 call
for C1CURB15C-1	[156, 180 thru 240] C1INSU13C-1-	73K34 call
for C1CURB16C-1	[300] C1INSU12C-1-	73K33 call
for C1CURB17C-1	[300] C1INSU14C-1-	73K35 call
<b>HORIZONTAL RETURN AIR PANEL KIT</b>		
Required for Horizontal Applications with Roof Curb	C1HRAP10C-1-	87M00 call
<b>BLOWER</b>		
VFD Manual Bypass Kit (for MSAV equipped units)	2, 3, 5 hp (208/230V) 2, 3, 5, 7.5, 10 hp (460V and 575V) KVFDDB11C-1 [Not for 156H] 7.5 hp, 10 hp (208/230V) KVFDDB10C-1	90W52 call 90W51 call
<b>ECONOMIZER</b>		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood</b>		
Standard Economizer - Downflow or Horizontal	K1ECON20C-3	13U48 call
<b>STANDARD ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy	C1SNSR64FF1	53W64 call
Differential Enthalpy	Order 2 - C1SNSR64FF1	53W64 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARDS)</b>		
<b>With Outdoor Air Hood</b>		
High Performance Economizer - Downflow or Horizontal	K1ECON22C-1	10U61 call
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy	C1SNSR64FF1	10Z75 call
Differential Enthalpy	Order 2 - C1SNSR64FF1	10Z75 call
<b>BAROMETRIC RELIEF DAMPERS</b>		
Downflow Barometric Relief Dampers with Exhaust Hood	C1DAMP50C	54W78 call
Horizontal Barometric Relief Dampers with Exhaust Hood	LAGEDH18/24	16K99 call
Exhaust Hood for Factory Installed Downflow Barometric Relief Dampers	[KHA180 thru 240] C1HOOD20C-1	85M26 call



Description		Order No.	Price
<b>LANDMARK® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
<b>POWER EXHAUST (DOWNFLOW APPLICATIONS ONLY)</b>			
Standard Static	208/230V - C1PWRE11C-1Y	<b>75W90</b>	<b>call</b>
	460V - C1PWRE11C-1G	<b>75W91</b>	<b>call</b>
<b>OUTDOOR AIR DAMPERS</b>			
Motorized Dampers with Outdoor Air Hood	C1DAMP20C-1	<b>13U04</b>	<b>call</b>
Manual Dampers With Outdoor Air Hood	C1DAMP10C-2	<b>13U05</b>	<b>call</b>
<b>CABINET ACCESSORIES</b>			
Coil/Hail Guards	[KCA/KGA156H, 180S thru 210S] C1GARD52C11	<b>13T14</b>	<b>call</b>
	[KCA/KGA180H thru 300H, 240S thru 300S] C1GARD52C21	<b>13T13</b>	<b>call</b>
	[KHA180 thru 240] K1GARD51C-1-	<b>13T26</b>	<b>call</b>
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	[156, 180] RTD11-185	<b>29G06</b>	<b>call</b>
	[210 thru 300] RTD11-275-R	<b>29G07</b>	<b>call</b>
Flush - Order one	[156, 180] FD11-185	<b>29G10</b>	<b>call</b>
	[210 thru 300] FD11-275-R	<b>29G11</b>	<b>call</b>
Transitions (Supply and Return) - Order 1	[156, 180] C1DIFF33C-1	<b>12X68</b>	<b>call</b>
	[210 thru 300] C1DIFF34C-1	<b>12X70</b>	<b>call</b>
<b>CONTROLS</b>			
BACnet®	K0CTRL31C-1	<b>96W16</b>	<b>call</b>
BACnet® Thermostat with Display	K0SNSR01FF1	<b>97W23</b>	<b>call</b>
BACnet Thermostat without Display	K0SNSR00FF1	<b>97W24</b>	<b>call</b>
Novar® 2051	K0CTRL30C-1	<b>96W13</b>	<b>call</b>
Plenum Cable (75 ft.)	K0MISC00FF1	<b>97W25</b>	<b>call</b>
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44C-1	<b>83W40</b>	<b>call</b>
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43C-1	<b>83W41</b>	<b>call</b>
<b>THERMOSTATS - See Controls Tab Section</b>			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	C1SNSR71FF1-	<b>10C24</b>	<b>call</b>
Low Ambient Control	[KCA/KGA180S] K1LOAM52C11	<b>10T62</b>	<b>call</b>
	[KCA/KGA156H, 210S] K1LOAM53C11	<b>10T63</b>	<b>call</b>
	[KCA/KGA180H, 210H, 240S, 300S] K1LOAM53C21	<b>10T64</b>	<b>call</b>
	[KCA/KGA240H, 300H] K1LOAM54C21	<b>10T65</b>	<b>call</b>
Low Ambient Kit	[KHA] K1SNSR33CS1	<b>55W73</b>	<b>call</b>



Description	Order No.	Price
<b>LANDMARK® - 13 - 25 TON ACCESSORIES (Field Installed)</b>		
<b>GAS HEAT (KG MODELS)</b>		
Bottom Gas Piping Kit	C1GPKT01C-1	<b>85M31</b> call
Combustion Air Intake Extensions (order two)	LTACAIK10/15	<b>89L97</b> call
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10C-2Y	<b>13X66</b> call
	460V-3ph - C1LTVH10C-2G	<b>13X67</b> call
LPG/Propane Conversion Kits (Order 2 kits)	[Standard heat] C1PROP25C11	<b>14N28</b> call
	[Medium heat] C1PROP26C11	<b>14N29</b> call
	[Not for 156H] [High heat] C1PROP27C11	<b>14N30</b> call
Vertical Vent Extension Kit (Order two kits)	C1EXTN20FF1	<b>42W16</b> call
<b>ELECTRICAL</b>		
Disconnect Switch	[KCA/KHA] 80 amp - C1DISC080C-1	<b>54W85</b> call
	[KCA/KHA] 150 amp - C1DISC150C-1	<b>54W86</b> call
	[KCA/KHA] 250 amp - C1DISC250C-1	<b>54W87</b> call
	[KGA] 80 amp - K1DISC080C-1	<b>54W91</b> call
	[KGA] 150 amp - K1DISC150C-1	<b>54W92</b> call
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b> call
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b> call
Phase Monitor	C1PHZM01FF1-	<b>10C25</b> call
<b>ELECTRIC HEAT (KC AND KH MODELS)</b>		
15 kW	[156 thru 300] 208/240V-3ph - C1EH0150C-1Y	<b>53W84</b> call
	[156 thru 300] 460V-3ph - C1EH0150C-1G	<b>53W86</b> call
30 kW	[156] 208/240V-3ph - C1EH0300C11Y	<b>53W88</b> call
	[156] 460V-3ph - C1EH0300C11G	<b>53W90</b> call
	[180 thru 300] 208/240V-3ph - C1EH0300C21Y	<b>53W92</b> call
	[180 thru 300] 460V-3ph - C1EH0300C21G	<b>53W94</b> call
45 kW	[156] 208/240V-3ph - C1EH0450C11Y	<b>53W96</b> call
	[156] 460V-3ph - C1EH0450C11G	<b>53W98</b> call
	[180 thru 300] 208/240V-3ph - C1EH0450C21Y	<b>54W00</b> call
	[180 thru 300] 460V-3ph - C1EH0450C21G	<b>54W02</b> call
60 kW	[156] 208/240V-3ph - C1EH0600121Y	<b>54W04</b> call
	[156] 460V-3ph - C1EH0600C11G	<b>54W06</b> call
	[180 thru 300] 208/240V-3ph - C1EH0600C21Y	<b>54W08</b> call
	[180 thru 300] 460V-3ph - C1EH0600C21G	<b>54W10</b> call
90 kW	[210 thru 300] 208/240V-3ph - C1EH0900C-1Y	<b>54W12</b> call
	[210 thru 300] 460V-3ph - C1EH0900C-1G	<b>54W14</b> call



Description		Order No.	Price
<b>LANDMARK® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
INDOOR AIR QUALITY			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15C-1-	<b>54W67</b>	<b>call</b>
24 x 24 x 2 (Order 6 per unit)	MERV 13 - C1FLTR40C-1-	<b>52W40</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30C-1-	<b>44N61</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b>	<b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b>	<b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (110/230v-1ph)	C1UVCL10C-1	<b>54W65</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ/Single Enth/Baro. Relief	Humiditrol®	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
-----------	---------	----------------	------	------	-----	------	-----------------	------------------------	-------	-------------------------------	-------------	----------------------------	----------------	-----------	-------	-------

**PACKAGED GAS - 3 - 6 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LGH036H4ES P	3 ton	208/230v-1ph	65 Single	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	568	V8265	call	---
LGH036H4EU P	3 ton	208/230v-1ph	108 Dual	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	568	L3251	call	---
LGH036H4ES Y	3 ton	208/230v-3ph	65 Single	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	568	L1513	call	---
LGH036H4ES Y	3 ton	208/230v-3ph	65 Single	18.0	12.7	---	0.5 HP	Direct	Y	Y		40x47x85.25	568	L1514	call	---
LGH036H4EM Y	3 ton	208/230v-3ph	105 Single	18.0	12.7	---	0.75 HP	Direct	Y			40x47x85.25	598	L3249	call	---
LGH036H4EU Y	3 ton	208/230v-3ph	108 Dual	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	568	L3252	call	---
LGH036H4ES G	3 ton	460v-3ph	65 Single	17.0	12.5	---	0.5 HP	Direct	Y			40x47x85.25	568	L1510	call	---
LGH036H4ES G	3 ton	460v-3ph	65 Single	17.0	12.5	---	0.5 HP	Direct	Y	Y		40x47x85.25	568	L1511	call	---
LGH048H4EM P	4 ton	208/230v-1ph	108 Single	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	L3254	call	---
LGH048H4EH P	4 ton	208/230v-1ph	105 Dual	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	L3280	call	---
LGH048H4ES Y	4 ton	208/230v-3ph	65 Single	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	V9850	call	---
LGH048H4EM Y	4 ton	208/230v-3ph	108 Single	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	L3255	call	---
LGH048H4EU Y	4 ton	208/230v-3ph	105 Dual	17.6	12.8	---	0.75 HP	Direct	Y	Y		40x47x85.25	598	L3256	call	---
LGH048H4EH Y	4 ton	208/230v-3ph	150 Dual	17.6	12.8	---	0.75 HP	Direct	Y	Y		40x47x85.25	598	V9845	call	---
LGH048H4ES G	4 ton	460v-3ph	65 Single	17.0	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	V9851	call	---
LGH048H4EM G	4 ton	460v-3ph	108 Single	17.0	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	V9849	call	---
LGH048H4EU G	4 ton	460v-3ph	108 Dual	17.6	12.8	---	0.75 HP	Direct	Y	Y		40x47x85.25	598	L3257	call	---
LGH060H4EH P	5 ton	208/230v-1ph	150 Dual	17.1	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L3281	call	---
LGH060H4ES Y	5 ton	208/230v-3ph	65 Single	17.1	12.7	---	1 HP	Direct	Y			48x47x85.25	685	AA992	call	---
LGH060H4ES Y	5 ton	208/230v-3ph	65 Single	17.1	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L1525	call	---
LGH060H4ES Y	5 ton	208/230v-3ph	65 Single	17.1	12.7	---	1 HP	Direct	Y	Y-T24		48x47x85.25	685	L2364	call	---
LGH060H4EM Y	5 ton	208/230v-3ph	108 Single	17.1	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L3258	call	---
LGH060H4EM Y	5 ton	208/230v-3ph	108 Single	17.1	12.7	---	1 HP	Direct	Y	Y-T24		48x47x85.25	685	L3261	call	---
LGH060H4EH Y	5 ton	208/230v-3ph	150 Dual	17.1	12.7	---	1 HP	Direct	Y			48x47x85.25	685	AA986	call	---
LGH060H4EH Y	5 ton	208/230v-3ph	150 Dual	17.1	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L1520	call	---
LGH060H4ES G	5 ton	460v-3ph	65 Single	17.0	12.7	---	1 HP	Direct	Y			48x47x85.25	685	AA993	call	---
LGH060H4EM G	5 ton	460v-3ph	108 Single	17.0	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L3259	call	---
LGH060H4EH G	5 ton	460v-3ph	150 Dual	17.0	12.7	---	1 HP	Direct	Y			48x47x85.25	685	L1515	call	---
LGH060H4EH G	5 ton	460v-3ph	150 Dual	17.0	12.7	---	1 HP	Direct	Y	Y		48x47x85.25	685	L1516	call	---
LGH072H4BH Y	6 ton	208/230v-3ph	150 Dual	---	12.0	13.5	2 HP	AA02				48x47x85.25	762	AA995	call	---
LGH072H4BH Y	6 ton	208/230v-3ph	150 Dual	---	12.0	13.5	2 HP	AA03				48x47x85.25	762	AA996	call	---
LGH072H4BH Y	6 ton	208/230v-3ph	150 Dual	---	12.0	13.5	2 HP	AA02		Y		48x47x85.25	762	V9857	call	---
LGH072H4BH G	6 ton	460v-3ph	150 Dual	---	12.0	13.5	2 HP	AA02				48x47x85.25	762	AA997	call	---

**PACKAGED GAS - 3 - 6 TON - HIGH EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

LGH036H4ES Y	3 ton	208/230v-3ph	65 Single	18.0	12.7	---	0.5 HP	Direct	Y	Y	Y	40x47x85.25	568	L0061	call	---
LGH036H4ES G	3 ton	460v-3ph	65 Single	17.0	12.5	---	0.5 HP	Direct	Y		Y	40x47x85.25	568	L0056	call	---
LGH048H4ES Y	4 ton	208/230v-3ph	65 Single	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	598	F0985	call	---
LGH048H4ES Y	4 ton	208/230v-3ph	65 Single	17.6	12.8	---	0.75 HP	Direct	Y		Y	40x47x85.25	598	L0070	call	---
LGH048H4EM Y	4 ton	208/230v-3ph	108 Single	17.6	12.8	---	0.75 HP	Direct	Y	Y	Y	40x47x85.25	598	L3263	call	---
LGH048H4EU Y	4 ton	208/230v-3ph	105 Dual	17.6	12.8	---	0.75 HP	Direct	Y	Y		40x47x85.25	598	L1001	call	---
LGH048H4ES G	4 ton	460v-3ph	65 Single	17.0	12.8	---	0.75 HP	Direct	Y		Y	40x47x85.25	598	L0069	call	---
LGH048H4EH G	4 ton	460v-3ph	150 Dual	17.0	12.8	---	0.75 HP	Direct	Y		Y	40x47x85.25	598	L0065	call	---
LGH060H4EH Y	5 ton	208/230v-3ph	150 Dual	17.1	12.7	---	1 HP	Direct	Y		Y	48x47x85.25	685	AA987	call	---
LGH060H4ES G	5 ton	460v-3ph	65 Single	17.0	12.7	---	1 HP	Direct	Y			48x47x85.25	685	L0082	call	---
LGH060H4EH G	5 ton	460v-3ph	150 Dual	17.0	12.7	---	1 HP	Direct	Y			48x47x85.25	685	AA988	call	---
LGH060H4EH G	5 ton	460v-3ph	150 Dual	17.0	12.7	---	1 HP	Direct	Y		Y	48x47x85.25	685	AA989	call	---
LGH072H4BH G	6 ton	460v-3ph	150 Dual	---	12.0	13.5	2 HP	AA02				48x47x85.25	762	L0097	call	---

**PACKAGED ELECTRIC/ELECTRIC - 3 - 6 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LCH036H4EN Y	3 ton	208/230v-3ph	Opt. Elec. Heat	18.0	12.7	---	0.5 HP	Direct	Y			40x47x85.25	532	L1505	call	---
LCH036H4EN G	3 ton	460v-3ph	Opt. Elec. Heat	17.0	12.5	---	0.5	Direct	Y			40x47x85.25	532	L1504	call	---
LCH048H4EN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	562	V9841	call	---





**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ/Single Enth/Baro. Relief	Humiditrol®	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
LCH048H4EN G	4 ton	460v-3ph	Opt. Elec. Heat	17.0	12.8	---	0.75 HP	Direct	Y			40x47x85.25	562	V9842	call	---
LCH060H4EN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	17.1	12.7	---	1 HP	Direct	Y			48x47x85.25	649	AA980	call	---
LCH060H4EN G	5 ton	460v-3ph	Opt. Elec. Heat	17.0	12.7	---	1 HP	Direct	Y			48x47x85.25	649	AA982	call	---
LCH072H4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.5	2 HP	AA02				48x47x85.25	726	AA983	call	---
LCH072H4BN G	6 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.5	2 HP	AA02				48x47x85.25	726	AA985	call	---

**PACKAGED ELECTRIC/ELECTRIC - 3 - 6 TON - HIGH EFFICIENCY COOLING - R-410A**

**CONVENTIONAL FIN/TUBE COIL**

LCH036H4EN G	3 ton	460v-3ph	Opt. Elec. Heat	17.0	12.5	---	0.5	Direct	Y			40x47x85.25	532	L0047	call	---
LCH048H4EN Y	4 ton	208/230v-3ph	Opt. Elec. Heat	17.6	12.8	---	0.75 HP	Direct	Y			40x47x85.25	562	L0050	call	---
LCH048H4EN G	4 ton	460v-3ph	Opt. Elec. Heat	17.0	12.8	---	0.75 HP	Direct	Y			40x47x85.25	562	L0049	call	---
LCH060H4EN Y	5 ton	208/230v-3ph	Opt. Elec. Heat	17.1	12.7	---	1 HP	Direct	Y		Y	48x47x85.25	649	AA981	call	---
LCH072H4BN Y	6 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.5	2 HP	AA02				48x47x85.25	726	L0096	call	---

**PACKAGED GAS - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LGH092H4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	12.5	13.0	2 Std	1				48x60.5x101.5	1168	L1305	call	---
LGH092H4BM Y	7.5 ton	208/230v-3ph	180 Dual	---	12.5	13.0	3 Std	5		Y		48x60.5x101.5	1168	L1303	call	---
LGH092H4BH Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	2 Std	1		Y		48x60.5x101.5	1168	L1301	call	---
LGH092H4BY Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	3 Std	4				48x60.5x101.5	1168	L1299	call	---
LGH092H4BY Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	2 Std	2		Y		48x60.5x101.5	1168	L1302	call	---
LGH092H4BY Y	7.5 ton	208/230v-3ph	240 Dual	---	12.5	13.0	3 Std	5		Y		48x60.5x101.5	1168	L1300	call	---
LGH092H4BS G	7.5 ton	460v-3ph	130 Dual	---	12.5	13.0	2 Std	1				48x60.5x101.5	1168	L1304	call	---
LGH092H4BG G	7.5 ton	460v-3ph	240 Dual	---	12.5	13.0	2 Std	2		Y		48x60.5x101.5	1168	L1296	call	---
LGH092H4BG G	7.5 ton	460v-3ph	240 Dual	---	12.5	13.0	3 Std	4				48x60.5x101.5	1168	L1295	call	---
LGH102H4BH Y	8.5 ton	208/230v-3ph	240 Dual	---	12.2	12.9	2 Std	1		Y		48x60.5x101.5	1175	L1306	call	---
LGH102H4BY Y	8.5 ton	208/230v-3ph	240 Dual	---	12.2	12.9	3 Std	5		Y		48x60.5x101.5	1175	L1307	call	---
LGH102H4BG G	8.5 ton	460v-3ph	240 Dual	---	12.2	12.9	2 Std	1				48x60.5x101.5	1175	L1308	call	---
LGH120H4BS Y	10 ton	208/230v-3ph	130 Dual	---	12.0	13.0	3 Std	4				48x60.5x101.5	1210	L1319	call	---
LGH120H4BS Y	10 ton	208/230v-3ph	130 Dual	---	12.0	13.0	3 Std	4		Y-T24		48x60.5x101.5	1210	L2365	call	---
LGH120H4MS Y	10 ton	208/230v-3ph	130 Dual	---	12.0	13.8	3 Std	4	Y			48x60.5x101.5	1210	L1329	call	---
LGH120H4MS J	10 ton	460v-3ph	130 Dual	---	12.0	13.8	3 Std	4	Y			48x60.5x101.5	1210	L1333	call	---
LGH120H4BY Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3 Std	5				48x60.5x101.5	1210	L1315	call	---
LGH120H4BY Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3 Std	5		Y		48x60.5x101.5	1210	L1314	call	---
LGH120H4MM Y	10 ton	208/230v-3ph	180 Dual	---	12.0	13.8	3 Std	5	Y	Y		48x60.5x101.5	1210	L1337	call	---
LGH120H4BY Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3 Hi	8		Y		48x60.5x101.5	1210	L1316	call	---
LGH120H4MH Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.8	3 Std	5	Y	Y		48x60.5x101.5	1210	M4930	call	---
LGH120H4BS G	10 ton	460v-3ph	130 Dual	---	12.0	13.0	3 Std	4				48x60.5x101.5	1210	L1320	call	---
LGH120H4MM J	10 ton	460v-3ph	180 Dual	---	12.0	13.8	3 Std	5	Y	Y		48x60.5x101.5	1210	L1341	call	---
LGH120H4BG G	10 ton	460v-3ph	240 Dual	---	12.0	13.0	3 Std	4				48x60.5x101.5	1210	L1318	call	---
LGH120H4BG G	10 ton	460v-3ph	240 Dual	---	12.0	13.0	3 Std	5		Y		48x60.5x101.5	1210	L1317	call	---
LGH150S4BS Y	12.5 ton	208/230v-3ph	130 Dual	---	11.0	11.4	3 Std	5				48x60.5x101.5	1250	V9580	call	---
LGH150S4MS Y	12.5 ton	208/230v-3ph	130 Dual	---	11.0	13.1	5 Std	10	Y			48x60.5x101.5	1250	V9583	call	---
LGH150S4MM Y	12.5 ton	208/230v-3ph	180 Dual	---	11.0	13.1	5 Std	11	Y	Y		48x60.5x101.5	1250	V9581	call	---
LGH150S4BY Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	3 Std	5				48x60.5x101.5	1250	V9576	call	---
LGH150S4BY Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5 Std	11		Y		48x60.5x101.5	1250	V9577	call	---
LGH150S4BY Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	5 Std	11		Y-T24		48x60.5x101.5	1250	L2366	call	---
LGH150S4BY Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	3 Std	5		Y	Y	48x60.5x101.5	1250	V9575	call	---
LGH150S4MS J	12.5 ton	460v-3ph	130 Dual	---	11.0	13.1	5 Std	10	Y			48x60.5x101.5	1250	V9584	call	---
LGH150S4MM J	12.5 ton	460v-3ph	180 Dual	---	11.0	13.1	5 Std	11	Y	Y		48x60.5x101.5	1250	V9582	call	---
LGH150S4BG G	12.5 ton	460v-3ph	240 Dual	---	11.0	11.4	5 Std	11		Y		48x60.5x101.5	1250	V9578	call	---

**PACKAGED GAS - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

LGH092H4BS Y	7.5 ton	208/230v-3ph	130 Dual	---	12.5	13.0	2 Std	1		Y	Y	48x60.5x101.5	1168	L0183	call	---
LGH102H4BY Y	8.5 ton	208/230v-3ph	240 Dual	---	12.2	12.9	3 Std	5		Y		48x60.5x101.5	1175	L0186	call	---
LGH120H4BY Y	10 ton	208/230v-3ph	240 Dual	---	12.0	13.0	3 Std	5		Y	Y	48x60.5x101.5	1210	L0197	call	---
LGH120H4BS G	10 ton	460v-3ph	130 Dual	---	12.0	13.0	3 Std	4				48x60.5x101.5	1210	L0202	call	---



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ/Single Enth/Baro. Relief	Humiditrol®	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price	Stock
LGH120H4BH G	10 ton	460v-3ph	240 Dual	---	12.0	13.0	3 Std	5		Y		48x60.5x101.5	1210	L0198	call	---
LGH120H4BH G	10 ton	460v-3ph	240 Dual	---	12.0	13.0	3 Std	5		Y	Y	48x60.5x101.5	1210	L0200	call	---
LGH150S4BS Y	12.5 ton	208/230v-3ph	130 Dual	---	11.0	11.4	3 Std	5				48x60.5x101.5	1250	L0211	call	---
LGH150S4BH Y	12.5 ton	208/230v-3ph	240 Dual	---	11.0	11.4	3 Std	5		Y	Y	48x60.5x101.5	1250	V9575	call	---

**PACKAGED ELECTRIC/ELECTRIC - 7.5 - 12.5 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LCH092H4BN Y	7.5 ton	208/230v-3ph	Opt. Elec. Heat	---	12.7	13.0	2 Std	2				48x60.5x101.5	1120	L1292	call	---
LCH092H4BN G	7.5 ton	460v-3ph	Opt. Elec. Heat	---	12.7	13.0	3 Std	4				48x60.5x101.5	1120	L1294	call	---
LCH120H4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	12.2	13.2	2 Std	1				48x60.5x101.5	1162	L1312	call	---
LCH120H4BN Y	10 ton	208/230v-3ph	Opt. Elec. Heat	---	12.2	13.2	3 Std	4				48x60.5x101.5	1162	L1311	call	---
LCH120H4BN G	10 ton	460v-3ph	Opt. Elec. Heat	---	12.2	13.2	3 Std	4				48x60.5x101.5	1162	L1310	call	---
LCH150S4BN Y	12.5 ton	208/230v-3ph	Opt. Elec. Heat	---	11.2	11.6	3 Std	4				48x60.5x101.5	1202	V9574	call	---
LCH150S4BN G	12.5 ton	460v-3ph	Opt. Elec. Heat	---	11.2	11.6	5 Std	11				48x60.5x101.5	1202	V9573	call	---
LCH150S4BN G	12.5 ton	460v-3ph	Opt. Elec. Heat	---	11.2	11.6	5 Std	11				48x60.5x101.5	1202	L1322	call	---

**FIN/TUBE COIL**

**PACKAGED GAS - 13 - 20 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LGH156H4BS Y	13 ton	208/230v-3ph	260 Dual	---	12.0	13.6	3 Std	2				56x93x134	1935	Z0376	call	---
LGH156H4BS G	13 ton	460v-3ph	260 Dual	---	12.0	13.6	3 Std	2				56x93x134	1935	Z0377	call	---
LGH180H4ML Y	15 ton	208/230v-3ph	169 Single	---	12.0	13.7	3 Std	1	Y			56x93x134	2115	L1331	call	---
LGH180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	3 Std	2		Y		56x93x134	2115	L1564	call	---
LGH180H4BS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.5	5 Std	3				56x93x134	2115	L1550	call	---
LGH180H4MS Y	15 ton	208/230v-3ph	260 Dual	---	12.0	13.7	5 Std	4	Y	Y		56x93x134	2115	L1339	call	---
LGH180H4BH Y	15 ton	208/230v-3ph	480 Dual	---	12.0	13.5	3 Std	2		Y		56x93x134	2115	L1548	call	---
LGH180H4BH Y	15 ton	208/230v-3ph	480 Dual	---	12.0	13.5	5 Std	3				56x93x134	2115	L1549	call	---
LGH180H4MH Y	15 ton	208/230v-3ph	480 Dual	---	12.0	13.5	5 Std	4	Y	Y		56x93x134	2115	M4931	call	---
LGH180H4ML G	15 ton	460v-3ph	169 Single	---	12.0	13.7	3 Std	1	Y			56x93x134	2115	L1335	call	---
LGH180H4BS G	15 ton	460v-3ph	260 Dual	---	12.0	13.5	3 Std	2		Y		56x93x134	2115	L1552	call	---
LGH180H4BS G	15 ton	460v-3ph	260 Dual	---	12.0	13.5	5 Std	3		Y		56x93x134	2115	L1551	call	---
LGH180H4MS G	15 ton	460v-3ph	260 Dual	---	12.0	13.7	5 Std	4	Y	Y		56x93x134	2115	L1343	call	---
LGH180H4BM G	15 ton	460v-3ph	360 Dual	---	12.0	13.5	5 Std	4		Y		56x93x134	2115	L1555	call	---
LGH180H4BH G	15 ton	460v-3ph	480 Dual	---	12.0	13.5	3 Std	2		Y		56x93x134	2115	L1554	call	---
LGH210H4BS Y	17.5 ton	208/230v-3ph	260 Dual	---	12.0	13.0	3 Std	2		Y		56x93x134	2240	Z0379	call	---
LGH210H4BS G	17.5 ton	460v-3ph	260 Dual	---	12.0	13.0	5 Std	4		Y		56x93x134	2240	Z0380	call	---
LGH210H4BH G	17.5 ton	460v-3ph	480 Dual	---	12.0	13.0	5 Std	4		Y		56x93x134	2240	Z0378	call	---
LGH240H4BM Y	20 ton	208/230v-3ph	260 Dual	---	12.0	14.5	5 Std	3	Y			56x93x134	2325	L1332	call	---
LGH240H4BS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	13.2	5 Std	3		Y		56x93x134	2325	L1559	call	---
LGH240H4MM Y	20 ton	208/230v-3ph	360 Dual	---	12.0	14.5	7.5 Std	7	Y	Y		56x93x134	2325	L1340	call	---
LGH240H4BH Y	20 ton	208/230v-3ph	480 Dual	---	12.0	13.2	5 Std	3				56x93x134	2325	L1560	call	---
LGH240H4BH Y	20 ton	208/230v-3ph	480 Dual	---	12.0	13.2	7.5 Std	6		Y		56x93x134	2325	L1561	call	---
LGH240H4MH Y	20 ton	208/230v-3ph	480 Dual	---	12.0	13.2	7.5 Std	7	Y	Y		56x93x134	2325	M4932	call	---
LGH240H4BS G	20 ton	460v-3ph	260 Dual	---	12.0	13.2	5 Std	3		Y		56x93x134	2325	L1562	call	---
LGH240H4BM G	20 ton	460v-3ph	260 Dual	---	12.0	14.5	5 Std	3	Y			56x93x134	2325	L1336	call	---
LGH240H4BS G	20 ton	460v-3ph	260 Dual	---	12.0	13.2	7.5 Std	6		Y		56x93x134	2325	L1563	call	---
LGH240H4MM G	20 ton	460v-3ph	360 Dual	---	12.0	14.5	7.5 Std	7	Y	Y		56x93x134	2325	L1344	call	---
LGH240H4BH G	20 ton	460v-3ph	480 Dual	---	12.0	13.2	5 Std	4		Y		56x93x134	2325	L1558	call	---
LGH240H4BH G	20 ton	460v-3ph	480 Dual	---	12.0	13.2	7.5 Std	6		Y		56x93x134	2325	L1557	call	---

**PACKAGED GAS - 13 - 20 TON - HIGH EFFICIENCY COOLING - R-410A**

**FIN/TUBE COIL**

LGH180H4ML G	15 ton	460v-3ph	169 Single	---	12.0	13.7	3 Std	1	Y			56x93x134	2220	N9890	call	---
LGH180H4BS G	15 ton	460v-3ph	260 Dual	---	12.0	13.5	3 Std	2			Y	56x93x134	2220	L0305	call	---
LGH210H4BH G	17.5 ton	460v-3ph	480 Dual	---	12.0	13.0	5 Std	4		Y		56x93x134	2330	L0309	call	---
LGH240H4BS Y	20 ton	208/230v-3ph	260 Dual	---	12.0	13.2	7.5 Std	7			Y	56x93x134	2430	L0316	call	---

**PACKAGED GAS - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**



**FACTORY CONFIGURATION**

Model No.	Cooling	Voltage /phase	Heat	SEER	EER	IEER	Blower Motor hp	Blower Type or Drive #	MSAV®	Econ/Single Enth/Baro. Relief	Humiditrol®	Dimensions H x W x L (in.)	Wt. (Net Base)	Order No.	Price Stock	
															call	---
LGH300S4BH Y	25 ton	208/230v-3ph	480 Dual	---	10.5	10.9	5 Std	3				56x93x134	2430	Z0381	call	---
LGH300S4BH Y	25 ton	208/230v-3ph	480 Dual	---	10.5	10.9	7.5 Std	6		Y		56x93x134	2430	Z0382	call	---
LGH300S4BS G	25 ton	460v-3ph	260 Dual	---	10.5	10.9	5 Std	3		Y		56x93x134	2430	Z0387	call	---
LGH300S4BS G	25 ton	460v-3ph	260 Dual	---	10.5	10.9	10 Std	10		Y		56x93x134	2430	Z0388	call	---
LGH300S4BM G	25 ton	460v-3ph	360 Dual	---	10.5	10.9	5 Std	3		Y		56x93x134	2430	Z0386	call	---
LGH300S4BH G	25 ton	460v-3ph	480 Dual	---	10.5	10.9	5 Std	3		Y		56x93x134	2430	Z0383	call	---
LGH300S4BH G	25 ton	460v-3ph	480 Dual	---	10.5	10.9	7.5 Std	6		Y		56x93x134	2430	Z0384	call	---

**FIN/TUBE COIL**

LGH300S4BS G	25 ton	460v-3ph	260 Dual	---	10.5	10.9	5 Std	3		Y		56x93x134	2495	L0323	call	---
LGH300S4BS G	25 ton	460v-3ph	260 Dual	---	10.5	10.9	10 Std	10		Y		56x93x134	2495	L0322	call	---
LGH300S4BM G	25 ton	460v-3ph	360 Dual	---	10.5	10.9	5 Std	3		Y		56x93x134	2495	L0328	call	---
LGH300S4BH G	25 ton	460v-3ph	480 Dual	---	10.5	10.9	5 Std	3		Y		56x93x134	2495	L0324	call	---
LGH300S4BH G	25 ton	460v-3ph	480 Dual	---	10.5	10.9	7.5 Std	6		Y		56x93x134	2495	L0325	call	---

**PACKAGED ELECTRIC/ELECTRIC - 13 - 25 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LCH156H4BN G	13 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.6	3 Std	2				56x93x134	1785	Z0374	call	---
LCH180H4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.5	3 Std	2				56x93x134	1965	L1545	call	---
LCH180H4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.5	3 Std	1		Y		56x93x134	1965	L1546	call	---
LCH180H4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.5	5 Std	3		Y		56x93x134	1965	L1547	call	---
LCH180H4BN Y	15 ton	208/230v-3ph	Opt. Elec. Heat	---	12.0	13.5	3 Std	2				56x93x134	1965	L1544	call	---
LCH240H4BN G	20 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.2	5 Std	3		Y		56x93x134	2175	L1556	call	---

**FIN/TUBE COIL**

LCH156H4BN G	13 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.6	3 Std	2				56x93x134	1850	L0294	call	---
LCH180H4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.5	3 Std	2				56x93x134	2070	L0297	call	---
LCH180H4BN G	15 ton	460v-3ph	Opt. Elec. Heat	---	12.0	13.5	3 Std	1		Y		56x93x134	2070	L0298	call	---

**PACKAGED ELECTRIC/ELECTRIC - 25 TON - STANDARD EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LCH300S4BN G	25 ton	460v-3ph	Opt. Elec. Heat	---	10.5	10.9	5 Std	3		Y		56x93x134	2280	Z0375	call	---
--------------	--------	----------	-----------------	-----	------	------	-------	---	--	---	--	-----------	------	-------	------	-----

**FIN/TUBE COIL**

LCH300S4BN G	25 ton	460v-3ph	Opt. Elec. Heat	---	10.5	10.9	5 Std	3		Y		56x93x134	2345	L0321	call	---
--------------	--------	----------	-----------------	-----	------	------	-------	---	--	---	--	-----------	------	-------	------	-----

**PACKAGED GAS - 25 - 30 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LGH300H4BS G	25 ton	460v-3ph	260 Dual	---	11.6	12.5	7.5 Std	3		Yes		65x90x145	3107	L1376	call	---
LGH300H4BH G	25 ton	460v-3ph	480 Dual	---	11.6	12.5	7.5 Std	3		Global		65x90x145	3107	L1378	call	---

**PACKAGED ELECTRIC/ELECTRIC - 25 - 30 TON - HIGH EFFICIENCY COOLING - R-410A**

**ENVIRON™ COIL SYSTEM**

LCH300H4BN Y	25 ton	208/230v-3ph	Opt. Elec. Heat	---	11.8	12.5	7.5 Std	3				65x90x145	2997	L1374	call	---
LCH360H4BN Y	30 ton	208/230v-3ph	Opt. Elec. Heat	---	10.8	11.5	7.5 Std	3				65x90x145	2997	L1105	call	---
LCH360H4BN G	30 ton	460v-3ph	Opt. Elec. Heat	---	10.8	11.5	5 Std	6				65x90x145	2997	L1375	call	---



Description	Order No.	Price
<b>ENERGENCE® - 3 - 6 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70A-1	11F50 call
14 in. height	C1CURB71A-1	11F51 call
18 in. height	C1CURB72A-1	11F52 call
24 in. height	C1CURB73A-1	11F53 call
<b>HINGED</b>		
8 in. height	T1CURB30AN1	17W46 call
18 in. height	T1CURB32AN1	17W47 call
24 in. height	T1CURB33AN1	17W48 call
<b>ADJUSTABLE PITCHED CURB</b>		
14 in. height	C1CURB55AT1	43W27 call
<b>TRANSITION CURB</b>		
Matches 036-072 to existing L Series® Curbs	E1CURB60A-1	20W06 call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (SENSIBLE CONTROL) (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood And Barometric Relief Dampers With Exhaust Hood</b>		
Standard Economizer	[All Models] E1ECON30A-2-	90W59 call
<b>HIGH PERFORMANCE ECONOMIZER (SENSIBLE CONTROL) (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Outdoor Air Hood And Barometric Relief Dampers With Exhaust Hood</b>		
High Performance Economizer	[All Models] E1ECON17A-1	10U54 call
<b>ECONOMIZER ACCESSORIES</b>		
Horizontal Economizer Conversion Kit	T1HECK00AN1	17W45 call
<b>ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Differential Enthalpy	Order 2 - C1SNSR64FF1	53W64 call
Single Enthalpy	C1SNSR64FF1	53W64 call
BAROMETRIC RELIEF DAMPERS (For Factory Installed Economizer)		
Barometric Relief Dampers with Hood	[All Models] C1DAMP50A-1-	74W38 call
Barometric Relief Dampers without Hood	[All Models] C1DAMP50A-2-	72W89 call
NOTE - Order Barometric Relief Dampers with Exhaust Hood if unit is ordered with factory installed Economizer with "No Exhaust" option. NOTE - Required when Economizer is factory installed (no exhaust option) with field installed Power Exhaust Fan option.		
NOTE - Order Barometric Relief Dampers without Exhaust Hood if unit is ordered with factory installed Power Exhaust Fan option.		
POWER EXHAUST - STANDARD STATIC		
	[All Models] 208/230V-1 or 3ph - C1PWRE10A-1P	79W87 call
	[All Models] 460V-3ph - C1PWRE10A-1G	79W88 call
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Manual	[All Models] C1DAMP11A-1-	53W34 call
Motorized	[All Models] E1DAMP21A-1-	53W35 call
CABINET ACCESSORIES		
Coil/Hail Guards	[036 thru 048] C1GARD51A-1	13R98 call
	[060 thru 072] C1GARD51AT1	13T03 call



Description		Order No.	Price
<b>ENERGENCE® - 3 - 6 TON ACCESSORIES (Field Installed)</b>			
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	[036 thru 060] RTD9-65-R	<b>27G87</b>	<b>call</b>
	[072] RTD11-95	<b>29G04</b>	<b>call</b>
Flush - Order one	[036 thru 060] FD9-65-R	<b>27G86</b>	<b>call</b>
	[072] FD11-95	<b>29G08</b>	<b>call</b>
Transitions (Supply and Return) - Order one	[036 thru 060] T1TRAN10AN1	<b>17W53</b>	<b>call</b>
	[072] T1TRAN20N-1	<b>17W54</b>	<b>call</b>
<b>CONTROLS</b>			
Blower Proving Switch	C1SNSR35FF1	<b>53W65</b>	<b>call</b>
Prodigy® Control System - BACnet® Module	C0CTRL60AE1L	<b>59W51</b>	<b>call</b>
Prodigy® Control System - LonTalk® Module	C0CTRL65FF1	<b>54W27</b>	<b>call</b>
Novar® 2051	E0CTRL30A1	<b>64W72</b>	<b>call</b>
Dirty Filter Switch	E1SNSR55AP1	<b>53W66</b>	<b>call</b>
Fresh Air Tempering	C1SNSR75AD1	<b>58W63</b>	<b>call</b>
<b>HUMIDITROL® CONDENSER REHEAT OPTION</b>			
Humidity Sensor Kit, Remote mounted (required)	COSNSR31AE-1	<b>17M50</b>	<b>call</b>
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44AP1	<b>53W78</b>	<b>call</b>
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43AP1	<b>53W79</b>	<b>call</b>
L CONNECTION® NETWORK - See Controls Tab Section			
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	E1SNSR71AD1	<b>68W88</b>	<b>call</b>
<b>GAS HEAT (LGH MODELS)</b>			
Bottom Gas Piping Kit	T1GPKT01AN1	<b>19W50</b>	<b>call</b>
Combustion Air Intake Extensions	T1EXTN10AN1	<b>19W51</b>	<b>call</b>
Low Temperature Vestibule Heater	208/230V-3ph - E1LTVH10A-1Y	<b>54W23</b>	<b>call</b>
	460V-3ph - E1LTVH10A-1G	<b>54W24</b>	<b>call</b>
LPG/Propane Conversion Kits	For one-stage models - C1PROP10AP2	<b>11U62</b>	<b>call</b>
	For two-stage models - C1PROP20AP2	<b>11U63</b>	<b>call</b>
Vertical Vent Extension	C1EXTN20FF1	<b>31W62</b>	<b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 3 - 6 TON ACCESSORIES (Field Installed)</b>			
<b>ELECTRIC HEAT (LCH MODELS)</b>			
7.5 kW	[LCH036 thru 060] 208/240V-1ph - E1EH0075AN1P	<b>46W28</b>	<b>call</b>
	208/240V-3ph - E1EH0075AN1Y	<b>46W31</b>	<b>call</b>
	460V-3ph - E1EH0075AN1G	<b>46W35</b>	<b>call</b>
15 kW	[LCH036 thru 060] 208/240V-1ph - E1EH0150AN1P	<b>46W29</b>	<b>call</b>
	208/240V-3ph - E1EH0150AN1Y	<b>46W32</b>	<b>call</b>
	460V-3ph - E1EH0150AN1G	<b>46W36</b>	<b>call</b>
22.5 kW	[LCH060] 208/240V-1ph - E1EH0225N1P	<b>46W30</b>	<b>call</b>
	[LCH060 thru 072] 208/240V-3ph - E1EH0225N1Y	<b>46W33</b>	<b>call</b>
	[LCH060 thru 072] 460V-3ph - E1EH0225N1G	<b>46W37</b>	<b>call</b>
30 kW	[LCH072] 208/240V-3ph - E1EH0300N-1Y	<b>46W34</b>	<b>call</b>
	[LCH072] 460V-3ph - E1EH0300N-1G	<b>46W38</b>	<b>call</b>
<b>ELECTRICAL</b>			
Disconnect Switch	[LGH036 thru 048] 80 amp - T1DISC080AH1	<b>20W23</b>	<b>call</b>
	[LCH060 thru 072] 80 amp - T2DISC080NH1	<b>20W24</b>	<b>call</b>
	[LGH060 thru 072] 80 amp - T1DISC080NH1	<b>20W26</b>	<b>call</b>
	[LCH036 thru 048] 80 amp - T2DISC080AH1	<b>20W21</b>	<b>call</b>
	[LCH048] 150 amp - T2DISC150AH1	<b>20W22</b>	<b>call</b>
	[LCH060 thru 072] 150 amp - T2DISC150NH1	<b>20W25</b>	<b>call</b>
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b>	<b>call</b>
Weatherproof Cover for GFI	C1GFIC99FF1	<b>10C89</b>	<b>call</b>



Description	Order No.	Price
<b>ENERGENCE® - 3 - 6 TON ACCESSORIES (Field Installed)</b>		
INDOOR AIR QUALITY		
<b>AIR FILTERS</b>		
Healthy Climate® High Efficiency Air Filters Order 4 per unit	[036 thru 048] MERV 8 (16 x 20 x 2) - C1FLTR15A-1-	<b>54W20</b> <b>call</b>
	[036 thru 048] MERV 13 (16 x 20 x 2) - T1FLTR40A-1-	<b>52W37</b> <b>call</b>
	[060 thru 072] MERV 8 (20 x 20 x 2) - C1FLTR15D-1-	<b>54W21</b> <b>call</b>
	[060 thru 072] MERV 13 (20 x 20 x 2) - C1FLTR40D-1-	<b>52W39</b> <b>call</b>
Replaceable Media Filter With Metal Mesh Frame (includes non- pleated filter media)	[036 thru 048] 16 x 20 x 2 (Order 4) - K1FLTR30A-1	<b>39W09</b> <b>call</b>
	[060 thru 072] 20 x 20 x 2 (Order 4) - K1FLTR30A-2	<b>39W10</b> <b>call</b>
<b>CO2 SENSORS</b>		
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b> <b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b> <b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b> <b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b> <b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b> <b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b> <b>call</b>
<b>UVC GERMICIDAL LAMPS</b>		
* Healthy Climate® UVC Light Kit (208/230v-1ph)	E1UVCL10AN1-	<b>50W90</b> <b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).





Description	Order No.	Price
<b>ENERGENCE® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70B-1	11F54 call
14 in. height	C1CURB71B-1	11F55 call
18 in. height	C1CURB72B-1	11F56 call
24 in. height	C1CURB73B-1	11F57 call
<b>ADJUSTABLE PITCHED CURB</b>		
14 in. height	C1CURB55B-1	54W50 call
ECONOMIZER SECTIONS		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood and Downflow Barometric Relief Dampers with Exhaust Hood</b>		
Standard Economizer Downflow or Horizontal	E1ECON15B-1	55W05 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARD)</b>		
<b>With Outdoor Air Hood and Downflow Barometric Relief Dampers with Exhaust Hood</b>		
High Performance Economizer Downflow or Horizontal	E1ECON17B-1	10U59 call
<b>HORIZONTAL BAROMETRIC RELIEF DAMPERS WITH EXHAUST HOOD</b>		
Horiz. Low Profile Barometric Relief Dampers with Hood	LAGEDH03/15	53K04 call
<b>ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Single Enthalpy Control	C1SNSR64FF1	53W64 call
Differential Enthalpy Control (order 2)	C1SNSR64FF1	53W64 call
POWER EXHAUST - STANDARD STATIC		
	208/230V-3ph - K1PWRE10B-1Y	53W44 call
	460V-3ph - K1PWRE10B-1G	53W45 call
OUTDOOR AIR DAMPERS		
<b>Includes Outdoor Air Hood</b>		
Motorized	C1DAMP20B-1	14G28 call
Manual	C1DAMP10B-2	14G29 call
CABINET ACCESSORIES		
Coil/Hail Guards	Environ™ Coil System - C1GARD52B-1	13T05 call
	Conventional Fin/Tube Condenser Coil - E1GARD51B-1	13T04 call
Horizontal Discharge Kit	K1HECK00B-1	51W25 call
Return Air Adaptor Plate (L Series® or T-Class™)	C1CONV10B-1	54W96 call
CEILING DIFFUSERS		
Step-Down - Order one	[092] RTD11-95	29G04 call
	[102 thru 120] RTD11-135	29G05 call
	[150] RTD11-185	29G06 call
Flush - Order one	[092] FD11-95	29G08 call
	[102 thru 120] FD11-135	29G09 call
	[150] FD11-185	29G10 call
Transitions (Supply and Return) - Order one	[092] C1DIFF30B-1	12X65 call
	[102 thru 120] C1DIFF31B-1	12X66 call
	[150] C1DIFF32B-1	12X67 call



Description	Order No.	Price
<b>ENERGENCE® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>		
<b>CONTROLS</b>		
Blower Proving Switch	C1SNSR35FF1	<b>53W65</b> call
Prodigy® Control System - BACnet® Module	C0CTRL60AE1L	<b>59W51</b> call
Prodigy® Control System - LonTalk® Module	C0CTRL65FF1	<b>54W27</b> call
Novar® 2051	E0CTRL30B1	<b>64W73</b> call
Dirty Filter Switch	E1SNSR55B-1	<b>53W67</b> call
Fresh Air Tempering	C1SNSR75AD1	<b>58W63</b> call
<b>HUMIDITROL® CONDENSER REHEAT OPTION</b>		
Humidity Sensor Kit, Remote mounted (required)	COSNSR31AE-1	<b>17M50</b> call
<b>SMOKE DETECTORS</b>		
Supply or Return (Power board and one sensor)	C1SNSR44B-2	<b>11K76</b> call
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43B-2	<b>11K80</b> call
L CONNECTION® NETWORK - See Controls Tab Section		
THERMOSTATS - See Controls Tab Section		
<b>COOLING ACCESSORIES</b>		
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b> call
	Copper - C1TRAP10AD2	<b>76W27</b> call
Drain Pan Overflow Switch	E1SNSR71AD1	<b>68W88</b> call
<b>GAS HEAT (LGH MODELS)</b>		
Bottom Gas Piping Kit	C1GPKT01B-01	<b>54W95</b> call
Combustion Air Intake Extensions	T1EXTN10AN1	<b>19W51</b> call
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10B-2Y	<b>13X63</b> call
	460V-3ph - C1LTVH10B-2G	<b>13X64</b> call
LPG/Propane Conversion Kits	[Standard heat] C1PROP23BS1	<b>14N22</b> call
	[Medium heat] C1PROP22BS1	<b>14N23</b> call
	[High heat] C1PROP21BS1	<b>14N25</b> call
Vertical Vent Extension	C1EXTN20FF1	<b>42W16</b> call
<b>ELECTRIC HEAT (LCH MODELS)</b>		
7.5 kW	[LCH092 thru 102] 208/240V-3ph - C1EH0075B-1Y	<b>56W38</b> call
	[LCH092 thru 102] 460V-3ph - C1EH0075B-1G	<b>56W39</b> call
15 kW	[LCH092 thru 150] 208/240V-3ph - C1EH0015B-1Y	<b>56W41</b> call
	[LCH092 thru 150] 460V-3ph - C1EH0150B-1G	<b>56W42</b> call
22.5 kW	[LCH092 thru 150] 208/240V-3ph - C1EH0225B-1Y	<b>56W44</b> call
	[LCH092 thru 150] 460V-3ph - C1EH0225B-1G	<b>56W45</b> call
30 kW	[LCH092 thru 150] 208/240V-3ph - C1EH0300B-1Y	<b>56W47</b> call
	[LCH092 thru 150] 460V-3ph - C1EH0300B-1G	<b>56W48</b> call
45 kW	[LCH092 thru 150] 208/240V-3ph - C1EH0450B-1Y	<b>56W50</b> call
	[LCH092 thru 150] 460V-3ph - C1EH0450B-1G	<b>56W51</b> call
60 kW	[LCH120 thru 150] 208/240V-3ph - C1EH0600B-1Y	<b>55W02</b> call
	[LCH120 thru 150] 460V-3ph - C1EH0600B-1G	<b>55W03</b> call



Description		Order No.	Price
<b>ENERGENCE® - 7.5 - 12.5 TON ACCESSORIES (Field Installed)</b>			
<b>ELECTRICAL</b>			
Disconnect	80 amp - C1DISC080B-1	<b>54W56</b>	<b>call</b>
	150 amp - C1DISC150B-1	<b>54W57</b>	<b>call</b>
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V only) LTAGFIK10/15	<b>74M70</b>	<b>call</b>
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b>	<b>call</b>
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15B-1	<b>50W61</b>	<b>call</b>
20 x 25 x 2 (Order 4 per unit)	MERV 13 - C1FLTR40B-1	<b>52W41</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30B-1-	<b>Y3063</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b>	<b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b>	<b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (208/230v-1ph)	C1UVCL10B-1	<b>54W62</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).



Description	Order No.	Price
<b>ENERGENCE® - 13 - 25 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURBS</b>		
8 in. height	C1CURB70C-1	11F58 call
14 in. height	C1CURB71C-1	11F59 call
18 in. height	C1CURB72C-1	11F60 call
24 in. height	C1CURB73C-1	11F61 call
<b>ADJUSTABLE PITCH CURB</b>		
14 in. height	L1CURB55C	43W26 call
ROOF CURBS - HORIZONTAL (REQUIRES HORIZONTAL RETURN AIR PANEL KIT)		
<b>STANDARD</b>		
26 in. height - slab applications	[156 thru 240] C1CURB14C-1	11T89 call
37 in. height - rooftop applications	[156 thru 240] C1CURB16C-1	11T96 call
30 in. height - slab applications	[300] C1CURB15C-1	11T90 call
41 in. height - rooftop applications	[300] C1CURB17C-1	11T97 call
<b>INSULATION KIT FOR STANDARD HORIZONTAL CURBS</b>		
for C1CURB14C-1	[156 thru 240] C1INSU11C-1-	73K32 call
for C1CURB15C-1	[156 thru 240] C1INSU13C-1-	73K34 call
for C1CURB16C-1	[300] C1INSU12C-1-	73K33 call
for C1CURB17C-1	[300] C1INSU14C-1-	73K35 call
<b>HORIZONTAL RETURN AIR PANEL KIT</b>		
Required for Horizontal Applications with Roof Curb	C1HRAP10C-1-	87M00 call
ECONOMIZER		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood</b>		
Standard Economizer - Downflow or Horizontal	E1ECON15C-2	13U47 call
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARDS)</b>		
<b>With Outdoor Air Hood</b>		
High Performance Economizer - Downflow or Horizontal	E1ECON17C-1	10U60 call
<b>BAROMETRIC RELIEF DAMPERS</b>		
Downflow Barometric Relief Dampers with Exhaust Hood	C1DAMP50C	54W78 call
Horizontal Barometric Relief Dampers with Exhaust Hood	LAGEDH18/24	16K99 call
<b>ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Differential Enthalpy	Order 2 - C1SNSR64FF1	53W64 call
Single Enthalpy	C1SNSR64FF1	53W64 call
POWER EXHAUST - STANDARD STATIC		
	208/230V - C1PWRE11C-1Y	75W90 call
	460V - C1PWRE11C-1G	75W91 call



Description		Order No.	Price
<b>ENERGENCE® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
<b>OUTDOOR AIR DAMPERS</b>			
Motorized Dampers with Outdoor Air Hood	C1DAMP20C-1	<b>13U04</b>	<b>call</b>
Manual Dampers With Outdoor Air Hood	C1DAMP10C-2	<b>13U05</b>	<b>call</b>
<b>CABINET ACCESSORIES</b>			
Coil/Hail Guards	Conventional Fin/Tube Condenser Coil - [156] C1GARD51C11	<b>13T08</b>	<b>call</b>
	Conventional Fin/Tube Condenser Coil - [180 thru 300] C1GARD51C21	<b>13T12</b>	<b>call</b>
	Environ™ Coil System -[180 and 240] C1GARD52C21	<b>13T13</b>	<b>call</b>
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	[156 thru 180] RTD11-185	<b>29G06</b>	<b>call</b>
	[210 thru 300] RTD11-275-R	<b>29G07</b>	<b>call</b>
Flush - Order one	[156 thru 180] FD11-185	<b>29G10</b>	<b>call</b>
	[210 thru 300] FD11-275-R	<b>29G11</b>	<b>call</b>
Transitions (Supply and Return) - Order 1	[156, 180] C1DIFF33C-1	<b>12X68</b>	<b>call</b>
	[210 thru 300] C1DIFF34C-1	<b>12X70</b>	<b>call</b>
<b>CONTROLS</b>			
Blower Proving Switch	C1SNSR35FF1	<b>53W65</b>	<b>call</b>
Prodigy® Control System - BACnet® Module	C0CTRL60AE1L	<b>59W51</b>	<b>call</b>
Prodigy® Control System - LonTalk® Module	C0CTRL65FF1	<b>54W27</b>	<b>call</b>
Novar® 2051	E0CTRL30C1	<b>64W74</b>	<b>call</b>
Dirty Filter Switch	E1SNSR55C-1	<b>53W68</b>	<b>call</b>
Fresh Air Tempering	C1SNSR75AD1	<b>58W63</b>	<b>call</b>
<b>HUMIDITROL® CONDENSER REHEAT OPTION</b>			
Humidity Sensor Kit, Remote mounted (required)	COSNSR31AE-1	<b>17M50</b>	<b>call</b>
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44C-1	<b>83W40</b>	<b>call</b>
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43C-1	<b>83W41</b>	<b>call</b>
L CONNECTION® NETWORK - See Controls Tab Section			
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	E1SNSR71AD1	<b>68W88</b>	<b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
<b>GAS HEAT (LGH MODELS)</b>			
Bottom Gas Piping Kit	C1GPKT01C-1	<b>85M31</b>	<b>call</b>
Combustion Air Intake Extensions (order two)	LTACAIK10/15	<b>89L97</b>	<b>call</b>
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10C-2Y	<b>13X66</b>	<b>call</b>
	460V-3ph - C1LTVH10C-2G	<b>13X67</b>	<b>call</b>
LPG/Propane Conversion Kits (Order 2 kits)	[Standard heat] C1PROP25C11	<b>14N28</b>	<b>call</b>
	[Medium heat] C1PROP26C11	<b>14N29</b>	<b>call</b>
	[High heat] C1PROP27C11	<b>14N30</b>	<b>call</b>
Vertical Vent Extension Kit (Order two kits)	C1EXTN20FF1	<b>42W16</b>	<b>call</b>
<b>ELECTRICAL</b>			
Disconnect Switch	[LGH] 80 amp - E1DISC080C-1	<b>54W88</b>	<b>call</b>
	[LGH] 150 amp - E1DISC150C-1	<b>54W89</b>	<b>call</b>
	[LCH] 80 amp - C1DISC080C-1	<b>54W85</b>	<b>call</b>
	[LCH] 150 amp - C1DISC150C-1	<b>54W86</b>	<b>call</b>
	[LCH] 250 amp - C1DISC250C-1	<b>54W87</b>	<b>call</b>
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V, 575V) LTAGFIK10/15	<b>74M70</b>	<b>call</b>
Weatherproof Cover for GFI	C1GFIC199FF1	<b>10C89</b>	<b>call</b>
<b>ELECTRIC HEAT (LCH MODELS)</b>			
15 kW	208/240V-3ph - C1EH0150C-1Y	<b>53W84</b>	<b>call</b>
	460V-3ph - C1EH0150C-1G	<b>53W86</b>	<b>call</b>
30 kW	[156] 208/240V-3ph - C1EH0300C11Y	<b>53W88</b>	<b>call</b>
	[156] 460V-3ph - C1EH0300C11G	<b>53W90</b>	<b>call</b>
	[180 thru 300] 208/240V-3ph - C1EH0300C21Y	<b>53W92</b>	<b>call</b>
	[180 thru 300] 460V-3ph - C1EH0300C21G	<b>53W94</b>	<b>call</b>
45 kW	[156] 208/240V-3ph - C1EH0450C11Y	<b>53W96</b>	<b>call</b>
	[156] 460V-3ph - C1EH0450C11G	<b>53W98</b>	<b>call</b>
	[180 thru 300] 208/240V-3ph - C1EH0450C21Y	<b>54W00</b>	<b>call</b>
	[180 thru 300] 460V-3ph - C1EH0450C21G	<b>54W02</b>	<b>call</b>
60 kW	[156] 208/240V-3ph - C1EH0600C11Y	<b>54W04</b>	<b>call</b>
	[156] 460V-3ph - C1EH0600C11G	<b>54W06</b>	<b>call</b>
	[180 thru 300] 208/240V-3ph - C1EH0600C21Y	<b>54W08</b>	<b>call</b>
	[180 thru 300] 460V-3ph - C1EH0600C21G	<b>54W10</b>	<b>call</b>
90 kW	[210 thru 300] 208/240V-3ph - C1EH0900C-1Y	<b>54W12</b>	<b>call</b>
	[210 thru 300] 460V-3ph - C1EH0900C-1G	<b>54W14</b>	<b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 13 - 25 TON ACCESSORIES (Field Installed)</b>			
INDOOR AIR QUALITY			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15C-1-	<b>54W67</b>	<b>call</b>
24 x 24 x 2 (Order 6 per unit)	MERV 13 - C1FLTR40C-1-	<b>52W40</b>	<b>call</b>
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30C-1-	<b>44N61</b>	<b>call</b>
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	<b>77N39</b>	<b>call</b>
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	<b>87N53</b>	<b>call</b>
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	<b>87N52</b>	<b>call</b>
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	<b>87N54</b>	<b>call</b>
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	<b>85L43</b>	<b>call</b>
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	<b>90N43</b>	<b>call</b>
<b>UVC GERMICIDAL LAMPS</b>			
* Healthy Climate® UVC Light Kit (110/230v-1ph)	C1UVCL10C-1	<b>54W65</b>	<b>call</b>

\* Lamps operate on 110-230V single-phase power supply. Step-down transformer must be field supplied for field installation in 460V and 575V rooftop units (transformer is furnished for factory installed light kits). Alternately, a separate 110V power supply may be used to directly power the UVC ballast(s).





Description	Order No.	Price
<b>ENERGENCE® - 25 - 30 TON ACCESSORIES (Field Installed)</b>		
ROOF CURBS - DOWNFLOW		
<b>HYBRID ROOF CURB</b>		
14 in. height	C1CURB71D-1	<b>11F62</b> <b>call</b>
18 in. height	C1CURB72D-1	<b>11F63</b> <b>call</b>
24 in. height	C1CURB73D-1	<b>11F64</b> <b>call</b>
ROOF CURBS - HORIZONTAL (REQUIRES HORIZONTAL RETURN AIR PANEL KIT)		
<b>STANDARD</b>		
30 in. height - slab applications	LARMFH30/36-30	<b>33K79</b> <b>call</b>
41 in. height - rooftop applications	LARMFH30/36-41	<b>38K54</b> <b>call</b>
<b>INSULATION KIT FOR STANDARD HORIZONTAL CURBS</b>		
for LARMFH30/36-30	[300] C1INSU12C-1-	<b>73K33</b> <b>call</b>
for LARMFH30/36-41	[300] C1INSU14C-1-	<b>73K35</b> <b>call</b>
<b>HORIZONTAL RETURN AIR PANEL KIT</b>		
Required for Horizontal Applications with Roof Curb		<b>38K48</b> <b>call</b>
ECONOMIZER		
<b>STANDARD ECONOMIZER (NOT FOR TITLE 24)</b>		
<b>With Outdoor Air Hood</b>		
Standard Economizer - Downflow or Horizontal	E1ECON15D-1	<b>74W43</b> <b>call</b>
<b>HIGH PERFORMANCE ECONOMIZER (APPROVED FOR CALIFORNIA TITLE 24 BUILDING STANDARDS)</b>		
<b>With Outdoor Air Hood</b>		
High Performance Economizer - Downflow or Horizontal	E1ECON17D-1	<b>10U62</b> <b>call</b>
<b>BAROMETRIC RELIEF DAMPERS</b>		
Downflow Barometric Relief Dampers with Exhaust Hood	E1DAMP60D-1	<b>76W17</b> <b>call</b>
Horizontal Barometric Relief Dampers with Exhaust Hood	LAGEDH30/36	<b>33K78</b> <b>call</b>
<b>ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>		
Differential Enthalpy	Order 2 - C1SNSR64FF1	<b>53W64</b> <b>call</b>
Single Enthalpy	C1SNSR64FF1	<b>53W64</b> <b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 25 - 30 TON ACCESSORIES (Field Installed)</b>			
<b>POWER EXHAUST</b>			
Standard Static	208/230V - E1PWRE40D-1Y	<b>74W21</b>	<b>call</b>
	460V - E1PWRE40D-1G	<b>74W22</b>	<b>call</b>
High Static - 50%	208/230V - Drive Kit #1 (405-533 rpm) - LAPEB30/36AY	<b>83M83</b>	<b>call</b>
	208/230V - Drive Kit #2 (531-731 rpm) - LAPEB30/36BY	<b>84M34</b>	<b>call</b>
	208/230V - Drive Kit #3 (731-932 rpm) - LAPEB30/36CY	<b>84M35</b>	<b>call</b>
	460V - Drive Kit #1 (405-533 rpm) - LAPEB30/36AG	<b>83M84</b>	<b>call</b>
	460V - Drive Kit #2 (531-731 rpm) - LAPEB30/36BG	<b>84M36</b>	<b>call</b>
	460V - Drive Kit #3 (731-932 rpm) - LAPEB30/36CG	<b>84M37</b>	<b>call</b>
	High Static - 100%	208/230V - Drive Kit #1 (406-533 rpm) - LAPEB30/36DY	<b>83M86</b>
208/230V - Drive Kit #2 (531-731 rpm) - LAPEB30/36EY		<b>84M40</b>	<b>call</b>
208/230V - Drive Kit #3 (731-932 rpm) - LAPEB30/36FY		<b>84M41</b>	<b>call</b>
460V - Drive Kit #1 (406-533 rpm) - LAPEB30/36DG		<b>83M87</b>	<b>call</b>
460V - Drive Kit #2 (531-731 rpm) - LAPEB30/36EG		<b>84M42</b>	<b>call</b>
460V - Drive Kit #3 (731-932 rpm) - LAPEB30/36FG		<b>84M43</b>	<b>call</b>
100% with VFD		208/230V - LAPEV30/36GY	<b>83M89</b>
	460V - LAPEV30/36GG	<b>83M90</b>	<b>call</b>
100% with VFD and Bypass	208/230V - LAPEV30/36HY	<b>83M92</b>	<b>call</b>
	460V - LAPEV30/36HG	<b>83M93</b>	<b>call</b>
<b>OUTDOOR AIR DAMPERS</b>			
Motorized Dampers with Outdoor Air Hood	E1DAMP25D-1-	<b>74W44</b>	<b>call</b>
Manual Dampers With Outdoor Air Hood	E1DAMO15D-1-	<b>74W45</b>	<b>call</b>
<b>CABINET ACCESSORIES</b>			
Coil/Hail Guards	C1GARD52D-1	<b>13T16</b>	<b>call</b>
Grille Guards	C1GARD39D-1-	<b>86K30</b>	<b>call</b>
Horizontal Return Air Panel Kit		<b>38K48</b>	<b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 25 - 30 TON ACCESSORIES (Field Installed)</b>			
<b>CEILING DIFFUSERS</b>			
Step-Down - Order one	LARTD30/36	<b>35K25</b>	<b>call</b>
Flush - Order one	LAFD30/36	<b>35K24</b>	<b>call</b>
Transitions (Supply and Return) - Order one	LASRT30/36	<b>33K80</b>	<b>call</b>
<b>CONTROLS</b>			
Blower Proving Switch	C1SNSR35FF1	<b>53W65</b>	<b>call</b>
Prodigy® Control System - BACnet® Module	C0CTRL60AE1L	<b>59W51</b>	<b>call</b>
Prodigy® Control System - LonTalk® Module	C0CTRL65FF1	<b>54W27</b>	<b>call</b>
Novar® 2051	E0CTRL30C1	<b>64W74</b>	<b>call</b>
Dirty Filter Switch	E1SNSR55C-1	<b>53W68</b>	<b>call</b>
Fresh Air Tempering	C1SNSR75AD1	<b>58W63</b>	<b>call</b>
<b>SMOKE DETECTORS</b>			
Supply or Return (Power board and one sensor)	C1SNSR44C-1	<b>83W40</b>	<b>call</b>
Supply <u>and</u> Return (Power board and two sensors)	C1SNSR43C-1	<b>83W41</b>	<b>call</b>
Supply Static Limit Switch	C0SNSR11AE1	<b>79M80</b>	<b>call</b>
Supply Static Limit Switch - Mounting Kit	C0SNSR12AE1	<b>79M81</b>	<b>call</b>
Supply Static Transducer	C0SNSR20AE1	<b>78M19</b>	<b>call</b>
L CONNECTION® NETWORK - See Controls Tab Section			
THERMOSTATS - See Controls Tab Section			
<b>COOLING ACCESSORIES</b>			
Condensate Drain Trap	PVC - C1TRAP20AD2	<b>76W26</b>	<b>call</b>
	Copper - C1TRAP10AD2	<b>76W27</b>	<b>call</b>
Drain Pan Overflow Switch	E1SNSR71AD1	<b>68W88</b>	<b>call</b>
Stainless Steel Condensate Drain Pan	C1DPAN10D-1-	<b>83W42</b>	<b>call</b>
<b>GAS HEAT (LGH MODELS)</b>			
Combustion Air Intake Extensions (order two)	LTACA1K10/15	<b>89L97</b>	<b>call</b>
LPG/Propane Conversion Kits (Order 2 kits)	Standard Heat - LTALPGK-130	<b>72M94</b>	<b>call</b>
	Medium Heat - LTALPGK-180	<b>72M95</b>	<b>call</b>
	High Heat - LTALPGK-240	<b>72M96</b>	<b>call</b>
Low Temperature Vestibule Heater	208/230V-3ph - C1LTVH10C-1Y	<b>58W28</b>	<b>call</b>
	460V - C1LTVH10C-1G	<b>58W29</b>	<b>call</b>
Vertical Vent Extension Kit (Order two kits)	C1EXTN20FF1	<b>42W16</b>	<b>call</b>



Description		Order No.	Price
<b>ENERGENCE® - 25 - 30 TON ACCESSORIES (Field Installed)</b>			
<b>ELECTRICAL</b>			
Disconnect Switch	[LGH] 80 amp - E1DISC080C-1	54W88	call
	[LGH] 150 amp - E1DISC150C-1	54W89	call
	[LCH] 80 amp - C1DISC080C-1	54W85	call
	[LCH] 150 amp - C1DISC150C-1	54W86	call
	[LCH] 250 amp - C1DISC250C-1	54W87	call
GFI Service Outlets	15 amp non-powered, field-wired (208/230V, 460V, 575V) LTAGFIK10/15	74M70	call
Weatherproof Cover for GFI	C1GFIC199FF1	10C89	call
<b>ELECTRIC HEAT (LCH MODELS)</b>			
30 kW	208/230V-3ph - C1EH0300C21Y	53W92	call
	460V-3ph - C1EH0300C21G	53W94	call
45 kW	208/230V-3ph - C1EH0450C21Y	54W00	call
	460V-3ph - C1EH0450C21G	54W02	call
60 kW	208/230V-3ph - C1EH0600C21Y	54W08	call
	460V-3ph - C1EH0600C21G	54W10	call
90 kW	208/230V-3ph - C1EH0900C21Y	54W12	call
	460V-3ph - C1EH0900C21G	54W14	call
120 kW	208/230V-3ph - E1EH1200D-1Y	73W98	call
	460V-3ph - E1EH1200D-1G	73W99	call
<b>INDOOR AIR QUALITY</b>			
<b>AIR FILTERS</b>			
Healthy Climate® High Efficiency Air Filters	MERV 8 - C1FLTR15D-1-	54W21	call
20 x 20 x 2 (Order 12 per unit)	MERV 13 - C1FLTR40D-1-	52W39	call
Replacement Media Filter With Metal Mesh Frame (includes non-pleated filter media)	C1FLTR30D-1-	44N60	call
<b>CO2 SENSORS</b>			
Sensor - Wall-mount, off-white plastic cover, LCD display	C0SNSR50AE1L	77N39	call
Sensor - Wall-mount, off-white plastic cover, no display	C0SNSR52AE1L	87N53	call
Sensor - Black plastic case with LCD display, rated for plenum mounting	C0SNSR51AE1L	87N52	call
Sensor - Wall-mount, black plastic case, no display, rated for plenum mounting	C0MISC19AE1	87N54	call
CO2 Sensor Duct Mounting Kit - for downflow applications	C0MISC19AE1-	85L43	call
Aspiration Box - for duct mounting non-plenum rated CO2 sensors (87N53 or 77N39)	C0MISC16AE1-	90N43	call



**ADAPTOR CURBS - FOR CURRENT LENNOX ROOFTOP UNITS**



**Fully Assembled and Insulated - Fully Welded - Internal Transitions**

Mfr.	Old Rooftop Unit	Existing Roof Curb	New Rooftop Unit	Order No.	Price
Lennox	GCS10-261-410-650	RMFG10-65	K / Emergence A Box (3 to 6 Ton)	83W54	call
Lennox	GCS/CHA/CHP16-261/411	RMF16-41	K / Emergence A Box (3 to 6 Ton)	20W04	call
Lennox	GCS/CHA/CHP16-261/411	RMF16-41	Raider ZG/ZC/ZH036-060	10M03	call
Lennox	GCS/CHA/CHP16-511/653, GCS20/CHA20-411/653	RMF16-41 (Cant.) or RMF16-65	K / Emergence A Box (3 to 6 Ton)	20W05	call
Lennox	GCS/CHA/CHP16-511/653, GCS20/CHA20-411/653	RMF16-41 (Cant.) or RMF16-65	Raider ZG/ZC/ZH036-060	10M21	call
Lennox	GCS/CHA/CHP24-650/813	RMF24-81	K / Emergence A Box (3 to 6 Ton)	20W06	call
Lennox	GCS/CHA/CHP24-650/813	RMF24-81	Raider ZG/ZC/ZH036-060	10M02	call
Lennox	GCS/CHA/CHP16-1853	RMF16-185	K / Emergence C Box (15 to 25 Ton)	20W08	call
Lennox	GCS/CHA16-180/240	RMF16-18/24	K / Emergence C Box (15 to 25 Ton)	20W09	call
Lennox	GCS/CHA16-2553/2753	RMF16-300	K / Emergence C Box (15 to 25 Ton)	20W10	call
Lennox	GCS/CHA16,24-3003	RMF16-300	K / Emergence C Box (15 to 25 Ton)	20W11	call
Lennox	CHA/CHP9 & 10 - 261/651	RMF9-65	K / Emergence A Box (3 to 6 Ton)	20W12	call
Lennox	CHA/CHP11-953	RMF11-95	K / Emergence B Box (7.5 to 12 Ton)	22W61	call
Lennox	GCS11-953	RMFG11-95	K / Emergence B Box (7.5 to 12 Ton)	22W62	call
Lennox	CHA/CHP11-1353	RMF11-135	K / Emergence B Box (7.5 to 12 Ton)	22W63	call
Lennox	GCS11-1353	RMFG11-135	K / Emergence B Box (7.5 to 12 Ton)	22W64	call
Lennox	GCS3-1853/2753	RMF3-185/275	K / Emergence C Box (15 to 25 Ton)	22W65	call
Lennox	CHA/CHP/GCS11-2753	RMF11-275	K / Emergence C Box (15 to 25 Ton)	22W66	call
Lennox	CHA/CHP/GCS11-3003	RMF11-275	K / Emergence C Box (15 to 25 Ton)	22W67	call
Lennox	GCS4-261/311	RMF3-31	K / Emergence A Box (3 to 6 Ton)	26W88	call
Lennox	CHA/P8, GCS3-411/461	RMF3-46	K / Emergence A Box (3 to 6 Ton)	26W89	call
Lennox	CHA/P8, GCS3-511/651	RMF3-65	K / Emergence A Box (3 to 6 Ton)	26W90	call
Lennox	GCS9-411/651	RMFG9-65	K / Emergence A Box (3 to 6 Ton)	26W91	call
Lennox	GCS9-411/651	RMFG9-65	Raider ZG/ZC/ZH036-060	10M20	call
Lennox	GCS/CHA16-823/953, GCS/CHA24-953	RMF16-95 (09)	K A+ Box (KGA/KCA090, KHA072)	88W66	call
Lennox	GCS/CHA16-823/953, GCS/CHA24-953	RMF16-95 (09)	K / Emergence B Box (7.5 to 12 Ton)	92M73	call
Lennox	GCS/CHA16-1353, GCS/CHA24-1353	RMF16-135/160	K / Emergence B Box (7.5 to 12 Ton)	92M72	call
Lennox	GCS3-1353, CHA/CHP8 1353	RMF3-135	K / Emergence B Box (7.5 to 12 Ton)	92M74	call
Lennox	GCS3-953	RMF3-95	K / Emergence B Box (7.5 to 12 Ton)	92M75	call
Lennox	CHA/CHP/GCS11-1853	RMF11-185	K / Emergence C Box (15 to 25 Ton)	92M80	call

ADAPTOR CURBS - FOR COMPETITOR'S ROOFTOP UNITS



Fully Assembled and Insulated - Fully Welded - Internal Transitions

Mfr.	Old Rooftop Unit	Existing Roof Curb	New Rooftop Unit	Order No.	Price
Carrier	48/50JD/DJE/LJ004-007	---	K / Emergence A Box (3 to 6 Ton)	64W81	call
Carrier	48HD007, 48HDT005-006, 48LDT004-006	---	K / Emergence A Box (3 to 6 Ton)	64W84	call
Carrier	48DP/DR012-020, 48THE016-020, 48TJD016-	---	K / Emergence B Box (7.5 to 12 Ton)	92M70	call
Carrier	48/50 DP/DR 012-020, 50PQ 012-020, 48/50 THE 016-020, 48/50TJD 016-020	---	K / Emergence C Box (15 to 25 Ton)	92M79	call
Carrier	48 HD/LD 004-006	---	K / Emergence A Box (3 to 6 Ton)	26W92	call
Carrier	48HD/HV/LD008	---	K / Emergence B Box (7.5 to 12 Ton)	92M71	call
* Singer	PGDA / PGMB036,060	---	K / Emergence A Box (3 to 6 Ton)	83W51	call
Trane	SACA753-A	---	K / Emergence B Box (7.5 to 12 Ton)	92M76	call
Trane	SACA C10, SACC C11, SFCA C10, SFCB C11	---	K / Emergence B Box (7.5 to 12 Ton)	92M77	call
Trane	SACA/SFCA/SFCB B50	---	K / Emergence A Box (3 to 6 Ton)	64W80	call
Trane	TCD102, 120, A&B	---	K / Emergence B Box (7.5 to 12 Ton)	83W55	call
Trane	YCD036~060A,C / TCD036~060C	---	K / Emergence A Box (3 to 6 Ton)	83W48	call
Trane	YCD036~060A,C / TCD036~060C	---	Raider ZG/ZC/ZH036-060	10M01	call
Trane	YCD075A, YCD090 A&B	---	K / Emergence B Box (7.5 to 12 Ton)	83W49	call
Trane	YCD/TCD180 A&B	---	K / Emergence C Box (15 to 25 Ton)	83W50	call
Trane	YCD181C, 240B	---	K / Emergence C Box (15 to 25 Ton)	83W56	call
York	B*CH/D*CE/D*CG036-072	---	K / Emergence A Box (3 to 6 Ton)	64W85	call
York	B*CH/D*CE/D*CG036-072	---	Raider ZG/ZC/ZH036-060	10L32	call
York	B*CH 090-150, D*EG 090- 150, D*CG 090-150	---	K / Emergence B Box (7.5 to 12 Ton)	92M78	call
York	SA42, 48, 60G	---	K / Emergence A Box (3 to 6 Ton)	83W53	call
York	SA24 - 30, 36	---	K / Emergence A Box (3 to 6 Ton)	83W57	call

\* Singer Curb - The supply and return to the existing curb are by installer. The bottom of this adaptor curb is panned.



**T-CLASS™ SEPARATED COMBUSTION UNIT HEATERS**

With Aluminized Steel Heat Exchanger



Model No.	Input Btuh	Order No.	Price	Stock
TUA045SNAF	45K	82M00	call	---
TUA100SNAF	100K	82M03	call	---
TUA125SNAF	125K	82M04	call	---
TUA150SNAF	150K	82M05	call	---
TUA250SNAF	240K	82M07	call	---
TUA300SNAF	300K	82M08	call	---

With Stainless Steel Heat Exchanger

TUA100SNSF	100K	82M42	call	---
TUA125SNSF	125K	82M43	call	---
TUA150SNSF	150K	82M44	call	---
TUA250SNSF	240K	82M46	call	---
TUA300SNSF	300K	82M47	call	---

**T-CLASS™ ACCESSORIES (Field Installed)**

LPG CONVERSION KITS

For 045 models	82M93	call	---
For 100, 125, 150, and 250 models	82M94	call	---
For 300 models	82M95	call	---

VERTICAL VENTING / AIR INLET TERMINATION CAP

3 inch	82M90	call	---
4 inch	82M91	call	---
5 inch	82M92	call	---
6 inch	82M96	call	---

**NOTE - Also see Horizontal Venting Components at end of this section.**





**LF24 SERIES HORIZONTAL UNIT HEATERS**

Low Profile



Model No.	Input Btuh	Order No.	Price	Stock
LF24-30A Low Profile	30K	<b>40K86</b>	call	---
LF24-45A Low Profile	45K	<b>40K87</b>	call	---
LF24-60A Low Profile	60K	<b>11L41</b>	call	---
LF24-75A Low Profile	75K	<b>11L42</b>	call	---

**LF24 MODELS**

With Aluminized Steel Heat Exchanger



Model No.	Input Btuh	Order No.	Price	Stock
LF24-100A	100K	<b>16J70</b>	call	---
LF24-115A	115K	<b>23W52</b>	call	---
LF24-145A	145K	<b>23W54</b>	call	---
LF24-175A	175K	<b>23W56</b>	call	---
LF24-200A	195K	<b>89K88</b>	call	---
LF24-230A	230K	<b>23W58</b>	call	---
LF24-250A	250K	<b>26J78</b>	call	---
LF24-300A	300K	<b>26J80</b>	call	---
LF24-345A	345K	<b>65K97</b>	call	---
LF24-400A	390K	<b>86K41</b>	call	---

With Stainless Steel Heat Exchanger

LF24-100S	100K	<b>16J71</b>	call	---
LF24-115S	115K	<b>23W53</b>	call	---
LF24-145S	145K	<b>23W55</b>	call	---
LF24-175S	175K	<b>23W57</b>	call	---
LF24-200S	195K	<b>89K89</b>	call	---
LF24-230S	230K	<b>23W59</b>	call	---
LF24-250S	250K	<b>26J79</b>	call	---
LF24-300S	300K	<b>26J81</b>	call	---
LF24-345S	345K	<b>65K98</b>	call	---
LF24-400S	390K	<b>86K42</b>	call	---

**NOTE - Also see Horizontal Venting Components at end of this section.**



**LF24 ACCESSORIES (Field Installed)**


Description	Order No.	Price	Stock
<b>HANGING BRACKET KIT</b>			
All models	<b>87277</b>	<b>call</b>	<b>---</b>
<b>HIGH ALTITUDE PRESSURE SWITCH KIT</b>			
LF24-175 - Required for proper operation at altitudes over 2500 ft. above sea level.	<b>36W49</b>	<b>call</b>	<b>---</b>
LF24-100 through 145 models - Required for proper operation at altitudes over 5500 ft. above sea level.			
<b>LPG CONVERSION KITS</b>			
For -30, -45, -60 & -75 models	<b>20L05</b>	<b>call</b>	<b>---</b>
For -100 models	<b>45L85</b>	<b>call</b>	<b>---</b>
For -115 thru -175 models	<b>63J56</b>	<b>call</b>	<b>---</b>
For -200 models	<b>20L07</b>	<b>call</b>	<b>---</b>
For -230 and-345 models	<b>63J57</b>	<b>call</b>	<b>---</b>
For -250 thru -300 models	<b>45L88</b>	<b>call</b>	<b>---</b>
For -400 models	<b>20L06</b>	<b>call</b>	<b>---</b>
<b>LF24 DISCHARGE NOZZLES (Field Installed)</b>			
30° discharge for LF24-100/115/145	<b>94K94</b>	<b>call</b>	<b>---</b>
30° discharge for LF24-175/200	<b>94K95</b>	<b>call</b>	<b>---</b>
30° discharge for LF24-230/250/300/345/400	<b>94K96</b>	<b>call</b>	<b>---</b>
45° discharge for LF24-100/115/145	<b>94K98</b>	<b>call</b>	<b>---</b>
45° discharge for LF24-175/200	<b>94K99</b>	<b>call</b>	<b>---</b>
45° discharge for LF24-230/250/300/345/400	<b>95K00</b>	<b>call</b>	<b>---</b>
60° discharge for LF24-100/115/145	<b>16L28</b>	<b>call</b>	<b>---</b>
60° discharge for LF24-175/200	<b>16L29</b>	<b>call</b>	<b>---</b>
60° discharge for LF24-230/250/300/345/400	<b>16L30</b>	<b>call</b>	<b>---</b>
90° discharge for LF24-100/115/145	<b>15L96</b>	<b>call</b>	<b>---</b>
90° discharge for LF24-175/200	<b>15L97</b>	<b>call</b>	<b>---</b>
90° discharge for LF24-230/250/300/345/400	<b>15L98</b>	<b>call</b>	<b>---</b>

**NOTE - Also see Horizontal Venting Components at end of this section.**



**LD24 SERIES DUCT FURNACES**

LD24 MODELS - With Aluminized Steel Heat Exchanger



Model No.	Input Btuh	Order No.	Price	Stock
LD24-75A	75K	<b>32K54</b>	call	---
LD24-100A	100K	<b>32K55</b>	call	---
LD24-125A	125K	<b>32K56</b>	call	---
LD24-150A	150K	<b>32K57</b>	call	---
LD24-200A	200K	<b>32K58</b>	call	---
LD24-250A	250K	<b>32K59</b>	call	---
LD24-300A	300K	<b>32K60</b>	call	---

LD24 MODELS - With Stainless Steel Heat Exchanger

LD24-100S	100K	<b>32K62</b>	call	---
LD24-125S	125K	<b>32K63</b>	call	---
LD24-150S	150K	<b>32K64</b>	call	---
LD24-200S	200K	<b>32K65</b>	call	---
LD24-250S	250K	<b>32K66</b>	call	---
LD24-300S	300K	<b>32K67</b>	call	---

**NOTE - Also see Horizontal Venting Components at end of this section.**



**HORIZONTAL VENTING**

HORIZONTAL VENT KITS - UPSLOPE

Description		Order No.	Price	Stock
3 in. - LF24-30-45, TUA045	C5VENT3KU	75W62	call	---
4 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4KU	75W63	call	---
5 in. - LD24-200-250-300, LF24-175-200-230-250-300, TUA100-125-150-250	C5VENT5KU	75W64	call	---
6 in. - LF24-345-400, TUA300	C5VENT6KU	75W65	call	---

HORIZONTAL VENT KITS - DOWNSLOPE

3 in. - LF24-30-45, TUA045	C5VENT3KD	75W66	call	---
4 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4KD	75W67	call	---
5 in. - LD24-200-250-300, LF24-175-200-230-250-300 TUA100-125-150-250	C5VENT5KD	75W68	call	---
6 in. - LF24-345-400, TUA300	C5VENT6KD	75W69	call	---

45° ELBOW

3 in. - LF24-30-45, TUA045 (optional)	C5VENT3E45	87W79	call	---
4 in. - LD24-75-100-125-150, LF24-60-75-100-115-145 (optional)	C5VENT4E45	87W80	call	---
5 in. - LD24-200-250-300, LF24-375-200-230-250-300 (required) TUA100-125-150-250 (optional)	C5VENT5E45	87W81	call	---
6 in. - LF24-345-400 (required) TUA300 (optional)	C5VENT6E45	87W82	call	---

90° ELBOW

3 in. - LF24-30-45, TUA045 (optional)	C5VENT3E	75W70	call	---
4 in. - LD24-75-100-125-150, LF24-60-75-100-115-145 (optional)	C5VENT4E	75W71	call	---
5 in. - LD24-200-250-300, LF24-375-200-230-250-300 (required) TUA100-125-150-250 (optional)	C5VENT5E	75W72	call	---
6 in. - LF24-345-400 (required) TUA300 (optional)	C5VENT6E	75W73	call	---

STRAIGHT VENT PIPE FOR HORIZONTAL VENTING

3 x 6 in. - LF24-30-45, TUA045	C5VENT3P6	75W74	call	---
3 x 12 in. - LF24-30-45, TUA045	C5VENT3P12	75W75	call	---
3 x 36 in. - LF24-30-45, TUA045	C5VENT3P36	75W76	call	---
4 x 6 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4P6	75W77	call	---
4 x 12 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4P12	75W78	call	---
4 x 36 in. - LD24-75-100-125-150, LF24-60-75-100-115-145	C5VENT4P36	75W79	call	---
5 x 6 in. - LD24-200-250-300, LF24-175-200-230-250-300 TUA100-125-150-250	C5VENT5P6	75W80	call	---
5 x 12 in. - LD24-200-250-300, LF24-175-200-230-250-300 TUA100-125-150-250	C5VENT5P12	75W81	call	---
5 x 36 in. - LD24-200-250-300, LF24-175-200-230-250-300 TUA100-125-150-250	C5VENT5P36	75W82	call	---
6 x 12 in. - LF24-345-400, TUA300	C5VENT6P12	75W83	call	---
6 x 36 in. - LF24-345-400, TUA300	C5VENT6P36	75W84	call	---

**ENERGY RECOVERY SYSTEMS**

Designed for applications requiring outdoor air to be utilized in a HVAC system.


**300 to 6200 CFM - Constant Volume - For Use With Lennox Packaged Rooftop Units (Except 35-50 ton) - Fixed or Pivoting Dessicant Wheel - Metal-Mesh, Mist-Eliminator Type Filters Furnished - Heavy-Duty Intake and Exhaust Blowers**



**NOTE – Contact your local Lennox Commercial Sales Representative for ordering information.**

**HIGH PERFORMANCE ECONOMIZER DAMPERS**

Approved for California Title 24 building standards



Model No.	Order No.	Price	Stock
C2ECON23K	10U53	call	---
<b>HIGH PERFORMANCE ECONOMIZER CONTROLS (NOT FOR TITLE 24)</b>			
Single Enthalpy Control - C1SNSR64FF1	10Z75	call	---
Differential Enthalpy Control - Order 2 - C1SNSR64FF1	10Z75	call	---

*NOTE - An IAQ sensor is used when demand control ventilation (DCV) is required.  
Use Honeywell C7232 or C7632, 2-10 Vdc control signal; minimum impedance >50k ohm.*



**T-CLASS™ - 3 - 5 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Model No.	Voltage	Tons	SEER	Order No.	Price	Stock
					call	---
TSA036S4	208/230v-3ph	3	13.00	40W79	call	---
TSA036S4	460v-3ph	3	13.00	40W78	call	---
TSA042S4	208/230v-3ph	3.5	13.00	41W75	call	---
TSA042S4	460v-3ph	3.5	13.00	41W74	call	---
TSA048S4	208/230v-3ph	4	13.00	41W78	call	---
TSA048S4	460v-3ph	4	13.00	41W76	call	---
TSA060S4	208/230v-3ph	5	13.00	41W81	call	---
TSA060S4	460v-3ph	5	13.00	41W79	call	---

**T-CLASS™ - 3 - 5 TON - HIGH EFFICIENCY - 3 PHASE - R-410A**

TSA036H4	208/230v-3ph	3	14.00	33W66	call	---
TSA036H4	460v-3ph	3	14.00	33W67	call	---
TSA042H4	208/230v-3ph	3.5	14.00	33W68	call	---
TSA042H4	460v-3ph	3.5	14.00	33W69	call	---
TSA048H4	208/230v-3ph	4	14.00	33W70	call	---
TSA048H4	460v-3ph	4	14.00	33W71	call	---
TSA060H4	208/230v-3ph	5	14.00	33W72	call	---
TSA060H4	460v-3ph	5	14.00	33W73	call	---

**T-CLASS™ - 3 - 5 TON ACCESSORIES (Field Installed)**

CABINET ACCESSORIES						
Hail Guards	24 x 24 x 28 in. - For TSA036S4			92M88	call	---
	28 x 28 x 28 x in. - For TSA042H4, TSA042S4			92M93	call	---
	28 x 28 x 36 x in. - For TSA036H4, TSA048H4, TSA048S4			92M90	call	---
	28 x 28 x 32 in. - For TSA060S4			12W21	call	---
	32 x 32 x 32 in. - For TSA060H4			27W35	call	---
Plastic Mounting Base	TSA036S4			69J06	call	---
	For TSA036H4, TSA042H4, TSA048H4, TSA060H4, TSA042S4, TSA048S4, TSA060S4			69J07	call	---
Unit Stand-Off Kit	4 mounting feet - adds 2 inches to height			94J45	call	---
CONTROLS						
L CONNECTION® NETWORK - See Controls Tab Section						



**T-CLASS™ 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Note - Also See Next Page for Units With Factory Corrosion Protection

	Model No.	Voltage	Tons	EER	Order No.	Price	Stock
	TSA072S4S	208/230/3	6 (single)	11.2	45W00	call	---
	TSA072S4S	460/3	6 (single)	11.2	45W01	call	---
	TSA090S4S	208/230/3	7.5 (single)	11.3	45W04	call	---
	TSA090S4S	460/3	7.5 (single)	11.3	45W05	call	---
	TSA120S4S	208/230/3	10 (single)	11.2	45W08	call	---
	TSA120S4S	460/3	10 (single)	11.2	45W09	call	---
	TSA120S4D	208/230/3	10 (dual)	11.2	45W12	call	---
	TSA120S4D	460/3	10 (dual)	11.2	45W13	call	---
	TSA150S4D	208/230/3	12.5 (dual)	11.2	45W16	call	---
	TSA150S4D	460/3	12.5 (dual)	11.2	45W17	call	---
	TSA180S4D	208/230/3	15 (dual)	11.4	45W20	call	---
	TSA180S4D	460/3	15 (dual)	11.4	45W21	call	---
	TSA240S4D	208/230/3	20 (dual)	11.3	45W24	call	---
	TSA240S4D	460/3	20 (dual)	11.3	45W25	call	---

**T-CLASS™ - 6 - 20 TON ACCESSORIES (Field Installed)**

CABINET ACCESSORIES

Coil Guards	[072S4S, 090S4S] T2GARD20L-1	47W12	call	---
	[120S4S, 120S4D] T2GARDD20M-1	47W13	call	---
	[150S4D] T2GARDD21M-1	47W14	call	---
	180S4D, 240S4D] T2GARD20N-1	47W15	call	---
Hail Guards	[072S4S, 090S4S] T2GARDD10L-1	47W16	call	---
	[120S4S, 120S4D] T2GARDD10M-1	47W17	call	---
	[150S4D] T2GARDD11M-1	47W18	call	---
	180S4D, 240S4D] T2GARD10N-1	47W19	call	---

CONTROLS

L CONNECTION® NETWORK - See Controls Tab Section

THERMOSTATS - See Controls Tab Section

COOLING ACCESSORIES

Low Ambient Control (0°F)	[072S4S, 090S4S, 120S4S] T2CWKT01LM1-	44W17	call	---
	[120S4D, 150S4D] T2CWKT02LM1-	44W18	call	---
	[180S4D, 240S4D] T2CWKT02LM1-	44W19	call	---







**T-CLASS™ 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

WITH FACTORY CORROSION PROTECTION

**8-10 week lead times - Includes painted unit base with E-coat coils**

	Model No.	Voltage	Tons	EER	Order No.	Price	Stock
	TSA072S4SN	208/230/3	6 (single)	11.2	<b>63W64</b>	call	---
	TSA072S4SN	460/3	6 (single)	11.2	<b>63W65</b>	call	---
	TSA090S4SN	208/230/3	7.5 (single)	11.3	<b>63W67</b>	call	---
	TSA090S4SN	460/3	7.5 (single)	11.3	<b>63W68</b>	call	---
	TSA120S4SN	208/230/3	10 (single)	11.2	<b>63W70</b>	call	---
	TSA120S4SN	460/3	10 (single)	11.2	<b>63W71</b>	call	---
	TSA120S4DN	208/230/3	10 (dual)	11.2	<b>63W73</b>	call	---
	TSA120S4DN	460/3	10 (dual)	11.2	<b>63W74</b>	call	---
	TSA150S4DN	208/230/3	12.5 (dual)	11.2	<b>63W76</b>	call	---
	TSA150S4DN	460/3	12.5 (dual)	11.2	<b>63W77</b>	call	---
	TSA180S4DN	208/230/3	15 (dual)	11.4	<b>63W79</b>	call	---
	TSA180S4DN	460/3	15 (dual)	11.4	<b>63W80</b>	call	---
	TSA240S4DN	208/230/3	20 (dual)	11.3	<b>63W82</b>	call	---
	TSA240S4DN	460/3	20 (dual)	11.3	<b>63W83</b>	call	---



COMMERCIAL SPLIT SYSTEMS

AIR CONDITIONERS

**S-CLASS™ - 3 - 5 TON - TWO-STAGE COOLING - 3 PHASE - R-410A**

	Model No.	Voltage	Tons	SEER	Order No.	Price	Stock
	SSB036H4	208/230/3	3	16	10P66	call	---
	SSB036H4	460/3	3	16	10P65	call	---
	SSB048H4	208/230/3	4	16	15W60	call	---
	SSB048H4	460/3	4	16	15W61	call	---
	SSB060H4	208/230/3	5	16	10P70	call	---
	SSB060H4	460/3	5	16	10P67	call	---


COOLING ACCESSORIES

Low Ambient Control (30°F)	34M72	call	---
----------------------------	-------	------	-----

CONTROLS

THERMOSTATS - See Controls Tab Section

**2SCU13 - DRY CHARGE - 3 - 5 TON - 3 PHASE**

	Model No.	Voltage	Tons	SEER	Order No.	Price	Stock
	2SCU13LC136T	208/230/3	3	13	92W09	call	---
	2SCU13LC148T	208/230/3	4	13	92W10	call	---
	2SCU13LC160T	208/230/3	5	13	92W11	call	---

COOLING ACCESSORIES

Low Ambient Control (30°F)	24H77	call	---
----------------------------	-------	------	-----

CONTROLS

THERMOSTATS - See Controls Tab Section



COMMERCIAL SPLIT SYSTEMS

HEAT PUMP OUTDOOR UNITS

**T-CLASS™ - 3 - 5 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Model No.	Voltage	Tons	SEER	Order No.	Price	Stock
					call	---
TPA036S4	208/230v-3ph	3	13.00	99M25	call	---
TPA036S4	460v-3ph	3	13.00	99M26	call	---
TPA042S4	208/230v-3ph	3.5	13.00	99M28	call	---
TPA042S4	460v-3ph	3.5	13.00	99M29	call	---
TPA048S4	208/230v-3ph	4	13.00	99M31	call	---
TPA048S4	460v-3ph	4	13.00	99M32	call	---
TPA060S4	208/230v-3ph	5	13.00	99M35	call	---
TPA060S4	460v-3ph	5	13.00	99M36	call	---

**T-CLASS™ - 3 - 5 TON - HIGH EFFICIENCY - 3 PHASE - R-410A**

TPA036H4	208/230v-3ph	3	15.00	33W74	call	---
TPA036H4	460v-3ph	3	15.00	33W75	call	---
TPA042H4	208/230v-3ph	3.5	15.00	33W76	call	---
TPA042H4	460v-3ph	3.5	15.00	33W77	call	---
TPA048H4	208/230v-3ph	4	15.00	33W78	call	---
TPA048H4	460v-3ph	4	15.00	33W79	call	---
TPA060H4	208/230v-3ph	5	15.00	33W80	call	---
TPA060H4	460v-3ph	5	15.00	33W81	call	---

**T-CLASS™ - 3 - 5 TON ACCESSORIES (Field Installed)**

**CABINET ACCESSORIES**

Hail Guards	For TPA036H4	27W34	call	---
	For TPA036S4	92M89	call	---
	For TPA048S4	92M90	call	---
	For TPA042H4, TPA048H4	27W36	call	---
	For TPA042S4	12W21	call	---
	For TPA060H4	94M94	call	---
	For TPA060S4	92M94	call	---
	TPA036S4	69J06	call	---
Plastic Mounting Base	For TPA036H4, TPA042H4, TPA048H4, TPA060H4, TPA042S4, TPA048S4, TPA060S4	69J07	call	---
	Unit Stand-Off Kit	4 mounting feet - adds 2 inches to height	94J45	call

**CONTROLS**

L CONNECTION® NETWORK - See Controls Tab Section



COMMERCIAL SPLIT SYSTEMS

HEAT PUMP OUTDOOR UNITS

**T-CLASS™ 7.5 - 10 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Note - Also See Below for Units With Factory Corrosion Protection

	Model No.	Voltage	Tons	EER	Order No.	Price	Stock
	TPA090S4	208/230/3	7.5 (single)	11.3	<b>45W28</b>	call	---
	TPA090S4	460/3	7.5 (single)	11.3	<b>45W29</b>	call	---
	TPA120S4	208/230/3	10 (single)	11	<b>45W32</b>	call	---
	TPA120S4	460/3	10 (single)	11	<b>45W33</b>	call	---

WITH FACTORY CORROSION PROTECTION

8-10 week lead times - Includes painted unit base with E-coat coils

	Model No.	Voltage	Tons	EER	Order No.	Price	Stock
	TPA090S4	208/230/3	7.5 (single)	11.3	<b>63W85</b>	call	---
	TPA090S4	460/3	7.5 (single)	11.3	<b>63W86</b>	call	---
	TPA120S4	208/230/3	10 (single)	11	<b>63W88</b>	call	---
	TPA120S4	460/3	10 (single)	11	<b>63W89</b>	call	---

**T-CLASS™ - 7.5 - 10 TON ACCESSORIES (Field Installed)**

CABINET ACCESSORIES

Coil Guards	[090S4S] T2GARDD20M-1	<b>47W13</b>	call	---
	[120S4S] T2GARDD21M-1	<b>47W14</b>	call	---
Hail Guards	[090S4S] T2GARDD10M-1	<b>47W17</b>	call	---
	[120S4S] T2GARDD11M-1	<b>47W18</b>	call	---

CONTROLS

L CONNECTION® NETWORK - See Controls Tab Section

THERMOSTATS - See Controls Tab Section

COOLING ACCESSORIES


Low Ambient Control (0°F)	T2CWKT04M-1-	<b>60W35</b>	call	---
---------------------------	--------------	--------------	------	-----



COMMERCIAL SPLIT SYSTEMS

HEAT PUMP OUTDOOR UNITS

**S-CLASS™ - 3 - 5 TON - TWO-STAGE COOLING - 3 PHASE - R-410A**

	<b>Model No.</b>	<b>Voltage</b>	<b>Tons</b>	<b>SEER</b>	<b>Order No.</b>	<b>Price</b>	<b>Stock</b>
	SPB036H4 - 3 Ton	208/230/3	3	16	<b>10T38</b>	call	---
	SPB048H4 - 4 Ton	208/230/3	4	16	<b>10T43</b>	call	---
	SPB060H4 - 5 Ton	208/230/3	5	16	<b>10T44</b>	call	---

COOLING ACCESSORIES

Low Ambient Control (30°F)	<b>54M89</b>	call	---
----------------------------	--------------	------	-----

CONTROLS

THERMOSTATS - See Controls Tab Section

**2SHP13 - DRY CHARGE - 3 - 5 TON - 3 PHASE**

	<b>Model No.</b>	<b>Voltage</b>	<b>Tons</b>	<b>SEER</b>	<b>Order No.</b>	<b>Price</b>	<b>Stock</b>
	2SHP13LC136T	208/230/3	3	13	<b>92W12</b>	call	---
	2SHP13LC148T	208/230/3	4	13	<b>92W13</b>	call	---
	2SHP13LC160T	208/230/3	5	13	<b>92W14</b>	call	---

COOLING ACCESSORIES

Low Ambient Control (30°F)	<b>27J00</b>	call	---
----------------------------	--------------	------	-----

CONTROLS

THERMOSTATS - See Controls Tab Section



**T-CLASS™ - 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**



Note - Also See Page 71 for Units With Factory Corrosion Protection

	Model No.	Tons	Static Range	Voltage	HP	RPM Range	Order No.	Price	Stock
	TAA072S4S	6 (single)	Low	208/230/3	1.5	552-780	<b>45W36</b>	call	---
	TAA072S4S	6 (single)	Low	460/3	1.5	552-780	<b>45W37</b>	call	---
	TAA090S4D	7.5 (dual)	Low	208/230/3	2	644-874	<b>45W40</b>	call	---
	TAA090S4D	7.5 (dual)	Low	460/3	2	644-874	<b>45W41</b>	call	---
	TAA120S4D	10 (dual)	Low	208/230/3	2	690-893	<b>45W44</b>	call	---
	TAA120S4D	10 (dual)	Low	460/3	2	690-893	<b>45W45</b>	call	---
	TAA150S4D	12.5 (dual)	Low	208/230/3	3	782-1012	<b>45W48</b>	call	---
	TAA150S4D	12.5 (dual)	Low	460/3	3	782-1012	<b>45W49</b>	call	---
	TAA180S4D	15 (dual)	Low	208/230/3	3	591-838	<b>45W52</b>	call	---
	TAA180S4D	15 (dual)	Low	460/3	3	591-838	<b>45W53</b>	call	---
	TAA240S4D	20 (dual)	Low	208/230/3	5	679-863	<b>45W56</b>	call	---
	TAA240S4D	20 (dual)	Low	460/3	5	679-863	<b>45W57</b>	call	---
	TAA072S4S	6 (single)	Standard	208/230/3	1.5	690-936	<b>45W60</b>	call	---
	TAA072S4S	6 (single)	Standard	460/3	1.5	690-936	<b>45W61</b>	call	---
	TAA090S4D	7.5 (dual)	Standard	208/230/3	2	782-1012	<b>45W64</b>	call	---
	TAA090S4D	7.5 (dual)	Standard	460/3	2	782-1012	<b>45W65</b>	call	---
	TAA120S4D	10 (dual)	Standard	208/230/3	2	852-1055	<b>45W68</b>	call	---
	TAA120S4D	10 (dual)	Standard	460/3	2	852-1055	<b>45W69</b>	call	---
TAA150S4D	12.5 (dual)	Standard	208/230/3	3	920-1150	<b>45W72</b>	call	---	
TAA150S4D	12.5 (dual)	Standard	460/3	3	920-1150	<b>45W73</b>	call	---	



**T-CLASS™ - 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

Note - Also See Page 71 for Units With Factory Corrosion Protection

	Model No.	Tons	Static Range	Voltage	HP	RPM Range	Order No.	Price	Stock
	TAA180S4D	15 (dual)	Standard	208/230/3	5	782-1012	<b>45W76</b>	call	---
	TAA180S4D	15 (dual)	Standard	460/3	5	782-1012	<b>45W77</b>	call	---
	TAA240S4D	20 (dual)	Standard	208/230/3	7.5	808-1026	<b>45W80</b>	call	---
	TAA240S4D	20 (dual)	Standard	460/3	7.5	808-1026	<b>45W81</b>	call	---
	TAA072S4S	6 (single)	High	208/230/3	2	906-1121	<b>45W84</b>	call	---
	TAA072S4S	6 (single)	High	460/3	2	906-1121	<b>45W85</b>	call	---
	TAA090S4D	7.5 (dual)	High	208/230/3	3	966-1196	<b>45W88</b>	call	---
	TAA090S4D	7.5 (dual)	High	460/3	3	966-1196	<b>45W89</b>	call	---
	TAA120S4D	10 (dual)	High	208/230/3	3	986-1232	<b>45W92</b>	call	---
	TAA120S4D	10 (dual)	High	460/3	3	986-1232	<b>45W93</b>	call	---
	TAA150S4D	12.5 (dual)	High	208/230/3	5	1134-1380	<b>45W96</b>	call	---
	TAA150S4D	12.5 (dual)	High	460/3	5	1134-1380	<b>45W97</b>	call	---
	TAA180S4D	15 (dual)	High	208/230/3	5	920-1150	<b>46W00</b>	call	---
	TAA180S4D	15 (dual)	High	460/3	5	920-1150	<b>46W01</b>	call	---
	TAA240S4D	20 (dual)	High	208/230/3	7.5	1002-1282	<b>46W04</b>	call	---
	TAA240S4D	20 (dual)	High	460/3	7.5	1002-1282	<b>46W05</b>	call	---





**T-CLASS™ - 6 - 20 TON - STANDARD EFFICIENCY - 3 PHASE - R-410A**

WITH FACTORY CORROSION PROTECTION

Includes painted blower housing(s) with E-coat coils



Model No.	Tons	Static Range	Voltage	HP	RPM Range	Order No.	Price	Stock
TAA072S4S	6 (single)	Standard	208/230/3	1.5	690-936	<b>63W91</b>	call	---
TAA072S4S	6 (single)	Standard	460/3	1.5	690-936	<b>63W92</b>	call	---
TAA090S4D	7.5 (dual)	Standard	208/230/3	2	782-1012	<b>63W94</b>	call	---
TAA090S4D	7.5 (dual)	Standard	460/3	2	782-1012	<b>63W95</b>	call	---
TAA120S4D	10 (dual)	Standard	208/230/3	2	852-1055	<b>63W97</b>	call	---
TAA120S4D	10 (dual)	Standard	460/3	2	852-1055	<b>63W98</b>	call	---
TAA150S4D	12.5 (dual)	Standard	208/230/3	3	920-1150	<b>64W00</b>	call	---
TAA150S4D	12.5 (dual)	Standard	460/3	3	920-1150	<b>64W01</b>	call	---
TAA180S4D	15 (dual)	Standard	208/230/3	5	782-1012	<b>64W03</b>	call	---
TAA180S4D	15 (dual)	Standard	460/3	5	782-1012	<b>64W04</b>	call	---
TAA240S4D	20 (dual)	Standard	208/230/3	7.5	808-1026	<b>64W06</b>	call	---
TAA240S4D	20 (dual)	Standard	460/3	7.5	808-1026	<b>64W07</b>	call	---



**T-CLASS™ - 6 TO 20 TON ACCESSORIES (Field Installed)**


Description		Order No.	Price	Stock
<b>ELECTRIC HEAT SECTIONS</b>				
<b>072 - 150 Models</b>				
10 kW	208/240-3ph - T3H0010LM1Y	<b>46W50</b>	call	---
	460V-3ph - T3H0010LM1G	<b>46W55</b>	call	---
15 kW	208/240-3ph - T3H0015LM1Y	<b>46W51</b>	call	---
	460V-3ph - T3H0015LM1G	<b>46W56</b>	call	---
25 kW	208/240-3ph - T3H0025LM1Y	<b>46W52</b>	call	---
	460V-3ph - T3H0025LM1G	<b>46W57</b>	call	---
35 kW	[090 thru 150] 208/240/3 - T3H0035LM1Y	<b>46W53</b>	call	---
	[090 thru 150] 460V-3ph - T3H0035LM1G	<b>46W58</b>	call	---
<b>180 - 240 Models</b>				
20 kW	208/240-3ph - T3EH0020N-1Y	<b>46W65</b>	call	---
	460V-3ph - T3EH0020N-1G	<b>46W69</b>	call	---
30 kW	208/240-3ph - T3EH0030N-1Y	<b>46W66</b>	call	---
	460V-3ph - T3EH0030N-1G	<b>46W70</b>	call	---
40 kW	208/240-3ph - T3EH0040N-1Y	<b>49W39</b>	call	---
	460V-3ph - T3EH0040N-1G	<b>49W40</b>	call	---
50 kW	208/240-3ph - T3EH0050N-1Y	<b>46W67</b>	call	---
	460V-3ph - T3EH0050N-1G	<b>46W71</b>	call	---



<b>T-CLASS™ - 6 TO 20 TON ACCESSORIES (Field Installed)</b>				
<b>Description</b>	<b>Order No.</b>	<b>Price</b>	<b>Stock</b>	
<b>MSAV® (MULTI-STAGE AIR VOLUME) SUPPLY AIR BLOWER VFD KIT</b>				
<b>090 Models</b>				
2 HP	208/240V-3ph - T2MSAV20LM1Y	<b>92W63</b>	call	---
	460V-3ph - T2MSAV20LM1G	<b>92W64</b>	call	---
<b>090 - 180 Models</b>				
3 HP	208/240V-3ph - T2MSAV20LN1Y	<b>92W66</b>	call	---
	460V-3ph - T2MSAV20LN1G	<b>92W67</b>	call	---
<b>150 - 240 Models</b>				
5 HP	208/240V-3ph - T2MSAV20MN1Y	<b>92W69</b>	call	---
	460V-3ph - T2MSAV20MN1G	<b>92W70</b>	call	---
<b>240 Models</b>				
7.5 HP	208/240V-3ph - T2MSAV20N-1Y	<b>92W72</b>	call	---
	460V-3ph - T2MSAV20N-1G	<b>92W73</b>	call	---
<b>HOT WATER COIL</b>				
	(072 thru 150) T2HWCL10LM1-	<b>44W20</b>	call	---
	[180 thru 240] T2HWCL10N-1-	<b>44W21</b>	call	---
<b>CABINET</b>				
Float Switch	T2SNSR71LN1-	<b>91W69</b>	call	---
<b>ECONOMIZER DAMPERS (Upflow and Horizontal)</b>				
Standard Economizer (Not for Title 24)	[072 thru 090] T2ECON31L-1-	<b>44W94</b>	call	---
	[120 thru 150] T2ECON31M-1-	<b>44W95</b>	call	---
	[180 thru 240] T2ECON31N-1-	<b>44W96</b>	call	---
High Performance Economizer (Approved for California Title 24 Building Standards)	[072 thru 090] T2ECON34L-1	<b>10U48</b>	call	---
	[120 thru 150] T2ECON34M-1	<b>10U49</b>	call	---
	[180 thru 240] T2ECON34N-1	<b>10U50</b>	call	---
Differential Enthalpy Control (Not for Title 24)	T1SNSR60AN1	<b>17W71</b>	call	---
<b>INDOOR AIR QUALITY</b>				
<b>HEALTHY CLIMATE® HIGH EFFICIENCY AIR FILTERS - Requires 5 In. Filter Mounting Kit Below</b>				
Order 3 for 072-090. order 4 for 120-150 and order 6 for 180-240 (16 x 25 x 5)	MERV 10 - HCF16-10	<b>X6670</b>	call	---
	MERV 16 - HCF16-16	<b>X6672</b>	call	---
<b>5 IN. FILTER MOUNTING KITS</b>				
	[072 thru 090] T2FLTR70L-1-	<b>47W71</b>	call	---
	[120 thru 150] T2FLTR70M-1-	<b>47W72</b>	call	---
	[180 thru 240] T2FLTR70N-1-	<b>47W73</b>	call	---
<b>HEALTHY CLIMATE® UVC LIGHT KIT</b>				
	[072 thru 150] 208/230V-1ph - T2UVCL10LM1	<b>46W43</b>	call	---
	[180 thru 240] 208/230V-1ph - T2UVCL10N-1	<b>46W44</b>	call	---
	Step-Down Transformer - 460/230V (for 460V air handlers)	<b>96M07</b>	call	---
<b>COOLING SYSTEM</b>				
Freezestat	T2SNSR70LN1	<b>91W70</b>	call	---
Heat Pump Check Valve Kit	[180] T2CVLV10N-1-	<b>47W48</b>	call	---
	[240] T2CVLV11N-1-	<b>50W73</b>	call	---
<b>RETURN AIR GRILLE</b>				
	[072 thru 090] T2GARD30L-1	<b>47W49</b>	call	---
	[120 thru 150] T2GARD30M-1	<b>47W50</b>	call	---
	[180 thru 240] T2GARD30N-1	<b>47W51</b>	call	---

**CBX32M - MULTI-POSITION**

**R-410A**




Model No.	Tons	Voltage	Order No.	Price	Stock
CBX32M-036	3	*460V-1ph	<b>34M16</b>	call	---
CBX32M-048	4	*460V-1ph	<b>34M17</b>	call	---
CBX32M-060	5	*460V-1ph	<b>34M18</b>	call	---

\*Blower motor is 460V – 1 phase. Optional electric heat is 460V or 575V – 3 phase

**CBX27UH - UPFLOW/HORIZONTAL**

**R-410A**



Model No.	Tons	Voltage	Order No.	Price	Stock
CBX27UH-030	3	208/230V-1ph	<b>24W78</b>	call	---
CBX27UH-036	3	*460V-1ph	<b>53W03</b>	call	---
CBX27UH-048	4	*460V-1ph	<b>53W04</b>	call	---
CBX27UH-060	5	*460V-1ph	<b>53W05</b>	call	---

\*Blower motor is 460V – 1 phase. Optional electric heat is 460V or 575V – 3 phase

**ELECTRIC HEAT**

**CBX27UH AND CBX32M**

Model No.	Order No.	Price	Stock
8 kW [030, 036, 048 thru 060] Terminal Block - 208/240V-3ph - ECB29-8	<b>12L61</b>	call	---
10 kW [030, 036, 048 thru 060] Terminal Block - 208/240V-3ph - ECB29-10	<b>12L62</b>	call	---
10 kW [030, 036, 048 thru 060] Terminal Block - 460V-3ph - ECB29-10	<b>28K47</b>	call	---
15 kW [036, 048 thru 060] Circuit Breaker - 208/240V-3ph - ECB29-15CB	<b>12L63</b>	call	---
15 kW [036, 048 thru 060] Terminal Block - 460V-3ph - ECB29-15	<b>28K48</b>	call	---
20 kW [036] Circuit Breaker - 208/240V-3ph - ECB29-20CB	<b>12L64</b>	call	---
20 kW [036] Terminal Block - 460V-3ph - ECB29-20	<b>28K49</b>	call	---
25 kW [048 thru 060] Circuit Breaker - 208/240V-3ph - ECB29-25CB	<b>12L65</b>	call	---
25 kW [048 thru 060] Terminal Block - 460V-3ph - ECB29-25	<b>28K50</b>	call	---



AIR HANDLER ACCESSORIES			
Description and Usage	Order No.	Price	Stock
<b>CABINET</b>			
<b>DOWNFLOW COMBUSTIBLE FLOORING BASE</b>			
All CBX27UH models	<b>44K15</b>	call	---
<b>DOWNFLOW CONVERSION KIT</b>			
All CBX27UH models	<b>83M57</b>	call	---
<b>FILTERS</b>			
<b>Filter Base (filter not furnished)</b>			
3 in. base height for 1 or 2 in. filters - 16 x 20 CBX32M-036	<b>32X54</b>	call	---
3 in. base height for 1 or 2 in. filters - 20 x 20 CBX27UH-018-024-030-036-042	<b>32X55</b>	call	---
3 in. base height for 1 or 2 in. filters - 25 x 20 CBX27UH, CBX32M-048-060	<b>32X57</b>	call	---
6 in. base height for 1, 2 or 4 in. filters - 20 x 20 CBX27UH, CBX32M-036	<b>62N01</b>	call	---
6 in. base height for 1, 2 or 4 in. filters - 25 x 20 CBX27UH, CBX32M-048-060	<b>32X58</b>	call	---



**PROGRAMMABLE DIGITAL THERMOSTATS**

**COMFORTSENSE® 7500 COMMERCIAL TOUCHSCREEN THERMOSTAT - 7 Day Programmable**



Four-Stage Heating / Two-Stage Cooling Universal Multi-Stage with Humidification/Dehumidification and Economizer Relay Control

Description	Order No.	Price
Thermostat - White	C0STAT06FF1L	<b>13H15</b> call
<b>OPTIONAL ACCESSORIES</b>		
* Remote non-adjustable wall mount 20k temperature sensor - White - C0SNZN01AE2-	<b>47W36</b>	call
* Remote non-adjustable wall mount 10k temperature sensor - White - C0SNZN73AE2-	<b>47W37</b>	call
Remote non-adjustable discharge air (duct mount) temperature sensor - C0SNDC00AE1-	<b>19L22</b>	call
Outdoor Temperature Sensor - C0SNSR03AE1-	<b>X2658</b>	call
Locking Cover (Clear) - C0MISC15AE1-	<b>39P21</b>	call

\*Remote sensors can be applied in any of the following combinations:

- One Sensor - (1) 47W36
- Two Sensors - (2) 47W37
- Three Sensors - (2) 47W36 and (1) 47W37
- Four Sensors - (4) 47W36
- Five Sensors - (3) 47W36 and (2) 47W37

**COMFORTSENSE® 3000 COMMERCIAL 5-2 Day Programmable**



Two-Stage Heating / Two-Stage Cooling Conventional Systems with Economizer Relay Control

Description	Order No.	Price
Thermostat - White	C0STAT05FF1L	<b>11Y05</b> call
<b>OPTIONAL ACCESSORIES</b>		
Remote non-adjustable wall mount 10k temperature sensor - White - C0SNZN73AE2-	<b>47W37</b>	call
Optional wall mounting plate - C0MISC17AE1-	<b>X2659</b>	call

**NON-PROGRAMMABLE DIGITAL THERMOSTATS**

**DIGITAL THERMOSTATS**



One-Stage Heating / Cooling Conventional Systems - Auto Changeover

Description	Order No.	Price
Thermostat - White	C0STAT12AE1L	<b>51M32</b> call
<b>OPTIONAL ACCESSORIES</b>		
Outdoor Temperature Sensor - C0SNSR03AE1-	<b>X2658</b>	call
Optional wall mounting plate - C0MISC17AE1-	<b>X2659</b>	call







**L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM**

Communicate with Prodigy™ Control System on Lennox' Premium Rooftop Units, non-Prodigy Control Lennox or aftermarket equipment with optional Network Thermostat Controller, and other building functions with the Building Controller.

NOTE - SEE COMPONENT SELECTION FLOWCHARTS AT THE END OF THIS SECTION








NOTE - FOR MORE DETAILS ON L CONNECTION NETWORK COMPONENTS, PLEASE SEE ENGINEERING HANDBOOK AND SELECTION SOFTWARE BELOW

Description	Order No.	Price
<b>* SOFTWARE</b>		
 Network Control Panel PC Software	C0SOFT11AE1-	<b>96L82</b> call
<a href="#">Unit Controller PC Software - Free download</a>		
<b>CONTROLLERS</b>		
 Building Controller	C0CTRL80AE1L	<b>17M12</b> call
Network Control Panel	C0CTRL10AE1L	<b>59L21</b> call
Network Thermostat Controller	C0CTRL07AE1L	<b>17M10</b> call
Landmark Wiring Harness For Network Thermostat Controller	COMISC08BC1-	<b>24W68</b> call
I/O Module Kit	C0CTRL10AE1L	<b>86M39</b> call
Zone Link - Bus expander for networks greater than 31 devices, each Zone Link adds up to 36 additional devices to a maximum of 93 total HVAC units	C0CTRL11AE1L	<b>11W27</b> call
<b>COMFORT SENSOR (NON-ZONING)</b>		
<b>Comfort Sensors With Display and Setpoint Adjustment</b>		
 Temperature, Display, Setpoint/Fan Control, After Hours Override	C0SNAJ02AE1L	<b>18W68</b> call
Temperature, Relative Humidity, Display, Setpoint/Fan Control, After Hours Override	C0SNMT10AE1L	<b>18W66</b> call
Temperature, CO2, Display, Setpoint/Fan Control, After Hours Override	C0SNMT20AE1L	<b>18W67</b> call
Temperature, Relative Humidity, CO2, Display, Setpoint/Fan Control, After Hours Override	C0SNMT30AE1L	<b>18W65</b> call
<b>Comfort Sensors - No Display or Setpoint Adjustment</b>		
Temperature, After Hours Override	C0SNZN09AE1-	<b>18W72</b> call
Temperature, Relative Humidity, After Hours Override	C0SNMT11AE1-	<b>18W69</b> call
Temperature, CO2, After Hours Override	C0SNMT21AE1L	<b>18W70</b> call
Temperature, Relative Humidity, CO2, After Hours Override	C0SNMT31AE1L	<b>18W71</b> call
<b>ZONING</b>		
<b>COMFORT SENSORS - ZONING</b>		
<b>Comfort Sensors For Zoning - With Display and Setpoint Adjustment</b>		
 Temperature, Display, Setpoint/Fan Control, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT01AE1L	<b>18W58</b> call
Temperature, Relative Humidity, Display, Setpoint/Fan Control, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT10AE1L	<b>18W56</b> call
Temperature, CO2, Display, Setpoint/Fan Control, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT20AE1L	<b>18W57</b> call
Temperature, Relative Humidity, CO2, Display, Setpoint/Fan Control, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT30AE1L	<b>18W55</b> call
<b>Comfort Sensors For Zoning - No Display or Setpoint Adjustment</b>		
Temperature, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT00AE1L	<b>18W59</b> call
Temperature, Relative Humidity, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT11AE1L	<b>18W60</b> call
Temperature, CO2, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT21AE1L	<b>18W61</b> call
Temperature, Relative Humidity, CO2, After Hours Override, Zone Damper, Fan and Heat Control	C0SNCT31AE1L	<b>18W62</b> call

\* Computer system requirements: IBM compatible PC with Pentium or higher processor, Microsoft® Windows® 95, 98, Me, 2000, XP, NT®, Vista. (Windows® 95, Windows® 98, Windows® Me, Windows® 2000, Windows® XP, Windows NT® and Windows Vista™ are registered trademarks of Microsoft Corp.), 256 MB RAM (more memory may be required to run additional applications simultaneously), requires at least 20 MB of free hard drive space, VGA or higher resolution monitor (screen resolution must be 800 X 600 or higher and 256 colors), CD-ROM drive, mouse or compatible pointing device, serial COM port, Network Modem or Ethernet Converter Kit for remote connections.



L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

Description	Order No.	Price
<b>ZONING (Continued)</b>		
 Zone Link	<b>ZONE LINK</b>	
Zoning coordinator for one HVAC unit and up to 31 Comfort Sensors - Zoning	C0CTRL11AE1L	11W27 call
<b>ZONING ACCESSORIES</b>		
<b>Supply Static Differential Pressure Sensor</b>		
Three Operating Ranges, Three Output Options	C0SNSR20AE1	78M19 call
<b>IMC VAV Module</b>		
For constant volume bypass applications with Prodigy™ Unit Controller	C0CTRL02AE1L	86M71 call
 ZoneBus Network Cable	<b>ZoneBus Network Cable</b>	
ZoneBus Cable - 500 ft. Box (Purple Jacket)	C0MISC05AE1-	23W99 call
ZoneBus Cable - 1000 ft. Box (Purple Jacket)	C0MISC06AE1-	24W00 call
ZoneBus Cable - 2500 ft. Roll (Purple Jacket)	C0MISC07AE1-	24W01 call
<b>Duct Pressure Limit Switch</b>		
For use with variable frequency drive	C0SNSR11AE1	79M80 call
Mounting Kit for Duct Pressure Limit Switch - 18 in. vinyl tubing and connectors	C0SNSR12AE1	79M81 call
<b>Duct Temperature Sensor</b>		
For use with Network Thermostat Controller - 12 in. Probe	C0SNDC04AE1-	99K64 call
<b>Network Thermostat Controller - Bypass Controller</b>		
For constant volume bypass applications with the Network Thermostat Controller	C0CTRL70AE1L	11W31 call
 Zone and Bypass Dampers	<b>Zone and Bypass Dampers</b>	
Zone and Bypass Dampers	See Damper Pages	
Damper Actuator	C0MISC21AE1L	12W98 call
<b>SENSORS</b>		
 Outdoor Temperature Sensor	<b>TEMPERATURE</b>	
<b>Outdoor Temperature Sensor</b>		
For use with Network Thermostat Controller or Building Controller	C0SNSR02AE1-	59M05 call
Water-Proof Wiring Junction Box, Vented Aluminum Cover		
 Wall-Mount Sensor	<b>Remote Discharge Temperature Kit</b>	
For use with Prodigy™ Unit Controller for fresh air tempering - Includes 15 ft. of Cable	C1SNSR75AD1	58W63 call
<b>Temperature Sensor Probe</b>		
General Purpose 3 in. Sensor	C0SNSR05AE1-	14K92 call
<b>Zone Sensors</b>		
 Zone Sensor Miniature	Wall-Mount - With Warmer/Cooler Setpoint Adjustment	C0SNAJ01AE1- 56L80 call
	Wall-Mount - No Adjustment	C0SNZN07AE1- 94L60 call
	Wall-Mount - Miniature	C0SNZN08AE1- 94L61 call
	Wall-Mount - Miniature, For use with Building Controller	C0SNZN03AE1- 59M04 call
	Wall-Mount - Averaging Sensor Kit (Two Sensors)	C0SNZN71AE1- 23M20 call
 Zone Sensor Averaging	Wall-Mount - Flush	C0SNZN04AE1- 76M32 call
	Return Air Duct Mount	C0SNDC02AE1- 56L81 call

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

Description	Order No.	Price	
<b>SENSORS (Continued)</b>			
<b>CARBON DIOXIDE (C02)</b>			
<p>CO<sub>2</sub> Sensor (With Display)</p>	Wall-Mount - Off-White Plastic Cover, No Display	C0SNSR52AE1L 87N53 call	
	Wall-Mount - Off-White Plastic Cover With LCD Display	C0SNSR50AE1L 77N39 call	
	Wall-Mount - Black Plastic Case, No Display, rated for plenum mounting	C0SNSR53AE1L 87N54 call	
	Wall-Mount - Black Plastic Case With LCD Display, rated for plenum mounting	C0SNSR51AE1L 87N52 call	
	Aspiration Box For Duct Mounting Non-Plenum Rated CO <sub>2</sub> Sensors (87N53 or 77N39)	C0MISC16AE1- 90N43 call	
<b>RELATIVE HUMIDITY (RH)</b>			
<p>Relative Humidity Sensor</p>	Wall-Mount - Off-White Plastic Case	C0SNSR31AE1- 17M50 call	
	Return Air Duct Mount	C0SNSR30AE1- 76M31 call	
<b>OTHER</b>			
<b>Outdoor Air Control Sensor Kit</b>			
<p>Outdoor Air Control Sensor Kit</p>	Includes I/O Module	C0SNSR23DE1- 98M61 call	
	<b>Building (Return) Static Differential Pressure Sensor</b>		
	For use with Prodigy™ Unit Controller and power exhaust fans, Three Operating Ranges, Three Output Options	C0SNSR21AE1- 78M20 call	
<p>Outdoor Air Weather-Head</p>	Used with 78M20 to minimize effects of wind on pressure readings	C0SNSR22AE1- 79M21 call	
	<b>Ambient Light Sensor</b>		
<p>Ambient Light Sensor</p>	For use with Building Controller	C0SNSR60AE1- 34M67 call	
	<b>MISCELLANEOUS</b>		
<b>NETWORK</b>			
<p>Network Modem Kit</p>	Ethernet Converter Kit	C0MISC43AE1L 76M77 call	
	Network Bus to PC Converter	C0MISC47AE1- 96L78 call	
	Network Modem Kit	C0MISC46AE1- 94L62 call	
	Network Repeater	C0CTRL51AE1L 11W30 call	
	Phone Line Auto-Router	C0MISC41AE1- 34M22 call	
<p>Surge Protector</p>	Surge Protector	C0MISC92AE1- 23W22 call	
	<b>SysBus</b>		
	SysBus Cable - 500 ft. Box (Yellow Jacket)	C0MISC00AE1- 27M19 call	
<p>SysBus Cable</p>	SysBus Cable - 1000 ft. Box (Yellow Jacket)	C0MISC04AE1- 94L63 call	
	SysBus Cable - 2500 ft. Roll (Yellow Jacket)	C0MISC01AE1- 68M25 call	
	<b>NEMA ENCLOSURES</b>		
<p>NEMA 4 Enclosure</p>	NEMA 1 - Hinged, For Network Thermostat Controller, Building Controller, Zone Link or Network Modem Kit and Auto-Router	C0MISC14AE1- 34M24 call	
	NEMA 1 - Hinged, For Network Control Panel, Network Modem Kit and Ethernet Converter Kit	C0MISC13AE1- 34M23 call	
	NEMA 4 - Hinged, For Network Thermostat Controller, Building Controller or Zone Link	C0MISC10AE1- 17M11 call	
<b>OTHER</b>			
<p>After-Hours Override Button</p>	After-Hours Override Button	C0SWCH20AE1- 56L16 call	
	Blower Airflow Proving Switch Kit	C0SWCH01AE1- 53W65 call	
<p>Plug-In Transformer</p>	Dirty Filter Switch	C0SWCH00AE1- 53W66 call	
	Pressure Switch - For use with Prodigy™ Unit Controller and power exhaust	C0SNSR10AE1 79M79 call	
	Network Control Panel Service Pack	C0SOFT50AE1- 26W28 call	
<p>Transformer</p>	Transformer - 120, 208, 240 and 480VAC, 60HZ Primary / 24VAC Secondary, 75VA	C0MISC32AE1- 27W14 call	
	Transformer - 120, 240, 277 and 480VAC, 60HZ Primary / 24VAC Secondary, 100VA	C0MISC33AE1- 27W15 call	
	Transformer - 24V, Plug-in	C0MISC30AE1- 18M13 call	



L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

ZONE DAMPERS - Round Damper Shells



Diameter (in.)	Length (in.)	Order No.	Price	Diameter (in.)	Length (in.)	Order No.	Price
6	12	21M90	call	11	14	21M95	call
7	13	21M91	call	12	14	21M96	call
8	13	21M92	call	14	17	21M97	call
9	14	21M93	call	16	17	21M98	call
10	14	21M94	call	18	17	34M44	call

ZONE DAMPERS - Rectangular Damper Shells



Width (in.)	Height (in.)	Order No.	Price	Width (in.)	Height (in.)	Order No.	Price
8	10	22M02	call	14	10	22M38	call
8	12	22M03	call	14	14	22M40	call
8	14	22M04	call	14	16	22M41	call
8	16	22M05	call	14	18	22M42	call
8	18	22M06	call	14	20	22M43	call
8	20	22M07	call	14	22	22M44	call
8	22	22M08	call	14	24	22M45	call
8	24	22M09	call	14	26	22M46	call
8	26	22M10	call	14	28	22M47	call
8	28	22M11	call	14	30	22M48	call
8	30	22M12	call	16	8	22M49	call
10	8	22M13	call	16	14	22M52	call
10	10	22M14	call	16	18	22M54	call
10	12	22M15	call	16	22	22M56	call
10	16	22M17	call	16	24	22M57	call
10	18	22M18	call	16	26	22M58	call
10	20	22M19	call	16	28	22M59	call
10	22	22M20	call	16	30	22M60	call
10	24	22M21	call	18	8	22M61	call
10	26	22M22	call	18	10	22M62	call
10	28	22M23	call	18	12	22M63	call
10	30	22M24	call	18	20	22M67	call
12	8	22M25	call	18	22	22M68	call
12	10	22M26	call	18	24	22M69	call
12	12	22M27	call	18	26	22M70	call
12	14	22M28	call	18	28	22M71	call
12	18	22M30	call	18	30	22M72	call
12	20	22M31	call				
12	22	22M32	call				
12	24	22M33	call				
12	26	22M34	call				
12	28	22M35	call				
12	30	22M36	call				



L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

ZONE DAMPERS - Rectangular Damper Shells




Width (in.)	Height (in.)	Order No.	Price	Width (in.)	Height (in.)	Order No.	Price
20	8	22M73	call	28	8	23M06	call
20	10	22M74	call	28	10	23M07	call
20	12	22M75	call	28	12	23M08	call
20	14	22M76	call	28	14	23M09	call
20	20	22M79	call	28	16	23M10	call
20	24	22M81	call	28	20	23M12	call
20	26	22M82	call	30	8	23M13	call
20	30	22M84	call	30	10	23M14	call
22	8	22M85	call	30	12	23M15	call
22	10	22M86	call	30	14	23M16	call
22	14	22M88	call	30	18	23M18	call
22	16	22M89	call	30	20	23M19	call
24	8	22M92	call	32	8	30M68	call
24	10	22M93	call	32	12	30M86	call
24	12	22M94	call	32	14	30M95	call
24	16	22M96	call	32	16	31M04	call
24	18	22M97	call	32	18	31M13	call
26	8	22M99	call	32	20	31M22	call
26	10	23M00	call	34	12	30M87	call
26	12	23M01	call	36	8	30M70	call
26	14	23M02	call	36	14	30M97	call
26	16	23M03	call	38	10	30M80	call
26	20	23M05	call	38	12	30M89	call
				40	12	30M90	call
				42	8	30M73	call
				48	18	31M21	call

L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

**SYSTEM COMPONENT SELECTION EXAMPLE - BASIC OVERVIEW**  
 Lennox Rooftop Units With Prodigy® Unit Controller


(NOTE - Prodigy and Network Thermostat Controller controlled units can be combined on the same system)

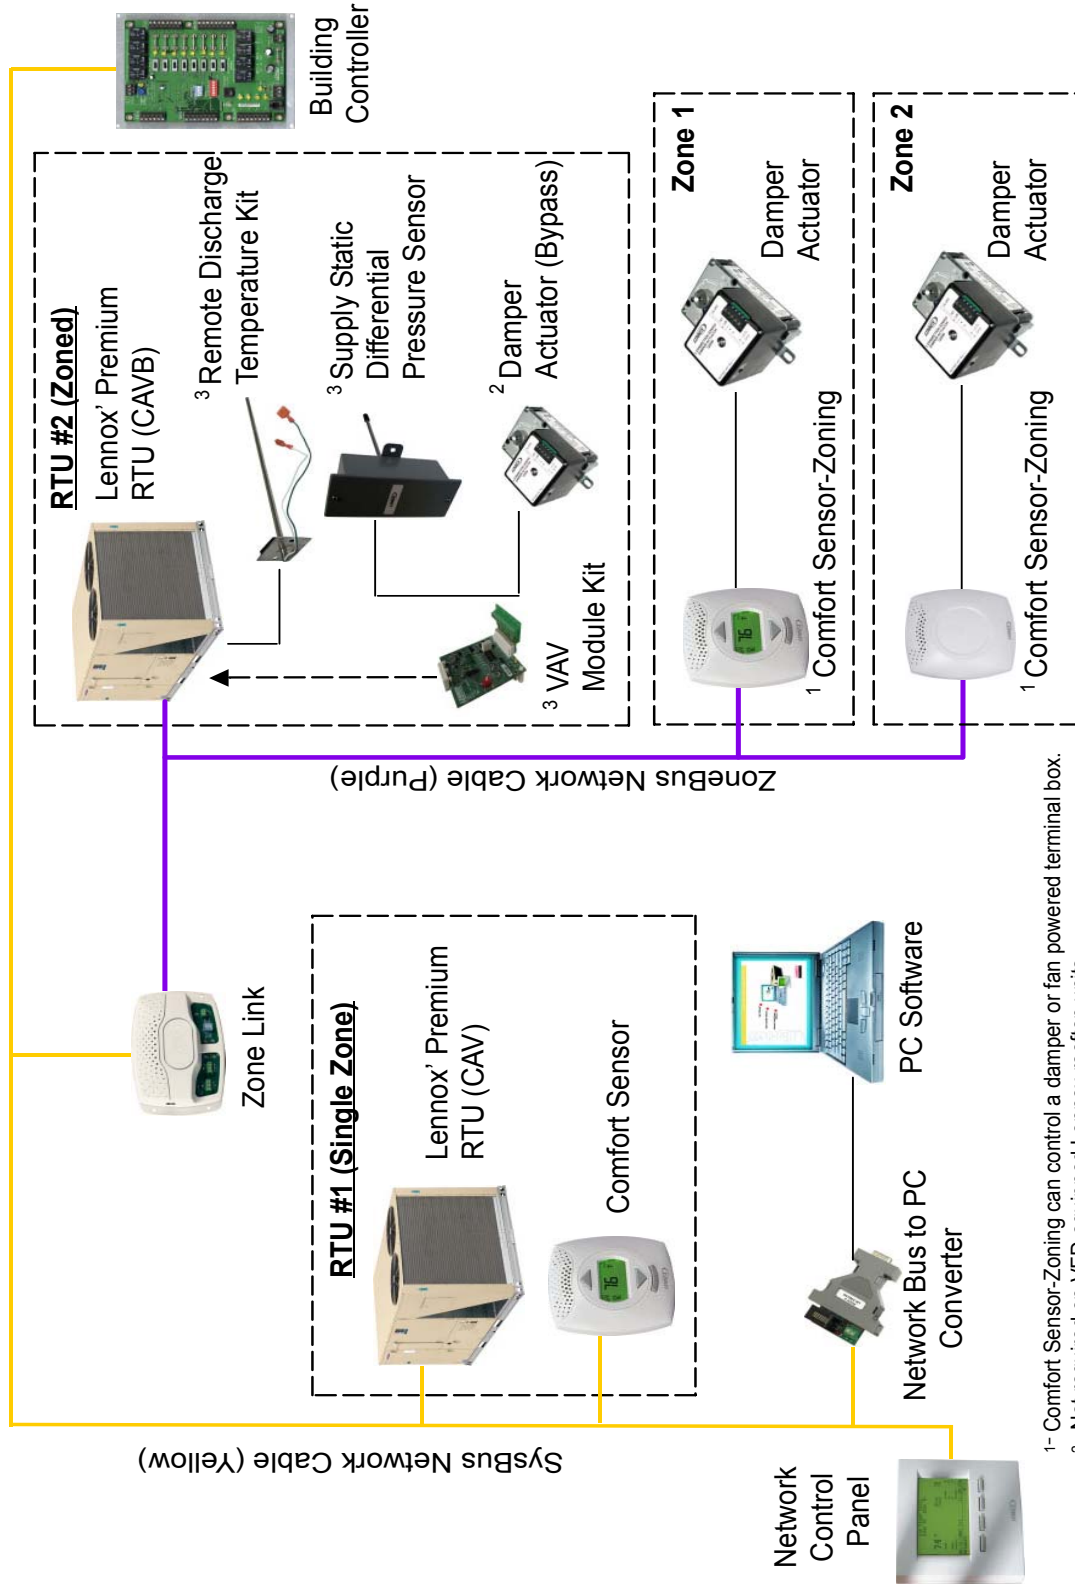

1- Comfort Sensor-Zoning can control a damper or fan powered terminal box.  
 2- Not required on VFD equipped Lennox rooftop units.  
 3- Automatically included with VFD equipped Lennox rooftop units.


L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

**BASIC COMPONENT SELECTION EXAMPLE**  
**Lennox Rooftop Units With Prodigy® Unit Controller**  
**(NOTE – Prodigy and Network Thermostat Controller controlled units can be combined on the same system)**

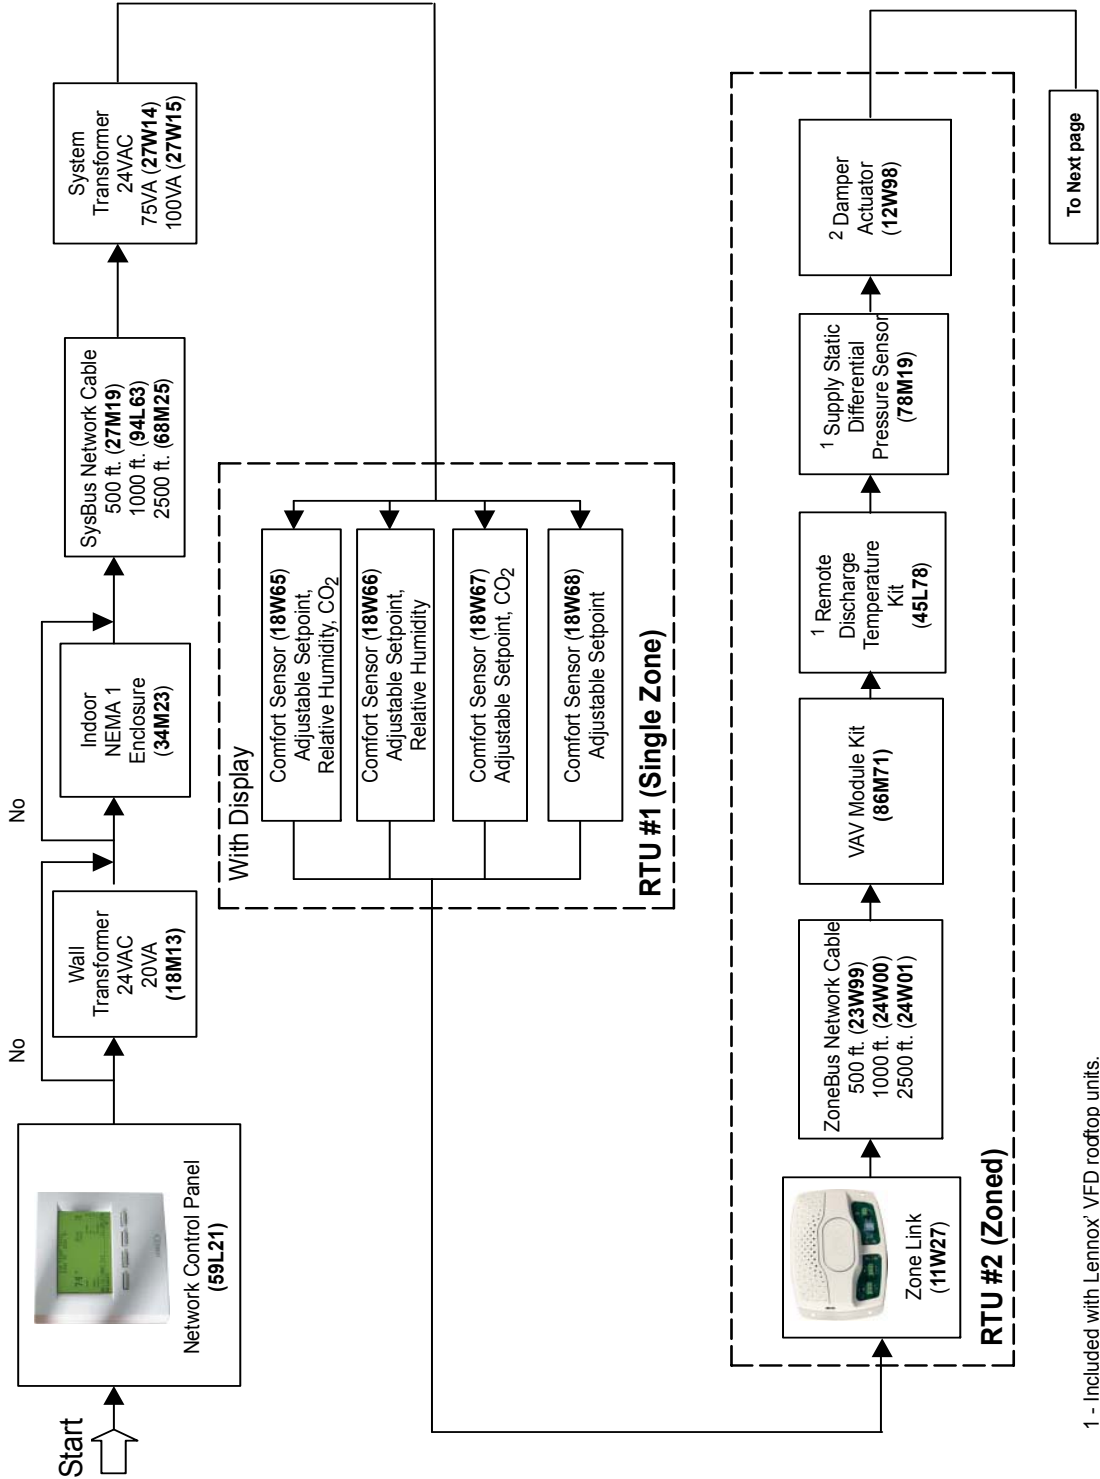

1 - Included with Lennox' VFD rooftop units.  
 2 - See Pages 79-81 for damper selection.  
 3 - 75VA and 100VA Transformers shown are recommended for powering Damper Actuators.

**BASIC COMPONENT SELECTION EXAMPLE**  
**Lennox Rooftop Units With Prodigy® Unit Controller**  
**(NOTE – Prodigy and Network Thermostat Controller controlled units can be combined on the same system)**

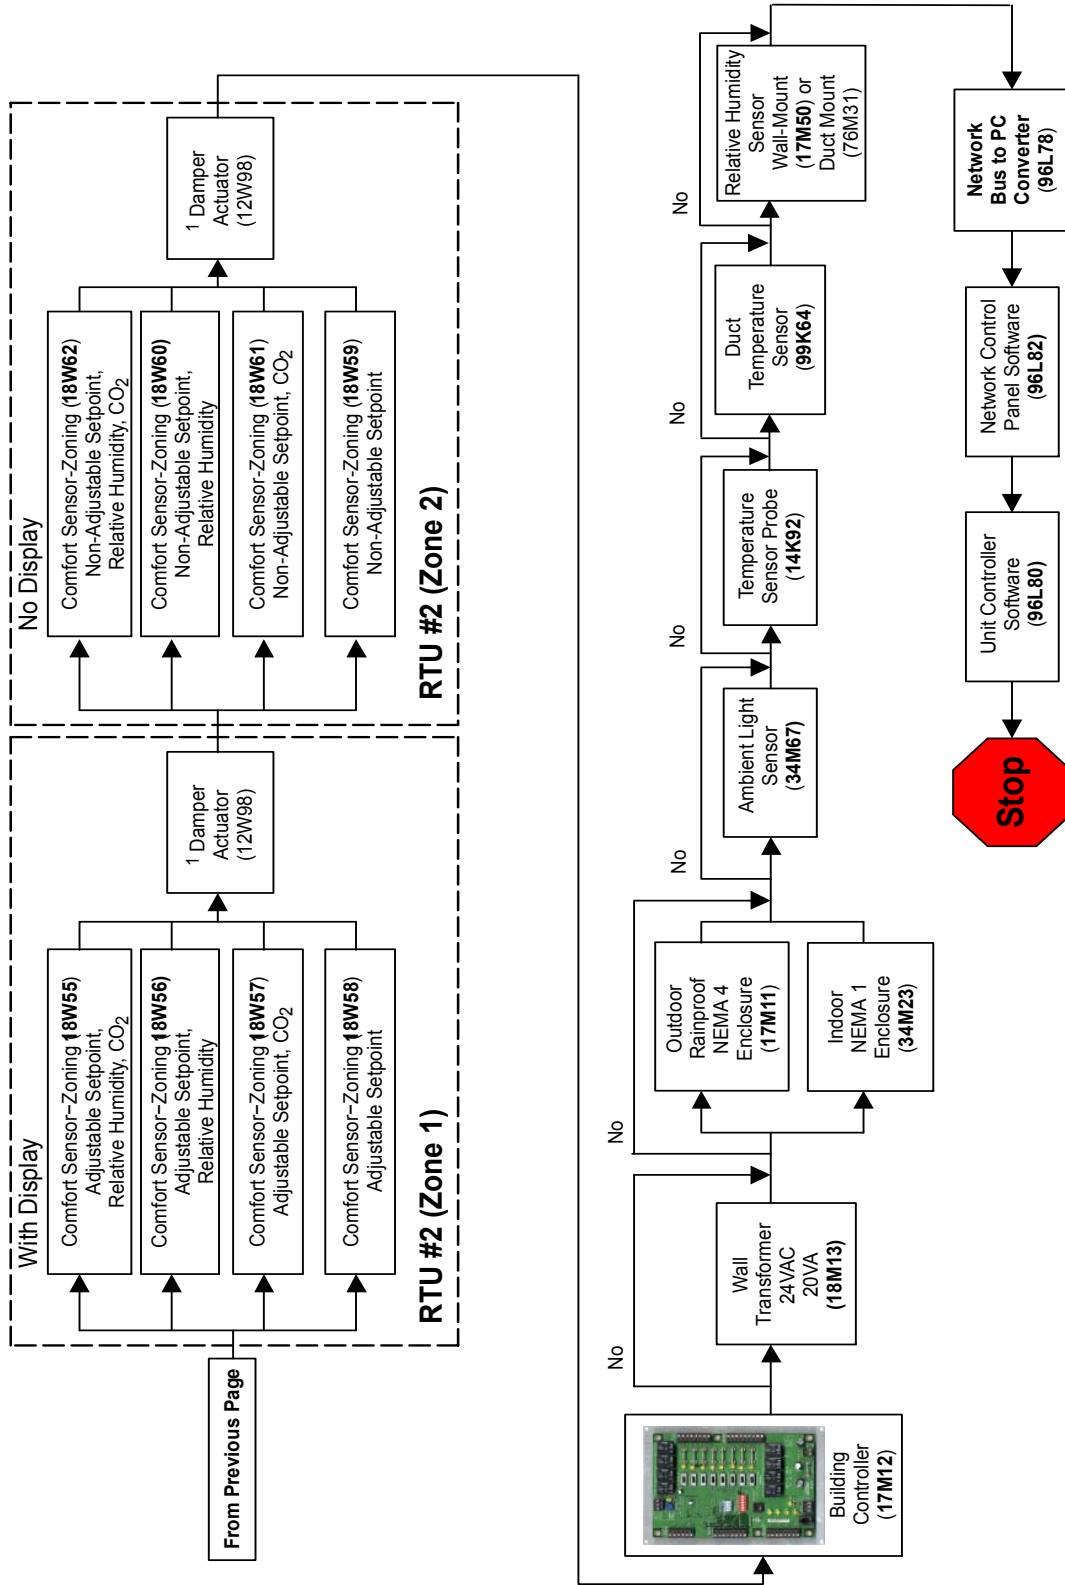


1 - 75VA and 100VA Transformers shown are recommended for powering Damper Actuators.



L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM


**COMPONENT SELECTION EXAMPLE - BASIC OVERVIEW**  
**Network Thermostat Controller Version - For Lennox' Rooftop Units Without The Prodigy® Unit Controller**  
**and Split Systems or Electro-Mechanically Controlled Third-Party Rooftop Units**

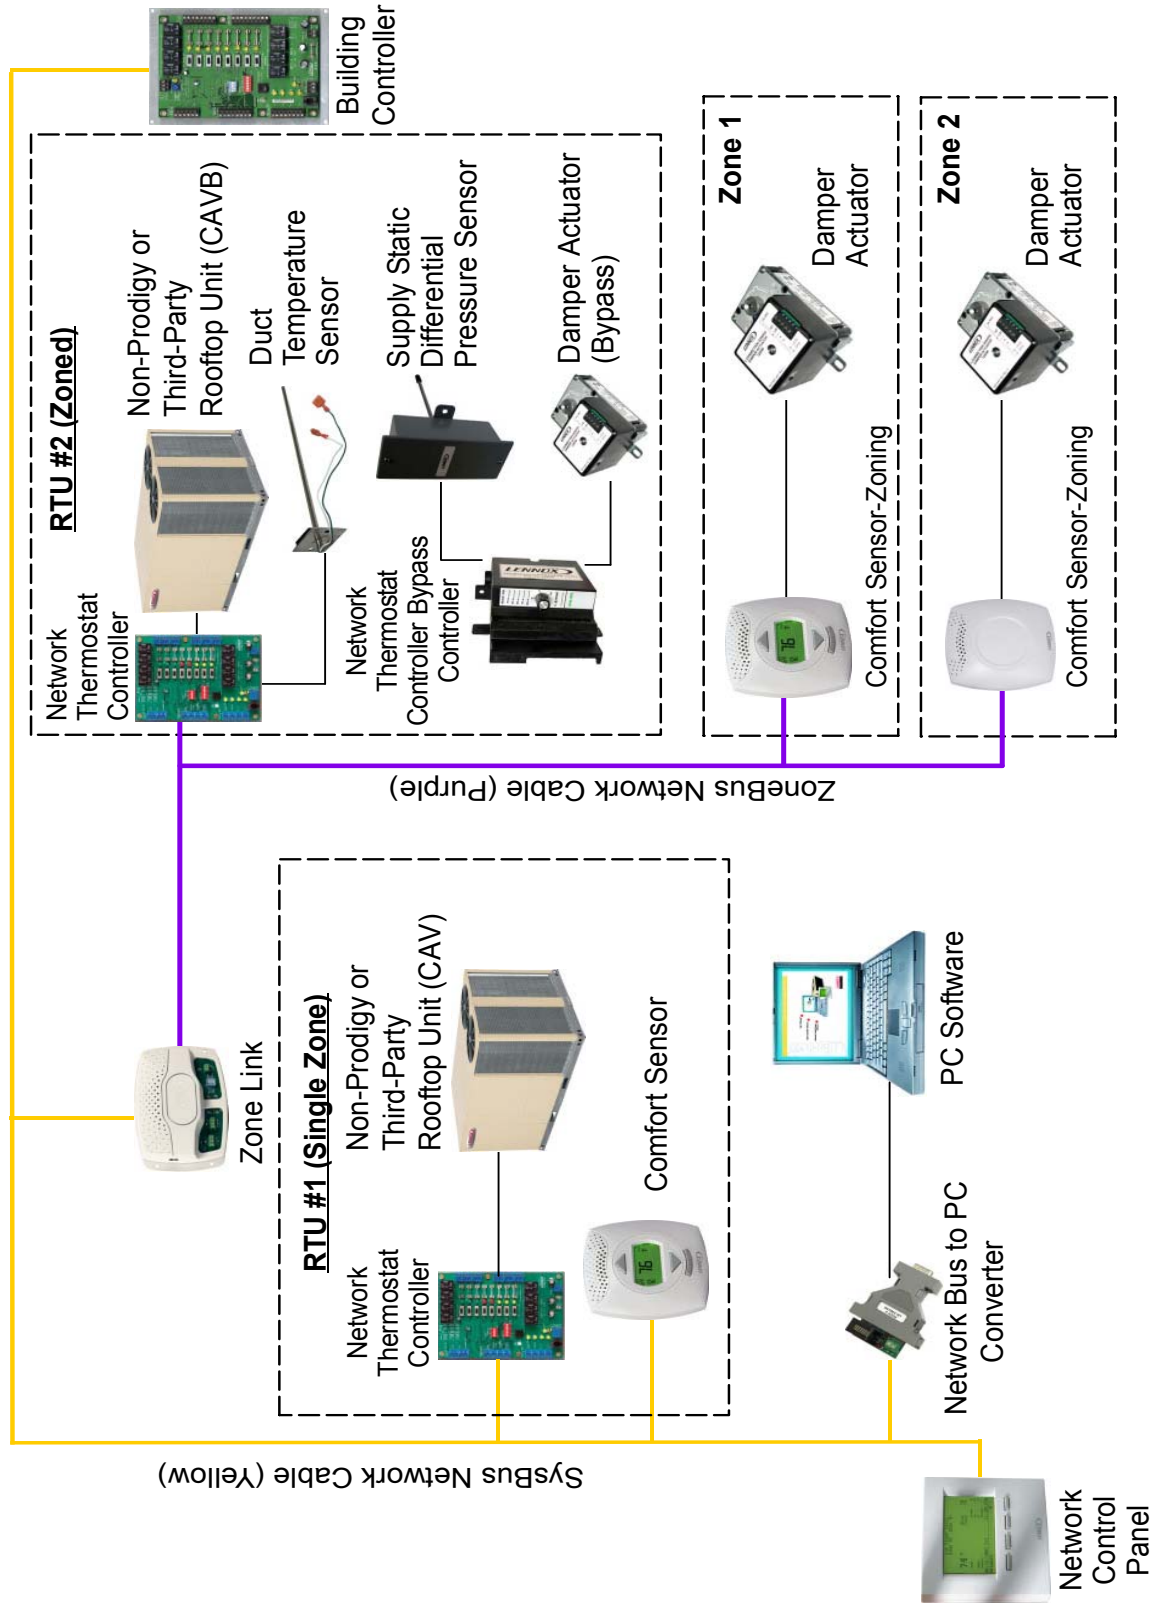




L CONNECTION® NETWORK BUILDING AUTOMATION SYSTEM

**BASIC COMPONENT SELECTION EXAMPLE**  
**Network Thermostat Controller Version - For Lennox' Rooftop Units Without The Prodigy® Unit Controller**  
**and Split Systems or Electro-Mechanically Controlled Third-Party Rooftop Units**

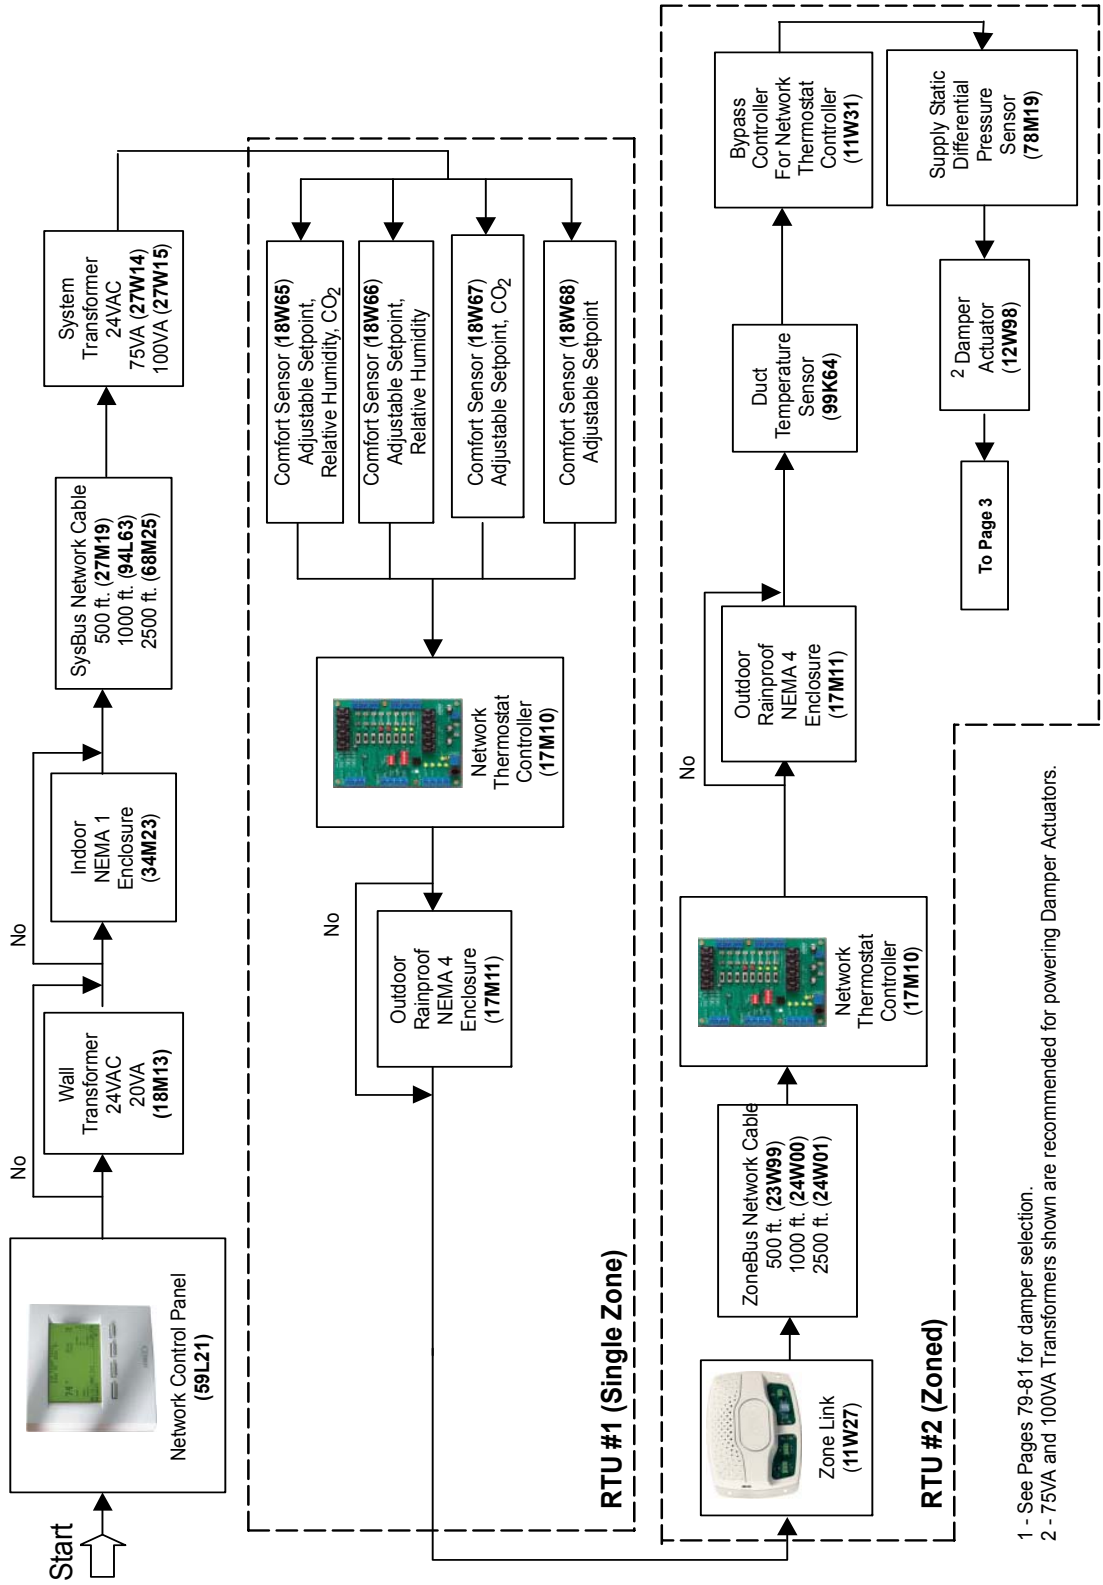

1 - See Pages 79-81 for damper selection.  
 2 - 75VA and 100VA Transformers shown are recommended for powering Damper Actuators.

**BASIC COMPONENT SELECTION EXAMPLE**  
**Network Thermostat Controller Version - For Lennox® Rooftop Units Without The Prodigy® Unit Controller**  
**and Split Systems or Electro-Mechanically Controlled Third-Party Rooftop Units**

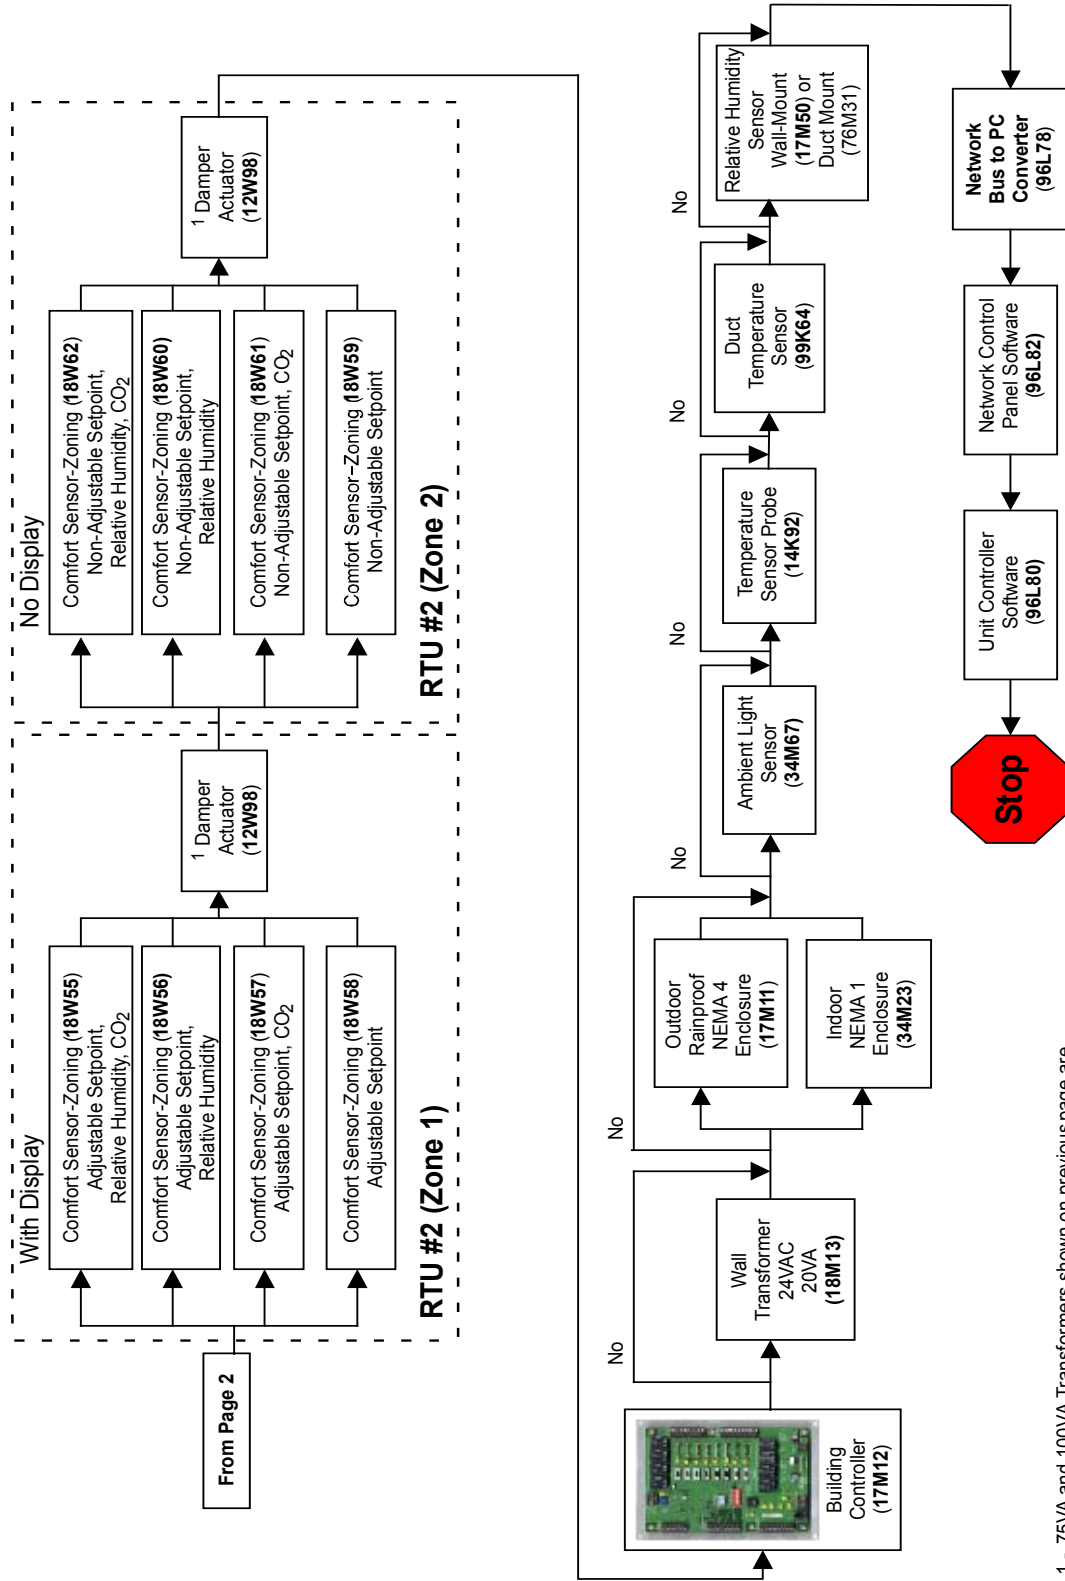

1 - 75VA and 100VA Transformers shown on previous page are recommended for powering DamperActuators.