




**Net Cooling Capacity - 47.4 to 77.9 kW**  
**Optional Electric Heat - 15 to 90 kW**

### MODEL NUMBER IDENTIFICATION

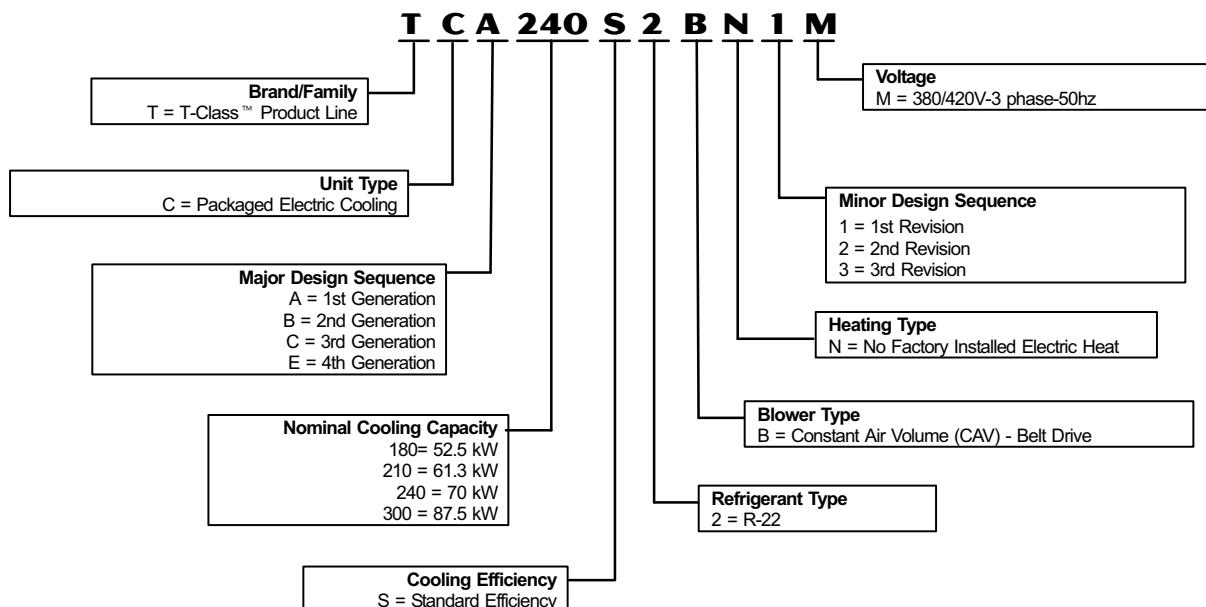

## TABLE OF CONTENTS

Blower Data .....	Pages 10-14
Cooling Ratings .....	Pages 8-9
Dimensions .....	Pages 19-24
Electric Heat Capacities .....	Page 16
Electrical/ Electric Heat Data .....	Page 16
Features and Benefits .....	Pages 2-4
Installation Clearances .....	Page 15
Model Number Identification .....	Page 1
Options / Accessories .....	Pages 4-6
Specifications .....	Page 7
Sound Data .....	Page 15
Temperature Control Systems .....	Page 17
Weight Data .....	Page 18

## FEATURES AND BENEFITS

### PERFORMANCE/QUALITY

Components bonded for grounding to meet safety standards for servicing required by Underwriters Laboratories (UL) and the International Electrotechnical Commission (IEC). Cooling performance is rated at test conditions included in Air-Conditioning and Refrigeration Institute (ARI) Standard 340/360-2000 while operating at rated voltage and air volumes. International Organization for Standardization (ISO) 9001 Registered Manufacturing Quality System

### COOLING SYSTEM

Designed to maximize sensible and latent cooling performance at design conditions. System can operate from -1°C to 52°C without any additional controls.

### 1 Compressors

Resiliently mounted on rubber grommets for quiet operation. Copeland Scroll™ compressors on all models for high performance, reliability and quiet operation.

### 2 Thermal Expansion Valves

Assures optimal performance throughout the application range. Removable element head.

### 3 Filter/Driers

High capacity filter/driers protect the system from dirt and moisture.

### Freezestats

Protects the evaporator coil from damaging ice build-up due to conditions such as low/no air flow, or low/no refrigerant charge.

### 4 Coil Construction

Copper tube construction, enhanced rippled-edge aluminum fins, flared shoulder tubing connections, silver soldered construction for improved heat transfer. Factory leak tested.

### Evaporator Coil

Cross row circuiting with rifled copper tubing optimizes both sensible and latent cooling capacity. Low fin per inch count minimizes air pressure drop. Face-split evaporator coils are designed to keep condensate water off of an inactive part of the coil so the condensate will not re-enter the air stream.

### Condenser Coil

Formed type coil.

### Condensate Drain Pan

Painted, galvanized pan with positive slope. Drain connection extends outside unit.

### 5 Outdoor Coil Fan Motors

Thermal overload protected, totally enclosed, permanently lubricated ball bearings, shaft up, independent motor mount.

### Outdoor Coil Fan

Polyvinyl Chloride (PVC) coated fan guard furnished.

### REQUIRED SELECTIONS

#### Cooling Capacity

Specify the nominal cooling capacity of the unit.

#### ACCESSORIES - Field Installed Compressor Crankcase Heaters

Protects against refrigerant migration that can occur during low ambient operation.

#### Condensate Drain Trap

Available in copper or polyvinyl chloride (PVC).

#### High Pressure Switches

Protects the compressor from overload conditions such as dirty condenser coils, blocked refrigerant flow, or loss of outdoor fan operation. Manual reset.

#### Low Ambient Kit

Cycles the outdoor fan while allowing compressor operation in the cooling cycle. This intermittent fan operation allows the system to operate without icing the evaporator coil and losing capacity. Designed for use in ambient temperatures no lower than -17°C.

### 6 BLOWER

Supply air fan provides a wide range of air flow capability. Stocked models (units typically in-stock at warehouses) are equipped with standard static motor/drive combinations. Special order high and low static motor and drive options are available CTO (configure to order) offering an even wider range of capability.

#### Supply Air Motor

Overload protected with permanently lubricated ball bearings ensures durable operation. Special order high and low static motors provide a higher level of air performance for demanding applications.

#### Supply Air Blower

A double inlet wheel with forward curve blades provide maximum air performance and quiet operation. Dynamically balanced with permanently lubricated ball bearings assure long, reliable operation. Adjustable pulleys allow air to be precisely tuned to the needs of the application.

### REQUIRED SELECTIONS

#### Supply Air Blower

Specify Blower motor / Drive Kit (See Blower Data Tables for specifications).

### 7 AIR FILTERS

Disposable 51 mm pleated MERV 7 filters (Minimum Efficiency Reporting Value based on American Society of Refrigeration and Air Conditioning Engineers 52.2) meet the requirements for ASHRAE 62 for improved indoor air quality.

#### ACCESSORIES - Field Installed


#### MERV 11 Filters

Disposable 51 mm pleated MERV 11 filters (Minimum Efficiency Reporting Value based on ASHRAE 52.2) are available for improved indoor air quality.

#### Replaceable Media

Permanent, metal frame filters with 51 mm polyester, replaceable media.

## FEATURES AND BENEFITS

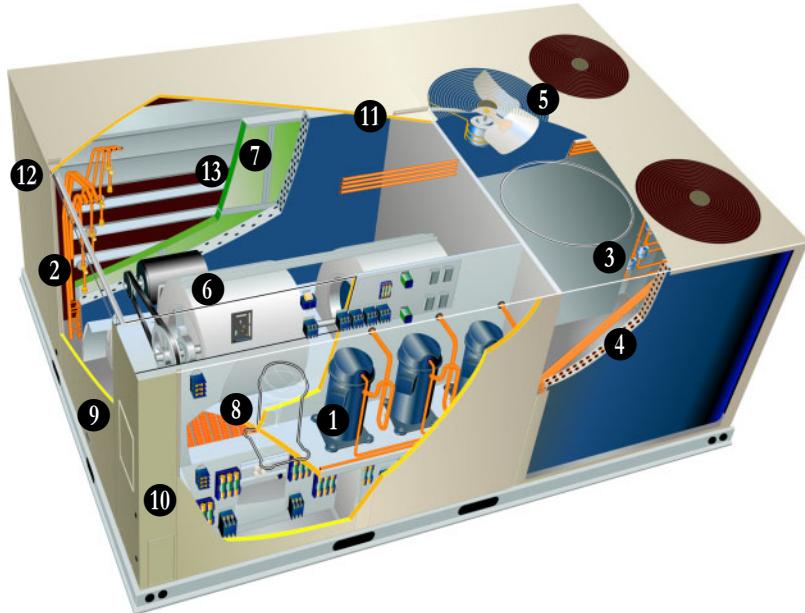

### ELECTRICAL

#### ACCESSORIES - Field Installed

##### ⑧ Electric Heat

Helix wound nichrome elements, time delay for element staging, individual element limit controls, wiring harness, may be two-stage controlled. The following must be ordered extra when field installed electric heat is used: Unit Fuse Block and Electric Heat Control Module. See Electric Heat tables for ordering information, Page 16.

### CONTROLS

#### Unit Controller

Solid-state microprocessor-based control board that provides flexible control of cooling functions. All control voltage is provided via a 24V (secondary) transformer with built-in circuit breaker protection. Built-in functions include:

**Blower On/Off Delay** - Time delay between blower on and off cycles provides a more even supply air temperature during heating.

**Built-in Control Parameters** - Saves installation time as no programming is required.

**Minimum Compressor Run Time** - Ensures proper oil return to the compressor.

**Night Setback Mode** - Saves energy by closing outdoor air dampers and operating supply fan on thermostat demand only.

**Heat/Cool Staging** - Capable of up to 2 heat / 3 cool staging with a third party DDC control system or compatible thermostat.

**Thermostat Bounce Delay** - Protects compressor from short cycling when a mechanical thermostat is used.

#### ACCESSORIES - Field Installed

##### Smoke Detector

Photoelectric type, installed in supply air section or return air section or both sections

##### Blower Proving Switch

Uses a static pressure sensor to monitors blower operation and shuts down unit if blower fails.

##### Control Systems

See Page 17.

##### Dirty Filter Switch

Senses static pressure increase indicating dirty filter condition.

### CABINET

##### ⑨ Construction

Heavy-gauge steel panels and full perimeter heavy-gauge galvanized steel base rail provides structural integrity for transportation, handling, and installation.

Base rails have rigging holes. Three sides of the base rail have fork slots.

Raised edges around duct and power entry openings in the bottom of the unit provide additional protection against water entering the building.

##### Air-Flow Choice

Units are available in down-flow (vertical) or horizontal return air flow configuration.

Horizontal air flow requires Horizontal Roof Curb.

Horizontal Return Air Panel Kit is also required if converting a down-flow configured unit to horizontal air flow.

##### Power Entry

Electrical lines can be brought through the unit base or through horizontal access knock-outs.

##### ⑩ Exterior Panels

Constructed of heavy-gauge, galvanized steel with a two-layer enamel paint finish.

##### ⑪ Insulation

All panels adjacent to conditioned air are fully insulated with non-hygroscopic fiberglass insulation.

Unit base is fully insulated. The insulation also serves as an air seal to the roof curb, eliminating the need to add a seal during installation.

##### ⑫ Access Panels

Access panels are provided for the compressor/controls/heating section and the blower access and air filter/economizer section.

## FEATURES AND BENEFITS

### CABINET - CONTINUED

#### REQUIRED SELECTIONS

##### Air Flow Configuration

Specify horizontal or down-flow (vertical).

#### OPTIONS - Factory Installed

##### Corrosion Protection

A completely flexible immersed coating with an electrodeposited dry film process. (AST ElectroFin E-Coat) Meets Mil Spec MIL-P-53084, ASTM B117 Standard Method Salt Spray Testing, ASTM 1153 Standard Specification for Methyl Isobutyl Ketone.

#### ACCESSORIES - Field Installed

##### Coil Guards

Painted, galvanized steel wire guards to protect outdoor coil. Not used with Hail Guards.

##### Hail Guards

Constructed of heavy gauge steel, painted to match cabinet, helps protect outdoor coils from hail damage. Not used with Coil Guards.

##### Horizontal Return Air Panel Kit

Required for horizontal applications with Horizontal Roof Curb, contains panel with return air opening for field replacement of existing unit panel and panel to cover bottom return air opening in unit, see dimension drawings.

### SERVICEABILITY

Designed to streamline general maintenance and decrease troubleshooting time.

#### Marked & Color-Coded Wiring

All electrical wiring is color-coded and marked to identify which components it is connecting.

#### Electrical Plugs

Positive connection electrical plugs are used to connect common accessories or maintenance parts for easy removal or installation.

#### Access Panels

Large access panels are provided for quick and easy access to maintenance areas.

#### Blower Access

Blower assembly slides out of the unit for easy access.

#### TXV Access

Thermal expansion valves are located near the perimeter of the unit for easier access.

### Thermal Expansion Valves

Removable element head allows change out of element and bulb without removing the TXV.

#### Coil Cleaning

Independently formed condenser coils allow separation for easier cleaning.

#### Standard Components

A large number of common maintenance parts are standard throughout the entire range of sizes tons), reducing the need to carry a lot of different parts to the job or in inventory.

#### Compressor Access

Compressors are located near the perimeter of the unit for easier access.

#### Compressor Compartment

Compressors are isolated from the condenser air flow allowing system operation checks to be done without changing the air flow across the outdoor coils.

## OPTIONS/ACCESSORIES

### ECONOMIZER/OUTDOOR AIR/EXHAUST ACCESSORIES

#### Field Installed

##### Economizer

13 Parallel, gear-driven action return air and outdoor air dampers, plug-in connections to unit, nylon bearings, neoprene seals, 24 volt, spring return motor, adjustable minimum damper position, damper assembly slides in unit, outdoor air hood must be ordered separately, choice of economizer controls. Economizer modulates dampers to maintain a 13°C discharge air temperature.

##### Economizer Enthalpy Control

Senses outdoor air enthalpy and enables economizer if the enthalpy is less than the setpoint of the control.

##### Down-Flow Barometric Relief

##### Dampers

Allows relief of excess return air static when economizer is near full open. Aluminum blade dampers prevent blow back and outdoor air infiltration during off cycle. Bird screen furnished.

#### Outdoor Air Damper Section

**25% Manual Outdoor Air Dampers** - Parallel blade dampers are manually adjustable to a fixed position.

**25% Automatic Outdoor Air Damper** - Parallel blade, gear-driven dampers are automatically adjusted with a two-position damper motor.

Economizer and Outdoor Air Damper Application Note: Minimum mixed air temperature in heating mode -1°C Maximum mixed air temperature in cooling mode: 32°C

#### Indoor Air Quality (CO<sub>2</sub>) Sensor

Monitors CO<sub>2</sub> levels.

#### Power Exhaust Fans

C1PWRE20C-1 models have two, 249 W (1/3 hp) motors with 508 mm (20 in.), five blade propeller-type fans with a total power input of 575 Watts and a total air volume of 3395 L/s (7190 cfm) at 0 Pa (0 in. w.g.).

Motor is inherently protected and enclosed for maximum protection from weather, dust and corrosion. Installs internal to unit for down-flow applications only with economizer option, provides exhaust air pressure relief, interlocked to run when return air dampers are closed and supply air blower is operating, fan runs when outdoor air dampers are 50% open (adjustable), motor is overload protected, steel cabinet and hood painted to match unit, requires optional Down-flow Economizer Barometric Relief Dampers.

See Power Exhaust Blower Tables.

#### Field Installed

##### Economizer Control

**Sensible Control** - Senses outdoor air temperature and enables the economizer if the temperature is less than the set point of the control.

**Differential Sensible Control** - Two temperature sensors allow the control to select between outdoor air or return air, whichever has lower temperature.

**Enthalpy Control** - Senses outdoor air enthalpy and enables economizer if the enthalpy is less than the setpoint of the control.

**Differential Enthalpy Control** - Two solid-state enthalpy sensors allow the control to select between outdoor air or return air, whichever has lower enthalpy.

#### Outdoor Air Hood

Required with Economizer, Outdoor Air Damper Sections, cleanable aluminum mesh fresh air filters furnished.

#### Down-Flow Barometric Relief

##### Damper Hood

Protects exhaust air from recirculating into outdoor air stream.

#### Horizontal Barometric Relief

##### Dampers

Allows relief of excess air when economizer is near full open. Aluminum blade dampers prevent blow back and outdoor air infiltration during off cycle. Field installed in return air duct. Bird screen furnished.

## OPTIONS/ACCESSORIES

### CEILING DIFFUSERS

#### ACCESSORIES - Field Installed

##### Ceiling Diffusers

Aluminum grilles, large center grille, insulated diffuser box with flanges, hanging rings furnished, interior transition (even air flow), internally sealed (prevents recirculation), adapts to T-bar ceiling grids or plaster ceilings.

##### Transitions (Supply and Return)

Used with diffusers, installs in roof curb, galvanized steel construction, flanges furnished for duct connection to diffusers, fully insulated.

### ROOF CURBS

#### ACCESSORIES - Field Installed

Nailer strip furnished, mates to unit, shipped knocked down.

##### Standard Down-Flow

available in 356 mm (14 inch) and 610 mm (24 inch) heights

##### Horizontal

Converts unit from down-flow to horizontal (side) air flow, return air is on unit, supply air is on curb, see dimension drawings. Requires Horizontal Return Air Panel. Available in 660 mm (26 inch), 762 mm (30 inch), 940 mm (37 inch) and 1041 mm (41 inch) heights. Optional Insulation Kit is available to help prevent sweating.

### Cliplock 1000 Full Perimeter Down-Flow

Available in 356 mm (14 inch), 457 mm (18 inch) and 610 mm (24 inch) heights.

## OPTIONS / ACCESSORIES

Item	180	210	240	300
<b>COOLING SYSTEM</b>				
Compressor Crankcase Heater	T1CCHT01CD1G	x	x	x
Condensate Drain Trap	PVC - LTACDKP09/36	x	x	x
	Copper - LTACDKC09/36	x	x	x
Corrosion Protection		○	○	○
High Pressure Switch	T1SNSR11C-1	x	x	x
Low Ambient Kit	T1SNSR12C-1	x	x	x
<b>ELECTRIC HEAT</b>				
15 kW	EHA240-7.5 (order 1) and EHA240S-7.5 (order 1)	x	x	x
30 kW	EHA360-15 (order 1) and EHA360S-15 (order 1)	x	x	x
45 kW	EHA360-22.5 (order 2)	x	x	x
60 kW	EHA150-30 (order 2)	x	x	x
90 kW	EHA360-45 (order 2)	x	x	x
Electric Heat Control Kit	T1EHKT01C-1Y	x	x	x
Unit Fuse Blocks	See Electric Heat Tables for Ordering Information			
<b>AIR FILTERS - ORDER SIX PER UNIT</b>				
MERV 11 High Efficiency	610 x 610 x 51 mm - C1FLTR10C-1	x	x	x
Replaceable Media Filter Kit with Frame	610 x 610 x 51 mm - C1FLTR30C-1	x	x	x
<b>BLOWER - SUPPLY AIR</b> - See Blower Data Tables for Specifications				
	Low Static Motor/Drive Combination	○	○	○
	Standard Static Motor/Drive Combination (stock unit)	○	○	○
	High Static Motor/Drive Combination	○	○	○
1	Standard to Low Static Conversion Kit - Drive Kit #A - C1DRKT044-1	x		
1	Standard to Low Static Conversion Kit - Drive Kit #2 - C1DRKT004-1		x	
1	Standard to Low Static Conversion Kit - Drive Kit #9 - C1DRKT045-1			x
1	Standard to Low Static Conversion Kit - Drive Kit #7 - C1DRKT042-1			x
2	High to Standard Static Conversion Kit - Drive Kit #3 - C1DRKT038-1	x		
2	High to Standard Static Conversion Kit - Drive Kit #7 - C1DRKT042-1		x	
<b>CONTROLS</b>				
Control Systems	See Page 17	x	x	x
Blower Proving Switch	LTABPSK	x	x	x
Dirty Filter Switch	LTADFSK	x	x	x
Smoke Detector - Supply	LTASASDK10/36	x	x	x
Smoke Detector - Return	LTARASDK10/30	x	x	x

**NOTE** - The catalog and part numbers that appear here are for ordering field installed accessories only.

○ - Configure to Order (Factory Installed). Factory installed items are special order with extended lead times and must be ordered with the unit.

X - Field Installed.

<sup>1</sup> Standard static drive can be converted to low static drive with field installed kit.

<sup>2</sup> High static drive can be converted to standard static drive with field installed kit.

## OPTIONS / ACCESSORIES

Item	180	210	240	300
<b>Indoor Air Quality (CO<sub>2</sub>) Sensors</b>				
CO <sub>2</sub> Sensor Duct Mounting Kit	LTIAQSDMK03/36	x	x	x
Sensor - white case CO <sub>2</sub> display	LTAIAQSVDK03/36	x	x	x
Sensor - white case no display	LTAIAQSWN03/36	x	x	x
Sensor - black case CO <sub>2</sub> display	LTAIAQSND03/36	x	x	x
Sensor - black case, no display	LTAIAQSDMBN03/36	x	x	x
Aspiration Box for duct mounting	LTIAQABD03/36	x	x	x
Handheld CO <sub>2</sub> Monitor	LTAIAQSHM03/36	x	x	x
<b>CABINET</b>				
Coil Guards	C1GARD20C-1	x	x	x
Hail Guards	C1GARD10C-1	x	x	x
Horizontal Return Air Panel Kit	C1HRAP10C-1	x	x	x
<b>ECONOMIZER / OUTDOOR AIR</b>				
Economizer - Order Hood Separately	T1ECON10C-1	⊗	⊗	⊗
<b>Economizer Controls</b>				
Differential Enthalpy	C1SNSR07AE1-	x	x	x
Single Enthalpy	C1SNSR06AE1-	⊗	⊗	⊗
Sensible	TASEK03/36	x	x	x
Differential Sensible	TASEK03/36	1x	1x	1x
<b>Barometric Relief</b>				
Down-Flow Barometric Relief Dampers - Order Hood Separately	LAGED18/24	⊗	⊗	⊗
Hood for Down-Flow LAGED	C1HOOD20C-1	x	x	x
Horizontal Barometric Relief Dampers - Hood Furnished	LAGEDH18/24	x	x	x
<b>Outdoor Air Dampers</b>				
Damper Section (down-flow) - Automatic - Order Hood Separately	T1DAMP20C-1	⊗	⊗	⊗
Damper Section (down-flow) - Manual - Order Hood Separately	LAOAD18/24	⊗	⊗	⊗
<b>Outdoor Air Hoods</b>				
Outdoor Air Hood (down-flow) includes 3 - 406 x 635 x 25 mm filters	C1HOOD10C-1	⊗	⊗	⊗
<b>Power Exhaust</b>				
Standard Static	C1PWRE20C-1M	x	x	x
<b>ROOF CURBS - CLIPLOCK 1000</b>				
<b>Down-Flow</b>				
356 mm height	LARMF18/30S-14	x	x	x
457 mm height	LARMF18/30S-18	x	x	x
610 mm height	LARMF18/30S-24	x	x	x
<b>Horizontal</b>				
660 mm height	LARMFH18/24S-26	x	x	x
940 mm height	LARMFH18/24S-37	x	x	x
<b>ROOF CURBS - STANDARD</b>				
<b>Down-Flow</b>				
356 mm height	LARMF18/36-14	x	x	x
610 mm height	LARMF18/36-24	x	x	x
<b>Horizontal</b>				
660 mm height	LARMFH18/24-26	x	x	x
940 mm height	LARMFH18/24-37	x	x	x
<b>Insulation Kits for Standard Horizontal Roof Curbs</b>				
for LARMFH18/24-26	C1INSU11C-1	x	x	x
for LARMFH18/24-37	C1INSU13C-1	x	x	x
<b>CEILING DIFFUSERS</b>				
Step-Down	RTD11-185(S)	x		
Order one	RTD11-275(S)		x	x
Flush	FD11-150/180S or FD11-185	x		
Order one	FD11-275(S)		x	x
Transitions - (Supply and Return)	LASRT18(S)	x		
Order one	LASRT21/24(S)		x	x

⊗ - Field Installed or Configure to Order (factory installed). Factory installed items are special order with extended lead times and must be ordered with the unit.

X - Field Installed.

1 - Order two each

## SPECIFICATIONS

General Data	Nominal Tonnage Model No. Efficiency Type	15 Ton TCA180S2B Standard	17.5 Ton TCA210S2B Standard	20 Ton TCA240S2B Standard	25 Ton TCA300S2B Standard
<b>Cooling Performance</b>	Gross Cooling Capacity - kW (Btu/h) <sup>1</sup> Net Cooling Capacity - kW (Btu/h)	49.6 (169,300) 47.4 (162,000)	58.8 (200,800) 56.2 (192,000)	65.2 (222,500) 62.4 (213,000)	81.4 (278,000) 77.9 (266,000)
	Total Unit Power - kW <sup>1</sup> EER (Btuh/Watt)	16.7 9.7	19.8 9.7	21.1 10.1	26.4 10.1
	<sup>2</sup> Integrated Part Load Value (Btuh/Watt)	10.6	10.6	11.4	10.2
	Refrigerant Type	R-22	R-22	R-22	R-22
	Refrigerant Charge Furnished	Circuit 1 Circuit 2 Circuit 3 Circuit 4	4.08 kg (9 lbs. 0 oz.) 4.08 kg (9 lbs. 0 oz.) 4.08 kg (9 lbs. 0 oz.) ---	3.63 kg (8 lbs. 0 oz.) 3.63 kg (8 lbs. 0 oz.) 3.63 kg (8 lbs. 0 oz.) ---	5.22 kg (11 lbs. 8 oz.) 5.22 kg (11 lbs. 8 oz.) 5.22 kg (11 lbs. 8 oz.) ---
					4.99 kg (11 lbs. 0 oz.) 4.99 kg (11 lbs. 0 oz.) 4.99 kg (11 lbs. 0 oz.) 4.99 kg (11 lbs. 0 oz.)
<b>Electric Heat</b> - See page 16 for capacities		15, 30, 45 or 60 kW		15, 30, 45, 60 or 90 kW	
<b>Compressor Type (no.)</b>		Scroll (3)	Scroll (3)	Scroll (3)	Scroll (4)
<b>Outdoor Coils</b>	Net face area - m <sup>2</sup> (sq. ft.) total Tube diameter - mm (in.) Number of rows Fins per M (inch)	5.2 (56.0) 9.5 (3/8) 1 787 (20)	5.2 (56.0) 9.5 (3/8) 1 787 (20)	5.2 (56.0) 9.5 (3/8) 2 787 (20)	5.2 (56.0) 9.5 (3/8) 2 787 (20)
<b>Outdoor Coil Fans</b>	Motor Watts (horsepower) Motor rpm Total Motor watts Diameter - mm (in.) - Number of blades Total Air volume - L/s (cfm)	(4) 249 (1/3) 896 1065 (4) 610 (24) - 3 7480 (15,850)	(4) 373 (1/2) 896 1375 (4) 610 (24) - 3 7550 (16,000)	(4) 249 (1/3) 896 1065 (4) 610 (24) - 3 6075 (12,875)	(4) 373 (1/2) 896 1375 (4) 610 (24) - 3 6275 (13,300)
<b>Indoor Coils</b>	Net face area - m <sup>2</sup> (sq. ft.) total Tube diameter - mm (in.) Number of rows Fins per m (inch) Drain connection - number and size Expansion device type	2.07 (22.3) 9.5 (3/8) 3 551 (14) (1) 1 in. NPT coupling Balanced Port Thermostatic Expansion Valve, removable power head	2.07 (22.3) 9.5 (3/8) 3 551 (14)	2.07 (22.3) 9.5 (3/8) 3 551 (14)	2.07 (22.3) 9.5 (3/8) 4 551 (14)
<b>3, 4 Indoor Blower and Drive Selection</b>	Nominal motor size Low Static Standard Static High Static Drive Kit Low Static Standard Static High Static Field Installed Drive Kits Standard to Low Static High to Standard Static	2.2 kW (3 hp) 2.2 kW (3 hp) 3.7 kW (5 hp) #A - 446-604 rpm #1 - 592-804 rpm #4 - 788-988 rpm #A - 446-604 rpm #3 - 708-871 rpm	3.7 kW (5 hp) 3.7 kW (5 hp) 5.6 kW (7.5 hp) #2 - 571-721 rpm #3 - 708-871 rpm #6 - 871-1071 rpm #2 - 571-721 rpm #7 - 708-871 rpm	3.7 kW (5 hp) 5.6 kW (7.5 hp) 7.5 kW (10 hp) #2 - 571-721 rpm #7 - 708-871 rpm #6 - 871-1071 rpm #9 - 571-721 rpm	5.6 kW (7.5 hp) 7.5 kW (10 hp) N/A #7 - 708-871 rpm #6 - 871-1071 rpm N/A #7 - 708-871 rpm
	Blower wheel nominal diameter x width			(2) 381 x 381 mm (15 x 15 in.)	
<b>Filters</b>	Type of filter No. and size - in. (mm)			Disposable, pleated MERV 7 (6) 24 x 24 x 2 (610 x 610 x 51)	(6) 24 x 24 x 2 (610 x 610 x 51)
<b>Electrical characteristics</b>				380/420V - 50 hertz - 3 phase	

NOTE - Net capacity includes evaporator blower motor heat deduction. Gross capacity does not include evaporator blower motor heat deduction.

<sup>1</sup> Rating test conditions are those included in Air-Conditioning and Refrigeration Institute (ARI) Standard 340/360 while operating at rated voltage and air volumes, 35°C (95°F) outdoor air temperature and 27°C (80°F) db/19°C (67°F) wb entering evaporator air; minimum external duct static pressure.

<sup>2</sup> Integrated Part Load Value rated at 27°C (80°F) outdoor air temperature, 27°C (80°F) db/19°C (67°F) wb indoor air temperature.

<sup>3</sup> Stocked models are available with standard static drives. High static drives are factory installed (configure to order). Low static drive can be factory installed (configure to order) or standard static drives can be converted to low static with field installed kit. High static models can be converted to standard static with field installed kit.

## COOLING RATINGS

NOTE - For Temperatures and Capacities not shown in tables, see bulletin — Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

### 15 TON STANDARD EFFICIENCY - TWO COMPRESSORS OPERATING

TCA180S

Entering Wet Bulb Temperature	Total Air Volume		18°C (65°F)						24°C (75°F)						29°C (85°F)						35°C (95°F)					
			Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	24°C 75°F
	m³/s	cfm	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F
17°C (63°F)	2.26	4800	33.9	115.7	6.45	.70	.85	.99	33.0	112.7	7.06	.70	.86	.99	32.0	109.1	7.78	.71	.88	1.00	30.8	105.2	8.61	.73	.89	1.00
	2.83	6000	35.1	119.9	6.53	.75	.93	1.00	34.3	116.9	7.15	.76	.94	1.00	33.2	113.3	7.87	.78	.96	1.00	32.0	109.3	8.69	.79	.98	1.00
	3.40	7200	36.2	123.6	6.61	.81	.99	1.00	35.4	120.7	7.22	.83	1.00	1.00	34.3	117.2	7.95	.84	1.00	1.00	33.3	113.5	8.79	.86	1.00	1.00
19°C (67°F)	2.26	4800	35.9	122.6	6.59	.54	.67	.81	35.0	119.5	7.20	.55	.68	.82	33.9	115.8	7.92	.55	.69	.84	32.7	111.6	8.74	.56	.70	.86
	2.83	6000	37.0	126.2	6.66	.58	.73	.90	36.0	123.0	7.28	.58	.74	.91	34.9	119.1	8.00	.59	.75	.93	33.6	114.7	8.82	.60	.77	.95
	3.40	7200	37.7	128.8	6.72	.61	.79	.97	36.8	125.4	7.33	.62	.81	.98	35.6	121.5	8.04	.62	.82	.99	34.3	117.0	8.88	.64	.84	1.00
22°C (71°F)	2.26	4800	38.2	130.3	6.75	.41	.53	.65	37.2	127.1	7.36	.41	.53	.66	36.1	123.2	8.08	.41	.54	.67	34.8	118.8	8.91	.41	.55	.68
	2.83	6000	39.2	133.6	6.82	.42	.56	.71	38.2	130.4	7.43	.42	.57	.72	37.0	126.4	8.15	.42	.58	.73	35.7	121.8	8.98	.43	.59	.74
	3.40	7200	39.9	136.0	6.88	.43	.60	.77	38.9	132.7	7.48	.43	.61	.78	37.7	128.6	8.20	.44	.62	.80	36.3	123.8	9.03	.44	.63	.82

### 15 TON STANDARD EFFICIENCY - ALL COMPRESSORS OPERATING

TCA180S

Entering Wet Bulb Temperature	Total Air Volume		29°C (85°F)						35°C (95°F)						41°C (105°F)						46°C (115°F)					
			Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	24°C 75°F
	m³/s	cfm	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F
17°C (63°F)	2.26	4800	47.2	161.1	11.88	.73	.88	1.00	45.5	155.3	13.15	.74	.90	1.00	43.7	149.0	14.59	.75	.92	1.00	41.9	142.8	16.23	.77	.95	1.00
	2.83	6000	49.0	167.2	12.02	.79	.97	1.00	47.3	161.3	13.28	.81	.98	1.00	45.5	155.1	14.75	.83	1.00	1.00	43.7	149.2	16.39	.85	1.00	1.00
	3.40	7200	50.7	173.0	12.15	.85	1.00	1.00	49.1	167.5	13.43	.87	1.00	1.00	47.3	161.4	14.90	.89	1.00	1.00	45.5	155.3	16.56	.92	1.00	1.00
19°C (67°F)	2.26	4800	50.1	171.0	12.10	.57	.71	.85	48.3	164.7	13.36	.57	.72	.87	46.3	158.0	14.83	.58	.73	.89	44.3	151.2	16.48	.59	.75	.91
	2.83	6000	51.5	175.8	12.23	.60	.77	.94	49.6	169.3	13.49	.61	.78	.95	47.6	162.4	14.94	.62	.80	.98	45.5	155.3	16.60	.63	.82	.99
	3.40	7200	52.6	179.4	12.29	.64	.83	1.00	50.6	172.7	13.58	.65	.85	1.00	48.5	165.6	15.03	.66	.87	1.00	46.5	158.5	16.70	.68	.90	1.00
22°C (71°F)	2.26	4800	53.3	181.9	12.35	.42	.55	.68	51.4	175.4	13.63	.42	.56	.69	49.3	168.3	15.11	.42	.57	.71	47.2	161.1	16.77	.43	.58	.73
	2.83	6000	54.7	186.6	12.46	.43	.59	.75	52.7	179.8	13.74	.44	.60	.76	50.6	172.5	15.21	.44	.61	.78	48.3	164.9	16.89	.45	.62	.80
	3.40	7200	55.7	189.9	12.54	.45	.63	.81	53.6	182.8	13.81	.45	.64	.83	51.3	175.2	15.29	.46	.65	.85	49.1	167.5	16.97	.46	.67	.87

### 17.5 TON STANDARD EFFICIENCY - TWO COMPRESSORS OPERATING

TCA210S

Entering Wet Bulb Temperature	Total Air Volume		18°C (65°F)						24°C (75°F)						29°C (85°F)						35°C (95°F)					
			Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	Total Cooling Capacity	Comp Motor kW Input	Sensible To Total Ratio (S/T) Dry Bulb	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	24°C 75°F
	m³/s	cfm	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F	29°C 85°F	kW	kBtuh	24°C 75°F	27°C 80°F
17°C (63°F)	2.64	5600	38.2	130.3	9.06	.69	.84	.98	36.8	125.7	10.13	.70	.86	.99	35.4	120.8	11.34	.71	.88	1.00	33.8	115.4	12.73	.72	.91	1.00
	3.30	7000	39.5	134.9	9.17	.74	.93	1.00	38.1	130.1	10.25	.76	.95	1.00	36.7	125.2	11.45	.78	.97	1.00	35.1	119.7	12.85	.80	.99	1.00
	3.96	8400	40.7	138.8	9.26	.80	.98	1.00	39.3	134.2	10.35	.82	1.00	1.00	37.9	129.4	11.57	.84	1.00	1.00	36.3	124.0	12.99	.87	1.00	1.00
19°C (67°F)	2.64	5600	40.4	137.8	9.23	.54	.66	.81	38.9	132.9	10.30	.54	.68	.83	37.4	127.5	11.52	.55	.69	.85</						

## COOLING RATINGS

NOTE - For Temperatures and Capacities not shown in tables, see bulletin — Cooling Unit Rating Table Correction Factor Data in Miscellaneous Engineering Data section.

### 20 TON STANDARD EFFICIENCY - TWO COMPRESSORS OPERATING

TCA240S

Entering Wet Bulb Tempera- ture	Total Air Volume		Outdoor Air Temperature Entering Outdoor Coil																							
			18°C (65°F)						24°C (75°F)						29°C (85°F)						35°C (95°F)					
	m³/s	cfm	Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb	
			24°C 75°F	27°C 80°F	29°C 85°F					24°C 75°F	27°C 80°F	29°C 85°F						24°C 75°F	27°C 80°F	29°C 85°F				24°C 75°F	27°C 80°F	29°C 85°F
17°C (63°F)	3.02	6400	46.0	156.8	7.91	.67	.82	.96	44.6	152.3	8.79	.68	.84	.98	43.2	147.5	9.81	.69	.85	.99	41.8	142.5	10.95	.70	.87	1.00
	3.77	8000	47.6	162.4	8.01	.72	.90	1.00	46.2	157.7	8.89	.73	.92	1.00	44.8	152.8	9.90	.75	.93	1.00	43.3	147.6	11.07	.76	.95	1.00
	4.53	9600	48.9	167.0	8.09	.78	.96	1.00	47.6	162.4	8.98	.79	.98	1.00	46.1	157.4	9.99	.81	.99	1.00	44.6	152.2	11.16	.83	1.00	1.00
19°C (67°F)	3.02	6400	48.7	166.3	8.07	.52	.65	.78	47.3	161.4	8.95	.53	.65	.80	45.7	156.1	9.96	.53	.66	.81	44.2	150.7	11.12	.54	.67	.83
	3.77	8000	50.1	170.9	8.16	.55	.69	.87	48.6	165.7	9.04	.56	.71	.88	47.0	160.3	10.04	.56	.72	.90	45.3	154.6	11.20	.57	.74	.92
	4.53	9600	51.1	174.3	8.23	.58	.75	.94	49.5	169.0	9.10	.59	.77	.95	47.9	163.4	10.11	.59	.79	.97	46.2	157.6	11.27	.60	.80	.98
22°C (71°F)	3.02	6400	51.8	176.9	8.27	.39	.51	.62	50.3	171.7	9.15	.39	.51	.63	48.7	166.1	10.16	.40	.52	.64	46.9	160.2	11.33	.40	.53	.65
	3.77	8000	53.2	181.5	8.36	.40	.54	.67	51.6	176.0	9.23	.40	.55	.69	49.9	170.1	10.25	.41	.55	.70	48.1	164.0	11.41	.41	.56	.71
	4.53	9600	54.1	184.7	8.42	.41	.57	.73	52.4	178.9	9.30	.42	.58	.74	50.7	173.0	10.30	.42	.59	.76	48.8	166.6	11.47	.42	.60	.78

### 20 TON STANDARD EFFICIENCY - ALL COMPRESSORS OPERATING

TCA240S

Entering Wet Bulb Tempera- ture	Total Air Volume		Outdoor Air Temperature Entering Outdoor Coil																							
			29°C (85°F)						35°C (95°F)						41°C (105°F)						46°C (115°F)					
	m³/s	cfm	Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb	
			24°C 75°F	27°C 80°F	29°C 85°F				24°C 75°F	27°C 80°F	29°C 85°F				24°C 75°F	27°C 80°F	29°C 85°F				24°C 75°F	27°C 80°F	29°C 85°F			
17°C (63°F)	3.02	6400	62.3	212.5	14.99	.72	.88	1.00	60.1	205.2	16.74	.73	.90	1.00	57.9	197.4	18.76	.75	.92	1.00	55.4	189.1	21.08	.76	.94	1.00
	3.77	8000	64.5	220.1	15.13	.78	.96	1.00	62.3	212.6	16.92	.79	.98	1.00	60.0	204.7	18.94	.81	1.00	1.00	57.6	196.6	21.23	.84	1.00	1.00
	4.53	9600	66.5	226.8	15.28	.84	1.00	1.00	64.3	219.3	17.06	.86	1.00	1.00	62.0	211.7	19.09	.88	1.00	1.00	59.7	203.6	21.45	.90	1.00	1.00
19°C (67°F)	3.02	6400	65.9	224.8	15.23	.56	.70	.85	63.6	216.9	17.00	.57	.71	.86	61.1	208.4	19.00	.58	.72	.88	58.4	199.4	21.32	.58	.74	.91
	3.77	8000	67.6	230.8	15.35	.59	.76	.93	65.2	222.5	17.12	.60	.77	.95	62.7	213.8	19.15	.61	.79	.97	59.9	204.3	21.49	.62	.81	.99
	4.53	9600	69.0	235.3	15.46	.63	.82	.99	66.5	226.8	17.23	.64	.84	1.00	63.8	217.8	19.28	.65	.86	1.00	61.0	208.3	21.59	.66	.88	1.00
22°C (71°F)	3.02	6400	70.1	239.2	15.54	.42	.55	.68	67.6	230.6	17.33	.42	.55	.69	64.9	221.6	19.37	.42	.56	.70	62.1	212.0	21.68	.42	.57	.72
	3.77	8000	71.8	244.9	15.68	.43	.58	.73	69.2	236.0	17.45	.43	.59	.75	66.4	226.6	19.50	.44	.60	.77	63.4	216.5	21.82	.44	.61	.79
	4.53	9600	73.0	249.0	15.76	.44	.62	.79	70.2	239.7	17.55	.45	.63	.81	67.4	230.1	19.57	.45	.64	.84	64.4	219.6	21.94	.46	.66	.86

### 25 TON STANDARD EFFICIENCY - TWO COMPRESSORS OPERATING

TCA300S

Entering Wet Bulb Tempera- ture	Total Air Volume		Outdoor Air Temperature Entering Outdoor Coil																							
			18°C (65°F)						24°C (75°F)						29°C (85°F)						35°C (95°F)					
	m³/s	cfm	Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb		Total Cooling Capacity		Comp Motor kW Input		Sensible To Total Ratio (S/T) Dry Bulb	
			24°C 75°F	27°C 80°F	29°C 85°F				24°C 75°F	27°C 80°F	29°C 85°F				24°C 75°F	27°C 80°F	29°C 85°F				24°C 75°F	27°C 80°F	29°C 85°F			
17°C (63°F)	3.77	8000	40.1	136.8	7.40	.59	.78	.99	38.8	132.4	8.30	.60	.81	1.00	37.5	128.0	9.26	.61	.83	1.00	36.1	123.2	10.34	.62	.86	1.00
	4.53	10000	41.6	142.0	7.50	.65	.91	1.00	40.3	137.4	8.40	.67	.93	1.00	38.9	132.8	9.38	.69	.96	1.00	37.5	128.0	10.46	.72	.88	1.00
	5.66	12000	43.0	146.6	7.58	.74	.99	1.00	41.6	142.0	8.50	.76	.98	1.00	40.3	137.6	9.48	.79	1.00	1.00	39.0	133.0	10.60	.82	1.00	1.00
19°C (67°F)	3.77	8000	42.4	144.6	7.54	.46	.57	.73	41.0	140.0	8.44	.47	.58	.75	39.6	135.0	9.44	.47	.59	.78	38.1	130.0	10.52	.48	.60	.81
	4.53	10000	43.6	148.8	7.62	.49	.62	.86	42.1	143.8	8.52	.50	.63	.89	40.7	138.8	9.52	.50	.66	.92	39.1	133.4	10.62	.51	.68	.95
	5.66	12000	44.5	152.0	7.68	.52	.70	.96	43.0	146.8	8.60	.53	.73	.98	41.5	141.6	9.60	.54	.76	1.00	39.9	136.0	10.70	.55	.79	1.00
22°C (71°F)	3.77	8000	45.1	153.8																						

**BLOWER DATA****TCA180****BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT WITH WET INDOOR COIL & AIR FILTERS IN PLACE.****FOR ALL UNITS ADD:** Any field installed accessories air resistance (duct resistance, diffuser, etc.). See page 14

Then determine from table the blower motor output and drive required.

**100 to 375 Pa****TCA180**

Air Volume L/s	External Static (Pa)											
	100 RPM BHP	125 RPM BHP	150 RPM BHP	175 RPM BHP	200 RPM BHP	225 RPM BHP	250 RPM BHP	275 RPM BHP	300 RPM BHP	325 RPM BHP	350 RPM BHP	375 RPM BHP
	Low - 2.2 kW, Drive Kit A	Standard Static - 2.2 kW (3 hp), Drive Kit 1						High Static - 3.7 kW (5 hp), Drive Kit 4				
2265	577 1.13	620 1.31	662 1.48	702 1.66	742 1.83	777 2.01	811 2.18	842 2.36	872 2.54	902 2.72	932 2.89	960 3.07
2360	585 1.25	628 1.43	670 1.60	710 1.78	750 1.95	783 2.13	815 2.30	848 2.50	880 2.70	910 2.88	940 3.05	968 3.23
2595	605 1.45	648 1.65	690 1.85	728 2.05	765 2.25	800 2.45	835 2.65	865 2.85	895 3.05	925 3.25	955 3.45	983 3.65
2830	630 1.75	670 1.95	710 2.15	748 2.38	785 2.60	818 2.83	850 3.05	880 3.25	910 3.45	940 3.68	970 3.90	998 4.13
3065	650 2.05	690 2.28	730 2.50	768 2.75	805 3.00	838 3.23	870 3.45	900 3.70	930 3.95	958 4.18	985 4.40	1013 4.63
3305	675 2.35	715 2.63	755 2.90	790 3.15	825 3.40	858 3.68	890 3.95	920 4.20	950 4.45	978 4.70	1005 4.95	1030 5.18
3540	687 2.55	725 2.81	763 3.06	798 3.33	833 3.60	866 3.86	898 4.11	926 4.36	954 4.61	984 4.90	1013 5.19	1038 5.44

**400 to 650 Pa****TCA180**

Air Volume cfm	External Static (Pa)											
	400 RPM BHP	425 RPM BHP	450 RPM BHP	475 RPM BHP	500 RPM BHP	525 RPM BHP	550 RPM BHP	575 RPM BHP	600 RPM BHP	625 RPM BHP	650 RPM BHP	
	High - 3.7 kW, Drive Kit 4	Field Furnished Drive										
2265	987 3.24	1014 3.42	1041 3.60	1064 3.78	1087 3.95	1112 4.13	1136 4.30	1159 4.50	1181 4.70	1204 4.88	1226 5.06	
2360	995 3.40	1020 3.60	1045 3.80	1070 3.98	1095 4.15	1118 4.33	1140 4.50	1163 4.70	1185 4.90	1208 5.10	1230 5.30	
2595	1010 3.85	1035 4.05	1060 4.25	1085 4.48	1110 4.70	1133 4.90	1155 5.10	1178 5.30	1200 5.50	1220 5.70	1240 5.90	
2830	1025 4.35	1050 4.58	1075 4.80	1098 5.00	1120 5.20	1145 5.43	1170 5.65	1193 5.88	1215 6.10	1235 6.33	1255 6.55	
3065	1040 4.85	1065 5.10	1090 5.35	1115 5.60	1140 5.85	1163 6.08	1185 6.30	1205 6.53	1225 6.75	1248 7.00	1270 7.25	
3305	1055 5.40	1080 5.68	1105 5.95	1130 6.20	1155 6.45	1178 6.70	1200 6.95	1220 7.20	1240 7.45	1263 7.73	1285 8.00	
3540	1063 5.68	1088 5.94	1113 6.19	1136 6.44	1159 6.69	1182 6.96	1204 7.23	1226 7.50	1248 7.77	1269 8.03	1289 8.28	

**AIR RESISTANCE (Pa) - Options**

Air Volume - L/s	Electric Heat	Economizer	Horizontal Roof Curb	MERV 11 Filter
2265	---	---	20	2
2360	---	---	20	2
2595	---	---	25	5
2830	2	---	27	5
3065	2	5	32	5
3305	2	10	37	7
3540	2	12	40	7

**BLOWER DATA****TCA210****BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT WITH WET INDOOR COIL & AIR FILTERS IN PLACE.****FOR ALL UNITS ADD:** Any field installed accessories air resistance (duct resistance, diffuser, etc.). See page 14

Then determine from table the blower motor output and drive required.

**75 to 350 Pa****TCA210**

Air Volume L/s	External Static (Pa)																							
	75 RPM BHP		100 RPM BHP		125 RPM BHP		150 RPM BHP		175 RPM BHP		200 RPM BHP		225 RPM BHP		250 RPM BHP		275 RPM BHP		300 RPM BHP		325 RPM BHP		350 RPM BHP	
	Low - 3.7 kW, Drive Kit 2				Standard Static - 3.7 kW (5 hp), Drive Kit 3								High Static - 5.6 kW, Drive Kit 6											
2645	609	1.51	652	1.71	694	1.91	732	2.12	769	2.33	803	2.53	837	2.73	868	2.93	899	3.13	928	3.33	957	3.53	985	3.74
2830	630	1.75	670	1.95	710	2.15	748	2.38	785	2.60	818	2.83	850	3.05	880	3.25	910	3.45	940	3.68	970	3.90	998	4.13
3065	650	2.05	690	2.28	730	2.50	768	2.75	805	3.00	838	3.23	870	3.45	900	3.70	930	3.95	958	4.18	985	4.40	1013	4.63
3305	675	2.35	715	2.63	755	2.90	790	3.15	825	3.40	858	3.68	890	3.95	920	4.20	950	4.45	978	4.70	1005	4.95	1030	5.18
3540	700	2.75	738	3.03	775	3.30	810	3.58	845	3.85	878	4.15	910	4.45	938	4.70	965	4.95	993	5.23	1020	5.50	1048	5.78
3775	725	3.20	763	3.50	800	3.80	833	4.08	865	4.35	898	4.65	930	4.95	958	5.23	985	5.50	1013	5.80	1040	6.10	1065	6.40
3965	746	3.55	783	3.87	819	4.18	853	4.49	886	4.80	916	5.12	946	5.43	974	5.73	1001	6.03	1029	6.35	1056	6.66	1081	6.96

**375 to 625 Pa****TCA210**

Air Volume L/s	External Static (Pa)																					
	375 RPM BHP		400 RPM BHP		425 RPM BHP		450 RPM BHP		475 RPM BHP		500 RPM BHP		525 RPM BHP		550 RPM BHP		575 RPM BHP		600 RPM BHP		625 RPM BHP	
	High Static - 5.6 kW, Drive Kit 6				Field Furnished Drive																	
2645	1012	3.95	1037	4.15	1062	4.35	1087	4.575	1112	4.80	1135	5	1157	5.20	1180	5.41	1202	5.62	1223	5.83	1244	6.04
2830	1025	4.35	1050	4.58	1075	4.80	1098	5.00	1120	5.20	1145	5.43	1170	5.65	1193	5.88	1215	6.10	1235	6.33	1255	6.55
3065	1040	4.85	1065	5.10	1090	5.35	1115	5.60	1140	5.85	1163	6.08	1185	6.30	1205	6.53	1225	6.75	1248	7.00	1270	7.25
3305	1055	5.40	1080	5.68	1105	5.95	1130	6.20	1155	6.45	1178	6.70	1200	6.95	1220	7.20	1240	7.45	1263	7.73	1285	8.00
3540	1075	6.05	1100	6.33	1125	6.60	1148	6.88	1170	7.15	1193	7.40	1215	7.65	1238	7.95	1260	8.25	1280	8.50	1300	8.75
3775	1090	6.70	1115	6.98	1140	7.25	1163	7.55	1185	7.85	1208	8.13	1230	8.40	1253	8.70	1275	9.00	1295	9.30	1315	9.60
3965	1106	7.26	1131	7.58	1156	7.89	1179	8.19	1201	8.49	1224	8.79	1246	9.09	1266	9.38	1286	9.67	1307	9.98	1328	10.29

**AIR RESISTANCE (Pa) - Options**

Air Volume - L/s	Electric Heat	Economizer	Horizontal Roof Curb	MERV 11 Filter
2645	---	---	25	5
2830	2	---	27	5
3065	2	5	32	5
3305	2	10	37	8
3540	2	15	42	8
3775	5	22	47	10
3965	5	27	52	10

**BLOWER DATA****TCA240****BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT WITH WET INDOOR COIL & AIR FILTERS IN PLACE.****FOR ALL UNITS ADD:** Any field installed accessories air resistance (duct resistance, diffuser, etc.). See page 14

Then determine from table the blower motor output and drive required.

**50 to 325 Pa****TCA240**

Air Volume L/s	External Static (Pa)											
	50	75	100	125	150	175	200	225	250	275	300	325
	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP
<b>Low Static - 3.7 kW, Drive Kit 2</b>	<b>Standard Static - 5.6 kW (7.5 hp), Drive Kit 7</b>											
3020	648 1.99	688 2.22	728 2.46	764 2.69	801 2.92	834 3.15	866 3.39	896 3.62	926 3.85	954 4.08	981 4.30	1008 4.53
3305	675 2.35	715 2.63	755 2.90	790 3.15	825 3.40	858 3.68	890 3.95	920 4.20	950 4.45	978 4.70	1005 4.95	1030 5.18
3540	700 2.75	738 3.03	775 3.30	810 3.58	845 3.85	878 4.15	910 4.45	938 4.70	965 4.95	993 5.23	1020 5.50	1048 5.78
3775	725 3.20	763 3.50	800 3.80	833 4.08	865 4.35	898 4.65	930 4.95	958 5.23	985 5.50	1013 5.80	1040 6.10	1065 6.40
4010	750 3.65	788 3.98	825 4.30	858 4.60	890 4.90	920 5.23	950 5.55	978 5.85	1005 6.15	1033 6.48	1060 6.80	1085 7.10
4250	780 4.20	815 4.53	850 4.85	880 5.18	910 5.50	940 5.83	970 6.15	998 6.48	1025 6.80	1053 7.15	1080 7.50	1105 7.83
4530	811 4.87	845 5.22	879 5.57	910 5.94	941 6.31	970 6.67	999 7.02	1027 7.38	1054 7.74	1079 8.08	1104 8.41	1129 8.77

**350 to 375 Pa****TCA240**

Air Volume L/s	External Static (Pa)											
	350	375	400	425	450	475	500	525	550	575	600	
	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP
<b>High Static - 7.5 kW, Drive Kit 6</b>	<b>Field Furnished Drive</b>											
3020	1035 4.75	1060 4.98	1085 5.22	1110 5.45	1135 5.68	1157 5.91	1180 6.15	1202 6.40	1225 6.65	1246 6.88	1268 7.11	
3305	1055 5.40	1080 5.68	1105 5.95	1130 6.20	1155 6.45	1178 6.70	1200 6.95	1220 7.20	1240 7.45	1263 7.73	1285 8.00	
3540	1075 6.05	1100 6.33	1125 6.60	1148 6.88	1170 7.15	1193 7.40	1215 7.65	1238 7.95	1260 8.25	1280 8.50	1300 8.75	
3775	1090 6.70	1115 6.98	1140 7.25	1163 7.55	1185 7.85	1208 8.13	1230 8.40	1253 8.70	1275 9.00	1295 9.30	1315 9.60	
4010	1110 7.40	1135 7.73	1160 8.05	1183 8.35	1205 8.65	1228 8.95	1250 9.25	1270 9.55	1290 9.85	1310 10.15	1330 10.45	
4250	1130 8.15	1153 8.45	1175 8.75	1198 9.08	1220 9.40	1243 9.75	1265 10.10	1288 10.45	1310 10.80	1330 11.10	1350 11.4	
4530	1154 9.13	1177 9.46	1199 9.78	1222 10.14	1244 10.50	1267 10.87	1289 11.23	---	---	---	---	---

**AIR RESISTANCE (Pa) - Options**

Air Volume - L/s	Electric Heat	Economizer	Horizontal Roof Curb	MERV 11 Filter
3020	2	5	32	5
3305	2	10	37	7
3540	2	15	42	7
3775	5	22	47	10
4010	5	27	52	10
4250	10	35	60	10
4530	12	40	65	12

**BLOWER DATA****TCA300S****BLOWER TABLE INCLUDES RESISTANCE FOR BASE UNIT WITH WET INDOOR COIL & AIR FILTERS IN PLACE.****FOR ALL UNITS ADD:** Any field installed accessories air resistance (duct resistance, diffuser, etc.). See page 14

Then determine from table the blower motor output and drive required.

**0 to 300 Pa****TCA300**

Air Volume L/s	External Static (Pa)											
	0	25	75	100	125	150	175	200	225	250	275	300
	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP
<b>Low Static - 5.6 kW (7.5 hp), Drive Kit 7</b>												<b>Standard Static - 7.5 kW (10 hp), Drive Kit 6</b>
3775	725 3.20	763 3.50	800 3.80	833 4.08	865 4.35	898 4.65	930 4.95	958 5.23	985 5.50	1013 5.80	1040 6.10	1065 6.40
4010	750 3.65	788 3.98	825 4.30	858 4.60	890 4.90	920 5.23	950 5.55	978 5.85	1005 6.15	1033 6.48	1060 6.80	1085 7.10
4365	790 4.45	825 4.80	860 5.15	893 5.50	925 5.85	955 6.20	985 6.55	1013 6.88	1040 7.20	1065 7.53	1090 7.85	1115 8.20
4720	835 5.40	868 5.78	900 6.15	930 6.50	960 6.85	988 7.23	1015 7.60	1043 7.98	1070 8.35	1095 8.70	1120 9.05	1145 9.43
5075	875 6.40	908 6.83	940 7.25	970 7.65	1000 8.05	1028 8.45	1055 8.85	1080 9.25	1105 9.65	1130 10.05	1155 10.45	1178 10.83
5425	915 7.40	948 7.88	980 8.35	1010 8.80	1040 9.25	1068 9.68	1095 10.10	1118 10.53	1140 10.95	1165 11.40	1190 11.85	1210 12.23
5665	935 7.95	963 8.35	990 8.75	1020 9.23	1050 9.70	1075 10.15	1100 10.60	1125 10.98	1150 11.35	1173 11.80	1195 12.25	---

**325 to 575 Pa****TCA300**

Air Volume L/s	External Static (Pa)											
	325	350	375	400	425	450	475	500	525	550	575	
	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP	RPM BHP
<b>Field Furnished Drive</b>												
3775	1090 6.70	1115 6.98	1140 7.25	1163 7.55	1185 7.85	1208 8.13	1230 8.40	1253 8.70	1275 9.00	1295 9.30	1315 9.60	
4010	1110 7.40	1135 7.73	1160 8.05	1183 8.35	1205 8.65	1228 8.95	1250 9.25	1270 9.55	1290 9.85	1310 10.15	1330 10.45	
4365	1140 8.55	1163 8.88	1185 9.20	1208 9.53	1230 9.85	1253 10.20	1275 10.55	1295 10.88	1315 11.20	---	---	
4720	1170 9.80	1193 10.15	1215 10.50	1238 10.88	1260 11.25	1283 11.62	---	---	---	---	---	
5075	1200 11.20	1222 11.57	---	---	---	---	---	---	---	---	---	
5425	1230 12.60	---	---	---	---	---	---	---	---	---	---	
5665	---	---	---	---	---	---	---	---	---	---	---	

**AIR RESISTANCE (Pa) - Options**

Air Volume - L/s	Electric Heat	Economizer	Horizontal Roof Curb	MERV 11 Filter
3775	5	22	32	10
4010	5	27	37	10
4365	10	37	45	12
4720	15	47	52	15
5075	25	57	62	15
5425	27	62	67	17

**POWER EXHAUST FANS**

Pa	in. w.g.	Air Volume Exhausted	
		L/s	cfm
0	0	4070	8630
12	0.05	3875	8210
25	0.10	3645	7725
37	0.15	3355	7110
50	0.20	3055	6470
62	0.25	2730	5790
75	0.30	2390	5060
87	0.35	2030	4300
100	0.40	1655	3510
112	0.45	1270	2690
125	0.50	870	1840

## BLOWER DATA

### CEILING DIFFUSER AIR RESISTANCE

Air Volume		Step-Down Diffuser							Flush Diffuser				
		RTD11-185			RTD11-275			FD11-185		FD11-275			
		2 Ends Open	1 Side/2 Ends Open	All Ends & Sides Open	2 Ends Open	1 Side/2 Ends Open	All Ends & Sides Open	Pa	in. w.g.	Pa	in. w.g.	Pa	
L/s	cfm	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	Pa	in. w.g.	in. w.g.	
2360	5000	127	.51	109	.44	97	.39	---	---	67	.27	---	
2455	5200	139	.56	119	.48	104	.42	---	---	75	.30	---	
2550	5400	152	.61	129	.52	112	.45	---	---	82	.33	---	
2645	5600	164	.66	139	.56	119	.48	---	---	90	.36	---	
2735	5800	177	.71	147	.59	127	.51	---	---	97	.39	---	
2830	6000	189	.76	157	.63	137	.55	90	.36	77	.31	67	
2925	6200	199	.80	169	.68	147	.59	---	---	114	.46	---	
3020	6400	214	.86	179	.72	157	.63	---	---	124	.50	---	
3065	6500	---	---	---	---	---	104	.42	90	.36	77	.31	85
3115	6600	229	.92	191	.77	167	.67	---	---	134	.54	---	
3210	6800	246	.99	206	.83	174	.72	---	---	144	.58	---	
3305	7000	256	1.03	216	.87	189	.76	122	.49	102	.41	90	
3400	7200	271	1.09	229	.92	199	.80	---	---	164	.66	---	
3490	7400	286	1.15	241	.97	209	.84	---	---	174	.70	---	
3540	7500	---	---	---	---	127	.51	114	.46	102	.41	---	
3585	7600	301	1.20	254	1.02	219	.88	---	---	184	.74	---	
3775	8000	---	---	---	---	147	.59	122	.49	107	.43	---	
4010	8500	---	---	---	---	172	.69	144	.58	124	.50	---	
4245	9000	---	---	---	---	196	.79	167	.67	144	.58	---	
4485	9500	---	---	---	---	221	.89	186	.75	162	.65	---	
4720	10,000	---	---	---	---	249	1.00	209	.84	182	.73	---	
4955	10,500	---	---	---	---	273	1.10	229	.92	199	.80	---	
5190	11,000	---	---	---	---	301	1.21	251	1.01	219	.88	---	
												239	
												.96	

## BLOWER DATA

### CEILING DIFFUSER AIR THROW DATA


Model No.	Air Volume		1 Effective Throw Range				Model No.	Air Volume		1 Effective Throw Range			
			Step-Down		Flush					Step-Down		Flush	
L/s	cfm	m	ft.	m	ft.	m	m	cfm	m	ft.	m	ft.	
180 Models	Diffuser Model	RTD11-185		FD11-185		210, 240, 300S Models	Diffuser Model	RTD11-275		FD11-275			
	2645	5600	12 - 15	39 - 49	9 - 11	28 - 37	3400	7200	10 - 12	33 - 38	8 - 11	26 - 35	
	2740	5800	13 - 16	42 - 51	9 - 12	29 - 38	3490	7400	11 - 12	35 - 40	9 - 11	28 - 37	
	2830	6000	13 - 17	44 - 54	12 - 15	40 - 50	3585	7600	11 - 13	36 - 41	9 - 12	29 - 38	
	2925	6200	14 - 17	45 - 55	13 - 16	42 - 51	3680	7800	11 - 13	38 - 43	12 - 15	40 - 50	
	3020	6400	14 - 17	46 - 55	13 - 16	53 - 52	3775	8000	12 - 13	39 - 44	13 - 16	42 - 51	
	3115	6600	14 - 17	57 - 56	14 - 17	45 - 56	3870	8200	12 - 14	41 - 46	13 - 16	43 - 52	
							3965	8400	13 - 15	43 - 49	13 - 17	44 - 54	
							4060	8600	13 - 15	44 - 50	14 - 17	46 - 57	
							4155	8800	14 - 17	47 - 55	15 - 18	48 - 59	

## OUTDOOR SOUND DATA

Unit Model No.	Octave Band Sound Power Levels dBA, re 10 <sup>-12</sup> Watts							<sup>1</sup> Sound Rating Number (dB)
	125	250	500	1000	2000	4000	8000	
180	97	92	91	88	83	79	72	93
210, 240	94	91	90	87	83	79	72	92
300	96	93	90	87	82	76	65	93

<sup>1</sup> Tested according to ARI Standard 270-95 test conditions and ANSI Standard S1.32-1981.

## INSTALLATION CLEARANCES - MM (INCHES)

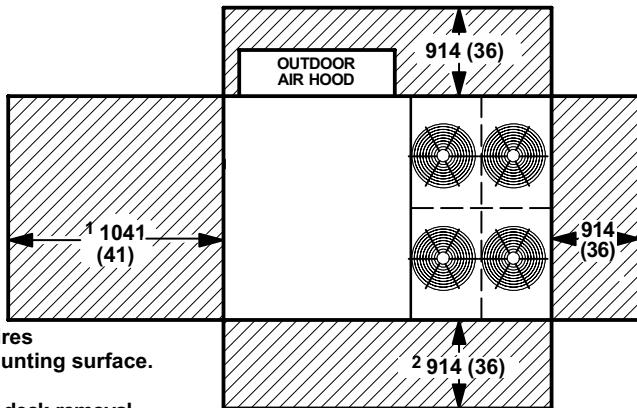

NOTE - Top Clearance 1524 mm (60 in.)

NOTE - Entire perimeter of unit base requires support when elevated above mounting surface.

<sup>1</sup> NOTE - 1676 mm (66 in.)

Recommended service clearance for blower deck removal

<sup>2</sup> NOTE - 1524 mm (60 in.) Recommended service clearance for heat exchanger removal

## ELECTRIC HEAT CAPACITIES

Input Voltage	15 kW			30 kW			45 kW			60 kW			90 kW		
	No of Steps	kW input	Btuh Output	No of Steps	kW input	Btuh Output	No of Steps	kW input	Btuh Output	No of Steps	kW input	Btuh Output	No of Steps	kW input	Btuh Output
380	1	9.4	32,100	1	18.8	64,200	1	28.2	96,300	1	37.6	128,400	1	56.4	192,500
400	1	10.4	35,600	1	20.8	71,100	1	31.2	106,700	1	41.6	142,200	1	62.5	213,200
420	1	11.5	39,200	1	23.0	78,400	1	34.4	117,600	1	45.9	156,800	1	68.9	235,100

<sup>1</sup> Can be used with two stage control.

## ELECTRICAL/ELECTRIC HEAT DATA

Voltage - 50hz - 3 phase				TCA180S 380/420V		TCA210S 380/420V		TCA240S 380/420V		TCA300S 380/420V							
<b>Compressors</b>				3		3		3		4							
Number of Compressors																	
Rated Load Amps each (total)				7.5 (22.5)		9.7 (29.1)		10.9 (32.7)		9.6 (38.4)							
Locked Rotor Amps each (total)				59.6 (178.8)		75 (225)		100 (300)		75 (300)							
<b>Outdoor Fan Motors (4)</b>				1.3 (5.2)		1.5 (6)		1.3 (5.2)		1.5 (6)							
Full Load Amps each (total)																	
Locked Rotor Amps each (total)				2.4 (9.6)		3 (12)		2.4 (9.6)		3 (12)							
<b>Power Exhaust Fans (2)</b>				Horsepower	249 (1/3)		249 (1/3)		249 (1/3)		249 (1/3)						
Full Load Amps each (total)					2.6 (5.2)		2.6 (5.2)		2.6 (5.2)		2.6 (5.2)						
Locked Rotor Amps each (total)				4.8 (9.6)		4.8 (9.6)		4.8 (9.6)		4.8 (9.6)							
<b>Indoor Blower Motor</b>				Motor Output kW	2.2	3.7	5.6	2.2	3.7	5.6	7.5	3.7	5.6	7.5			
				Horsepower	3	5	7.5	3	5	7.5	10	5	7.5	10			
				Rated Load Amps	5.0	7.8	11.8	5.0	7.8	11.8	15.2	7.8	11.8	15.2			
				Locked Rotor Amps	27	46	66	27	46	66	46	66	84	46	66	84	
<sup>1</sup> Minimum Circuit Ampacity	with power exhaust		<b>0 kW</b>	38	40	44	46	48	52	52	56	59	58	62	65		
	<b>15 kW</b>		15 kW	38	40	44	46	48	52	52	56	59	58	62	65		
	<b>30 kW</b>		30 kW	49	53	58	49	53	58	53	58	62	58	62	65		
	<b>45 kW</b>		45 kW	69	73	78	69	73	78	73	78	82	73	78	82		
	<b>60 kW</b>		60 kW	73	77	82	73	77	82	77	82	86	77	82	86		
	<b>90 kW</b>		90 kW	---	---	---	105	108	113	108	113	118	108	113	118		
	without power exhaust			35	38	42	43	46	50	49	53	56	55	59	62		
<sup>2</sup> Maximum Overcurrent Protection	with power exhaust		<b>0 kW</b>	40	45	50	50	50	60	60	60	70	60	70	80		
	<b>15 kW</b>		15 kW	40	45	50	50	50	60	60	60	70	60	70	80		
	<b>30 kW</b>		30 kW	50	60	60	50	60	60	60	60	70	60	70	80		
	<b>45 kW</b>		45 kW	70	80	80	70	80	80	80	80	90	80	80	90		
	<b>60 kW</b>		60 kW	80	80	90	80	80	90	80	90	90	80	90	90		
	<b>90 kW</b>		90 kW	---	---	---	110	110	125	110	125	125	110	125	125		
	without power exhaust			40	45	50	50	50	60	50	60	70	60	70	70		
<sup>4</sup> Unit Fuse Block				with power exhaust	LAFB40A8	LAFB45A8	LAFB50A8	LAFB50A8	LAFB60A9	LAFB60A9	LAFB70A8	LAFB60A9	LAFB70A8	LAFB80A8			
				without power exhaust	LAFB40A8	LAFB45A8	LAFB50A8	LAFB50A8	LAFB60A8	LAFB50A8	LAFB60A9	LAFB70A8	LAFB60A9	LAFB70A8			
<sup>4</sup> Electric Heat Control Kit					T1EHKT01C-1G		T1EHKT01C-1G		T1EHKT01C-1G		T1EHKT01C-1G						
Disconnect				<b>0-30 kW</b>	T1DISC080-1		<b>45 kW</b>	T1DISC080-1		<b>60 kW</b>	T1DISC080-1		<b>90 kW</b>	T1DISC080-1			
					T1DISC080-1			T1DISC080-1			T1DISC080-1			T1DISC080-1			
					T1DISC080-1			T1DISC080-1			T1DISC080-1			T1DISC080-1			
				<b>60 kW</b>	T1DISC150-1			T1DISC150-1			T1DISC150-1			T1DISC150-1			
					---			T1DISC150-1			T1DISC150-1			T1DISC150-1			

NOTE - Extremes of operating range are plus and minus 10% of line voltage.

<sup>1</sup> HACR (heating, air conditioning, refrigeration) type breaker or fuse.


<sup>2</sup> Refer to local codes to determine wire, fuse and disconnect size requirements.

<sup>3</sup> Circuit breaker must be field provided.

<sup>4</sup> Only used with electric heat.


## OPTIONAL CONVENTIONAL TEMPERATURE CONTROL SYSTEMS - FIELD INSTALLED

System and Component Description	Field Installed Catalog No.
<b>ELECTRO-MECHANICAL THERMOSTAT</b>	
Thermostat - Two stage heat & two stage cool with dual temperature levers, subbase choice .....	13F06
Subbase - Manual system switch (Off-Heat-Auto-Cool), fan switch (Auto-On) .....	13F17
Subbase - Non-switching .....	13F16
<b>Night Setback Operation</b> - Order components below	
Heating Thermostat - Single stage heat / Single stage cool .....	12F99
Subbase - Non-switching .....	13F16
Time Clock - 7 day operation, indicates day and night periods, 2 hour increments, battery back-up .....	See Price Book
Time Clock - 24 hour night setback operation, 15 minute increments, battery back-up .....	See Price Book
Blower Proving Switch - Monitors blower operation, locks out unit in case of blower failure .....	30K49
Dirty Filter Switch - Senses static pressure increase indicating a dirty filter condition .....	30K48

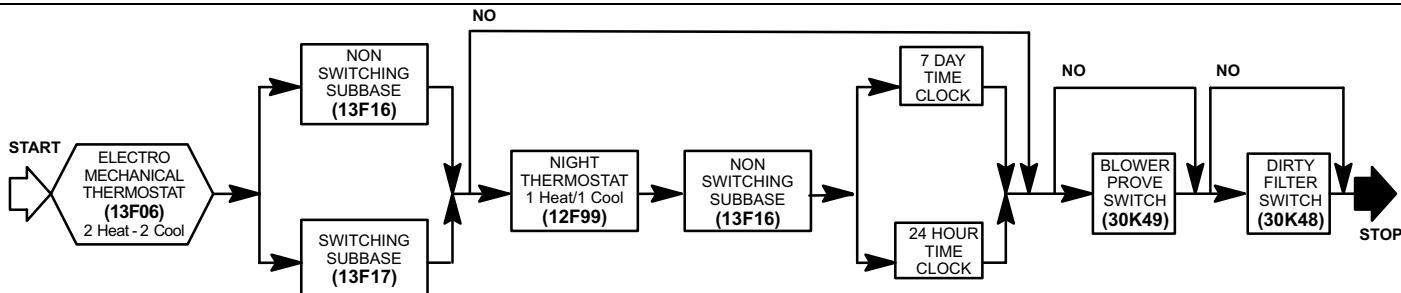

### ELECTRONIC THERMOSTAT

Electronic Thermostat - Any two stage heat/ two stage cool electronic thermostat may be used. ....	See Price Book
Time Clock - 7 day operation, indicates day and night periods, 2 hour increments, battery back-up .....	See Price Book
Time Clock - 24 hour night setback operation, 15 minute increments, battery back-up .....	See Price Book
Blower Proving Switch - Monitors blower operation, locks out unit in case of blower failure .....	30K49
Dirty Filter Switch - Senses static pressure increase indicating a dirty filter condition .....	30K48

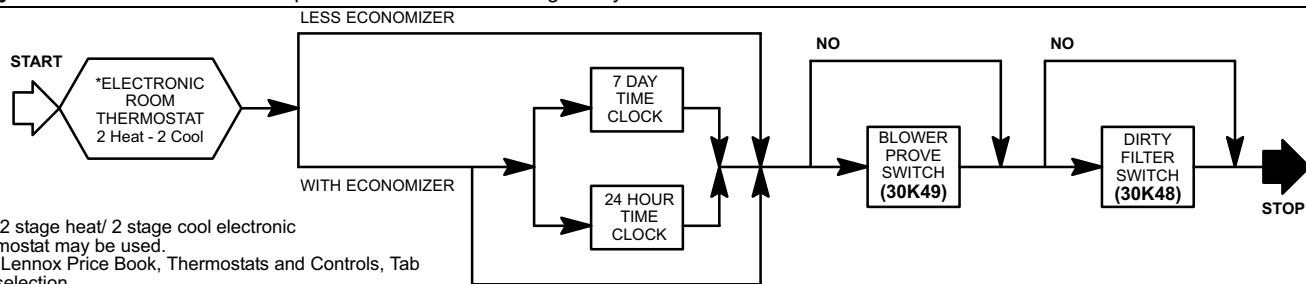


\* Any 2 stage heat/ 2 stage cool electronic thermostat may be used.

See Lennox Price Book, Thermostats and Controls, Tab for selection.

### HONEYWELL T7300 THERMOSTAT

Thermostat - Programmable, internal or optional remote temperature sensing (sensor required), touch sensitive keyboard, automatic switching, °F or °C readout, no anticipator, droop/no droop selection, indicator LED's, hour/day programming, override capabilities, time and operational mode readout, stage status indicators, battery back-up, subbase choice, manual system switch (Heat-Off-Auto-Cool), fan switch (Auto-On) .....	37L54
Subbase - Selectable staging, indicator LED's, auxiliary relay output for economizer operation	
2 Heat / 2 Cool .....	37L55
3 Heat / 3 Cool .....	37L53
Sensor - Room temperature .....	58C92
Sensor - Room temperature with 3 hour override and setpoint adjustment .....	86G67
Sensor - Return air temperature .....	27C40
Blower Proving Switch - Monitors blower operation, locks out unit in case of blower failure .....	30K49
Dirty Filter Switch - Senses static pressure increase indicating a dirty filter condition .....	30K48

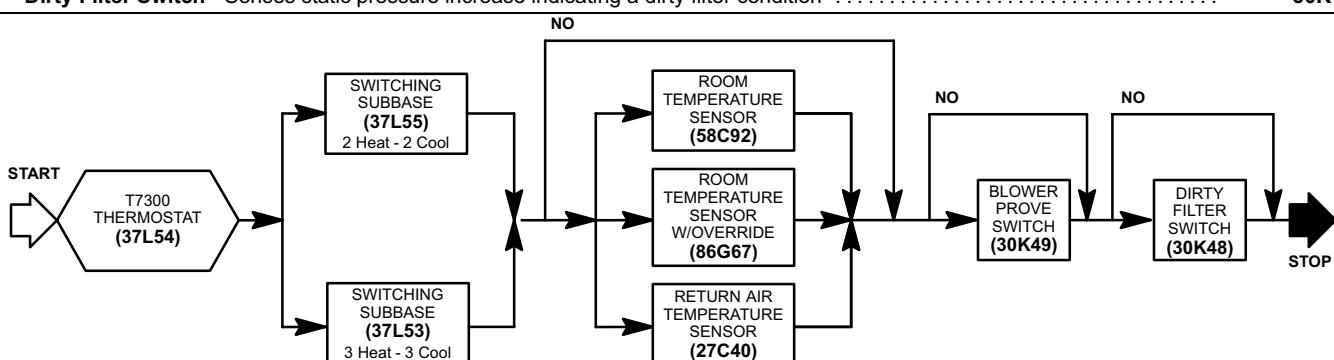

## WEIGHT DATA

Model Number	Net		Shipping	
	kg	lbs.	kg	lbs.
180/210 Base Unit	953	2101	1044	2301
180/210 Max. Unit	1046	2306	1137	2506
240 Base Unit	996	2195	1086	2395
240 Max. Unit	1089	2400	1179	2600
300 Base Unit	1052	2320	1143	2520
300 Max. Unit	1145	2525	1236	2725

## OPTIONS / ACCESSORIES

	Weight	
	kg.	lbs.
<b>CEILING DIFFUSERS</b>		
Step-Down	RTD11-185	178 392
	RTD11-275	183 403
Flush	FD11-185	135 289
	FD11-275	165 363
Transitions	LASRT18	36 80
	LASRT21/24	34 75
<b>ECONOMIZER / OUTDOOR AIR / EXHAUST</b>		
Economizer	T1ECON10C-1	39 86
<b>Barometric Relief</b>		
Down-Flow Barometric Relief Dampers	LAGED18/24	14 30
Horizontal Barometric Relief Dampers	LAGEDH18/24	9 20
<b>Outdoor Air Dampers</b>		
Damper Section (down-flow) - Automatic	T1DAMP20C-1	24 52
Damper Section (down-flow) - Manual	LAOAD18/24	22 49
Outdoor Air Hood (down-flow)	C1HOOD10C-1	29 65
Power Exhaust	C1PWRE20C-1	28 62
<b>ELECTRIC HEAT</b>		
15 kW		27 59
30 kW		27 59
45 kW		35 76
60 kW		35 76
90 kW		38 84
<b>PACKAGING</b>		
LTL Packaging (less than truck load)		127 280
<b>ROOF CURBS - STANDARD</b>		
<b>Down-Flow</b>		
14 in. (356 mm) height	LARMF18/36-14	73 160
24 in. (610 m) height	LARMF18/36-24	100 220
<b>Horizontal</b>		
26 in. (660 mm) height	LARMFH18/24-26	191 420
37 in. (940 mm) height	LARMFH18/24-37	263 580
<b>ROOF CURBS - CLIPLOCK 1000</b>		
<b>Down-Flow</b>		
14 in. (356 mm) height	LARMF18/30S-14	74 164
18 in. (457 mm) height	LARMF18/30S-18	85 187
24 in. (610 mm) height	LARMF18/30S-24	101 222
<b>Horizontal</b>		
26 in. (660 mm) height	LARMFH18/24S-26	152 335
37 in. (940 mm) height	LARMFH18/24S-37	202 445

Base Unit - The unit with NO OPTIONS.



Max. Unit - The unit with ALL OPTIONS Installed. (Electric Heat, Economizer, Power Exhaust Fans, Controls)

**DIMENSIONS - MM (INCHES)**

Model Number	CORNER WEIGHTS								CENTER OF GRAVITY			
	AA		BB		CC		DD		EE		FF	
	kg	lbs.	kg	lbs.	kg	lbs.	kg	lbs.	mm	inch	mm	inch
180 Base Unit	248	546	206	455	222	490	277	611	1397	55	997	39-1/4
180 Max. Unit	280	618	231	510	239	527	295	650	1397	55	1086	42-3/4
210 Base Unit	254	560	200	441	214	472	285	628	1321	52	1003	39-1/2
210 Max. Unit	288	636	224	494	230	508	303	668	1321	52	1092	43
240 Base Unit	259	571	216	476	232	511	289	637	1397	55	1003	39-1/2
240 Max. Unit	296	653	235	518	244	537	314	692	1346	53	1080	42-1/2
300 Base Unit	270	595	230	506	249	549	304	670	1422	56	984	38-3/4
300 Max. Unit	305	672	248	546	261	576	331	730	1372	54	1041	41


Base Unit - Unit with NO OPTIONS.

Max. Unit - Unit with ALL OPTIONS Installed. (Economizer, Power Exhaust Fans, Controls)

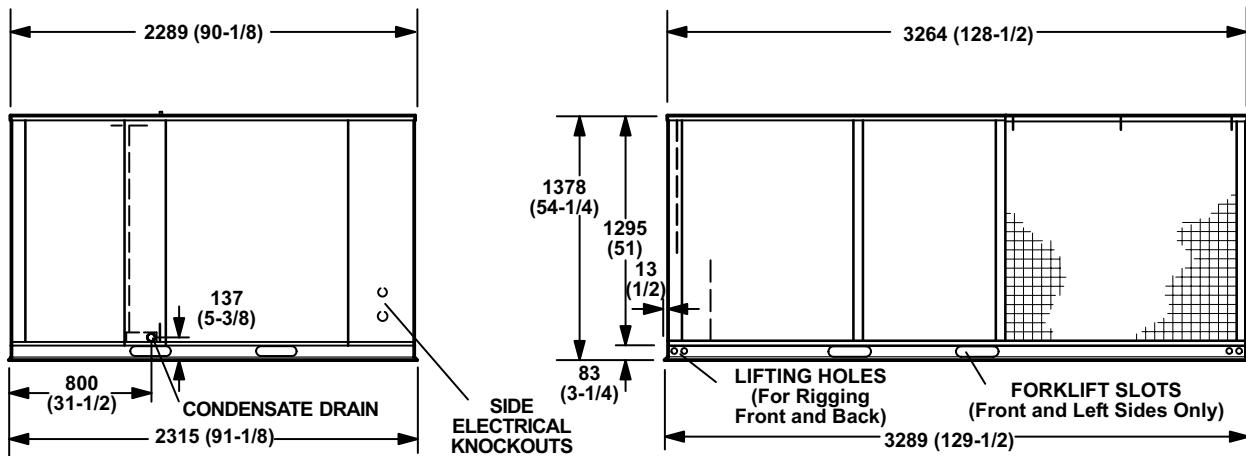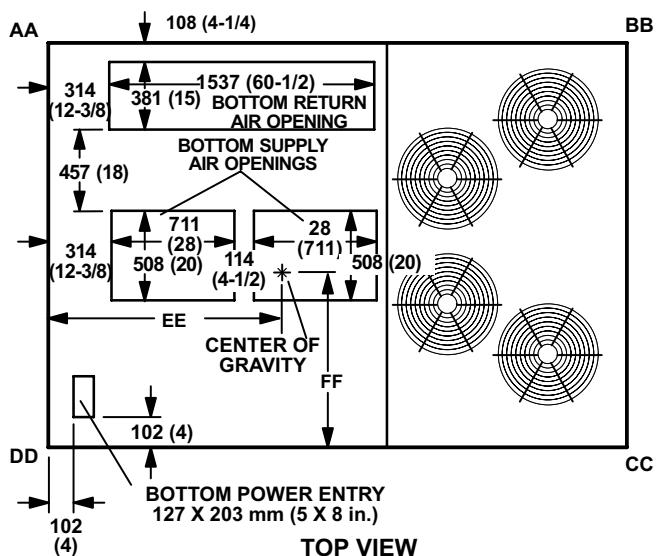

## ACCESSORY DIMENSIONS - MM (INCHES)


### OPTIONAL OUTDOOR AIR HOOD DETAIL

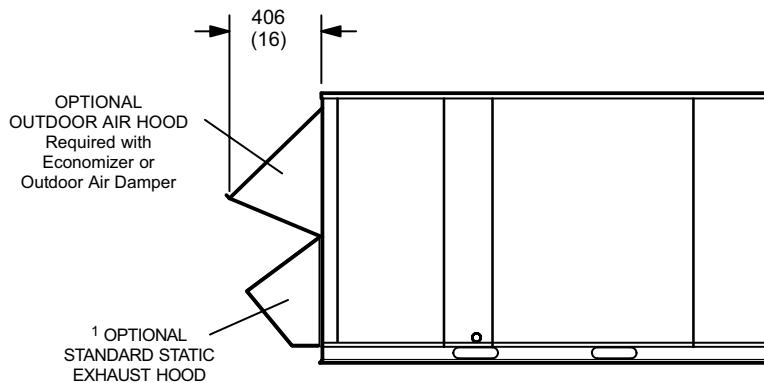

1 Field Installed in Return Air Duct for Horizontal Applications.

### HORIZONTAL BAROMETRIC RELIEF DAMPERS

(Field installed in horizontal return air duct adjacent to unit)

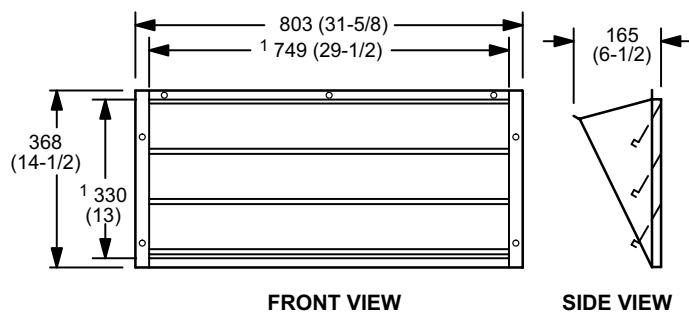

FRONT VIEW


SIDE VIEW

NOTE - Two furnished per order no.


<sup>1</sup> NOTE - Opening size required in return air duct.

## ACCESSORY DIMENSIONS - MM (INCHES)

### STANDARD ROOF CURBS - DOUBLE DUCT OPENING

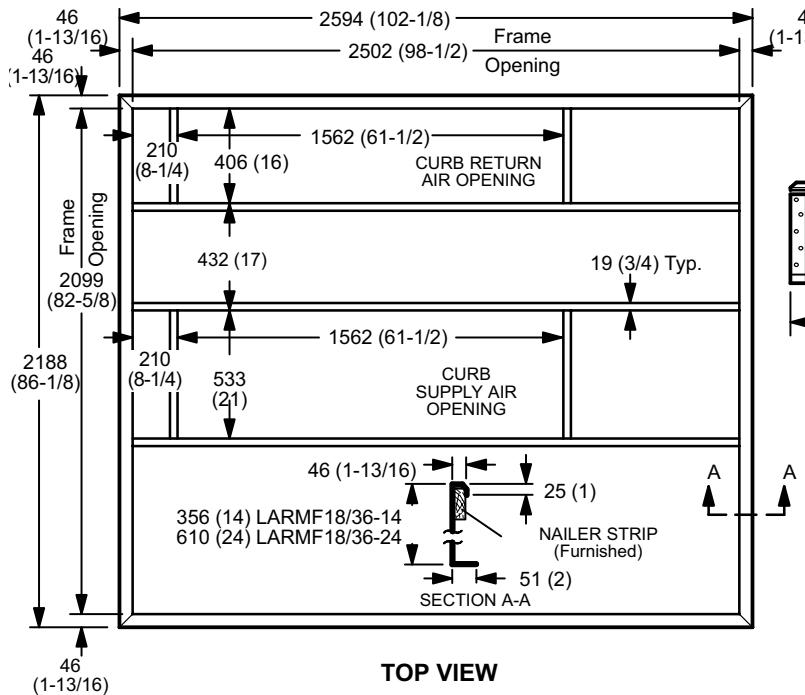



TOP VIEW

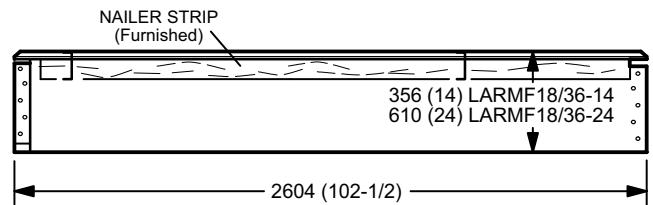

NOTE — Roof deck may be omitted within confines of curb.


SIDE VIEW

### CLIPLOCK 1000 ROOF CURBS - DOUBLE DUCT OPENING

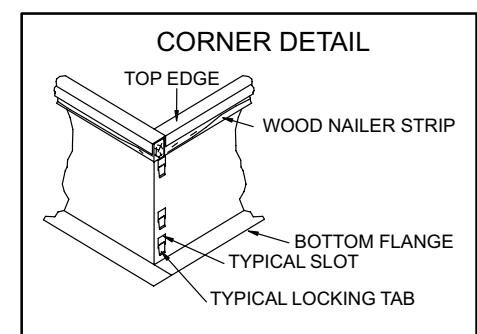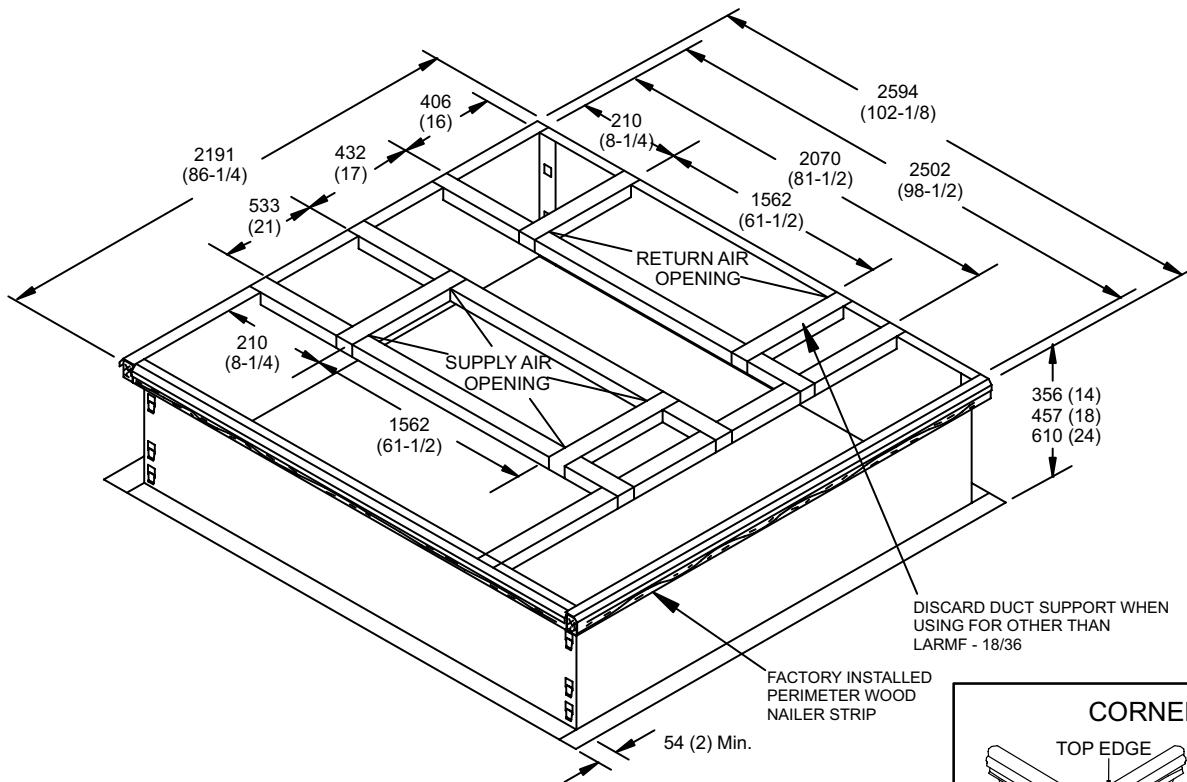

## ACCESSORY DIMENSIONS - MM (INCHES)

### STANDARD ROOF CURBS WITH SUPPLY & RETURN AIR TRANSITIONS FOR CEILING DIFFUSERS

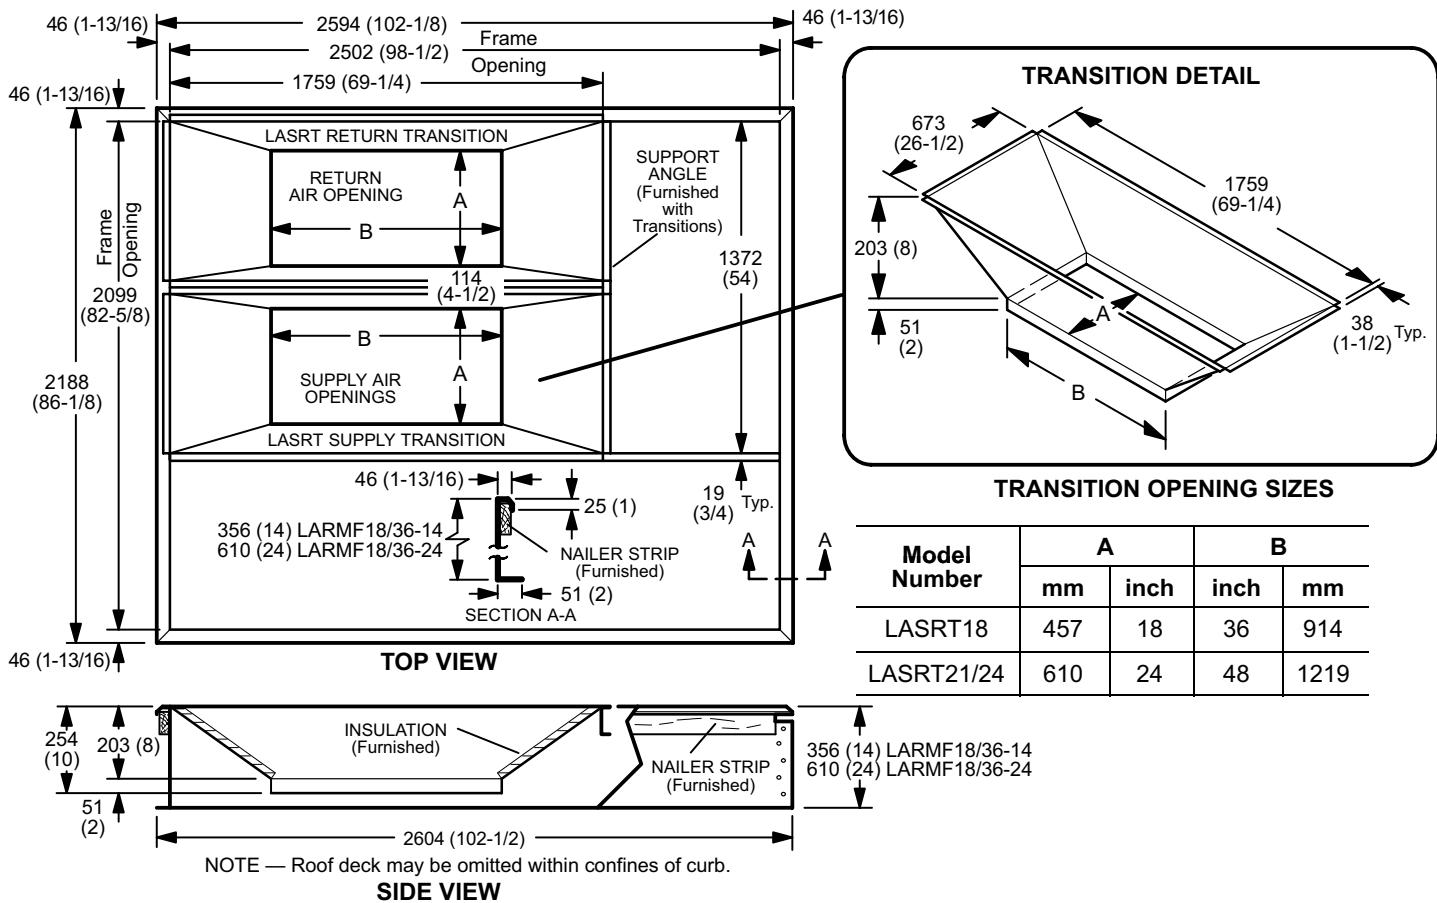


### ROOF CURB SPECIFICATIONS

Roof Curb is rigid enough to be spanned over its entire length or cantilevered if supported on both sides of center of gravity.

Roof Curb	LARMF18/36 -14	LARMF18/36 -24
<sup>1</sup> Moment of inertia ( $I$ ) - cm <sup>4</sup> (in. <sup>4</sup> )	1634 (39)	6639 (160)
<sup>1</sup> Section Modulus $\frac{I}{C}$ cm <sup>3</sup> (in. <sup>3</sup> )	5.5 (90)	512 (13.1)
Curb weight. (kg/m) (lb/ft) of length	5.5 (8.2)	12.7 (8.5)
Design strength (kPa) (psi)	137,900 (20,000)	


<sup>1</sup> Includes both sides of curb.

### TYPICAL FLASHING DETAIL FOR ROOF CURBS

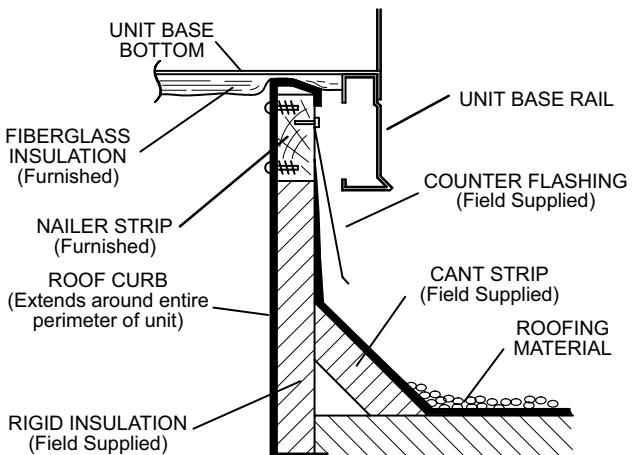

## ACCESSORY DIMENSIONS - MM (INCHES)

### HORIZONTAL ROOF CURBS - Requires Optional Horizontal Return Air Panel Kit

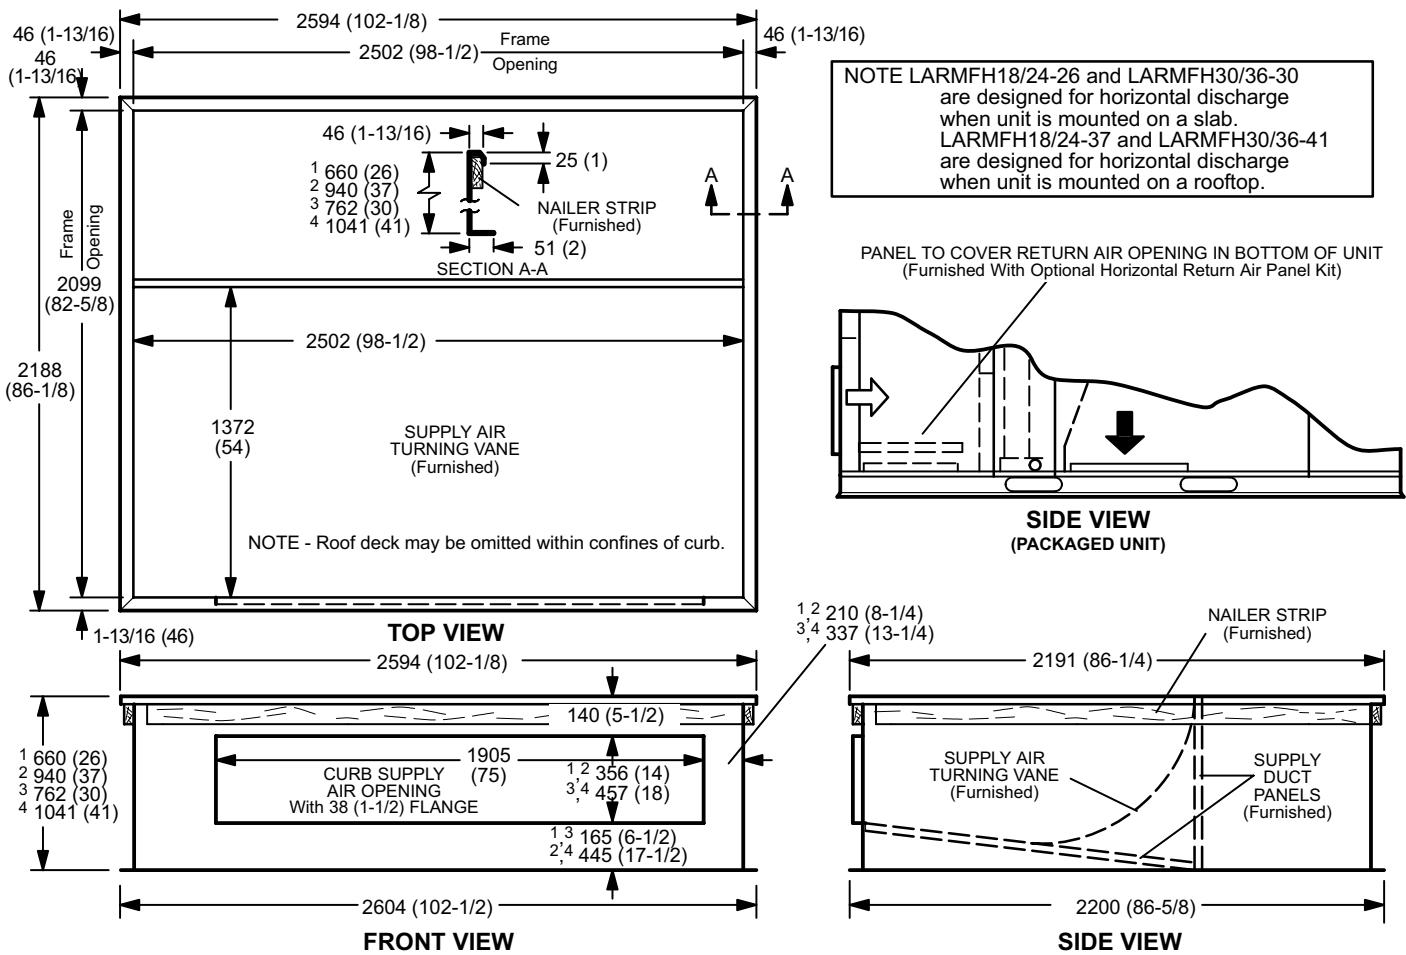


<sup>1</sup> LARMFH18/24-26

<sup>2</sup> LARMFH18/24-37

<sup>3</sup> LARMFH30/36-30 (used with 300S Models)

<sup>4</sup> LARMFH30/36-40 (used with 300S Models)

### HORIZONTAL SUPPLY AND RETURN AIR OPENINGS WITH HORIZONTAL ROOF CURB

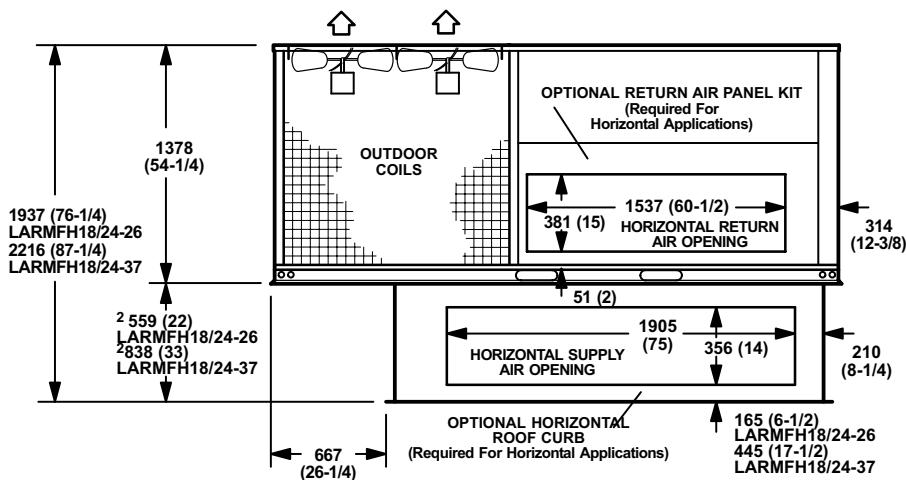


<sup>2</sup> NOTE - Top of Roof Curb extends 102 mm (4 inch) inside bottom of unit base. See Typical flashing detail.


## ACCESSORY DIMENSIONS - MM (INCHES)

### COMBINATION CEILING SUPPLY AND RETURN DIFFUSERS

STEP-DOWN CEILING DIFFUSER

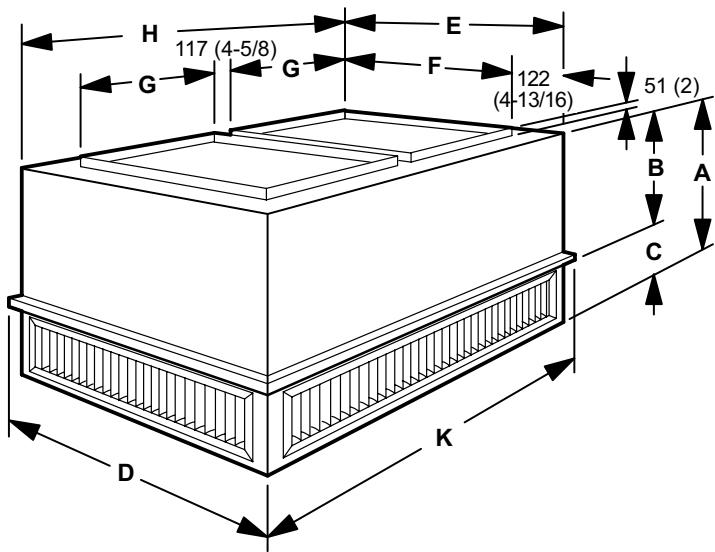

FLUSH CEILING DIFFUSER

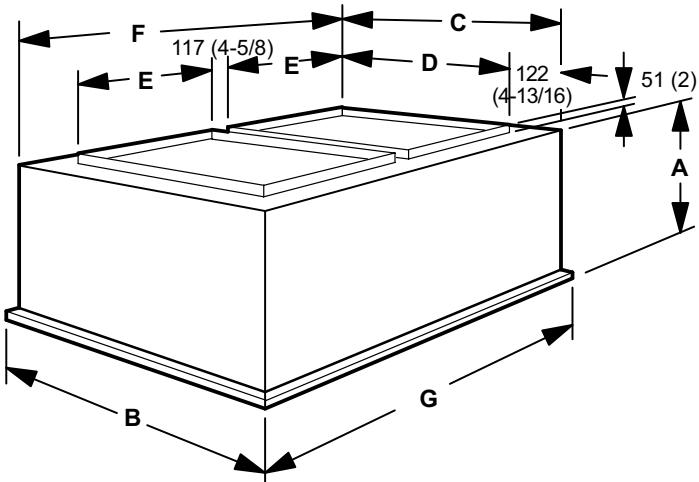

Model Number		RTD11-185	RTD11-275
A	mm	864	1016
	in.	34	40
B	mm	606	225
	in.	23-7/8	28-7/8
C	mm	257	283
	in.	10-1/8	11-1/8
D	mm	1210	1514
	in.	47-5/8	59-5/8
E	mm	1159	1470
	in.	45-5/8	57-7/8
F	mm	914	1219
	in.	36	48
G	mm	457	610
	in.	18	24
H	mm	1159	1464
	in.	45-5/8	57-5/8
K	mm	1210	1521
	in.	47-5/8	59-5/8

Model Number		FD11-185	FD11-275
A	mm	613	918
	in.	30-1/8	36-1/8
B	mm	1210	1514
	in.	47-5/8	59-5/8
C	mm	1159	1464
	in.	45-5/8	57-5/8
D	mm	914	1219
	in.	36	48
E	mm	457	610
	in.	18	24
F	mm	1159	1464
	in.	45-5/8	57-5/8
G	mm	1210	1521
	in.	47-5/8	59-5/8





NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.  
Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.  
Installation and service must be performed by a qualified installer and servicing agency.

©2005 Lennox Industries Inc.