



AIR CONDITIONERS

14ACX

MERIT® Series
R-410A

PRODUCT SPECIFICATIONS

Bulletin No. 210740
November 2017
Supersedes August 2017




MERIT®
SERIES

SEER up to 16.00

1.5 to 5 Tons

Cooling Capacity - 17,900 to 59,000 Btuh


MODEL NUMBER IDENTIFICATION

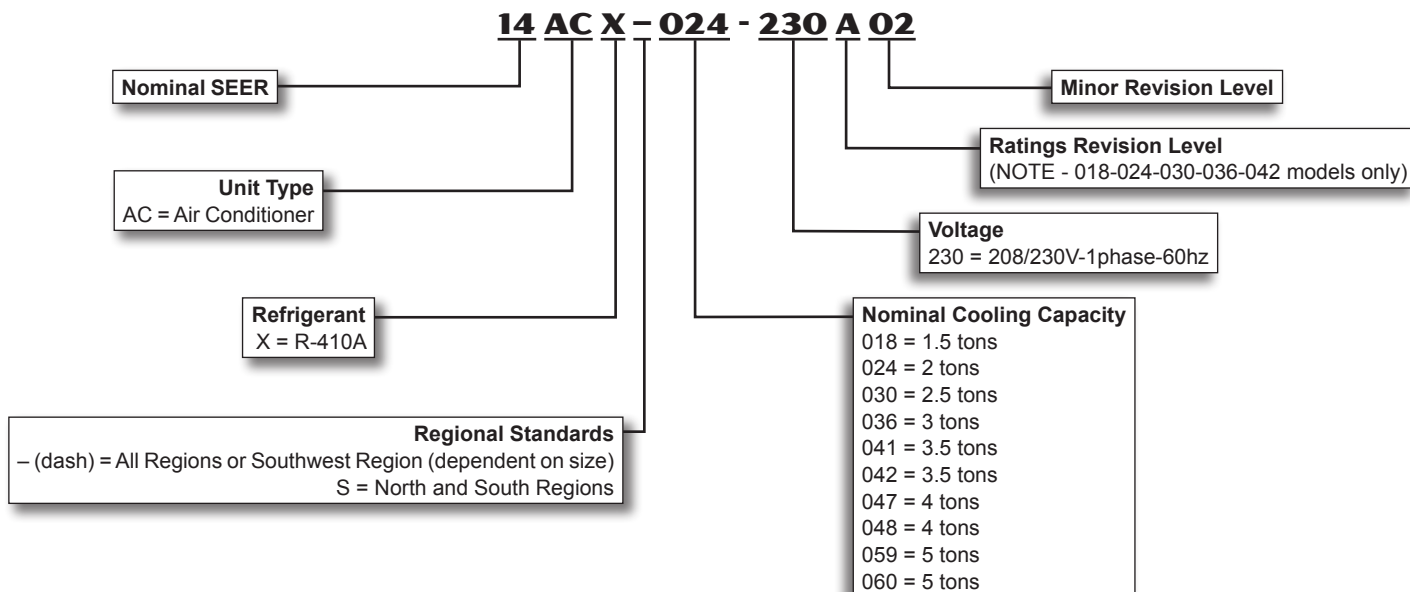

FEATURES

CONTENTS

AHRI System Matches - All Regions	10
AHRI System Matches - North / South Region.....	37
AHRI System Matches - Southwest Region	84
Dimensions - Unit	8
Electrical Data.....	6
Features.....	2
Field Wiring.....	5
Installation Clearances	5
Model Number Identification	1
Optional Accessories	6
Sound Data.....	9
Specifications.....	6
TXV Usage	9

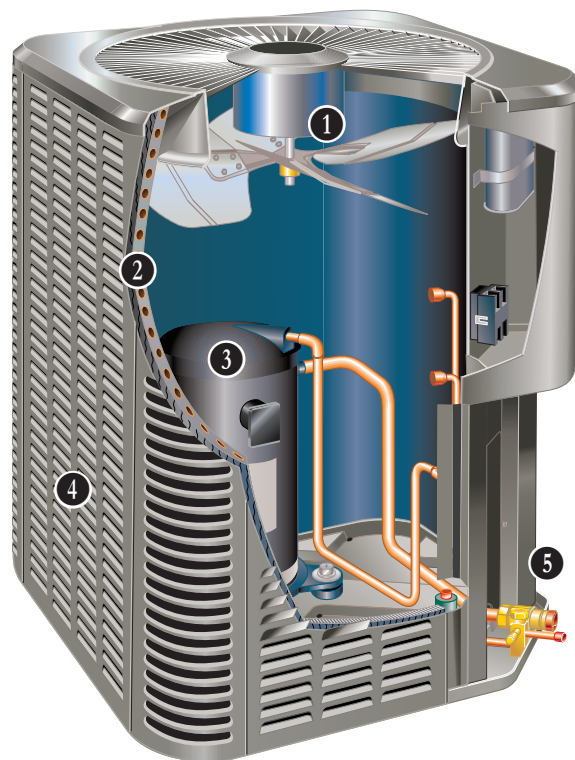

WARRANTY

Compressor - limited warranty for five years in residential installations and five years in non-residential installations.

All other covered components - five years in residential installations and one year in non-residential installations.

Note - Refer to Lennox Equipment Limited Warranty certificate included with unit for specific details.

APPROVALS

AHRI Certified to AHRI Standard 210/240-2008.

Sound rated in Lennox reverberant sound test room in Accordance with test conditions included in AHRI Standard 270-2008.

Tested in the Lennox Research Laboratory environmental test room.

Rated According to U.S. Department of Energy (DOE) test procedures.

Region specific models meet the minimum efficiency requirements for U.S DOE Federal Regional Standards in that area.

Units and components within bonded for grounding to meet safety standards for servicing required by UL, NEC and CEC.

Units are ETL certified for the U.S. and Canada.

ISO 9001 Registered Manufacturing Quality System.

For expanded ratings, see www.LennoxPROs.com.

APPLICATIONS

SEER up to 16.00.

1.5 through 5 ton.

Single-phase power supply.

Sound levels as low as 76 dB.

Vertical air discharge allows concealment behind shrubs at grade level or out of sight on a roof.

Matching add-on furnace indoor coils or air handlers provide a wide range of cooling capacities and applications. See AHRI System Matches.

See Indoor Coils and Air Handlers sections for data.

Units shipped completely factory assembled, piped and wired. Each unit test operated at the factory ensuring proper operation.

Installer must set air conditioner, connect refrigerant lines and make electrical connections to complete job.

FEATURES

REFRIGERATION SYSTEM

R-410A Refrigerant

Non-chlorine, ozone friendly, R-410A.

Unit pre-charged with refrigerant.

See Specification table.



1 Outdoor Coil Fan

Direct drive fan moves large air volumes uniformly through entire condenser coil for high refrigerant cooling capacity.

Vertical air discharge minimizes operating sounds and eliminates damage to lawn and shrubs.

Fan motor has sleeve bearings (-018 through -048 and -060 models), ball bearings (-059 model) and is inherently protected.

Motor totally enclosed for maximum protection from weather, dust and corrosion.

Rain shield on motor provides additional protection from moisture.

Louvered steel top fan guard furnished as standard.

Fan service access accomplished by removal of top panel.

2 Copper Tube/Enhanced Fin Coil

Lennox designed and fabricated coil.

Ripple-edged aluminum fins.

Copper tube construction.

Lanced fins provide maximum exposure of fin surface to air stream resulting in excellent heat transfer.

Fin collars grip tubing for maximum contact area.

Flared shoulder tubing connections/silver soldering construction.

Coil is factory tested under high pressure to ensure leakproof construction.

Steel louvered panels provide complete coil protection.

Panels can be completely removed for servicing.

High Capacity Liquid Line Drier

Furnished with unit for field installation.

Approved for use with R-410A systems.

Traps any moisture or dirt that could contaminate the refrigerant system.

High Pressure Switch

Shuts off unit if abnormal operating conditions cause the discharge pressure to rise above setting.

Protects compressor from excessive condensing pressure.

Manual reset.

Refrigerant Flow Control


Units applicable to expansion valve systems or RFC systems when matched with specific indoor coils.

RFCIV:

Accurately meters refrigerant in system.

Refrigerant control is accomplished by exact sizing of refrigerant metering orifice.

The principle involves matching indoor coil with proper bore size of orifice in metering device.

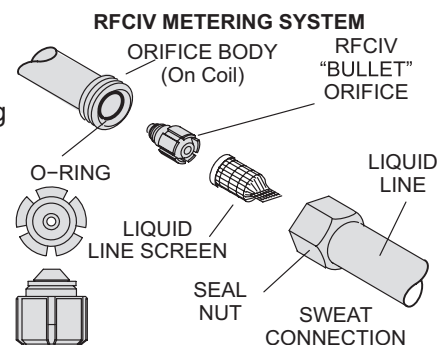

Equalizes pressure shortly after compressor stops, unit starts unloaded, eliminating need for additional controls.

Optional Accessories

Expansion Valve Kits

Must be ordered extra and field installed on certain indoor units. See TXV Usage Table on Page 9.

Chatleff-style fittings.

Freezestat

Installs on or near the vapor line of the indoor coil or on the suction line.

Senses suction line temperature and cycles the compressor off when suction line temperature falls below its setpoint.

Opens at 29°F and closes at 58°F.

Loss of Charge Switch Kit

Helps protect the compressor from damage due low refrigerant charge conditions.

SPST, normally-closed switch, automatic reset switch mounted on liquid line.

Refrigerant Line Kits

Refrigerant lines (suction & liquid) are shipped refrigeration clean. Lines are cleaned, dried, pressurized and sealed at factory.

Suction line fully insulated.

Lines are stubbed at both ends.

Not available for -059-060 models. Must be field fabricated.

FEATURES

COMPRESSOR

3 Scroll Compressor

Compressor features high efficiency with uniform suction flow, constant discharge flow, high volumetric efficiency and quiet operation.

Compressor consists of two involute spiral scrolls matched together to generate a series of crescent shaped gas pockets between them.

During compression, one scroll remains stationary while the other scroll orbits around it.

Gas is drawn into the outer pocket, the pocket is sealed as the scroll rotates.

As the spiral movement continues, gas pockets are pushed to the center of the scrolls. Volume between the pockets is simultaneously reduced.

When the pocket reaches the center, gas is now at high pressure and is forced out of a port located in the center of the fixed scrolls.

During compression, several pockets are compressed simultaneously resulting in a smooth continuous compression cycle.

Continuous flank contact, maintained by centrifugal force, minimizes gas leakage and maximizes efficiency.

Scroll compressor is tolerant to the effects of slugging and contaminants. If this occurs, scrolls separate, allowing liquid or contaminants to be worked toward the center and discharged.

Low gas pulses during compression reduces operational sound levels.

Compressor motor is internally protected from excessive current and temperature.

Compressor is installed in the unit on resilient rubber mounts for vibration free operation.

Compressor Crankcase Heater (-041, -047, -048, -059 & -060 Models)

Protects against refrigerant migration that can occur during low ambient operation.

Optional Accessories

Compressor Crankcase Heater (Optional for 018-024-030-036-042)

Protects against refrigerant migration that can occur during low ambient operation.

Compressor Sound Cover

A reinforced vinyl compressor cover containing a 1-1/2 inch thick batt of fiberglass insulation.

All open edges are sealed with a one-inch wide hook and loop fastening tape.



CONTROLS

Optional Accessories

Compressor Hard Start Kit

Single-phase units are equipped with a PSC compressor motor. This type of motor normally doesn't need a potential relay and start capacitor.

In conditions such as low voltage, this kit may be required to increase the compressor starting torque.

Compressor Low Ambient Cut-Off Switch

Non-adjustable switch (low ambient cut-out) prevents compressor operation when outdoor temperature is below 35°F.

Compressor Time-Off Control

Kit prevents compressor short-cycling and allows time for suction and discharge pressure to equalize.

Permits compressor start-up in an unloaded condition.

Automatic reset with 5 minute delay between compressor shut-off and start-up.

Indoor Blower Off Delay Relay

Delays the indoor blower-off time during the cooling cycle.

See AHRI System Matches for usage.

Low Ambient Kit

Air conditioners operate satisfactorily in the cooling mode down to 45°F outdoor air temperature without any additional controls.

Kit can be added in the field enabling unit to operate properly down to 30°F in the cooling mode.

Crankcase heater and freezestat should be installed on compressors equipped with a Low Ambient Kit.

A compressor lock-out thermostat should be added to terminate compressor operation below recommended operation conditions.

Thermostat

Thermostat not furnished with unit. See Thermostat bulletins in Controls Section and Lennox Price Book.

FEATURES

CABINET

- 4 Heavy gauge steel cabinet with five station metal wash process.
- Louvered heavy gauge steel panels surround unit on all four sides to prevent damage to the coil.
- Powder paint finish provides superior rust and corrosion protection.
- Control box is conveniently located with all controls factory wired.
- Corner patch plate allows access to compressor components.
- Drainage holes are provided in base section for moisture removal.

PermaGuard™ Unit Base

Durable zinc-coated base section resists rust and corrosion.


5 Refrigerant Line Connections, Electrical Inlets, Service Valves

Sweat connection suction and liquid lines are located on corner of unit cabinet.

Fully serviceable brass service valves prevent corrosion and provide access to refrigerant system. Suction valve can be fully shut off, while liquid valve may be front seated to manage refrigerant charge while servicing system.

Refrigerant line connections and field wiring inlets are located in one central area of cabinet for easy access. See dimension drawing.

FIELD WIRING

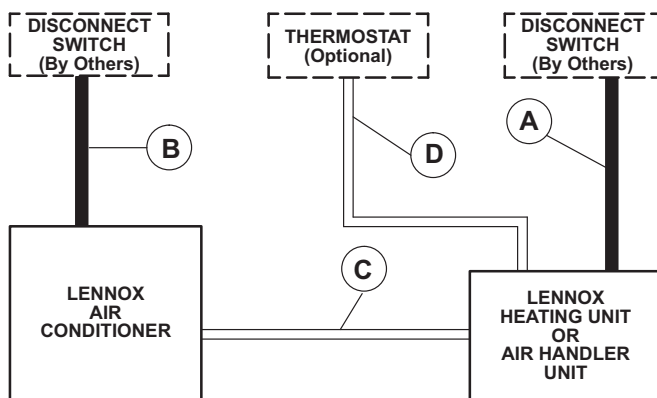

- A - Two Wire Power
- B - Two Wire Power (See Electrical Data)
- C - Two Wire Low Voltage (18 ga. minimum)
- D - Four Wire Low Voltage (Electro-Mechanical) 18 ga. minimum.
Five Wire Low Voltage (Electronic) 18 ga. minimum

NOTE - Field Wiring Not Furnished

All wiring must conform to NEC or CEC and local electrical codes.


Optional Accessories

Unit Stand-Off Kit

Black high density polyethylene feet are available to raise unit off of mounting surface away from damaging moisture.

Four feet are furnished per order number.

INSTALLATION CLEARANCES - IN. (MM)

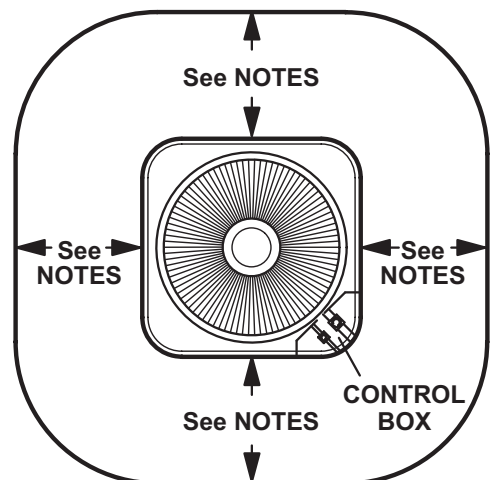

NOTES:

- Service clearance of 30 in. (762 mm) must be maintained on one of the sides adjacent to the control box.
- Clearance to one of the other three sides must be 36 in. (914 mm)
- Clearance to one of the remaining two sides may be 12 in. (305 mm) and the final side may be 6 in. (152 mm).
- A clearance of 24 in. must be maintained between two units.
- 48 in. (1219 mm) clearance required on top of unit.

SPECIFICATIONS					
General Data	Model No.	All Regions	---	---	---
		North / South Regions	14ACXS018	14ACXS024	14ACXS030
		Southwest Region	14ACX-018	14ACX-024	14ACX-030
		Nominal Tonnage	1.5	2	2.5
Connections (sweat)		Liquid line o.d. - in.	3/8	3/8	3/8
		Suction line o.d. - in.	3/4	3/4	3/4
¹ Refrigerant (R-410A) furnished			4 lbs. 13 oz.	5 lbs. 9 oz.	6 lbs. 11 oz.
Outdoor Coil	Net face area	Outer coil	13.22	16	21
		sq. ft. Inner coil	---	---	---
		Tube diameter - in.	5/16	5/16	5/16
		Number of rows	1	1	1
		Fins per inch	26	26	26
Outdoor Fan		Diameter - in.	18	22	22
		Number of blades	3	3	3
		Motor hp	1/10	1/6	1/6
		Cfm	2290	3160	3160
		Rpm	1075	825	825
		Watts	160	215	215
			310	310	310
Shipping Data - lbs. 1 package			138	158	171
ELECTRICAL DATA					
	Line voltage data - 60 hz - 1ph		208/230V	208/230V	208/230V
	² Maximum overcurrent protection (amps)		20	25	25
	³ Minimum circuit ampacity		12.4	15.0	17.1
Compressor		Rated load amps	9.4	11.2	12.9
		Locked rotor amps	56.6	60.8	64
		Power factor	0.96	0.97	0.98
Condenser Fan Motor		Full load amps	0.7	1.0	1.0
		Locked rotor amps	1.3	1.9	1.9
OPTIONAL ACCESSORIES - ORDER SEPARATELY					
Compressor Crankcase Heater		93M04	•	•	•
		Factory			•
Compressor Hard Start Kit	Copeland	10J42	•	•	•
	LG	88M91		•	•
Compressor Low Ambient Cut-Off Switch		45F08	•	•	•
Compressor Sound Cover		27W55	•	•	•
		27W56			•
Compressor Time-Off Control		47J27	•	•	•
Freezestat	3/8 in. tubing	93G35	•	•	•
	5/8 in. tubing	50A93	•	•	•
Indoor Blower Off Delay Relay		58M81	•	•	•
Loss of Charge Switch Kit		84M23	•	•	•
⁴ Low Ambient Kit (Fan Cycling)		34M72	•	•	•
Refrigerant Line Sets	L15-41-20, L15-41-30,		•	•	
	L15-41-40, L15-41-50				
	L15-65-30, L15-65-40,			•	•
	L15-65-50				
Unit Stand-Off Kit		94J45	•	•	•

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.

¹ Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

² HACR type circuit breaker or fuse.

³ Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

⁴ Crankcase Heater and Freezestat are recommended with Low Ambient Kit.

SPECIFICATIONS								
General Data	Model No.	All Regions		---	14ACX-047	14ACX-048	14ACX-059	14ACX-060
		North / South Regions		14ACXS042	---	---	---	---
		Southwest Region		14ACX-042	---	---	---	---
		Nominal Tonnage		3.5	4	4	5	5
Connections (sweat)	Liquid line o.d. - in.		3/8	3/8	3/8	3/8	3/8	
	Suction line o.d. - in.		7/8	7/8	7/8	1-1/8	1-1/8	
¹Refrigerant (R-410A) furnished			8 lbs. 10 oz.	11 lbs. 3 oz.	10 lbs. 8 oz.	11 lbs. 2 oz.	12 lbs. 0 oz.	
Outdoor Coil	Net face area	Outer coil	18.67	22	21	24.94	22	
		sq. ft. Inner coil	17.96	21.33	20.25	24.14	21.33	
	Tube diameter - in.		5/16	5/16	5/16	5/16	5/16	
	Number of rows		2	2	2	2	2	
	Fins per inch		22	22	22	22	22	
Outdoor Fan	Diameter - in.		22	26	22	26	26	
	Number of blades		4	4	4	4	4	
	Motor hp		1/4	1/3	1/4	1/3	1/3	
	Cfm		3500	4400	3600	4400	4400	
	Rpm		825	825	825	825	825	
	Watts		310	310	310	310	310	
	Shipping Data - lbs. 1 package			208	250	228	266	253
ELECTRICAL DATA								
Line voltage data - 60 hz - 1ph			208/230V	208/230V	208/230V	208/230V	208/230V	
²Maximum overcurrent protection (amps)			40	45	45	50	60	
³Minimum circuit ampacity			24.1	26.7	26.7	34.1	34.8	
Compressor	Rated load amps		17.9	19.9	20	25	26.4	
	Locked rotor amps		112	109	99	134	134	
	Power factor		0.94	0.97	0.99	0.98	0.98	
	Condenser Fan Motor	Full load amps		1.7	1.8	1.7	2.8	1.8
Locked rotor amps		3.2	2.9	3.2	---	2.9		
OPTIONAL ACCESSORIES - ORDER SEPARATELY								
Compressor Crankcase Heater		93M04	•					
		Factory		•	•	•	•	
Compressor Hard Start Kit	Copeland	10J42	•	•		•	•	
	LG	88M91	•		•		•	
Compressor Low Ambient Cut-Off Switch		45F08	•	•	•	•	•	
Compressor Sound Cover		27W56	•	•	•	•	•	
Compressor Time-Off Control		47J27	•	•	•	•	•	
Freezestat	3/8 in. tubing	93G35	•	•	•	•	•	
	5/8 in. tubing	50A93	•	•	•	•	•	
Indoor Blower Off Delay Relay		58M81	•	•	•	•	•	
Loss of Charge Switch Kit		84M23	•	•	•	•	•	
⁴Low Ambient Kit (Fan Cycling)		34M72	•	•	•		•	
		68M04				•		
Refrigerant Line Sets	L15-65-30, L15-65-40, L15-65-50		•	•	•			
	Field Fabricate					•	•	
Unit Stand-Off Kit		94J45	•	•	•	•	•	

NOTE - Extremes of operating range are plus 10% and minus 5% of line voltage.





¹ Refrigerant charge sufficient for 15 ft. length of refrigerant lines. For longer line set requirements see the Installation Instructions for information about line set length and additional refrigerant charge required.

² HACR type circuit breaker or fuse.

³ Refer to National or Canadian Electrical Code manual to determine wire, fuse and disconnect size requirements.

⁴ Crankcase Heater and Freezestat are recommended with Low Ambient Kit.

DIMENSIONS - UNIT - INCHES (MM)

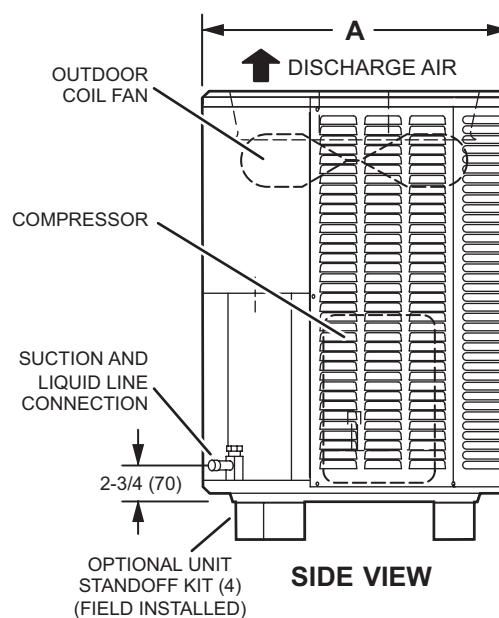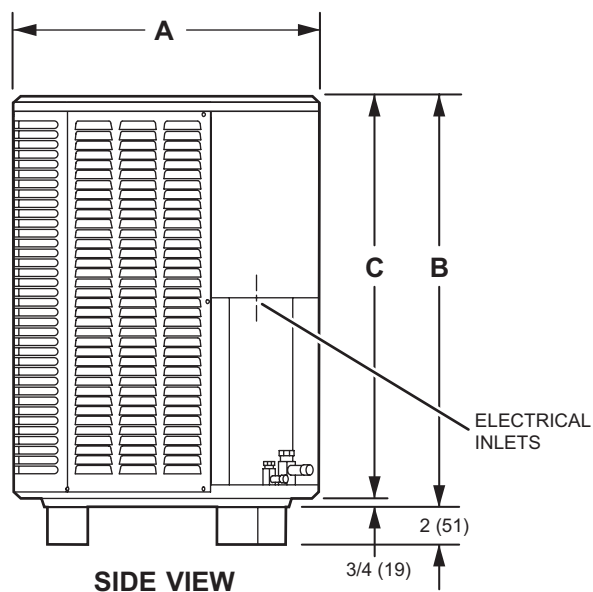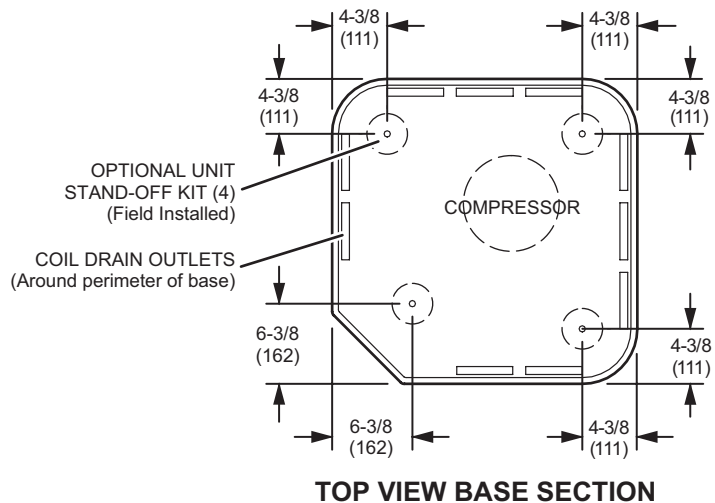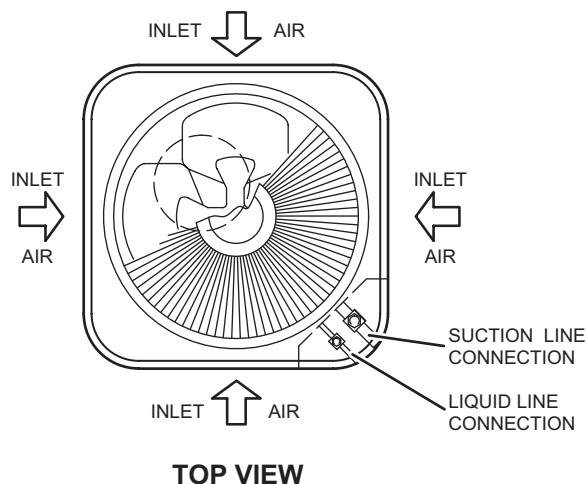

Model	A		B		C	
	inches	mm	inches	mm	inches	mm
018	24-1/4	616	29-1/4	743	28-1/2	724
024	28-1/4	718	29-1/4	743	28-1/2	724
030	28-1/4	718	37-1/4	946	36-1/2	927
036	28-1/4	718	37-1/4	946	36-1/2	927
041	28-1/4	718	37-1/4	946	36-1/2	927
042	28-1/4	718	33-1/4	845	32-1/2	826
047	32-1/4	817	33-1/4	845	32-1/2	826
048	28-1/4	718	37-1/4	946	36-1/2	927
059	32-1/4	817	37-1/4	946	36-1/2	927
060	32-1/4	817	33-1/4	845	32-1/2	826

SOUND DATA

¹ Unit Model	Octave Band Linear Sound Power Levels dB, re 10 ⁻¹² Watts Center Frequency - HZ							¹ Sound Rating Number (dB)
	125	250	500	1000	2000	4000	8000	
018	69.5	70.5	71.0	71.0	69.0	63.5	57.5	76
024	69.5	72.0	70.5	70.5	67.5	62.5	57.5	76
030	72.5	74.0	74.0	72.0	67.5	61.5	56.5	76
036	73.5	75.0	74.0	72.5	67.5	62.5	56.5	76
041	76.5	74.0	73.5	73.5	70.0	62.5	58.5	78
042	73.5	75.5	74.5	73.5	70.5	64.0	58.5	78
047	76.5	77.5	77.5	73.5	69.0	63.5	60.5	80
048	76.5	74.0	73.5	73.5	70.0	62.5	58.5	78
059	79.5	76.5	76.5	72.5	68.0	63.0	60.5	78
060	76.5	77.5	77.5	73.5	69.0	63.5	60.5	80

NOTE - the octave sound power data does not include tonal correction.

¹ Tested according to AHRI Standard 270-2008 test conditions.

MOST POPULAR MATCHES

Outdoor Unit Model No.	Indoor Unit Model No
14ACX(-)(S)018	CX34-25
14ACX(-)(S)024	CX34-25
14ACX(-)(S)030	CX34-31
14ACX(-)(S)036	CX34-38
14ACX-041	CX34-49
14ACX(-)(S)042	CX34-49
14ACX-047	CX34-62C
14ACX-048	CX34-62C
14ACX-059	CX34-62C
14ACX-060	CX34-62C

TXV USAGE

Use this table for C33, C35, CH23, CH33, CH35 and CR33 Field Installed TXV Match-Ups.

Outdoor Unit Model No.	Thermal Expansion Valve (TXV)
14ACX(-)(S)018	12J18
14ACX(-)(S)024	12J18
14ACX(-)(S)030	12J18
14ACX(-)(S)036	12J19
14ACX-041	12J20
14ACX(-)(S)042	12J20
14ACX-047	12J20
14ACX-048	12J20
14ACX-059	12J20
14ACX-060	12J20

CX34 and CX35 upflow coils and all Lennox air handlers are shipped with a factory installed TXV. In most cases, no change out of the valve is needed.

If a change out is required it will be listed in the "TXV SUBSTITUTIONS" table. The correct TXV must be ordered separately and field installed.

C33, C35 and CH33 and CH35 coils - Replace the factory installed orifice with the expansion valve listed.

CR33 and CH23 coils - Use the expansion valve listed.

AHRI STANDARD 210/240

Cooling or heating capacities are net values, including the effects of blower motor heat, and do not include supplementary heat. Power input is the total power input to the compressor(s) and fan(s), plus any controls and other items required as part of the system for normal operation.

Units which do not have an indoor air-circulating blower furnished as part of the model, i.e., split system with indoor coil only, is established by subtracting from the total cooling capacity 1250 Btu/h per 1,000 cfm, and by adding the same amount to the heating capacity. Total power input for both heating and cooling is increased by 365 W per 1,000 cfm of indoor air circulated.

*TXV SUBSTITUTIONS

Use this table to determine if the factory installed TXV in the indoor unit needs to be replaced.

Outdoor Unit Model No.	Indoor Coil	Factory TXV	Replacement TXV
14ACX(-)(S)030	CX34-42	12J20	12J18
14ACX(-)(S)030	CX34-43	12J20	12J18
14ACX(-)(S)030	CX35-48	12J20	12J18
14ACX(-)(S)036	CX34-31	12J18	12J19

*CX34 and CX35 coils - The factory installed expansion valve must be replaced with the expansion valve listed (ordered separately).

If the combination is not listed above, the factory installed TXV is used.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-041-230	TXV	38500	15.5	12.5	C35-36B	EL180UH090E48B	8267933
14ACX-041-230	TXV	38500	15.5	12.5	C35-36B	EL180UH090XE48B	8267932
14ACX-041-230	TXV	38500	15.5	12.5	C35-48B	EL180UH090E48B	8267940
14ACX-041-230	TXV	38500	15.5	12.5	C35-48B	EL180UH090XE48B	8267938
14ACX-041-230	TXV	37800	14.5	12.2	C35-48B		8267934
14ACX-041-230	TXV	38500	16	13	C35-48C	EL180UH090E60C	8267939
14ACX-041-230	TXV	38500	16	13	C35-48C	EL180UH110E60C	8267941
14ACX-041-230	TXV	38500	16	13	C35-48C	EL180UH110XE60C	8267942
14ACX-041-230	TXV	38500	15.5	12.5	C35-48C	EL195UH090XE48C	8267946
14ACX-041-230	TXV	38500	15.5	12.5	C35-48C	EL195UH110XE60C	8267945
14ACX-041-230	TXV	38500	15.5	12.5	C35-48C	EL296UH090XE48C	8267944
14ACX-041-230	TXV	38500	15.5	12.5	C35-48C	EL296UH110XE60C	8267943
14ACX-041-230	TXV	39000	16	13	C35-48C	SL280UH090V60C	8267936
14ACX-041-230	TXV	39000	16	13	C35-48C	SL280UH090XV60C	8267947
14ACX-041-230	TXV	38500	15.5	12.5	C35-48C	SL280UH110V60C	8267937
14ACX-041-230	TXV	38500	15.5	12.5	C35-48C	SL280UH110XV60C	8267948
14ACX-041-230	TXV	37800	14.5	12.2	C35-48C		8267935
14ACX-041-230	TXV	39000	16	13	C35-49C	EL180UH090E60C	8267950
14ACX-041-230	TXV	39000	16	13	C35-49C	EL180UH110E60C	8267951
14ACX-041-230	TXV	39000	16	13	C35-49C	EL180UH110XE60C	8267952
14ACX-041-230	TXV	38500	16	13	C35-49C	EL195UH090XE48C	8267956
14ACX-041-230	TXV	39000	15.5	12.5	C35-49C	EL195UH110XE60C	8267955
14ACX-041-230	TXV	38500	16	13	C35-49C	EL296UH090XE48C	8267954
14ACX-041-230	TXV	39000	15.5	12.5	C35-49C	EL296UH110XE60C	8267953
14ACX-041-230	TXV	38500	14.7	12.5	C35-49C		8267949
14ACX-041-230	TXV	38000	15.5	12.5	C35-50/60C	EL180UH090E60C	8267957
14ACX-041-230	TXV	38000	15.5	12.5	C35-50/60C	EL180UH110E60C	8267958
14ACX-041-230	TXV	38000	15.5	12.5	C35-50/60C	EL180UH110XE60C	8267959
14ACX-041-230	TXV	38000	15.5	12.5	C35-50/60C	EL195UH090XE48C	8267963
14ACX-041-230	TXV	38500	15.5	12.5	C35-50/60C	EL195UH110XE60C	8267962
14ACX-041-230	TXV	38000	15.5	12.5	C35-50/60C	EL296UH090XE48C	8267961
14ACX-041-230	TXV	38500	15.5	12.5	C35-50/60C	EL296UH110XE60C	8267960
14ACX-041-230	TXV	40000	16	13	C35-60C	EL180UH090E60C	8267965
14ACX-041-230	TXV	40000	16	13	C35-60C	EL180UH110E60C	8267966
14ACX-041-230	TXV	40000	16	13	C35-60C	EL180UH110XE60C	8267967
14ACX-041-230	TXV	39500	16	13	C35-60C	EL195UH090XE48C	8267971
14ACX-041-230	TXV	40000	16	13	C35-60C	EL195UH110XE60C	8267970
14ACX-041-230	TXV	39500	16	13	C35-60C	EL296UH090XE48C	8267969
14ACX-041-230	TXV	40000	16	13	C35-60C	EL296UH110XE60C	8267968
14ACX-041-230	TXV	40000	16	13	C35-60C	SLP98UH090XV48C	8267964
14ACX-041-230	TXV	39500	16	13	CBA27UHE-048		10259379
14ACX-041-230	TXV	38000	14.5	12.5	CBX25UH-042		5732787
14ACX-041-230	TXV	39500	15.2	13	CBX25UH-048		5732788
14ACX-041-230	TXV	39000	16	13.5	CBX25UHV-042		6970129
14ACX-041-230	TXV	40000	16	14	CBX25UHV-048		6970130
14ACX-041-230	TXV	39000	16	13	CBX27UH-048		3869097
14ACX-041-230	TXV	39500	16	13	CBX32MV-048		3869098
14ACX-041-230	TXV	39000	16	13	CBX40UHV-048		3869099
14ACX-041-230	TXV	37600	15.5	13	CH23-51	EL180UH090E60C	5736596

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-041-230	TXV	37400	15.2	13	CH23-51	EL296UH110XV48C	5685140
14ACX-041-230	TXV	37200	15.5	13	CH23-51	SL280UH090V60C	5514080
14ACX-041-230	TXV	38000	15.5	13	CH23-65	EL180UH090E60C	5736598
14ACX-041-230	TXV	37600	15.5	13	CH23-65	SL280UH090V60C	5514082
14ACX-041-230	TXV	39500	16	13.5	CH33-43	EL180UH090E48B	5735097
14ACX-041-230	TXV	39000	16	13.5	CH33-43	EL180UH090E60C	5735991
14ACX-041-230	TXV	39500	16	13.5	CH33-43	EL180UH090XE48B	5737061
14ACX-041-230	TXV	39000	16	13.5	CH33-43	EL180UH110E60C	5737813
14ACX-041-230	TXV	39000	16	13.5	CH33-43	EL180UH110XE60C	5738874
14ACX-041-230	TXV	39000	15	12.7	CH33-43	EL296UH045XV36B	5153070
14ACX-041-230	TXV	39000	15.7	13	CH33-43	EL296UH090XV36C	5057187
14ACX-041-230	TXV	39000	15.7	13	CH33-43	EL296UH090XV48C	5057188
14ACX-041-230	TXV	39000	15.7	13	CH33-43	EL296UH090XV60C	5057189
14ACX-041-230	TXV	38500	16	13	CH33-43	EL296UH110XV60C	5057190
14ACX-041-230	TXV	39500	15.7	13	CH33-43	SL280UH090V36B	4253795
14ACX-041-230	TXV	39000	15.7	13	CH33-43	SLP98UH090XV36C	5140458
14ACX-041-230	TXV	39000	15.7	13	CH33-43	SLP98UH090XV48C	5140459
14ACX-041-230	TXV	39000	15.7	13	CH33-43	SLP98UH090XV60C	5140460
14ACX-041-230	TXV	38500	16	13	CH33-43	SLP98UH110XV60C	5140461
14ACX-041-230	TXV	39500	15.7	13	CH33-43B	SL280UH090V48B	3869100
14ACX-041-230	TXV	39500	15.7	13	CH33-43B	SL280UH090XV48B	4038521
14ACX-041-230	TXV	39000	15.7	13	CH33-43C	EL195UH090XE48C	4693855
14ACX-041-230	TXV	38500	15.7	13	CH33-43C	EL195UH110XE60C	4694030
14ACX-041-230	TXV	39000	15.7	13	CH33-43C	EL296UH090XE48C	5647240
14ACX-041-230	TXV	38500	15.7	13	CH33-43C	EL296UH110XE60C	5647288
14ACX-041-230	TXV	39000	15.7	13.5	CH33-43C	EL296UH110XV48C	5685137
14ACX-041-230	TXV	39500	16	13	CH33-43C	SL280UH090V60C	3869104
14ACX-041-230	TXV	39500	16	13	CH33-43C	SL280UH090XV60C	4235236
14ACX-041-230	TXV	39000	15.7	13	CH33-43C	SL280UH110V60C	3869105
14ACX-041-230	TXV	39000	15.7	13	CH33-43C	SL280UH110XV60C	4040073
14ACX-041-230	TXV	38500	15.5	13.2	CH33-44/48	EL180UH090E48B	5735098
14ACX-041-230	TXV	38500	15.5	13.2	CH33-44/48	EL180UH090XE48B	5737063
14ACX-041-230	TXV	38000	14.7	12.5	CH33-44/48	EL296UH045XV36B	5153071
14ACX-041-230	TXV	38500	15.7	13.2	CH33-48	EL180UH090E60C	5735993
14ACX-041-230	TXV	38500	15.7	13.2	CH33-48	EL180UH110E60C	5737815
14ACX-041-230	TXV	38500	15.7	13.2	CH33-48	EL180UH110XE60C	5738875
14ACX-041-230	TXV	38500	15.2	13	CH33-48	EL296UH090XV36C	5057191
14ACX-041-230	TXV	38500	15.5	13	CH33-48	EL296UH090XV48C	5057192
14ACX-041-230	TXV	38500	15.2	13	CH33-48	SLP98UH090XV36C	5140515
14ACX-041-230	TXV	38500	15.5	13	CH33-48	SLP98UH090XV48C	5140516
14ACX-041-230	TXV	38500	15.5	13	CH33-48C	EL195UH090XE48C	4693856
14ACX-041-230	TXV	39000	15.5	13.2	CH33-48C	EL195UH110XE60C	4693869
14ACX-041-230	TXV	38500	15.5	13	CH33-48C	EL296UH090XE48C	5647241
14ACX-041-230	TXV	39000	15.5	13.2	CH33-48C	EL296UH110XE60C	5647254
14ACX-041-230	TXV	39000	15.5	13.2	CH33-48C	EL296UH110XV48C	5685138
14ACX-041-230	TXV	39500	16	13.5	CH33-49	EL180UH090E60C	5735995
14ACX-041-230	TXV	39500	16	13.5	CH33-49	EL180UH110E60C	5737818
14ACX-041-230	TXV	39500	16	13.5	CH33-49	EL180UH110XE60C	5738877
14ACX-041-230	TXV	39000	15.7	13.5	CH33-49	EL195UH090XE48C	4693857

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-041-230	TXV	39500	15.7	13.5	CH33-49	EL195UH110XE60C	4693870
14ACX-041-230	TXV	39000	15.7	13.5	CH33-49	EL296UH090XE48C	5647242
14ACX-041-230	TXV	39500	15.7	13.5	CH33-49	EL296UH110XE60C	5647255
14ACX-041-230	TXV	39000	15.7	13.5	CH33-50/60C	EL180UH090E60C	5795750
14ACX-041-230	TXV	39000	15.7	13.5	CH33-50/60C	EL180UH110E60C	5737820
14ACX-041-230	TXV	39000	15.7	13.5	CH33-50/60C	EL180UH110XE60C	5738879
14ACX-041-230	TXV	39000	15.7	13.5	CH33-50/60C	EL195UH090XE48C	4693858
14ACX-041-230	TXV	39500	15.7	13.5	CH33-50/60C	EL195UH110XE60C	4693871
14ACX-041-230	TXV	39000	15.7	13.5	CH33-50/60C	EL296UH090XE48C	5647243
14ACX-041-230	TXV	39500	15.7	13.5	CH33-50/60C	EL296UH110XE60C	5647256
14ACX-041-230	TXV	39500	15.7	13.5	CH33-50/60C	EL296UH110XV48C	5685139
14ACX-041-230	TXV	39000	14.5	12.5	CH33-50/60C		4253798
14ACX-041-230	TXV	39500	16	13	CH35-42B	EL180UH090E48B	7163353
14ACX-041-230	TXV	39000	15.1	13	CH35-42B	EL296UH045XV36B	9973355
14ACX-041-230	TXV	39500	15.5	13	CH35-42B	SL280UH090V36B	7163354
14ACX-041-230	TXV	39500	15.5	13	CH35-42B	SL280UH090V48B	7163355
14ACX-041-230	TXV	39000	15.1	13	CH35-42B	SLP98UH070XV36B	7163356
14ACX-041-230	TXV	39000	14.5	12.5	CH35-42B		7163350
14ACX-041-230	TXV	39000	16	13	CH35-42C	EL180UH090E60C	7163364
14ACX-041-230	TXV	39000	16	13	CH35-42C	EL180UH110E60C	7163365
14ACX-041-230	TXV	38500	15.5	13	CH35-42C	EL195UH090XE48C	7163357
14ACX-041-230	TXV	39000	15.5	13	CH35-42C	EL195UH110XE60C	7164138
14ACX-041-230	TXV	38500	15.5	13	CH35-42C	EL296UH090XE48C	7163361
14ACX-041-230	TXV	38500	15.5	13	CH35-42C	EL296UH090XV36C	7163358
14ACX-041-230	TXV	38500	15.5	13	CH35-42C	EL296UH090XV48C	7163359
14ACX-041-230	TXV	39000	15.5	13	CH35-42C	EL296UH090XV60C	7163360
14ACX-041-230	TXV	39000	15.5	13	CH35-42C	EL296UH110XE60C	7164140
14ACX-041-230	TXV	39000	15.5	13	CH35-42C	EL296UH110XV48C	7163362
14ACX-041-230	TXV	39000	16	13	CH35-42C	EL296UH110XV60C	7163363
14ACX-041-230	TXV	39000	16	13	CH35-42C	SL280UH090V60C	7163367
14ACX-041-230	TXV	39000	15.5	13	CH35-42C	SL280UH110V60C	7163368
14ACX-041-230	TXV	38500	15.5	13	CH35-42C	SLP98UH090XV36C	7163369
14ACX-041-230	TXV	38500	15.5	13	CH35-42C	SLP98UH090XV48C	7163370
14ACX-041-230	TXV	39000	15.5	13	CH35-42C	SLP98UH090XV60C	7163371
14ACX-041-230	TXV	38500	16	13	CH35-42C	SLP98UH110XV60C	7163372
14ACX-041-230	TXV	38500	14.5	12.5	CH35-42C		7163351
14ACX-041-230	TXV	38500	15.5	13	CH35-48B	EL180UH090E48B	7163376
14ACX-041-230	TXV	38000	14.5	12.5	CH35-48B	EL296UH045XV36B	9973356
14ACX-041-230	TXV	38000	14.5	12.5	CH35-48B		7163373
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	EL180UH090E60C	7163383
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	EL180UH110E60C	7163384
14ACX-041-230	TXV	38000	15.5	13	CH35-48C	EL195UH090XE48C	7163377
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	EL195UH110XE60C	7163378
14ACX-041-230	TXV	38500	15.1	13	CH35-48C	EL296UH090XV36C	7163379
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	EL296UH090XV48C	7163380
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	EL296UH110XE60C	7163382
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	EL296UH110XV48C	7163381
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	SL280UH090V60C	7163385
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	SL280UH110V60C	7163386

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-041-230	TXV	38500	15.1	13	CH35-48C	SLP98UH090XV36C	7163387
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	SLP98UH090XV48C	7163388
14ACX-041-230	TXV	38500	15.1	13	CH35-48C	SLP98UH090XV60C	7164139
14ACX-041-230	TXV	38500	15.5	13	CH35-48C	SLP98UH110XV60C	7163389
14ACX-041-230	TXV	38000	14.5	12.5	CH35-48C		7163374
14ACX-041-230	TXV	39000	16	13	CH35-51C	EL180UH090E60C	7163396
14ACX-041-230	TXV	39000	16	13	CH35-51C	EL180UH110E60C	7163397
14ACX-041-230	TXV	39000	15.5	13	CH35-51C	EL195UH090XE48C	7163391
14ACX-041-230	TXV	39000	15.5	13	CH35-51C	EL195UH110XE60C	7163392
14ACX-041-230	TXV	39000	15.5	13	CH35-51C	EL296UH090XE48C	7163393
14ACX-041-230	TXV	39000	15.5	13	CH35-51C	EL296UH110XE60C	7163395
14ACX-041-230	TXV	39500	15.5	13	CH35-51C	EL296UH110XV48C	7163394
14ACX-041-230	TXV	39000	15.5	13	CH35-51C	SLP98UH090XV36C	7163398
14ACX-041-230	TXV	39000	15.5	13	CH35-51C	SLP98UH090XV48C	7163399
14ACX-041-230	TXV	39500	15.5	13	CH35-51C	SLP98UH090XV60C	7163400
14ACX-041-230	TXV	39500	15.5	13	CH35-51C	SLP98UH110XV60C	7163401
14ACX-041-230	TXV	38500	14.5	12.5	CH35-51C		7163390
14ACX-041-230	TXV	38500	15.7	13.5	CR33-50/60	EL180DF110E60C	5733505
14ACX-041-230	TXV	38000	15.5	13	CR33-50/60	EL195DF090XE48C	4693849
14ACX-041-230	TXV	38500	15.5	13.2	CR33-50/60	EL195DF110XE60C	4694029
14ACX-041-230	TXV	38000	15.5	13	CR33-50/60	EL296DF090XE48C	5647285
14ACX-041-230	TXV	36400	15.5	13	CR33-50/60	EL296DF090XV60C	5530488
14ACX-041-230	TXV	38500	15.5	13.2	CR33-50/60	EL296DF110XE60C	5647287
14ACX-041-230	TXV	38500	15	12.5	CR33-50/60	EL296DF110XV60C	7176680
14ACX-041-230	TXV	38500	16	13	CR33-50/60	SL280DF090V60C	3869114
14ACX-041-230	TXV	39000	16	13	CR33-50/60	SL280DF110V60C	3869166
14ACX-041-230	TXV	38500	15.5	12.5	CX35-36B	EL180UH090E48B	8267973
14ACX-041-230	TXV	38500	15.5	12.5	CX35-36B	EL180UH090XE48B	8267972
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48B	EL180UH090E48B	8267978
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48B	EL180UH090XE48B	8267976
14ACX-041-230	TXV	38000	14.5	12.2	CX35-48B		8267974
14ACX-041-230	TXV	38500	16	13	CX35-48C	EL180UH090E60C	8267977
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL180UH110E60C	8267979
14ACX-041-230	TXV	38500	16	13	CX35-48C	EL180UH110XE60C	8267980
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL195UH090XE48C	8267992
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL195UH110XE60C	8267991
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL296UH090XE48C	8267982
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL296UH090XV36C	8267987
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL296UH090XV48C	8267988
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL296UH090XV60C	8267989
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL296UH110XE60C	8267981
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	EL296UH110XV60C	8267990
14ACX-041-230	TXV	39000	16	13	CX35-48C	SL280UH090V60C	8267995
14ACX-041-230	TXV	39000	16	13	CX35-48C	SL280UH090XV60C	8267994
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	SL280UH110V60C	8267996
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	SL280UH110XV60C	8267993
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	SLP98UH090XV36C	8267984
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	SLP98UH090XV48C	8267985
14ACX-041-230	TXV	38500	15.5	12.5	CX35-48C	SLP98UH090XV60C	8267986

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-041-230	TXV	38000	16	13	CX35-48C	SLP98UH110XV60C	8267983
14ACX-041-230	TXV	38000	14.5	12.2	CX35-48C		8267975
14ACX-041-230	TXV	39000	16	13	CX35-49C	EL180UH090E60C	8267999
14ACX-041-230	TXV	39000	16	13	CX35-49C	EL180UH110E60C	8268000
14ACX-041-230	TXV	39000	16	13	CX35-49C	EL180UH110XE60C	8268001
14ACX-041-230	TXV	38500	16	13	CX35-49C	EL195UH090XE48C	8268006
14ACX-041-230	TXV	39000	15.5	12.5	CX35-49C	EL195UH110XE60C	8268007
14ACX-041-230	TXV	38500	16	13	CX35-49C	EL296UH090XE48C	8268002
14ACX-041-230	TXV	39000	15.5	12.5	CX35-49C	EL296UH090XV48C	8267998
14ACX-041-230	TXV	39000	15.5	12.5	CX35-49C	EL296UH110XE60C	8268003
14ACX-041-230	TXV	39500	16	13	CX35-49C	EL296UH110XV60C	8268005
14ACX-041-230	TXV	39000	16	13	CX35-49C	SL280UH090V60C	8268008
14ACX-041-230	TXV	39000	16	13	CX35-49C	SL280UH110V60C	8268009
14ACX-041-230	TXV	38500	16	13	CX35-49C	SLP98UH110XV60C	8268004
14ACX-041-230	TXV	38500	14.5	12.2	CX35-49C		8267997
14ACX-041-230	TXV	38000	15.5	12.5	CX35-50/60C	EL180UH090E60C	8268010
14ACX-041-230	TXV	38000	15.5	12.5	CX35-50/60C	EL180UH110E60C	8268011
14ACX-041-230	TXV	38000	15.5	12.5	CX35-50/60C	EL180UH110XE60C	8268012
14ACX-041-230	TXV	38000	15.5	12.5	CX35-50/60C	EL195UH090XE48C	8268016
14ACX-041-230	TXV	38500	15.5	12.5	CX35-50/60C	EL195UH110XE60C	8268015
14ACX-041-230	TXV	38000	15.5	12.5	CX35-50/60C	EL296UH090XE48C	8268013
14ACX-041-230	TXV	38500	15.5	12.5	CX35-50/60C	EL296UH110XE60C	8268014
14ACX-041-230	TXV	40000	16	13	CX35-60C	EL180UH090E60C	8268017
14ACX-041-230	TXV	40000	16	13	CX35-60C	EL180UH110E60C	8268018
14ACX-041-230	TXV	40000	16	13	CX35-60C	EL180UH110XE60C	8268019
14ACX-041-230	TXV	39500	16	13	CX35-60C	EL195UH090XE48C	8268031
14ACX-041-230	TXV	40000	16	13	CX35-60C	EL195UH110XE60C	8268030
14ACX-041-230	TXV	39500	16	13	CX35-60C	EL296UH090XE48C	8268020
14ACX-041-230	TXV	39500	16	13	CX35-60C	EL296UH090XV36C	8268027
14ACX-041-230	TXV	40000	16	13	CX35-60C	EL296UH090XV48C	8268028
14ACX-041-230	TXV	40000	16	13	CX35-60C	EL296UH090XV60C	8268029
14ACX-041-230	TXV	40000	16	13	CX35-60C	EL296UH110XE60C	8268021
14ACX-041-230	TXV	40000	16	13	CX35-60C	EL296UH110XV60C	8268026
14ACX-041-230	TXV	40000	16	13	CX35-60C	SL280UH090V60C	8268032
14ACX-041-230	TXV	40000	16	13	CX35-60C	SL280UH110V60C	8268033
14ACX-041-230	TXV	39500	16	13	CX35-60C	SLP98UH090XV36C	8268022
14ACX-041-230	TXV	40000	16	13	CX35-60C	SLP98UH090XV48C	8268023
14ACX-041-230	TXV	40000	16	13	CX35-60C	SLP98UH090XV60C	8268024
14ACX-041-230	TXV	40000	16	13	CX35-60C	SLP98UH110XV60C	8268025
14ACX-041-230	TXV	39000	14.5	12.5	CX38-49C		10546596
14ACX-047-230	TXV	46000	15	12.5	C35-48B	EL180UH090E48B	8267394
14ACX-047-230	TXV	46000	15	12.5	C35-48B	EL180UH090XE48B	8267393
14ACX-047-230	TXV	46000	15	12.5	C35-49C	EL180UH090E60C	8267395
14ACX-047-230	TXV	46500	15.1	12.5	C35-49C	EL180UH110E60C	8267396
14ACX-047-230	TXV	46500	15.1	12.5	C35-49C	EL180UH110XE60C	8267397
14ACX-047-230	TXV	46500	15.1	12.5	C35-49C	EL195UH090XE48C	8267407
14ACX-047-230	TXV	46500	15.5	12.5	C35-49C	EL195UH110XE60C	8267406
14ACX-047-230	TXV	46500	15.1	12.5	C35-49C	EL296UH090XE48C	8267399
14ACX-047-230	TXV	47000	15.1	12.5	C35-49C	EL296UH090XV48C	8267403

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-047-230	TXV	47000	15.1	12.5	C35-49C	EL296UH090XV60C	8267404
14ACX-047-230	TXV	46500	15.5	12.5	C35-49C	EL296UH110XE60C	8267398
14ACX-047-230	TXV	47000	15.1	12.5	C35-49C	EL296UH110XV60C	8267405
14ACX-047-230	TXV	47000	15.5	12.5	C35-49C	SL280UH090V60C	8267408
14ACX-047-230	TXV	47000	15.1	12.5	C35-49C	SL280UH110V60C	8267409
14ACX-047-230	TXV	47000	15.1	12.5	C35-49C	SLP98UH090XV48C	8267401
14ACX-047-230	TXV	47000	15.5	12.5	C35-49C	SLP98UH090XV60C	8267402
14ACX-047-230	TXV	47000	15.1	12.5	C35-49C	SLP98UH110XV60C	8267400
14ACX-047-230	TXV	45500	15.1	12.5	C35-50/60C	EL180UH090E60C	8267410
14ACX-047-230	TXV	46000	14.5	12.2	C35-50/60C	EL180UH110E60C	8267411
14ACX-047-230	TXV	46000	14.7	12.2	C35-50/60C	EL180UH110XE60C	8267412
14ACX-047-230	TXV	45500	15	12.2	C35-50/60C	EL195UH090XE48C	8267416
14ACX-047-230	TXV	45500	15	12.5	C35-50/60C	EL195UH110XE60C	8267415
14ACX-047-230	TXV	45500	15	12.2	C35-50/60C	EL296UH090XE48C	8267414
14ACX-047-230	TXV	45500	15	12.5	C35-50/60C	EL296UH110XE60C	8267413
14ACX-047-230	TXV	47500	16	13	C35-60C	EL180UH090E60C	8267420
14ACX-047-230	TXV	47500	16	13	C35-60C	EL180UH110E60C	8267421
14ACX-047-230	TXV	47500	16	13	C35-60C	EL180UH110XE60C	8267422
14ACX-047-230	TXV	47500	15.5	12.5	C35-60C	EL195UH090XE48C	8267426
14ACX-047-230	TXV	47500	15.5	12.5	C35-60C	EL195UH110XE60C	8267425
14ACX-047-230	TXV	47500	15.5	12.5	C35-60C	EL296UH090XE48C	8267424
14ACX-047-230	TXV	47500	15.5	12.5	C35-60C	EL296UH110XE60C	8267423
14ACX-047-230	TXV	48000	16	13	C35-60C	SL280UH090V60C	8267427
14ACX-047-230	TXV	48000	16	13	C35-60C	SL280UH090XV60C	8267418
14ACX-047-230	TXV	47500	16	13	C35-60C	SL280UH110V60C	8267428
14ACX-047-230	TXV	47500	16	13	C35-60C	SL280UH110XV60C	8267419
14ACX-047-230	TXV	47000	14.5	12.2	C35-60C		8267417
14ACX-047-230	TXV	47500	15.5	12.5	C35-60D	EL180UH135E60D	8267429
14ACX-047-230	TXV	47000	15.5	12.5	C35-60D	EL195UH135XE60D	8267431
14ACX-047-230	TXV	47000	15.5	12.5	C35-60D	EL296UH135XE60D	8267430
14ACX-047-230	TXV	47000	16	13	CBA27UHE-048		10259382
14ACX-047-230	TXV	46500	15.1	12.5	CBX25UH-048		5732790
14ACX-047-230	TXV	47000	16	13	CBX25UHV-048		6970132
14ACX-047-230	TXV	46500	16	13	CBX27UH-048		3869174
14ACX-047-230	TXV	46000	16	13	CBX32MV-060		3869175
14ACX-047-230	TXV	46000	16	13	CBX40UHV-060		3869176
14ACX-047-230	TXV	44000	15	12.2	CH23-65	EL180UH090E60C	5736928
14ACX-047-230	TXV	47500	15.5	12.7	CH33-43	EL180UH090E48B	5735113
14ACX-047-230	TXV	46000	15.2	12.7	CH33-43	EL180UH090E60C	5736017
14ACX-047-230	TXV	47500	15.5	12.7	CH33-43	EL180UH090XE48B	5737077
14ACX-047-230	TXV	46500	15	12.5	CH33-43	EL180UH110E60C	5737841
14ACX-047-230	TXV	46500	15	12.5	CH33-43	EL180UH110XE60C	5738918
14ACX-047-230	TXV	47000	15.2	12.7	CH33-43	SL280UH090V48B	4016678
14ACX-047-230	TXV	46500	15.2	12.7	CH33-43	SL280UH090V60C	4253830
14ACX-047-230	TXV	47000	15.2	12.7	CH33-43	SL280UH090XV48B	4038535
14ACX-047-230	TXV	46000	15.2	12.5	CH33-43	SL280UH110V60C	4253831
14ACX-047-230	TXV	46000	15	12.5	CH33-43C	EL195UH090XE48C	4693923
14ACX-047-230	TXV	46000	15.2	12.7	CH33-43C	EL195UH110XE60C	4693935
14ACX-047-230	TXV	46000	15	12.5	CH33-43C	EL296UH090XE48C	5647268

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-047-230	TXV	46000	15.2	12.7	CH33-43C	EL296UH110XE60C	5647231
14ACX-047-230	TXV	46000	14.25	12	CH33-43C		7426645
14ACX-047-230	TXV	45500	14.7	12.2	CH33-44/48	EL180UH090E48B	5735115
14ACX-047-230	TXV	45500	14.7	12.2	CH33-44/48	EL180UH090XE48B	5737079
14ACX-047-230	TXV	45000	14.5	12	CH33-44/48	SL280UH090V48B	4016679
14ACX-047-230	TXV	45000	14.5	12	CH33-44/48	SL280UH090XV48B	4038536
14ACX-047-230	TXV	45500	15.2	12.5	CH33-48	EL180UH090E60C	5736020
14ACX-047-230	TXV	46500	14.7	12.2	CH33-48	EL180UH110E60C	5737843
14ACX-047-230	TXV	46500	14.7	12.2	CH33-48	EL180UH110XE60C	5738921
14ACX-047-230	TXV	46000	14.7	12.5	CH33-48	EL296UH090XV48C	5057275
14ACX-047-230	TXV	46000	14.7	12.2	CH33-48	EL296UH090XV60C	5057276
14ACX-047-230	TXV	46000	14.7	12.5	CH33-48	EL296UH110XV60C	5057277
14ACX-047-230	TXV	46000	15.2	12.5	CH33-48	SL280UH090V60C	3869180
14ACX-047-230	TXV	46000	15.2	12.5	CH33-48	SL280UH090XV60C	4235242
14ACX-047-230	TXV	46000	15	12.5	CH33-48	SL280UH110V60C	3869181
14ACX-047-230	TXV	46000	15	12.5	CH33-48	SL280UH110XV60C	4040143
14ACX-047-230	TXV	46000	14.7	12.5	CH33-48	SLP98UH090XV48C	5140465
14ACX-047-230	TXV	46000	14.7	12.2	CH33-48	SLP98UH090XV60C	5140466
14ACX-047-230	TXV	46000	14.7	12.5	CH33-48	SLP98UH110XV60C	5140467
14ACX-047-230	TXV	45500	14.7	12.5	CH33-48C	EL195UH090XE48C	4693924
14ACX-047-230	TXV	45500	14.7	12.5	CH33-48C	EL195UH110XE60C	4693936
14ACX-047-230	TXV	45500	14.7	12.5	CH33-48C	EL296UH090XE48C	5647269
14ACX-047-230	TXV	45500	14.7	12.5	CH33-48C	EL296UH110XE60C	5647232
14ACX-047-230	TXV	45500	14.25	12	CH33-48C		7426646
14ACX-047-230	TXV	46500	15.5	12.7	CH33-49	EL180UH090E60C	5736022
14ACX-047-230	TXV	47500	15.2	12.7	CH33-49	EL180UH110E60C	5737845
14ACX-047-230	TXV	47500	15.2	12.7	CH33-49	EL180UH110XE60C	5738922
14ACX-047-230	TXV	46500	15.2	12.7	CH33-49	EL195UH090XE48C	4693925
14ACX-047-230	TXV	46500	15.2	12.7	CH33-49	EL195UH110XE60C	4693937
14ACX-047-230	TXV	46500	15.2	12.7	CH33-49	EL296UH090XE48C	5647270
14ACX-047-230	TXV	47000	15.2	12.7	CH33-49	EL296UH090XV48C	5057284
14ACX-047-230	TXV	47000	15.2	12.7	CH33-49	EL296UH090XV60C	5057285
14ACX-047-230	TXV	46500	15.2	12.7	CH33-49	EL296UH110XE60C	5647233
14ACX-047-230	TXV	47000	15.2	12.7	CH33-49	EL296UH110XV60C	5057286
14ACX-047-230	TXV	47000	15.2	12.7	CH33-49	SLP98UH090XV48C	5140537
14ACX-047-230	TXV	47000	15.2	12.7	CH33-49	SLP98UH090XV60C	5140538
14ACX-047-230	TXV	47000	15.2	12.7	CH33-49	SLP98UH110XV60C	5140539
14ACX-047-230	TXV	46500	14.5	12	CH33-49		7426652
14ACX-047-230	TXV	46500	15.5	12.7	CH33-50/60C	EL180UH090E60C	5736024
14ACX-047-230	TXV	47000	15	12.5	CH33-50/60C	EL180UH110E60C	5737847
14ACX-047-230	TXV	47000	15	12.5	CH33-50/60C	EL180UH110XE60C	5738925
14ACX-047-230	TXV	46500	15.2	12.7	CH33-50/60C	EL195UH090XE48C	4693926
14ACX-047-230	TXV	46500	15.2	12.7	CH33-50/60C	EL195UH110XE60C	4693938
14ACX-047-230	TXV	46500	15.2	12.7	CH33-50/60C	EL296UH090XE48C	5647271
14ACX-047-230	TXV	46500	15.2	12.7	CH33-50/60C	EL296UH110XE60C	5647234
14ACX-047-230	TXV	46500	14.5	12.2	CH33-50/60C		4253835
14ACX-047-230	TXV	46500	15.5	12.7	CH33-60D	EL180UH135E60D	5746070
14ACX-047-230	TXV	46500	15	12.5	CH33-60D	EL195UH135XE60D	4693945
14ACX-047-230	TXV	46500	15	12.5	CH33-60D	EL296UH135XE60D	5647281

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-047-230	TXV	46000	14.25	12	CH33-60D		7426647
14ACX-047-230	TXV	47000	15.7	13	CH33-62D	EL180UH135E60D	5746071
14ACX-047-230	TXV	47000	15.2	12.7	CH33-62D	EL195UH135XE60D	4693946
14ACX-047-230	TXV	47000	15.2	12.7	CH33-62D	EL296UH135XE60D	5647282
14ACX-047-230	TXV	46500	14.5	12	CH33-62D		7426648
14ACX-047-230	TXV	47500	15.5	12.5	CH35-42B	EL180UH090E48B	7163952
14ACX-047-230	TXV	47500	15	12.5	CH35-42B	SL280UH090XV48B	7163955
14ACX-047-230	TXV	47000	14.5	12	CH35-42B		7163957
14ACX-047-230	TXV	46000	15.1	12.5	CH35-42C	EL180UH090E60C	7163970
14ACX-047-230	TXV	47000	15	12.5	CH35-42C	EL180UH110E60C	7163972
14ACX-047-230	TXV	46000	15.1	12.5	CH35-42C	EL195UH090XE48C	7163961
14ACX-047-230	TXV	46000	15.1	12.5	CH35-42C	EL195UH110XE60C	7163963
14ACX-047-230	TXV	46000	15.1	12.5	CH35-42C	EL296UH090XE48C	7163965
14ACX-047-230	TXV	46000	15.1	12.5	CH35-42C	EL296UH110XE60C	7163968
14ACX-047-230	TXV	46500	15.1	12.5	CH35-42C	SL280UH090V60C	7163974
14ACX-047-230	TXV	46500	15.1	12.5	CH35-42C	SL280UH110V60C	7163976
14ACX-047-230	TXV	46500	15	12.5	CH35-42C	SLP98UH090XV48C	7163978
14ACX-047-230	TXV	46500	15	12.5	CH35-42C	SLP98UH090XV60C	7163981
14ACX-047-230	TXV	46500	15	12.5	CH35-42C	SLP98UH110XV60C	7163982
14ACX-047-230	TXV	46000	14.5	12	CH35-42C		7163959
14ACX-047-230	TXV	46000	15	12.5	CH35-48B	EL180UH090E48B	7163985
14ACX-047-230	TXV	46000	14.5	12	CH35-48B	SL280UH090V48B	7163988
14ACX-047-230	TXV	46000	14.5	12	CH35-48B		7163991
14ACX-047-230	TXV	46000	15.1	12.5	CH35-48C	EL180UH090E60C	7164014
14ACX-047-230	TXV	46500	15	12.5	CH35-48C	EL180UH110E60C	7164016
14ACX-047-230	TXV	46000	15	12.5	CH35-48C	EL195UH090XE48C	7163995
14ACX-047-230	TXV	46000	15.1	12.5	CH35-48C	EL195UH110XE60C	7163998
14ACX-047-230	TXV	46000	15	12.5	CH35-48C	EL296UH090XE48C	7164001
14ACX-047-230	TXV	46000	15	12.5	CH35-48C	EL296UH090XV48C	7164003
14ACX-047-230	TXV	46000	15	12	CH35-48C	EL296UH090XV60C	7164006
14ACX-047-230	TXV	46000	15.1	12.5	CH35-48C	EL296UH110XE60C	7164009
14ACX-047-230	TXV	46000	15	12.5	CH35-48C	EL296UH110XV60C	7164011
14ACX-047-230	TXV	46500	15.1	12.5	CH35-48C	SL280UH090V60C	7164019
14ACX-047-230	TXV	46000	15.1	12.5	CH35-48C	SL280UH110V60C	7164021
14ACX-047-230	TXV	46000	15	12.5	CH35-48C	SLP98UH090XV48C	7164025
14ACX-047-230	TXV	46000	15	12	CH35-48C	SLP98UH090XV60C	7164027
14ACX-047-230	TXV	46000	15	12.5	CH35-48C	SLP98UH110XV60C	7164030
14ACX-047-230	TXV	46000	14.5	12	CH35-48C		7163993
14ACX-047-230	TXV	47000	15.5	13	CH35-51C	EL180UH090E60C	7164054
14ACX-047-230	TXV	47500	15.1	12.5	CH35-51C	EL180UH110E60C	7164056
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	EL195UH090XE48C	7164035
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	EL195UH110XE60C	7164038
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	EL296UH090XE48C	7164042
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	EL296UH090XV48C	7164044
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	EL296UH090XV60C	7164047
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	EL296UH110XE60C	7164049
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	EL296UH110XV60C	7164052
14ACX-047-230	TXV	47000	15.5	12.5	CH35-51C	SL280UH090V60C	7164059
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	SL280UH110V60C	7164062

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	SLP98UH090XV48C	7164065
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	SLP98UH090XV60C	7164067
14ACX-047-230	TXV	47000	15.1	12.5	CH35-51C	SLP98UH110XV60C	7164070
14ACX-047-230	TXV	47000	14.5	12	CH35-51C		7164033
14ACX-047-230	TXV	47500	15.5	13	CH35-60D	EL180UH135E60D	7164080
14ACX-047-230	TXV	47000	15.1	12.5	CH35-60D	EL195UH135XE60D	7164075
14ACX-047-230	TXV	47000	15.1	12.5	CH35-60D	EL296UH135XE60D	7164078
14ACX-047-230	TXV	47000	15.5	13	CH35-60D	SL280UH135V60D	7164083
14ACX-047-230	TXV	47000	15.5	12.5	CH35-60D	SLP98UH135XV60D	10040425
14ACX-047-230	TXV	47000	14.5	12	CH35-60D		7164073
14ACX-047-230	TXV	45000	15.2	12.5	CR33-50/60	EL180DF110E60C	5733507
14ACX-047-230	TXV	44500	14.7	12.2	CR33-50/60	EL195DF090XE48C	4693917
14ACX-047-230	TXV	44500	15.2	12.2	CR33-50/60	EL195DF110XE60C	4693918
14ACX-047-230	TXV	44500	14.7	12.2	CR33-50/60	EL296DF090XE48C	5647262
14ACX-047-230	TXV	44500	15.2	12.2	CR33-50/60	EL296DF110XE60C	5647263
14ACX-047-230	TXV	45500	15.7	13	CR33-50/60	SL280DF090V60C	3869186
14ACX-047-230	TXV	45500	15.7	13	CR33-50/60	SL280DF110V60C	3869187
14ACX-047-230	TXV	46000	15	12.5	CX35-48B	EL180UH090E48B	8267433
14ACX-047-230	TXV	46000	15	12.5	CX35-48B	EL180UH090XE48B	8267432
14ACX-047-230	TXV	46000	14.5	12.2	CX35-48B	SL280UH090V48B	8267435
14ACX-047-230	TXV	46000	14.5	12.2	CX35-48B	SL280UH090XV48B	8267434
14ACX-047-230	TXV	46500	15.1	12.5	CX35-49C	EL180UH110E60C	8267436
14ACX-047-230	TXV	46500	15.1	12.5	CX35-49C	EL180UH110XE60C	8267437
14ACX-047-230	TXV	46500	15.1	12.5	CX35-49C	EL195UH090XE48C	8267447
14ACX-047-230	TXV	46500	15.5	12.5	CX35-49C	EL195UH110XE60C	8267446
14ACX-047-230	TXV	46500	15.1	12.5	CX35-49C	EL296UH090XE48C	8267438
14ACX-047-230	TXV	47000	15.1	12.5	CX35-49C	EL296UH090XV48C	8267443
14ACX-047-230	TXV	47000	15.1	12.5	CX35-49C	EL296UH090XV60C	8267444
14ACX-047-230	TXV	46500	15.5	12.5	CX35-49C	EL296UH110XE60C	8267439
14ACX-047-230	TXV	47000	15.1	12.5	CX35-49C	EL296UH110XV60C	8267445
14ACX-047-230	TXV	47000	15.5	12.5	CX35-49C	SL280UH090V60C	8267448
14ACX-047-230	TXV	47000	15.1	12.5	CX35-49C	SL280UH110V60C	8267449
14ACX-047-230	TXV	47000	15	12.5	CX35-49C	SLP98UH090XV48C	8267441
14ACX-047-230	TXV	47000	15.1	12.5	CX35-49C	SLP98UH090XV60C	8267442
14ACX-047-230	TXV	47000	15.1	12.5	CX35-49C	SLP98UH110XV60C	8267440
14ACX-047-230	TXV	45500	15.1	12.5	CX35-50/60C	EL180UH090E60C	8267450
14ACX-047-230	TXV	46000	14.5	12.2	CX35-50/60C	EL180UH110E60C	8267451
14ACX-047-230	TXV	46000	14.7	12.2	CX35-50/60C	EL180UH110XE60C	8267452
14ACX-047-230	TXV	45500	15	12.2	CX35-50/60C	EL195UH090XE48C	8267456
14ACX-047-230	TXV	45500	15	12.5	CX35-50/60C	EL195UH110XE60C	8267455
14ACX-047-230	TXV	45500	15	12.5	CX35-50/60C	EL296UH090XE48C	8267453
14ACX-047-230	TXV	45500	15	12.2	CX35-50/60C	EL296UH110XE60C	8267454
14ACX-047-230	TXV	47500	16	13	CX35-60C	EL180UH090E60C	8267460
14ACX-047-230	TXV	47500	16	13	CX35-60C	EL180UH110E60C	8267461
14ACX-047-230	TXV	47500	16	13	CX35-60C	EL180UH110XE60C	8267462
14ACX-047-230	TXV	47500	15.5	12.5	CX35-60C	EL195UH090XE48C	8267466
14ACX-047-230	TXV	47500	15.5	12.5	CX35-60C	EL195UH110XE60C	8267465
14ACX-047-230	TXV	47500	15.5	12.5	CX35-60C	EL296UH090XE48C	8267463
14ACX-047-230	TXV	47500	15.5	12.5	CX35-60C	EL296UH110XE60C	8267464

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-047-230	TXV	48000	16	13	CX35-60C	SL280UH090V60C	8267467
14ACX-047-230	TXV	48000	16	13	CX35-60C	SL280UH090XV60C	8267458
14ACX-047-230	TXV	47500	16	13	CX35-60C	SL280UH110V60C	8267468
14ACX-047-230	TXV	47500	16	13	CX35-60C	SL280UH110XV60C	8267459
14ACX-047-230	TXV	47000	14.5	12.2	CX35-60C		8267457
14ACX-047-230	TXV	47500	15.5	12.5	CX35-60D	EL180UH135E60D	8267469
14ACX-047-230	TXV	47000	15.5	12.5	CX35-60D	EL195UH135XE60D	8267471
14ACX-047-230	TXV	47000	15.5	12.5	CX35-60D	EL296UH135XE60D	8267470
14ACX-047-230	TXV	47000	14.7	12.5	CX38-62C		10546846
14ACX-048-230	TXV	48000	14.25	12	C35-48B	EL180UH090E48B	9138782
14ACX-048-230	TXV	48000	14.25	12	C35-48B	EL180UH090XE48B	9138781
14ACX-048-230	TXV	48000	14.5	12	C35-48C	EL180UH090E60C	9138769
14ACX-048-230	TXV	47500	14.5	12	C35-48C	EL180UH110E60C	9138770
14ACX-048-230	TXV	47500	14.5	12	C35-48C	EL180UH110XE60C	9138771
14ACX-048-230	TXV	48000	14.5	12	C35-48C	EL195UH090XE48C	9138772
14ACX-048-230	TXV	48000	14.5	12	C35-48C	EL195UH110XE60C	9138762
14ACX-048-230	TXV	48000	14.5	12	C35-48C	EL296UH090XE48C	9138761
14ACX-048-230	TXV	48000	14	12	C35-48C	EL296UH090XV48C	9138764
14ACX-048-230	TXV	48000	14	12	C35-48C	EL296UH090XV60C	9138778
14ACX-048-230	TXV	48000	14.5	12	C35-48C	EL296UH110XE60C	9138763
14ACX-048-230	TXV	48000	14.5	12	C35-48C	EL296UH110XV48C	9138767
14ACX-048-230	TXV	48000	14	12	C35-48C	EL296UH110XV60C	9138768
14ACX-048-230	TXV	48000	14.5	12	C35-48C	SL280UH090V60C	9138773
14ACX-048-230	TXV	48000	14.5	12	C35-48C	SL280UH090XV60C	9138784
14ACX-048-230	TXV	48000	14.5	12	C35-48C	SL280UH110V60C	9138774
14ACX-048-230	TXV	48000	14.5	12	C35-48C	SL280UH110XV60C	9138775
14ACX-048-230	TXV	48000	14	12	C35-48C	SLP98UH090XV48C	9138776
14ACX-048-230	TXV	48000	14	12	C35-48C	SLP98UH090XV60C	9138777
14ACX-048-230	TXV	48000	14.25	12	C35-48C	SLP98UH110XV60C	9138783
14ACX-048-230	TXV	48000	15	12.5	C35-49C	EL180UH090E60C	9138759
14ACX-048-230	TXV	48000	14	12	C35-49C	EL180UH110E60C	9138760
14ACX-048-230	TXV	48000	14	12	C35-49C	EL180UH110XE60C	9138749
14ACX-048-230	TXV	48000	14.5	12	C35-49C	EL195UH090XE48C	9138746
14ACX-048-230	TXV	48000	14.5	12	C35-49C	EL195UH110XE60C	9138753
14ACX-048-230	TXV	48000	14.5	12	C35-49C	EL296UH090XE48C	9138752
14ACX-048-230	TXV	48000	14.5	12	C35-49C	EL296UH090XV48C	9138743
14ACX-048-230	TXV	48000	14.5	12	C35-49C	EL296UH090XV60C	9138744
14ACX-048-230	TXV	48000	14.5	12	C35-49C	EL296UH110XE60C	9138754
14ACX-048-230	TXV	48000	14.5	12	C35-49C	EL296UH110XV48C	9138745
14ACX-048-230	TXV	48000	14.5	12	C35-49C	EL296UH110XV60C	9138758
14ACX-048-230	TXV	48000	15	12.5	C35-49C	SL280UH090V60C	9138750
14ACX-048-230	TXV	48000	15	12.5	C35-49C	SL280UH090XV60C	9138751
14ACX-048-230	TXV	48000	15	12.5	C35-49C	SL280UH110V60C	9138765
14ACX-048-230	TXV	48000	15	12.5	C35-49C	SL280UH110XV60C	9138766
14ACX-048-230	TXV	48000	14.5	12	C35-49C	SLP98UH090XV48C	9138755
14ACX-048-230	TXV	48000	14.5	12	C35-49C	SLP98UH090XV60C	9138756
14ACX-048-230	TXV	48000	14.5	12	C35-49C	SLP98UH110XV60C	9138757
14ACX-048-230	TXV	48000	14	11.7	C35-49C		9138613
14ACX-048-230	TXV	47500	14.5	12	C35-50/60C	EL180UH090E60C	9138741

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-048-230	TXV	48000	14	11.7	C35-50/60C	EL180UH110E60C	9138742
14ACX-048-230	TXV	48000	14	11.7	C35-50/60C	EL180UH110XE60C	9138731
14ACX-048-230	TXV	47500	14.25	12	C35-50/60C	EL195UH090XE48C	9138728
14ACX-048-230	TXV	47500	14.25	12	C35-50/60C	EL195UH110XE60C	9138735
14ACX-048-230	TXV	47500	14.25	12	C35-50/60C	EL296UH090XE48C	9138734
14ACX-048-230	TXV	47500	14	11.7	C35-50/60C	EL296UH090XV48C	9138725
14ACX-048-230	TXV	47500	14	11.7	C35-50/60C	EL296UH090XV60C	9138726
14ACX-048-230	TXV	47500	14.25	12	C35-50/60C	EL296UH110XE60C	9138736
14ACX-048-230	TXV	47500	14.25	11.7	C35-50/60C	EL296UH110XV48C	9138727
14ACX-048-230	TXV	47500	14	11.7	C35-50/60C	EL296UH110XV60C	9138740
14ACX-048-230	TXV	47500	14.25	12	C35-50/60C	SL280UH090V60C	9138732
14ACX-048-230	TXV	47500	14.25	12	C35-50/60C	SL280UH090XV60C	9138733
14ACX-048-230	TXV	47500	14.25	12	C35-50/60C	SL280UH110V60C	9138747
14ACX-048-230	TXV	47500	14.25	12	C35-50/60C	SL280UH110XV60C	9138748
14ACX-048-230	TXV	47500	14	11.7	C35-50/60C	SLP98UH090XV48C	9138737
14ACX-048-230	TXV	47500	14	11.7	C35-50/60C	SLP98UH090XV60C	9138738
14ACX-048-230	TXV	47500	14	11.7	C35-50/60C	SLP98UH110XV60C	9138739
14ACX-048-230	TXV	48000	15.1	12.5	C35-60C	EL180UH090E60C	9139419
14ACX-048-230	TXV	48000	15	12.5	C35-60C	EL180UH110E60C	9138724
14ACX-048-230	TXV	48000	15	12.5	C35-60C	EL180UH110XE60C	9138716
14ACX-048-230	TXV	48000	14.5	12.5	C35-60C	EL195UH090XE48C	9138713
14ACX-048-230	TXV	48000	15	12.5	C35-60C	EL195UH110XE60C	9138718
14ACX-048-230	TXV	48000	14.5	12.5	C35-60C	EL296UH090XE48C	9138717
14ACX-048-230	TXV	48000	14.5	12	C35-60C	EL296UH090XV48C	9138710
14ACX-048-230	TXV	48000	14.5	12	C35-60C	EL296UH090XV60C	9138711
14ACX-048-230	TXV	48000	15	12.5	C35-60C	EL296UH110XE60C	9138719
14ACX-048-230	TXV	48000	15	12.5	C35-60C	EL296UH110XV48C	9138712
14ACX-048-230	TXV	48000	14.5	12.5	C35-60C	EL296UH110XV60C	9138723
14ACX-048-230	TXV	48000	15.1	12.5	C35-60C	SL280UH090V60C	9139417
14ACX-048-230	TXV	48000	15.1	12.5	C35-60C	SL280UH090XV60C	9139418
14ACX-048-230	TXV	48000	15	12.5	C35-60C	SL280UH110V60C	9138729
14ACX-048-230	TXV	48000	15	12.5	C35-60C	SL280UH110XV60C	9138730
14ACX-048-230	TXV	48000	14.5	12	C35-60C	SLP98UH090XV48C	9138720
14ACX-048-230	TXV	48000	14.5	12	C35-60C	SLP98UH090XV60C	9138721
14ACX-048-230	TXV	48000	14.5	12.5	C35-60C	SLP98UH110XV60C	9138722
14ACX-048-230	TXV	48000	14	11.7	C35-60C		9138614
14ACX-048-230	TXV	48000	15	12.5	C35-60D	EL180UH135E60D	9138704
14ACX-048-230	TXV	48000	14.25	12	C35-60D	EL195UH135XE60D	9138707
14ACX-048-230	TXV	48000	14.25	12	C35-60D	EL296UH135XE60D	9138714
14ACX-048-230	TXV	48000	14.5	12	C35-60D	EL296UH135XV60D	9138715
14ACX-048-230	TXV	48000	15	12.5	C35-60D	SL280UH135V60D	9138705
14ACX-048-230	TXV	48000	14.5	12	C35-60D	SLP98UH135XV60D	9138706
14ACX-048-230	TXV	48000	14	11.7	C35-60D		9138615
14ACX-048-230	TXV	48000	14.5	12.2	CBA27UHE-048		10259383
14ACX-048-230	TXV	48000	15	12.5	CBA27UHE-060		10259384
14ACX-048-230	TXV	48000	14.5	12	CBX25UH-048		9139066
14ACX-048-230	TXV	48000	14.5	12.5	CBX25UHV-048		9139067
14ACX-048-230	TXV	48000	14.5	12	CBX27UH-048		9139068
14ACX-048-230	TXV	48000	15	12.5	CBX27UH-060		9139069

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-048-230	TXV	48000	14.25	12	CBX32M-048		9139058
14ACX-048-230	TXV	48000	14.25	12	CBX32M-060		9139059
14ACX-048-230	TXV	48000	14.25	12	CBX32MV-048		9139060
14ACX-048-230	TXV	48000	14.5	12	CBX32MV-060		9139061
14ACX-048-230	TXV	47500	14.5	12	CBX40UHV-048		9139062
14ACX-048-230	TXV	48000	14.5	12	CBX40UHV-060		9139063
14ACX-048-230	TXV	46000	14	11.7	CH23-51	EL180UH090E48B	9139052
14ACX-048-230	TXV	45500	14	11.7	CH23-51	EL180UH110E60C	9139053
14ACX-048-230	TXV	45500	14	11.7	CH23-51	EL180UH110XE60C	9139054
14ACX-048-230	TXV	47000	14.25	11.7	CH23-65	EL180UH090E48B	9139055
14ACX-048-230	TXV	47000	14.5	12	CH23-65	EL180UH090E60C	9139057
14ACX-048-230	TXV	47000	14.25	11.7	CH23-65	EL180UH090XE48B	9139056
14ACX-048-230	TXV	46500	14.5	12	CH23-65	EL180UH110E60C	9139046
14ACX-048-230	TXV	46500	14.5	12	CH23-65	EL180UH110XE60C	9139047
14ACX-048-230	TXV	48000	15	12.5	CH23-68	EL180UH135E60D	9139050
14ACX-048-230	TXV	48000	14.5	12	CH23-68	EL195UH135XE60D	9139048
14ACX-048-230	TXV	48000	14.5	12	CH23-68	EL296UH135XE60D	9139049
14ACX-048-230	TXV	48000	14	11.7	CH23-68		9138607
14ACX-048-230	TXV	48000	14.5	12	CH33-43B	EL180UH090E48B	9139051
14ACX-048-230	TXV	48000	14.5	12	CH33-43B	EL180UH090XE48B	9139040
14ACX-048-230	TXV	48000	14.5	12	CH33-43C	EL180UH090E60C	9139037
14ACX-048-230	TXV	48000	14.25	12	CH33-43C	EL180UH110E60C	9139038
14ACX-048-230	TXV	48000	14.25	12	CH33-43C	EL180UH110XE60C	9139039
14ACX-048-230	TXV	47500	14.25	12	CH33-43C	EL195UH090XE48C	9139041
14ACX-048-230	TXV	48000	14.5	12	CH33-43C	EL195UH110XE60C	9139043
14ACX-048-230	TXV	47500	14.25	12	CH33-43C	EL296UH090XE48C	9139042
14ACX-048-230	TXV	48000	14.25	12	CH33-43C	EL296UH090XV48C	9139045
14ACX-048-230	TXV	48000	14.25	11.7	CH33-43C	EL296UH090XV60C	9139034
14ACX-048-230	TXV	48000	14.5	12	CH33-43C	EL296UH110XE60C	9139044
14ACX-048-230	TXV	48000	14.25	12	CH33-43C	EL296UH110XV48C	9139035
14ACX-048-230	TXV	48000	14.25	12	CH33-43C	EL296UH110XV60C	9139036
14ACX-048-230	TXV	48000	14.5	12	CH33-43C	SL280UH090V60C	9139028
14ACX-048-230	TXV	48000	14.5	12	CH33-43C	SL280UH090XV60C	9139029
14ACX-048-230	TXV	48000	14.5	12	CH33-43C	SL280UH110V60C	9139030
14ACX-048-230	TXV	48000	14.5	12	CH33-43C	SL280UH110XV60C	9139031
14ACX-048-230	TXV	48000	14.25	12	CH33-43C	SLP98UH090XV48C	9139032
14ACX-048-230	TXV	48000	14.25	11.7	CH33-43C	SLP98UH090XV60C	9139033
14ACX-048-230	TXV	48000	14.25	12	CH33-43C	SLP98UH110XV60C	9139022
14ACX-048-230	TXV	47000	14	11.7	CH33-44/48B	EL180UH090E48B	9139023
14ACX-048-230	TXV	47000	14	11.7	CH33-44/48B	EL180UH090XE48B	9139024
14ACX-048-230	TXV	47500	14.5	12	CH33-48C	EL180UH090E60C	9139021
14ACX-048-230	TXV	48000	14	12	CH33-48C	EL180UH110E60C	9139010
14ACX-048-230	TXV	48000	14	12	CH33-48C	EL180UH110XE60C	9139011
14ACX-048-230	TXV	47500	14	12	CH33-48C	EL195UH090XE48C	9139025
14ACX-048-230	TXV	47500	14	12	CH33-48C	EL195UH110XE60C	9139027
14ACX-048-230	TXV	47500	14	12	CH33-48C	EL296UH090XE48C	9139026
14ACX-048-230	TXV	47500	14	11.7	CH33-48C	EL296UH090XV48C	9139017
14ACX-048-230	TXV	47500	14	11.7	CH33-48C	EL296UH090XV60C	9139018
14ACX-048-230	TXV	47500	14	12	CH33-48C	EL296UH110XE60C	9139016

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-048-230	TXV	47500	14.25	11.7	CH33-48C	EL296UH110XV48C	9139019
14ACX-048-230	TXV	47500	14	11.7	CH33-48C	EL296UH110XV60C	9139020
14ACX-048-230	TXV	48000	14.25	12	CH33-48C	SL280UH090V60C	9139012
14ACX-048-230	TXV	48000	14.25	12	CH33-48C	SL280UH090XV60C	9139013
14ACX-048-230	TXV	47500	14.25	12	CH33-48C	SL280UH110V60C	9139014
14ACX-048-230	TXV	47500	14.25	12	CH33-48C	SL280UH110XV60C	9139015
14ACX-048-230	TXV	47500	14	11.7	CH33-48C	SLP98UH090XV48C	9139004
14ACX-048-230	TXV	47500	14	11.7	CH33-48C	SLP98UH090XV60C	9139005
14ACX-048-230	TXV	47500	14	11.7	CH33-48C	SLP98UH110XV60C	9139006
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL180UH090E60C	9139003
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL180UH110E60C	9138992
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL180UH110XE60C	9138993
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL195UH090XE48C	9139007
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL195UH110XE60C	9139009
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL296UH090XE48C	9139008
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL296UH090XV48C	9138999
14ACX-048-230	TXV	48000	14.25	12	CH33-49	EL296UH090XV60C	9139000
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL296UH110XE60C	9138998
14ACX-048-230	TXV	48000	14.5	12	CH33-49	EL296UH110XV48C	9139001
14ACX-048-230	TXV	48000	14.25	12	CH33-49	EL296UH110XV60C	9139002
14ACX-048-230	TXV	48000	14.5	12	CH33-49	SL280UH090V60C	9138994
14ACX-048-230	TXV	48000	14.5	12	CH33-49	SL280UH090XV60C	9138995
14ACX-048-230	TXV	48000	14.5	12	CH33-49	SL280UH110V60C	9138996
14ACX-048-230	TXV	48000	14.5	12	CH33-49	SL280UH110XV60C	9138997
14ACX-048-230	TXV	48000	14.5	12	CH33-49	SLP98UH090XV48C	9138986
14ACX-048-230	TXV	48000	14.25	12	CH33-49	SLP98UH090XV60C	9138987
14ACX-048-230	TXV	48000	14.25	12	CH33-49	SLP98UH110XV60C	9138988
14ACX-048-230	TXV	48000	14	11.7	CH33-49		9138608
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	EL180UH090E60C	9138985
14ACX-048-230	TXV	48000	14.25	12	CH33-50/60C	EL180UH110E60C	9138974
14ACX-048-230	TXV	48000	14.25	12	CH33-50/60C	EL180UH110XE60C	9138975
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	EL195UH090XE48C	9138989
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	EL195UH110XE60C	9138991
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	EL296UH090XE48C	9138990
14ACX-048-230	TXV	48000	14.25	12	CH33-50/60C	EL296UH090XV48C	9138981
14ACX-048-230	TXV	48000	14.25	12	CH33-50/60C	EL296UH090XV60C	9138982
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	EL296UH110XE60C	9138980
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	EL296UH110XV48C	9138983
14ACX-048-230	TXV	48000	14.25	12	CH33-50/60C	EL296UH110XV60C	9138984
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	SL280UH090V60C	9138976
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	SL280UH090XV60C	9138977
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	SL280UH110V60C	9138978
14ACX-048-230	TXV	48000	14.5	12	CH33-50/60C	SL280UH110XV60C	9138979
14ACX-048-230	TXV	48000	14.25	12	CH33-50/60C	SLP98UH090XV48C	9138968
14ACX-048-230	TXV	48000	14.25	12	CH33-50/60C	SLP98UH090XV60C	9138969
14ACX-048-230	TXV	48000	14.25	12	CH33-50/60C	SLP98UH110XV60C	9138970
14ACX-048-230	TXV	48000	14	11.7	CH33-50/60C		9138617
14ACX-048-230	TXV	48000	15	12.5	CH33-60D	EL180UH135E60D	9138962
14ACX-048-230	TXV	48000	14.25	12	CH33-60D	EL195UH135XE60D	9138971

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-048-230	TXV	48000	14.25	12	CH33-60D	EL296UH135XE60D	9138972
14ACX-048-230	TXV	48000	14.5	12	CH33-60D	EL296UH135XV60D	9138973
14ACX-048-230	TXV	48000	14.5	12	CH33-60D	SL280UH135V60D	9138963
14ACX-048-230	TXV	48000	14.5	12	CH33-60D	SLP98UH135XV60D	9138964
14ACX-048-230	TXV	48000	15	12.5	CH33-62D	EL180UH135E60D	9138956
14ACX-048-230	TXV	48000	14.5	12	CH33-62D	EL195UH135XE60D	9138965
14ACX-048-230	TXV	48000	14.5	12	CH33-62D	EL296UH135XE60D	9138966
14ACX-048-230	TXV	48000	14.5	12	CH33-62D	EL296UH135XV60D	9138967
14ACX-048-230	TXV	48000	15	12.5	CH33-62D	SL280UH135V60D	9138957
14ACX-048-230	TXV	48000	14.5	12	CH33-62D	SLP98UH135XV60D	9138958
14ACX-048-230	TXV	48000	14	11.7	CH33-62D		9138618
14ACX-048-230	TXV	48000	14.5	12	CH35-42B	EL180UH090E48B	9138959
14ACX-048-230	TXV	48000	14.5	12	CH35-42B	EL180UH090XE48B	9138960
14ACX-048-230	TXV	48000	14.5	12	CH35-42C	EL180UH090E60C	9138945
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	EL180UH110E60C	9138946
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	EL180UH110XE60C	9138947
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	EL195UH090XE48C	9138961
14ACX-048-230	TXV	48000	14.5	12	CH35-42C	EL195UH110XE60C	9138951
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	EL296UH090XE48C	9138950
14ACX-048-230	TXV	48000	14.25	11.7	CH35-42C	EL296UH090XV48C	9138953
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	EL296UH090XV60C	9138954
14ACX-048-230	TXV	48000	14.5	12	CH35-42C	EL296UH110XE60C	9138952
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	EL296UH110XV48C	9138955
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	EL296UH110XV60C	9138944
14ACX-048-230	TXV	48000	14.5	12	CH35-42C	SL280UH090V60C	9138948
14ACX-048-230	TXV	48000	14.5	12	CH35-42C	SL280UH090XV60C	9138949
14ACX-048-230	TXV	48000	14.5	12	CH35-42C	SL280UH110V60C	9138938
14ACX-048-230	TXV	48000	14.5	12	CH35-42C	SL280UH110XV60C	9138939
14ACX-048-230	TXV	48000	14.25	11.7	CH35-42C	SLP98UH090XV48C	9138940
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	SLP98UH090XV60C	9138941
14ACX-048-230	TXV	48000	14.25	12	CH35-42C	SLP98UH110XV60C	9138942
14ACX-048-230	TXV	47500	14.25	11.7	CH35-48B	EL180UH090E48B	9138943
14ACX-048-230	TXV	47500	14.25	11.7	CH35-48B	EL180UH090XE48B	9138932
14ACX-048-230	TXV	48000	14.5	12	CH35-48C	EL180UH090E60C	9138929
14ACX-048-230	TXV	48000	14.25	11.7	CH35-48C	EL180UH110E60C	9138930
14ACX-048-230	TXV	48000	14.25	11.7	CH35-48C	EL180UH110XE60C	9138931
14ACX-048-230	TXV	48000	14	12	CH35-48C	EL195UH090XE48C	9138933
14ACX-048-230	TXV	48000	14	12	CH35-48C	EL195UH110XE60C	9138935
14ACX-048-230	TXV	48000	14	12	CH35-48C	EL296UH090XE48C	9138934
14ACX-048-230	TXV	48000	14.25	12	CH35-48C	EL296UH090XV48C	9138937
14ACX-048-230	TXV	48000	14.25	11.7	CH35-48C	EL296UH090XV60C	9138926
14ACX-048-230	TXV	48000	14	12	CH35-48C	EL296UH110XE60C	9138936
14ACX-048-230	TXV	48000	14.25	12	CH35-48C	EL296UH110XV48C	9138927
14ACX-048-230	TXV	48000	14.25	12	CH35-48C	EL296UH110XV60C	9138928
14ACX-048-230	TXV	48000	14.5	12	CH35-48C	SL280UH090V60C	9138920
14ACX-048-230	TXV	48000	14.5	12	CH35-48C	SL280UH090XV60C	9138921
14ACX-048-230	TXV	48000	14.5	12	CH35-48C	SL280UH110V60C	9138922
14ACX-048-230	TXV	48000	14.5	12	CH35-48C	SL280UH110XV60C	9138923
14ACX-048-230	TXV	48000	14.25	12	CH35-48C	SLP98UH090XV48C	9138924

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-048-230	TXV	48000	14.25	11.7	CH35-48C	SLP98UH090XV60C	9138925
14ACX-048-230	TXV	48000	14.25	12	CH35-48C	SLP98UH110XV60C	9138914
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL180UH090E60C	9138911
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL180UH110E60C	9138912
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL180UH110XE60C	9138913
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL195UH090XE48C	9138915
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL195UH110XE60C	9138917
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL296UH090XE48C	9138916
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL296UH090XV48C	9138919
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL296UH090XV60C	9138908
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL296UH110XE60C	9138918
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL296UH110XV48C	9138909
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	EL296UH110XV60C	9138910
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	SL280UH090V60C	9138902
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	SL280UH090XV60C	9138903
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	SL280UH110V60C	9138904
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	SL280UH110XV60C	9138905
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	SLP98UH090XV48C	9138906
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	SLP98UH090XV60C	9138907
14ACX-048-230	TXV	48000	14.5	12	CH35-51C	SLP98UH110XV60C	9138896
14ACX-048-230	TXV	48000	14	11.7	CH35-51C		9138619
14ACX-048-230	TXV	48000	15	12.5	CH35-60D	EL180UH135E60D	9138900
14ACX-048-230	TXV	48000	14.5	12	CH35-60D	EL195UH135XE60D	9138897
14ACX-048-230	TXV	48000	14.5	12	CH35-60D	EL296UH135XE60D	9138898
14ACX-048-230	TXV	48000	14.5	12	CH35-60D	EL296UH135XV60D	9138899
14ACX-048-230	TXV	48000	15	12.5	CH35-60D	SL280UH135V60D	9138901
14ACX-048-230	TXV	48000	14.5	12	CH35-60D	SLP98UH135XV60D	9138890
14ACX-048-230	TXV	48000	14	11.7	CH35-60D		9138620
14ACX-048-230	TXV	46500	14.25	11.7	CR33-48	EL180DF110E60C	9138893
14ACX-048-230	TXV	46500	14	11.7	CR33-48	EL195DF110XE60C	9138891
14ACX-048-230	TXV	46500	14	11.7	CR33-48	EL296DF110XE60C	9138892
14ACX-048-230	TXV	46500	14.25	11.7	CR33-48	SL280DF090V60C	9138894
14ACX-048-230	TXV	46500	14.25	11.7	CR33-48	SL280DF110V60C	9138895
14ACX-048-230	TXV	47500	14.25	12	CR33-50/60	EL180DF110E60C	9138888
14ACX-048-230	TXV	47000	14.25	12	CR33-50/60	EL195DF110XE60C	9138884
14ACX-048-230	TXV	47000	14	11.7	CR33-50/60	EL296DF090XV60C	9138886
14ACX-048-230	TXV	47000	14.25	12	CR33-50/60	EL296DF110XE60C	9138885
14ACX-048-230	TXV	47000	14	11.7	CR33-50/60	EL296DF110XV60C	9138887
14ACX-048-230	TXV	47000	14.25	12	CR33-50/60	SL280DF090V60C	9138889
14ACX-048-230	TXV	47000	14.5	12	CR33-50/60	SL280DF110V60C	9138878
14ACX-048-230	TXV	47000	14	11.7	CR33-50/60	SLP98DF090XV48C	9138879
14ACX-048-230	TXV	47000	14	11.7	CR33-50/60	SLP98DF090XV60C	9138880
14ACX-048-230	TXV	47000	14	11.7	CR33-50/60	SLP98DF110XV60C	9138881
14ACX-048-230	TXV	48000	14.25	12	CX35-48B	EL180UH090E48B	9138708
14ACX-048-230	TXV	48000	14.25	12	CX35-48B	EL180UH090XE48B	9138709
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	EL180UH090E60C	9138688
14ACX-048-230	TXV	47500	14.5	12	CX35-48C	EL180UH110E60C	9138701
14ACX-048-230	TXV	47500	14.5	12	CX35-48C	EL180UH110XE60C	9138702
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	EL195UH090XE48C	9138689

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	EL195UH110XE60C	9138691
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	EL296UH090XE48C	9138690
14ACX-048-230	TXV	48000	14	12	CX35-48C	EL296UH090XV48C	9138696
14ACX-048-230	TXV	48000	14	12	CX35-48C	EL296UH090XV60C	9138697
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	EL296UH110XE60C	9138695
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	EL296UH110XV48C	9138686
14ACX-048-230	TXV	48000	14	12	CX35-48C	EL296UH110XV60C	9138687
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	SL280UH090V60C	9138703
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	SL280UH090XV60C	9138692
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	SL280UH110V60C	9138693
14ACX-048-230	TXV	48000	14.5	12	CX35-48C	SL280UH110XV60C	9138694
14ACX-048-230	TXV	48000	14	12	CX35-48C	SLP98UH090XV48C	9138698
14ACX-048-230	TXV	48000	14	12	CX35-48C	SLP98UH090XV60C	9138699
14ACX-048-230	TXV	48000	14	12	CX35-48C	SLP98UH110XV60C	9138700
14ACX-048-230	TXV	48000	15	12.5	CX35-49C	EL180UH090E60C	9138678
14ACX-048-230	TXV	48000	14	12	CX35-49C	EL180UH110E60C	9138679
14ACX-048-230	TXV	48000	14	12	CX35-49C	EL180UH110XE60C	9138668
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	EL195UH090XE48C	9138669
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	EL195UH110XE60C	9138671
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	EL296UH090XE48C	9138670
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	EL296UH090XV48C	9138673
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	EL296UH090XV60C	9138675
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	EL296UH110XE60C	9138672
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	EL296UH110XV48C	9138676
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	EL296UH110XV60C	9138677
14ACX-048-230	TXV	48000	15	12.5	CX35-49C	SL280UH090V60C	9138681
14ACX-048-230	TXV	48000	15	12.5	CX35-49C	SL280UH090XV60C	9138682
14ACX-048-230	TXV	48000	15	12.5	CX35-49C	SL280UH110V60C	9138683
14ACX-048-230	TXV	48000	15	12.5	CX35-49C	SL280UH110XV60C	9138684
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	SLP98UH090XV48C	9138685
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	SLP98UH090XV60C	9138674
14ACX-048-230	TXV	48000	14.5	12	CX35-49C	SLP98UH110XV60C	9138680
14ACX-048-230	TXV	48000	14	11.7	CX35-49C		9138616
14ACX-048-230	TXV	47500	14.5	12	CX35-50/60C	EL180UH090E60C	9138660
14ACX-048-230	TXV	48000	14	11.7	CX35-50/60C	EL180UH110E60C	9138661
14ACX-048-230	TXV	48000	14	11.7	CX35-50/60C	EL180UH110XE60C	9138650
14ACX-048-230	TXV	47500	14.25	12	CX35-50/60C	EL195UH090XE48C	9138651
14ACX-048-230	TXV	47500	14.25	12	CX35-50/60C	EL195UH110XE60C	9138653
14ACX-048-230	TXV	47500	14.25	12	CX35-50/60C	EL296UH090XE48C	9138652
14ACX-048-230	TXV	47500	14	11.7	CX35-50/60C	EL296UH090XV48C	9138655
14ACX-048-230	TXV	47500	14	11.7	CX35-50/60C	EL296UH090XV60C	9138657
14ACX-048-230	TXV	47500	14.25	12	CX35-50/60C	EL296UH110XE60C	9138654
14ACX-048-230	TXV	47500	14.25	11.7	CX35-50/60C	EL296UH110XV48C	9138658
14ACX-048-230	TXV	47500	14	11.7	CX35-50/60C	EL296UH110XV60C	9138659
14ACX-048-230	TXV	47500	14.25	12	CX35-50/60C	SL280UH090V60C	9138663
14ACX-048-230	TXV	47500	14.25	12	CX35-50/60C	SL280UH090XV60C	9138664
14ACX-048-230	TXV	47500	14.25	12	CX35-50/60C	SL280UH110V60C	9138665
14ACX-048-230	TXV	47500	14.25	12	CX35-50/60C	SL280UH110XV60C	9138666
14ACX-048-230	TXV	47500	14	11.7	CX35-50/60C	SLP98UH090XV48C	9138667

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-048-230	TXV	47500	14	11.7	CX35-50/60C	SLP98UH090XV60C	9138656
14ACX-048-230	TXV	47500	14	11.7	CX35-50/60C	SLP98UH110XV60C	9138662
14ACX-048-230	TXV	48000	15.1	12.5	CX35-60C	EL180UH090E60C	9139414
14ACX-048-230	TXV	48000	15	12.5	CX35-60C	EL180UH110E60C	9138645
14ACX-048-230	TXV	48000	15	12.5	CX35-60C	EL180UH110XE60C	9138635
14ACX-048-230	TXV	48000	14.5	12.5	CX35-60C	EL195UH090XE48C	9138636
14ACX-048-230	TXV	48000	15	12.5	CX35-60C	EL195UH110XE60C	9138638
14ACX-048-230	TXV	48000	14.5	12.5	CX35-60C	EL296UH090XE48C	9138637
14ACX-048-230	TXV	48000	14.5	12	CX35-60C	EL296UH090XV48C	9138640
14ACX-048-230	TXV	48000	14.5	12	CX35-60C	EL296UH090XV60C	9138642
14ACX-048-230	TXV	48000	15	12.5	CX35-60C	EL296UH110XE60C	9138639
14ACX-048-230	TXV	48000	15	12.5	CX35-60C	EL296UH110XV48C	9138643
14ACX-048-230	TXV	48000	14.5	12.5	CX35-60C	EL296UH110XV60C	9138644
14ACX-048-230	TXV	48000	15.1	12.5	CX35-60C	SL280UH090V60C	9139415
14ACX-048-230	TXV	48000	15.1	12.5	CX35-60C	SL280UH090XV60C	9139416
14ACX-048-230	TXV	48000	15	12.5	CX35-60C	SL280UH110V60C	9138647
14ACX-048-230	TXV	48000	15	12.5	CX35-60C	SL280UH110XV60C	9138648
14ACX-048-230	TXV	48000	14.5	12	CX35-60C	SLP98UH090XV48C	9138649
14ACX-048-230	TXV	48000	14.5	12	CX35-60C	SLP98UH090XV60C	9138641
14ACX-048-230	TXV	48000	14.5	12.5	CX35-60C	SLP98UH110XV60C	9138646
14ACX-048-230	TXV	48000	14	11.7	CX35-60C		9138609
14ACX-048-230	TXV	48000	15	12.5	CX35-60D	EL180UH135E60D	9138633
14ACX-048-230	TXV	48000	14.25	12	CX35-60D	EL195UH135XE60D	9138630
14ACX-048-230	TXV	48000	14.25	12	CX35-60D	EL296UH135XE60D	9138632
14ACX-048-230	TXV	48000	14.5	12	CX35-60D	EL296UH135XV60D	9138631
14ACX-048-230	TXV	48000	15	12.5	CX35-60D	SL280UH135V60D	9138634
14ACX-048-230	TXV	48000	14.5	12	CX35-60D	SLP98UH135XV60D	9138629
14ACX-048-230	TXV	48000	14	11.7	CX35-60D		9138610
14ACX-048-230	TXV	48000	14.25	12	CX38-62C		10547058
14ACX-059-230	TXV	56000	14	12.2	C35-48C	EL180UH090E60C	10490445
14ACX-059-230	TXV	56000	14	12.2	C35-48C	EL180UH090E60C	9139278
14ACX-059-230	TXV	56000	14	12.2	C35-48C	EL180UH110E60C	9139279
14ACX-059-230	TXV	56000	14	12.2	C35-48C	EL180UH110E60C	10490446
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	EL195UH110XE60C	10490447
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	EL195UH110XE60C	9139280
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	EL296UH110XE60C	9139270
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	EL296UH110XE60C	10490437
14ACX-059-230	TXV	56000	14.5	12	C35-48C	EL296UH110XV60C	10490436
14ACX-059-230	TXV	56000	14.5	12	C35-48C	EL296UH110XV60C	9139269
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	SL280UH090V60C	9139271
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	SL280UH090V60C	10490438
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	SL280UH110V60C	9139272
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	SL280UH110V60C	10490439
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	SL280UH110XV60C	10490440
14ACX-059-230	TXV	56000	14.5	12.2	C35-48C	SL280UH110XV60C	9139273
14ACX-059-230	TXV	56000	14	11.7	C35-48C	SLP98UH090XV60C	9139274
14ACX-059-230	TXV	56000	14	11.7	C35-48C	SLP98UH090XV60C	10490441
14ACX-059-230	TXV	56000	14.2	11.7	C35-48C	SLP98UH110XV60C	10490430
14ACX-059-230	TXV	56000	14.2	11.7	C35-48C	SLP98UH110XV60C	9139263

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-059-230	TXV	56000	14	11.7	C35-48C		9139183
14ACX-059-230	TXV	56000	14	11.7	C35-48C		10490350
14ACX-059-230	TXV	56500	15	12.2	C35-49C	EL180UH090E60C	9139213
14ACX-059-230	TXV	56500	15	12.2	C35-49C	EL180UH090E60C	10490380
14ACX-059-230	TXV	56500	15	12.2	C35-49C	EL180UH110E60C	10490381
14ACX-059-230	TXV	56500	15	12.2	C35-49C	EL180UH110E60C	9139214
14ACX-059-230	TXV	56500	14.5	12.2	C35-49C	EL195UH110XE60C	9139203
14ACX-059-230	TXV	56500	14.5	12.2	C35-49C	EL195UH110XE60C	10490370
14ACX-059-230	TXV	56500	14.5	12.2	C35-49C	EL296UH110XE60C	9139205
14ACX-059-230	TXV	56500	14.5	12.2	C35-49C	EL296UH110XE60C	10490372
14ACX-059-230	TXV	56500	14.5	12	C35-49C	EL296UH110XV60C	9139204
14ACX-059-230	TXV	56500	14.5	12	C35-49C	EL296UH110XV60C	10490371
14ACX-059-230	TXV	56500	15	12.2	C35-49C	SL280UH090V60C	9139206
14ACX-059-230	TXV	56500	15	12.2	C35-49C	SL280UH090V60C	10490373
14ACX-059-230	TXV	56500	14.5	12.2	C35-49C	SL280UH110V60C	9139207
14ACX-059-230	TXV	56500	14.5	12.2	C35-49C	SL280UH110V60C	10490374
14ACX-059-230	TXV	56500	14.5	12.2	C35-49C	SL280UH110XV60C	10490375
14ACX-059-230	TXV	56500	14.5	12.2	C35-49C	SL280UH110XV60C	9139208
14ACX-059-230	TXV	57000	14.2	12.2	C35-49C	SLP98UH090XV60C	9139197
14ACX-059-230	TXV	57000	14.2	12.2	C35-49C	SLP98UH090XV60C	10490364
14ACX-059-230	TXV	56500	14.5	12	C35-49C	SLP98UH110XV60C	9139198
14ACX-059-230	TXV	56500	14.5	12	C35-49C	SLP98UH110XV60C	10490365
14ACX-059-230	TXV	57000	14.5	12	C35-49C		9139170
14ACX-059-230	TXV	57000	14.5	12	C35-49C		10490337
14ACX-059-230	TXV	56500	14	11.7	C35-50/60C	EL180UH090E60C	9139264
14ACX-059-230	TXV	56500	14	11.7	C35-50/60C	EL180UH090E60C	10490431
14ACX-059-230	TXV	56000	14	11.7	C35-50/60C	EL180UH110E60C	9139265
14ACX-059-230	TXV	56000	14	11.7	C35-50/60C	EL180UH110E60C	10490432
14ACX-059-230	TXV	55500	14.2	11.7	C35-50/60C	SL280UH090V60C	10490433
14ACX-059-230	TXV	55500	14.2	11.7	C35-50/60C	SL280UH090V60C	9139266
14ACX-059-230	TXV	55500	14.2	12	C35-50/60C	SL280UH110V60C	9139267
14ACX-059-230	TXV	55500	14.2	12	C35-50/60C	SL280UH110V60C	10490434
14ACX-059-230	TXV	55500	14.2	12	C35-50/60C	SL280UH110XV60C	9139268
14ACX-059-230	TXV	55500	14.2	12	C35-50/60C	SL280UH110XV60C	10490435
14ACX-059-230	TXV	55500	14.2	11.7	C35-50/60C	SLP98UH110XV60C	10490424
14ACX-059-230	TXV	55500	14.2	11.7	C35-50/60C	SLP98UH110XV60C	9139257
14ACX-059-230	TXV	55500	14.2	11.7	C35-50/60C		10490339
14ACX-059-230	TXV	55500	14.2	11.7	C35-50/60C		9139172
14ACX-059-230	TXV	58000	15.5	12.5	C35-60C	EL180UH090E60C	10490425
14ACX-059-230	TXV	58000	15.5	12.5	C35-60C	EL180UH090E60C	9139258
14ACX-059-230	TXV	57500	15.1	12.5	C35-60C	EL180UH110XE60C	9139259
14ACX-059-230	TXV	57500	15.1	12.5	C35-60C	EL180UH110XE60C	10490426
14ACX-059-230	TXV	57000	14.5	12.2	C35-60C	EL195UH110XE60C	10490427
14ACX-059-230	TXV	57000	14.5	12.2	C35-60C	EL195UH110XE60C	9139260
14ACX-059-230	TXV	57000	14.5	12.2	C35-60C	EL296UH110XE60C	9139262
14ACX-059-230	TXV	57000	14.5	12.2	C35-60C	EL296UH110XE60C	10490429
14ACX-059-230	TXV	58000	14.5	12.2	C35-60C	EL296UH110XV60C	9139261
14ACX-059-230	TXV	58000	14.5	12.2	C35-60C	EL296UH110XV60C	10490428
14ACX-059-230	TXV	58000	15.1	12.5	C35-60C	SL280UH090V60C	10490418

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-059-230	TXV	58000	15.1	12.5	C35-60C	SL280UH090V60C	9139251
14ACX-059-230	TXV	58000	14.5	12.2	C35-60C	SL280UH110V60C	9139252
14ACX-059-230	TXV	58000	14.5	12.2	C35-60C	SL280UH110V60C	10490419
14ACX-059-230	TXV	58000	14.5	12.2	C35-60C	SL280UH110XV60C	9139253
14ACX-059-230	TXV	58000	14.5	12.2	C35-60C	SL280UH110XV60C	10490420
14ACX-059-230	TXV	58000	14.5	12.2	C35-60C	SLP98UH090XV60C	10490421
14ACX-059-230	TXV	58000	14.5	12.2	C35-60C	SLP98UH090XV60C	9139254
14ACX-059-230	TXV	57500	15	12.2	C35-60C	SLP98UH110XV60C	10490422
14ACX-059-230	TXV	57500	15	12.2	C35-60C	SLP98UH110XV60C	9139255
14ACX-059-230	TXV	57500	14.5	12.2	C35-60C		9139173
14ACX-059-230	TXV	57500	14.5	12.2	C35-60C		10490340
14ACX-059-230	TXV	56500	15.5	12.5	C35-60D	EL180UH135E60D	10490423
14ACX-059-230	TXV	56500	15.5	12.5	C35-60D	EL180UH135E60D	9139256
14ACX-059-230	TXV	57500	14.5	12.2	C35-60D	EL195UH135XE60D	10490412
14ACX-059-230	TXV	57500	14.5	12.2	C35-60D	EL195UH135XE60D	9139245
14ACX-059-230	TXV	57500	14.5	12.2	C35-60D	EL296UH135XE60D	9139247
14ACX-059-230	TXV	57500	14.5	12.2	C35-60D	EL296UH135XE60D	10490414
14ACX-059-230	TXV	57500	15	12.2	C35-60D	EL296UH135XV60D	10490413
14ACX-059-230	TXV	57500	15	12.2	C35-60D	EL296UH135XV60D	9139246
14ACX-059-230	TXV	57000	15.5	12.5	C35-60D	SL280UH135V60D	10490415
14ACX-059-230	TXV	57000	15.5	12.5	C35-60D	SL280UH135V60D	9139248
14ACX-059-230	TXV	57000	14.5	11.7	C35-60D		10490341
14ACX-059-230	TXV	57000	14.5	11.7	C35-60D		9139174
14ACX-059-230	TXV	56000	15	12	CBA27UHE-060		10259385
14ACX-059-230	TXV	56000	15	12	CBA27UHE-060		10490580
14ACX-059-230	TXV	56500	14.5	12	CBX25UH-060		9139328
14ACX-059-230	TXV	56500	14.5	12	CBX25UH-060		10490495
14ACX-059-230	TXV	57000	15	12.5	CBX25UHV-060		10490465
14ACX-059-230	TXV	57000	15	12.5	CBX25UHV-060		9139298
14ACX-059-230	TXV	56500	15	12.2	CBX27UH-060		10490575
14ACX-059-230	TXV	56500	15	12.2	CBX27UH-060		9139408
14ACX-059-230	TXV	56500	14.5	12.2	CBX32M-060		9139409
14ACX-059-230	TXV	56500	14.5	12.2	CBX32M-060		10490576
14ACX-059-230	TXV	55500	14.7	12	CBX32MV-048		9139410
14ACX-059-230	TXV	55500	14.7	12	CBX32MV-048		10490577
14ACX-059-230	TXV	56500	14.7	12.2	CBX32MV-060		9139411
14ACX-059-230	TXV	56500	14.7	12.2	CBX32MV-060		10490578
14ACX-059-230	TXV	56000	14.7	12	CBX32MV-068		10490357
14ACX-059-230	TXV	56000	14.7	12	CBX32MV-068		9139190
14ACX-059-230	TXV	56000	15	12.2	CBX40UHV-048		9139191
14ACX-059-230	TXV	56000	15	12.2	CBX40UHV-048		10490358
14ACX-059-230	TXV	56500	14.7	12.2	CBX40UHV-060		9139192
14ACX-059-230	TXV	56500	14.7	12.2	CBX40UHV-060		10490359
14ACX-059-230	TXV	57500	15.2	12.5	CH23-68	EL180UH135E60D	9139297
14ACX-059-230	TXV	57500	15.2	12.5	CH23-68	EL180UH135E60D	10490464
14ACX-059-230	TXV	57500	14.7	12.2	CH23-68	EL195UH135XE60D	9139399
14ACX-059-230	TXV	57500	14.7	12.2	CH23-68	EL195UH135XE60D	10490566
14ACX-059-230	TXV	57500	14.7	12.2	CH23-68	EL296UH135XE60D	9139333
14ACX-059-230	TXV	57500	14.7	12.2	CH23-68	EL296UH135XE60D	10490500

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-059-230	TXV	57000	14.5	12.5	CH23-68		10490331
14ACX-059-230	TXV	57000	14.5	12.5	CH23-68		9139164
14ACX-059-230	TXV	57000	15	12.5	CH33-49	EL180UH090E60C	9139306
14ACX-059-230	TXV	57000	15	12.5	CH33-49	EL180UH090E60C	10490473
14ACX-059-230	TXV	56500	15	12.2	CH33-49	EL180UH110E60C	10490475
14ACX-059-230	TXV	56500	15	12.2	CH33-49	EL180UH110E60C	9139308
14ACX-059-230	TXV	56500	15	12.2	CH33-49	EL180UH110XE60C	10490477
14ACX-059-230	TXV	56500	15	12.2	CH33-49	EL180UH110XE60C	9139310
14ACX-059-230	TXV	56500	15	12.2	CH33-49	EL195UH110XE60C	9139395
14ACX-059-230	TXV	56500	15	12.2	CH33-49	EL195UH110XE60C	10490562
14ACX-059-230	TXV	56500	15	12.2	CH33-49	EL296UH110XE60C	9139329
14ACX-059-230	TXV	56500	15	12.2	CH33-49	EL296UH110XE60C	10490496
14ACX-059-230	TXV	57000	15	12.2	CH33-49	SL280UH090V60C	10490360
14ACX-059-230	TXV	57000	15	12.2	CH33-49	SL280UH090V60C	9139193
14ACX-059-230	TXV	57000	14.7	12	CH33-49	SL280UH110V60C	10490361
14ACX-059-230	TXV	57000	14.7	12	CH33-49	SL280UH110V60C	9139194
14ACX-059-230	TXV	57000	14.7	12	CH33-49	SL280UH110XV60C	9139401
14ACX-059-230	TXV	57000	14.7	12	CH33-49	SL280UH110XV60C	10490568
14ACX-059-230	TXV	57000	14.5	12	CH33-49	SLP98UH090XV60C	10490525
14ACX-059-230	TXV	57000	14.5	12	CH33-49	SLP98UH090XV60C	9139358
14ACX-059-230	TXV	57500	14.2	11.7	CH33-50/60C	EL180UH090E60C	9139307
14ACX-059-230	TXV	57500	14.2	11.7	CH33-50/60C	EL180UH090E60C	10490474
14ACX-059-230	TXV	57500	14.2	12	CH33-50/60C	EL180UH110E60C	10490485
14ACX-059-230	TXV	57500	14.2	12	CH33-50/60C	EL180UH110E60C	9139318
14ACX-059-230	TXV	57500	14.2	12	CH33-50/60C	EL180UH110XE60C	9139302
14ACX-059-230	TXV	57500	14.2	12	CH33-50/60C	EL180UH110XE60C	10490469
14ACX-059-230	TXV	57000	14.2	11.7	CH33-50/60C	EL195UH110XE60C	10490563
14ACX-059-230	TXV	57000	14.2	11.7	CH33-50/60C	EL195UH110XE60C	9139396
14ACX-059-230	TXV	57000	14.2	11.7	CH33-50/60C	EL296UH110XE60C	9139330
14ACX-059-230	TXV	57000	14.2	11.7	CH33-50/60C	EL296UH110XE60C	10490497
14ACX-059-230	TXV	56500	14.5	12	CH33-50/60C	SL280UH090V60C	10490569
14ACX-059-230	TXV	56500	14.5	12	CH33-50/60C	SL280UH090V60C	9139402
14ACX-059-230	TXV	56000	14.5	12	CH33-50/60C	SL280UH110V60C	10490570
14ACX-059-230	TXV	56000	14.5	12	CH33-50/60C	SL280UH110V60C	9139403
14ACX-059-230	TXV	56000	14.5	12	CH33-50/60C	SL280UH110XV60C	10490544
14ACX-059-230	TXV	56000	14.5	12	CH33-50/60C	SL280UH110XV60C	9139377
14ACX-059-230	TXV	56500	15	12.2	CH33-60D	EL180UH135E60D	9139303
14ACX-059-230	TXV	56500	15	12.2	CH33-60D	EL180UH135E60D	10490470
14ACX-059-230	TXV	56500	14.5	12	CH33-60D	EL195UH135XE60D	10490543
14ACX-059-230	TXV	56500	14.5	12	CH33-60D	EL195UH135XE60D	9139376
14ACX-059-230	TXV	56500	14.5	12	CH33-60D	EL296UH135XE60D	10490501
14ACX-059-230	TXV	56500	14.5	12	CH33-60D	EL296UH135XE60D	9139334
14ACX-059-230	TXV	56500	14.7	12.2	CH33-60D	EL296UH135XV60D	9139346
14ACX-059-230	TXV	56500	14.7	12.2	CH33-60D	EL296UH135XV60D	10490513
14ACX-059-230	TXV	56500	14.7	12.2	CH33-60D	SL280UH135V60D	9139393
14ACX-059-230	TXV	56500	14.7	12.2	CH33-60D	SL280UH135V60D	10490560
14ACX-059-230	TXV	56500	14.7	12.2	CH33-60D	SLP98UH135XV60D	9139361
14ACX-059-230	TXV	56500	14.7	12.2	CH33-60D	SLP98UH135XV60D	10490528
14ACX-059-230	TXV	56000	14.5	11.7	CH33-60D		9139179

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-059-230	TXV	56000	14.5	11.7	CH33-60D		10490346
14ACX-059-230	TXV	57000	15	12.2	CH33-62D	EL180UH135E60D	10490471
14ACX-059-230	TXV	57000	15	12.2	CH33-62D	EL180UH135E60D	9139304
14ACX-059-230	TXV	57000	14.5	12	CH33-62D	EL195UH135XE60D	10490532
14ACX-059-230	TXV	57000	14.5	12	CH33-62D	EL195UH135XE60D	9139365
14ACX-059-230	TXV	57000	14.5	12	CH33-62D	EL296UH135XE60D	9139323
14ACX-059-230	TXV	57000	14.5	12	CH33-62D	EL296UH135XE60D	10490490
14ACX-059-230	TXV	57000	15	12.2	CH33-62D	EL296UH135XV60D	10490502
14ACX-059-230	TXV	57000	15	12.2	CH33-62D	EL296UH135XV60D	9139335
14ACX-059-230	TXV	57000	14.7	12.2	CH33-62D	SL280UH135V60D	9139394
14ACX-059-230	TXV	57000	14.7	12.2	CH33-62D	SL280UH135V60D	10490561
14ACX-059-230	TXV	56500	15	12.2	CH33-62D	SLP98UH135XV60D	10490529
14ACX-059-230	TXV	56500	15	12.2	CH33-62D	SLP98UH135XV60D	9139362
14ACX-059-230	TXV	56500	14.5	12	CH33-62D		10490347
14ACX-059-230	TXV	56500	14.5	12	CH33-62D		9139180
14ACX-059-230	TXV	58000	14.5	12	CH35-51C	EL180UH090E60C	10490458
14ACX-059-230	TXV	58000	14.5	12	CH35-51C	EL180UH090E60C	9139291
14ACX-059-230	TXV	58000	14.5	12	CH35-51C	EL180UH110E60C	9139292
14ACX-059-230	TXV	58000	14.5	12	CH35-51C	EL180UH110E60C	10490459
14ACX-059-230	TXV	57500	14.25	11.7	CH35-51C	EL195UH110XE60C	10490456
14ACX-059-230	TXV	57500	14.25	11.7	CH35-51C	EL195UH110XE60C	9139289
14ACX-059-230	TXV	57500	14.25	11.7	CH35-51C	EL296UH110XE60C	10490457
14ACX-059-230	TXV	57500	14.25	11.7	CH35-51C	EL296UH110XE60C	9139290
14ACX-059-230	TXV	57500	14.5	12	CH35-51C	SL280UH090V60C	9139281
14ACX-059-230	TXV	57500	14.5	12	CH35-51C	SL280UH090V60C	10490448
14ACX-059-230	TXV	56500	14.5	12	CH35-51C	SL280UH110V60C	10490449
14ACX-059-230	TXV	56500	14.5	12	CH35-51C	SL280UH110V60C	9139282
14ACX-059-230	TXV	56500	14.5	12	CH35-51C	SL280UH110XV60C	9139283
14ACX-059-230	TXV	56500	14.5	12	CH35-51C	SL280UH110XV60C	10490450
14ACX-059-230	TXV	57000	14.5	12	CH35-51C	SLP98UH090XV60C	10490455
14ACX-059-230	TXV	57000	14.5	12	CH35-51C	SLP98UH090XV60C	9139288
14ACX-059-230	TXV	57000	14.5	12	CH35-51C	SLP98UH110XV60C	10490454
14ACX-059-230	TXV	57000	14.5	12	CH35-51C	SLP98UH110XV60C	9139287
14ACX-059-230	TXV	57000	14.5	12	CH35-51C		10490348
14ACX-059-230	TXV	57000	14.5	12	CH35-51C		9139181
14ACX-059-230	TXV	57000	15	12	CH35-60D	EL180UH135E60D	9139275
14ACX-059-230	TXV	57000	15	12	CH35-60D	EL180UH135E60D	10490442
14ACX-059-230	TXV	57000	14.5	12	CH35-60D	EL195UH135XE60D	9139284
14ACX-059-230	TXV	57000	14.5	12	CH35-60D	EL195UH135XE60D	10490451
14ACX-059-230	TXV	57000	14.5	12	CH35-60D	EL296UH135XE60D	9139286
14ACX-059-230	TXV	57000	14.5	12	CH35-60D	EL296UH135XE60D	10490453
14ACX-059-230	TXV	57000	15	12	CH35-60D	EL296UH135XV60D	10490452
14ACX-059-230	TXV	57000	15	12	CH35-60D	EL296UH135XV60D	9139285
14ACX-059-230	TXV	57000	15	12	CH35-60D	SL280UH135V60D	9139276
14ACX-059-230	TXV	57000	15	12	CH35-60D	SL280UH135V60D	10490443
14ACX-059-230	TXV	57000	15	12	CH35-60D	SLP98UH135XV60D	9139277
14ACX-059-230	TXV	57000	15	12	CH35-60D	SLP98UH135XV60D	10490444
14ACX-059-230	TXV	56500	14.5	12	CH35-60D		9139182
14ACX-059-230	TXV	56500	14.5	12	CH35-60D		10490349

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-059-230	TXV	56000	15	12.2	CR33-50/60	EL180DF110E60C	10490484
14ACX-059-230	TXV	56000	15	12.2	CR33-50/60	EL180DF110E60C	9139317
14ACX-059-230	TXV	55500	14.5	12	CR33-50/60	EL195DF110XE60C	10490571
14ACX-059-230	TXV	55500	14.5	12	CR33-50/60	EL195DF110XE60C	9139404
14ACX-059-230	TXV	55500	14.5	12	CR33-50/60	EL296DF110XE60C	9139338
14ACX-059-230	TXV	55500	14.5	12	CR33-50/60	EL296DF110XE60C	10490505
14ACX-059-230	TXV	55500	14.7	12	CR33-50/60	SL280DF090V60C	9139383
14ACX-059-230	TXV	55500	14.7	12	CR33-50/60	SL280DF090V60C	10490550
14ACX-059-230	TXV	56000	14.7	12.2	CR33-50/60	SL280DF110V60C	9139384
14ACX-059-230	TXV	56000	14.7	12.2	CR33-50/60	SL280DF110V60C	10490551
14ACX-059-230	TXV	56500	14.2	11.7	CR33-50/60	SLP98DF090XV60C	9139363
14ACX-059-230	TXV	56500	14.2	11.7	CR33-50/60	SLP98DF090XV60C	10490530
14ACX-059-230	TXV	55500	14.2	11.7	CR33-50/60	SLP98DF110XV60C	9139364
14ACX-059-230	TXV	55500	14.2	11.7	CR33-50/60	SLP98DF110XV60C	10490531
14ACX-059-230	TXV	55500	14.2	11.7	CR33-50/60		9139184
14ACX-059-230	TXV	55500	14.2	11.7	CR33-50/60		10490351
14ACX-059-230	TXV	55500	14.2	11.7	CR33-60		9139165
14ACX-059-230	TXV	55500	14.2	11.7	CR33-60		10490332
14ACX-059-230	TXV	56000	14	12.2	CX35-48C	EL180UH090E60C	10490416
14ACX-059-230	TXV	56000	14	12.2	CX35-48C	EL180UH090E60C	9139249
14ACX-059-230	TXV	56000	14	12.2	CX35-48C	EL180UH110E60C	10490417
14ACX-059-230	TXV	56000	14	12.2	CX35-48C	EL180UH110E60C	9139250
14ACX-059-230	TXV	56000	14.5	12.2	CX35-48C	EL195UH110XE60C	10490406
14ACX-059-230	TXV	56000	14.5	12.2	CX35-48C	EL195UH110XE60C	9139239
14ACX-059-230	TXV	56000	14.5	12.2	CX35-48C	EL296UH110XE60C	9139241
14ACX-059-230	TXV	56000	14.5	12.2	CX35-48C	EL296UH110XE60C	10490408
14ACX-059-230	TXV	56000	14.5	12	CX35-48C	EL296UH110XV60C	10490407
14ACX-059-230	TXV	56000	14.5	12	CX35-48C	EL296UH110XV60C	9139240
14ACX-059-230	TXV	56000	14.5	12.2	CX35-48C	SL280UH090V60C	10490409
14ACX-059-230	TXV	56000	14.5	12.2	CX35-48C	SL280UH090V60C	9139242
14ACX-059-230	TXV	56000	14.5	12	CX35-48C	SL280UH110V60C	10490410
14ACX-059-230	TXV	56000	14.5	12	CX35-48C	SL280UH110V60C	9139243
14ACX-059-230	TXV	56000	14.5	12.2	CX35-48C	SL280UH110XV60C	9139244
14ACX-059-230	TXV	56000	14.5	12.2	CX35-48C	SL280UH110XV60C	10490411
14ACX-059-230	TXV	56000	14	11.7	CX35-48C	SLP98UH090XV60C	10490400
14ACX-059-230	TXV	56000	14	11.7	CX35-48C	SLP98UH090XV60C	9139233
14ACX-059-230	TXV	56000	14.2	12.2	CX35-48C	SLP98UH110XV60C	9139234
14ACX-059-230	TXV	56000	14.2	12.2	CX35-48C	SLP98UH110XV60C	10490401
14ACX-059-230	TXV	56000	14.2	11.7	CX35-48C		9139175
14ACX-059-230	TXV	56000	14.2	11.7	CX35-48C		10490342
14ACX-059-230	TXV	56500	15	12.2	CX35-49C	EL180UH090E60C	9139235
14ACX-059-230	TXV	56500	15	12.2	CX35-49C	EL180UH090E60C	10490402
14ACX-059-230	TXV	56500	15	12.2	CX35-49C	EL180UH110E60C	10490403
14ACX-059-230	TXV	56500	15	12.2	CX35-49C	EL180UH110E60C	9139236
14ACX-059-230	TXV	56500	14.5	12.2	CX35-49C	EL195UH110XE60C	9139237
14ACX-059-230	TXV	56500	14.5	12.2	CX35-49C	EL195UH110XE60C	10490404
14ACX-059-230	TXV	56500	14.5	12.2	CX35-49C	EL296UH110XE60C	10490394
14ACX-059-230	TXV	56500	14.5	12.2	CX35-49C	EL296UH110XE60C	9139227
14ACX-059-230	TXV	56500	14.5	12	CX35-49C	EL296UH110XV60C	10490405

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-059-230	TXV	56500	14.5	12	CX35-49C	EL296UH110XV60C	9139238
14ACX-059-230	TXV	56500	15	12.2	CX35-49C	SL280UH090V60C	10490395
14ACX-059-230	TXV	56500	15	12.2	CX35-49C	SL280UH090V60C	9139228
14ACX-059-230	TXV	56500	14.5	12.2	CX35-49C	SL280UH110V60C	10490396
14ACX-059-230	TXV	56500	14.5	12.2	CX35-49C	SL280UH110V60C	9139229
14ACX-059-230	TXV	56500	14.5	12.2	CX35-49C	SL280UH110XV60C	9139230
14ACX-059-230	TXV	56500	14.5	12.2	CX35-49C	SL280UH110XV60C	10490397
14ACX-059-230	TXV	57000	14.2	12.2	CX35-49C	SLP98UH090XV60C	9139231
14ACX-059-230	TXV	57000	14.2	12.2	CX35-49C	SLP98UH090XV60C	10490398
14ACX-059-230	TXV	56500	14.5	12	CX35-49C	SLP98UH110XV60C	9139232
14ACX-059-230	TXV	56500	14.5	12	CX35-49C	SLP98UH110XV60C	10490399
14ACX-059-230	TXV	57000	14.5	12	CX35-49C		10490343
14ACX-059-230	TXV	57000	14.5	12	CX35-49C		9139176
14ACX-059-230	TXV	56500	14	11.7	CX35-50/60C	EL180UH090E60C	9139221
14ACX-059-230	TXV	56500	14	11.7	CX35-50/60C	EL180UH090E60C	10490388
14ACX-059-230	TXV	56000	14	11.7	CX35-50/60C	EL180UH110E60C	10490389
14ACX-059-230	TXV	56000	14	11.7	CX35-50/60C	EL180UH110E60C	9139222
14ACX-059-230	TXV	55500	14.2	11.7	CX35-50/60C	SL280UH090V60C	9139223
14ACX-059-230	TXV	55500	14.2	11.7	CX35-50/60C	SL280UH090V60C	10490390
14ACX-059-230	TXV	55500	14.2	12	CX35-50/60C	SL280UH110V60C	10490391
14ACX-059-230	TXV	55500	14.2	12	CX35-50/60C	SL280UH110V60C	9139224
14ACX-059-230	TXV	55500	14.2	12	CX35-50/60C	SL280UH110XV60C	10490392
14ACX-059-230	TXV	55500	14.2	12	CX35-50/60C	SL280UH110XV60C	9139225
14ACX-059-230	TXV	55500	14.2	11.7	CX35-50/60C	SLP98UH110XV60C	10490393
14ACX-059-230	TXV	55500	14.2	11.7	CX35-50/60C	SLP98UH110XV60C	9139226
14ACX-059-230	TXV	55500	14.2	11.7	CX35-50/60C		10490344
14ACX-059-230	TXV	55500	14.2	11.7	CX35-50/60C		9139177
14ACX-059-230	TXV	58000	15.5	12.5	CX35-60C	EL180UH090E60C	9139215
14ACX-059-230	TXV	58000	15.5	12.5	CX35-60C	EL180UH090E60C	10490382
14ACX-059-230	TXV	57500	15.1	12.5	CX35-60C	EL180UH110E60C	10490383
14ACX-059-230	TXV	57500	15.1	12.5	CX35-60C	EL180UH110E60C	9139216
14ACX-059-230	TXV	57000	14.5	12.2	CX35-60C	EL195UH110XE60C	9139217
14ACX-059-230	TXV	57000	14.5	12.2	CX35-60C	EL195UH110XE60C	10490384
14ACX-059-230	TXV	57000	14.5	12.2	CX35-60C	EL296UH110XE60C	9139219
14ACX-059-230	TXV	57000	14.5	12.2	CX35-60C	EL296UH110XE60C	10490386
14ACX-059-230	TXV	58000	14.5	12.2	CX35-60C	EL296UH110XV60C	9139218
14ACX-059-230	TXV	58000	14.5	12.2	CX35-60C	EL296UH110XV60C	10490385
14ACX-059-230	TXV	58000	15.1	12.5	CX35-60C	SL280UH090V60C	10490387
14ACX-059-230	TXV	58000	15.1	12.5	CX35-60C	SL280UH090V60C	9139220
14ACX-059-230	TXV	58000	14.5	12.2	CX35-60C	SL280UH110V60C	9139209
14ACX-059-230	TXV	58000	14.5	12.2	CX35-60C	SL280UH110V60C	10490376
14ACX-059-230	TXV	58000	14.5	12.2	CX35-60C	SL280UH110XV60C	9139210
14ACX-059-230	TXV	58000	14.5	12.2	CX35-60C	SL280UH110XV60C	10490377
14ACX-059-230	TXV	58000	14.5	12.2	CX35-60C	SLP98UH090XV60C	10490378
14ACX-059-230	TXV	58000	14.5	12.2	CX35-60C	SLP98UH090XV60C	9139211
14ACX-059-230	TXV	57500	15	12.2	CX35-60C	SLP98UH110XV60C	9139212
14ACX-059-230	TXV	57500	15	12.2	CX35-60C	SLP98UH110XV60C	10490379
14ACX-059-230	TXV	57500	14.5	12.2	CX35-60C		10490336
14ACX-059-230	TXV	57500	14.5	12.2	CX35-60C		9139169

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-059-230	TXV	56500	15.5	12.5	CX35-60D	EL180UH135E60D	9139199
14ACX-059-230	TXV	56500	15.5	12.5	CX35-60D	EL180UH135E60D	10490366
14ACX-059-230	TXV	57500	14.5	12.2	CX35-60D	EL195UH135XE60D	9139200
14ACX-059-230	TXV	57500	14.5	12.2	CX35-60D	EL195UH135XE60D	10490367
14ACX-059-230	TXV	57500	14.5	12.2	CX35-60D	EL296UH135XE60D	10490369
14ACX-059-230	TXV	57500	14.5	12.2	CX35-60D	EL296UH135XE60D	9139202
14ACX-059-230	TXV	57500	15	12.2	CX35-60D	EL296UH135XV60D	10490368
14ACX-059-230	TXV	57500	15	12.2	CX35-60D	EL296UH135XV60D	9139201
14ACX-059-230	TXV	57000	15.5	12.5	CX35-60D	SL280UH135V60D	9139196
14ACX-059-230	TXV	57000	15.5	12.5	CX35-60D	SL280UH135V60D	10490363
14ACX-059-230	TXV	57000	14.5	11.7	CX35-60D		9139171
14ACX-059-230	TXV	57000	14.5	11.7	CX35-60D		10490338
14ACX-059-230	TXV	57500	14.7	12.2	CX38-62C		10547232
14ACX-059-230	TXV	57500	14.7	12.2	CX38-62C		10547145
14ACX-060-230	TXV	58000	14.5	12	C35-49C	EL180UH090E60C	8267315
14ACX-060-230	TXV	57500	14.2	12	C35-49C	EL180UH110E60C	8267317
14ACX-060-230	TXV	57500	14.2	12	C35-49C	EL180UH110XE60C	8267314
14ACX-060-230	TXV	57500	14.2	12	C35-49C	EL195UH110XE60C	8267308
14ACX-060-230	TXV	57000	14.2	11.7	C35-49C	EL296UH090XV60C	8267318
14ACX-060-230	TXV	57500	14.2	12	C35-49C	EL296UH110XE60C	8267309
14ACX-060-230	TXV	57000	14.2	12	C35-49C	EL296UH110XV60C	8267316
14ACX-060-230	TXV	58000	14.2	12	C35-49C	SL280UH090V60C	8267312
14ACX-060-230	TXV	58000	14.2	12	C35-49C	SL280UH090XV60C	8267319
14ACX-060-230	TXV	57500	14.2	12	C35-49C	SL280UH110V60C	8267313
14ACX-060-230	TXV	57500	14.2	12	C35-49C	SL280UH110XV60C	8267320
14ACX-060-230	TXV	57000	14.2	11.7	C35-49C	SLP98UH090XV60C	8267310
14ACX-060-230	TXV	57000	14.2	12	C35-49C	SLP98UH110XV60C	8267311
14ACX-060-230	TXV	58000	14	11.7	C35-49C		8267307
14ACX-060-230	TXV	56500	14.2	11.7	C35-50/60C	EL180UH090E60C	8267323
14ACX-060-230	TXV	56500	14	11.7	C35-50/60C	EL180UH110E60C	8267322
14ACX-060-230	TXV	56500	14	11.7	C35-50/60C	EL180UH110XE60C	8267321
14ACX-060-230	TXV	56500	14	11.7	C35-50/60C	EL195UH110XE60C	8267324
14ACX-060-230	TXV	56500	14	11.7	C35-50/60C	EL296UH110XE60C	8267325
14ACX-060-230	TXV	56500	14	11.7	C35-50/60C	SL280UH090V60C	8267326
14ACX-060-230	TXV	56500	14	11.7	C35-50/60C	SL280UH090XV60C	8267327
14ACX-060-230	TXV	59000	14.7	12.2	C35-60C	EL180UH090E60C	8267332
14ACX-060-230	TXV	58500	14.7	12.2	C35-60C	EL180UH110E60C	8267331
14ACX-060-230	TXV	58500	14.7	12.2	C35-60C	EL180UH110XE60C	8267330
14ACX-060-230	TXV	58500	14.5	12	C35-60C	EL195UH110XE60C	8267341
14ACX-060-230	TXV	58000	14.5	12	C35-60C	EL296UH090XV60C	8267335
14ACX-060-230	TXV	58500	14.5	12	C35-60C	EL296UH110XE60C	8267342
14ACX-060-230	TXV	58000	14.5	12.2	C35-60C	EL296UH110XV60C	8267336
14ACX-060-230	TXV	59000	14.7	12.2	C35-60C	SL280UH090V60C	8267337
14ACX-060-230	TXV	59000	14.7	12.2	C35-60C	SL280UH090XV60C	8267339
14ACX-060-230	TXV	58500	14.5	12.2	C35-60C	SL280UH110V60C	8267338
14ACX-060-230	TXV	58500	14.5	12.2	C35-60C	SL280UH110XV60C	8267340
14ACX-060-230	TXV	58500	14.5	12	C35-60C	SLO185B124/141V60	8267329
14ACX-060-230	TXV	58000	14.5	12	C35-60C	SLP98UH090XV60C	8267333
14ACX-060-230	TXV	58000	14.5	12.2	C35-60C	SLP98UH110XV60C	8267334

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-060-230	TXV	59000	14.2	12	C35-60C		8267328
14ACX-060-230	TXV	58500	14.5	12.2	C35-60D	EL180UH135E60D	8267344
14ACX-060-230	TXV	58500	14.2	11.7	C35-60D	EL195UH135XE60D	8267347
14ACX-060-230	TXV	58500	14.2	11.7	C35-60D	EL296UH135XE60D	8267348
14ACX-060-230	TXV	57500	14.5	12	C35-60D	EL296UH135XV60D	8267349
14ACX-060-230	TXV	58000	15	12.2	C35-60D	SL280UH135V60D	8267345
14ACX-060-230	TXV	57500	14.5	12	C35-60D	SLP98UH135XV60D	8267346
14ACX-060-230	TXV	58500	14	11.7	C35-60D		8267343
14ACX-060-230	TXV	58000	14.5	12	CBA27UHE-060		10259386
14ACX-060-230	TXV	58000	14	11.7	CBX25UH-060		5732793
14ACX-060-230	TXV	58500	14.5	12.2	CBX25UHV-060		6970135
14ACX-060-230	TXV	58000	14.5	12	CBX27UH-060		5697724
14ACX-060-230	TXV	57500	14.2	11.7	CBX32M-060		5697726
14ACX-060-230	TXV	57000	14.2	11.7	CBX32MV-048		5697727
14ACX-060-230	TXV	57500	14.2	12	CBX32MV-060		5697728
14ACX-060-230	TXV	57500	14.5	12	CBX32MV-068		5697729
14ACX-060-230	TXV	57500	14.2	12	CBX40UHV-060		9105790
14ACX-060-230	TXV	58500	14.7	12.2	CH23-65	EL180UH090E60C	5736963
14ACX-060-230	TXV	58500	14.5	12.2	CH23-65	EL180UH110E60C	5738743
14ACX-060-230	TXV	59000	14.7	12.2	CH23-68	EL180UH135E60D	5745980
14ACX-060-230	TXV	59000	14.2	12	CH23-68	EL195UH135XE60D	5697733
14ACX-060-230	TXV	57500	14.5	12	CH23-68	EL296UH090XV60C	5697735
14ACX-060-230	TXV	58500	14.5	12	CH23-68	EL296UH110XV60C	5697736
14ACX-060-230	TXV	59000	14.2	12	CH23-68	EL296UH135XE60D	5697734
14ACX-060-230	TXV	59000	14.5	12.2	CH23-68	EL296UH135XV60D	5697737
14ACX-060-230	TXV	58000	14.5	12.2	CH23-68	SL280UH110V60C	5697739
14ACX-060-230	TXV	58500	15	12.5	CH23-68	SL280UH135V60D	5697740
14ACX-060-230	TXV	58500	14.2	11.7	CH23-68		5697732
14ACX-060-230	TXV	58000	14.5	12	CH33-49	EL180UH090E60C	5736965
14ACX-060-230	TXV	58000	14.2	12	CH33-49	EL180UH110E60C	5738744
14ACX-060-230	TXV	58000	14.2	12	CH33-49	EL195UH110XE60C	5697742
14ACX-060-230	TXV	57500	14.2	11.7	CH33-49	EL296UH090XV60C	5697744
14ACX-060-230	TXV	58000	14.2	12	CH33-49	EL296UH110XE60C	5697743
14ACX-060-230	TXV	58000	14.2	11.7	CH33-49	EL296UH110XV60C	5697745
14ACX-060-230	TXV	58000	14.5	12	CH33-49	SL280UH090V60C	5697748
14ACX-060-230	TXV	58000	14.2	12	CH33-49	SL280UH110V60C	5697749
14ACX-060-230	TXV	57500	14.2	11.7	CH33-49	SLP98UH090XV60C	5697750
14ACX-060-230	TXV	57500	14.2	12	CH33-49	SLP98UH110XV60C	5697751
14ACX-060-230	TXV	58000	14	11.7	CH33-49		5697741
14ACX-060-230	TXV	57500	14.2	11.7	CH33-50/60C	SL280UH090V60C	5697835
14ACX-060-230	TXV	57500	14	11.7	CH33-50/60C	SL280UH110V60C	5697836
14ACX-060-230	TXV	58000	14	11.7	CH33-50/60C		5697752
14ACX-060-230	TXV	57500	14.2	12	CH33-60D	EL180UH135E60D	5745981
14ACX-060-230	TXV	57500	14	11.7	CH33-60D	EL195UH135XE60D	5697758
14ACX-060-230	TXV	57500	14	11.7	CH33-60D	EL296UH135XE60D	5697759
14ACX-060-230	TXV	57500	14.2	11.7	CH33-60D	EL296UH135XV60D	5697760
14ACX-060-230	TXV	57000	14.7	12.2	CH33-60D	SL280UH135V60D	5697762
14ACX-060-230	TXV	57500	14.2	12	CH33-60D	SLP98UH135XV60D	5697763
14ACX-060-230	TXV	58000	14.5	12	CH33-62D	EL180UH135E60D	5745982

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-060-230	TXV	58000	14.2	11.7	CH33-62D	EL195UH135XE60D	5697765
14ACX-060-230	TXV	58000	14.2	11.7	CH33-62D	EL296UH135XE60D	5697766
14ACX-060-230	TXV	58000	14.2	12	CH33-62D	EL296UH135XV60D	5699647
14ACX-060-230	TXV	57500	14.7	12.2	CH33-62D	SL280UH135V60D	5697837
14ACX-060-230	TXV	57500	14.5	12	CH33-62D	SLP98UH135XV60D	5697768
14ACX-060-230	TXV	57500	14	11.7	CH33-62D		5697764
14ACX-060-230	TXV	59000	14	11.7	CH35-51C	EL180UH110E60C	7163532
14ACX-060-230	TXV	57500	14.25	11.7	CH35-51C	EL296UH090XV60C	7163528
14ACX-060-230	TXV	58000	14.25	11.7	CH35-51C	EL296UH110XV60C	7163529
14ACX-060-230	TXV	58000	14.25	12	CH35-51C	SL280UH090V60C	7163550
14ACX-060-230	TXV	58000	14.25	11.7	CH35-51C	SL280UH110V60C	7163551
14ACX-060-230	TXV	57500	14.25	11.7	CH35-51C	SLP98UH090XV60C	7163533
14ACX-060-230	TXV	57500	14.5	12	CH35-51C	SLP98UH110XV60C	7163534
14ACX-060-230	TXV	58500	14	11.7	CH35-51C		7163526
14ACX-060-230	TXV	58500	14.5	12	CH35-60D	EL180UH135E60D	7163539
14ACX-060-230	TXV	58000	14.25	11.7	CH35-60D	EL195UH135XE60D	7163536
14ACX-060-230	TXV	58000	14.25	11.7	CH35-60D	EL296UH135XE60D	7163538
14ACX-060-230	TXV	58500	14.25	12	CH35-60D	EL296UH135XV60D	7163537
14ACX-060-230	TXV	57500	14.5	12	CH35-60D	SL280UH135V60D	7163552
14ACX-060-230	TXV	58000	14.5	12	CH35-60D	SLP98UH135XV60D	7163540
14ACX-060-230	TXV	58000	14	11.7	CH35-60D		7163535
14ACX-060-230	TXV	57000	14.2	12	CR33-50/60	EL180DF110E60C	5733579
14ACX-060-230	TXV	57000	14.2	12	CR33-50/60	EL195DF110XE60C	5697770
14ACX-060-230	TXV	57000	14.2	12	CR33-50/60	EL296DF110XE60C	5697771
14ACX-060-230	TXV	56500	14	11.7	CR33-50/60	SL280DF090V60C	5697775
14ACX-060-230	TXV	56500	14.2	11.7	CR33-50/60	SL280DF110V60C	5697776
14ACX-060-230	TXV	58000	14.5	12	CX35-49C	EL180UH090E60C	8267353
14ACX-060-230	TXV	57500	14.2	12	CX35-49C	EL180UH110E60C	8267352
14ACX-060-230	TXV	57500	14.2	12	CX35-49C	EL180UH110XE60C	8267351
14ACX-060-230	TXV	57500	14.2	12	CX35-49C	EL195UH110XE60C	8267359
14ACX-060-230	TXV	57000	14.2	11.7	CX35-49C	EL296UH090XV60C	8267361
14ACX-060-230	TXV	57500	14.2	12	CX35-49C	EL296UH110XE60C	8267360
14ACX-060-230	TXV	57000	14.2	12	CX35-49C	EL296UH110XV60C	8267362
14ACX-060-230	TXV	58000	14.2	12	CX35-49C	SL280UH090V60C	8267363
14ACX-060-230	TXV	58000	14.2	12	CX35-49C	SL280UH090XV60C	8267355
14ACX-060-230	TXV	57500	14.2	12	CX35-49C	SL280UH110V60C	8267354
14ACX-060-230	TXV	57500	14.2	12	CX35-49C	SL280UH110XV60C	8267356
14ACX-060-230	TXV	57000	14.2	11.7	CX35-49C	SLP98UH090XV60C	8267357
14ACX-060-230	TXV	57000	14.2	12	CX35-49C	SLP98UH110XV60C	8267358
14ACX-060-230	TXV	58000	14	11.7	CX35-49C		8267350
14ACX-060-230	TXV	56500	14.2	11.7	CX35-50/60C	EL180UH090E60C	8267366
14ACX-060-230	TXV	56500	14	11.7	CX35-50/60C	EL180UH110E60C	8267364
14ACX-060-230	TXV	56500	14	11.7	CX35-50/60C	EL180UH110XE60C	8267365
14ACX-060-230	TXV	56500	14	11.7	CX35-50/60C	EL195UH110XE60C	8267370
14ACX-060-230	TXV	56500	14	11.7	CX35-50/60C	EL296UH110XE60C	8267367
14ACX-060-230	TXV	56500	14	11.7	CX35-50/60C	SL280UH090V60C	8267368
14ACX-060-230	TXV	56500	14	11.7	CX35-50/60C	SL280UH090XV60C	8267369
14ACX-060-230	TXV	59000	14.7	12.2	CX35-60C	EL180UH090E60C	8267375
14ACX-060-230	TXV	58500	14.7	12.2	CX35-60C	EL180UH110E60C	8267374

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - ALL REGIONS - 041-047-048-059-060

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-060-230	TXV	58500	14.7	12.2	CX35-60C	EL180UH110XE60C	8267373
14ACX-060-230	TXV	58500	14.5	12	CX35-60C	EL195UH110XE60C	8267382
14ACX-060-230	TXV	58000	14.5	12	CX35-60C	EL296UH090XV60C	8267384
14ACX-060-230	TXV	58500	14.5	12	CX35-60C	EL296UH110XE60C	8267383
14ACX-060-230	TXV	58000	14.5	12.2	CX35-60C	EL296UH110XV60C	8267385
14ACX-060-230	TXV	59000	14.7	12.2	CX35-60C	SL280UH090V60C	8267376
14ACX-060-230	TXV	59000	14.7	12.2	CX35-60C	SL280UH090XV60C	8267378
14ACX-060-230	TXV	58500	14.5	12.2	CX35-60C	SL280UH110V60C	8267377
14ACX-060-230	TXV	58500	14.5	12.2	CX35-60C	SL280UH110XV60C	8267379
14ACX-060-230	TXV	58500	14.5	12	CX35-60C	SLO185B124/141V60	8267372
14ACX-060-230	TXV	58000	14.5	12	CX35-60C	SLP98UH090XV60C	8267380
14ACX-060-230	TXV	58000	14.5	12.2	CX35-60C	SLP98UH110XV60C	8267381
14ACX-060-230	TXV	59000	14.2	12	CX35-60C		8267371
14ACX-060-230	TXV	58500	14.5	12.2	CX35-60D	EL180UH135E60D	8267387
14ACX-060-230	TXV	58500	14.2	11.7	CX35-60D	EL195UH135XE60D	8267388
14ACX-060-230	TXV	58500	14.2	11.7	CX35-60D	EL296UH135XE60D	8267389
14ACX-060-230	TXV	57500	14.5	12	CX35-60D	EL296UH135XV60D	8267390
14ACX-060-230	TXV	58000	15	12.2	CX35-60D	SL280UH135V60D	8267391
14ACX-060-230	TXV	57500	14.5	12	CX35-60D	SLP98UH135XV60D	8267392
14ACX-060-230	TXV	58500	14	11.7	CX35-60D		8267386
14ACX-060-230	TXV	59000	14.2	12	CX38-62C		10547281

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS018-230	RFC	18000	14	12.2	C35-18/24A		8471022
14ACXS018-230	RFC	18000	14	12.2	C35-18/24B		8471023
14ACXS018-230	RFC	18000	14	12	C35-24A		8471024
14ACXS018-230	RFC	18000	14	12	C35-24B		8471026
14ACXS018-230	RFC	18900	14	12	CH33-25A		7625288
14ACXS018-230	RFC	19200	14.25	12.2	CH33-31A		7625305
14ACXS018-230	RFC	19100	14.25	12.2	CH33-31B		7625309
14ACXS018-230	RFC	18000	14	12	CH35-24A		10514525
14ACXS018-230	RFC	19000	14	12.2	CR33-30/36A		7625341
14ACXS018-230	RFC	19000	14	12.2	CR33-30/36B		7625344
14ACXS018-230	TXV	19700	16	13	C35-24A	EL180UH045E36A	8260923
14ACXS018-230	TXV	19700	16	13	C35-24A	EL180UH045XE36A	8260922
14ACXS018-230	TXV	18800	14	12	C35-24A		8260919
14ACXS018-230	TXV	19500	15.5	12.5	C35-24B	EL180UH070E36B	8261761
14ACXS018-230	TXV	19500	15.5	12.5	C35-24B	EL180UH070XE36B	8261759
14ACXS018-230	TXV	18000	14.5	12.2	C35-24B	EL195UH030XE24B	8606325
14ACXS018-230	TXV	18000	14.5	12.2	C35-24B	EL195UH045XE24B	8606326
14ACXS018-230	TXV	20000	16	13	C35-24B	EL195UH045XE36B	8261762
14ACXS018-230	TXV	20000	16	13	C35-24B	EL296UH045XE36B	8261764
14ACXS018-230	TXV	20200	16	13	C35-24B	EL296UH045XV36B	8261766
14ACXS018-230	TXV	20200	16	13	C35-24B	EL296UH070XV36B	8261767
14ACXS018-230	TXV	20200	16	13	C35-24B	SLP98UH070XV36B	8261758
14ACXS018-230	TXV	18800	14	12	C35-24B		8261755
14ACXS018-230	TXV	19900	16	13	C35-30A	EL180UH045E36A	8260929
14ACXS018-230	TXV	19900	16	13	C35-30A	EL180UH045XE36A	8260930
14ACXS018-230	TXV	19000	14	12.2	C35-30A		8260926
14ACXS018-230	TXV	19700	15.5	12.5	C35-30B	EL180UH070E36B	8260941
14ACXS018-230	TXV	19700	15.5	12.5	C35-30B	EL180UH070XE36B	8260942
14ACXS018-230	TXV	18000	14.5	12.2	C35-30B	EL195UH030XE24B	8606327
14ACXS018-230	TXV	18000	14.5	12.2	C35-30B	EL195UH045XE24B	8606328
14ACXS018-230	TXV	19800	16	13	C35-30B	EL195UH045XE36B	8260944
14ACXS018-230	TXV	19800	16	13	C35-30B	EL296UH045XE36B	8260936
14ACXS018-230	TXV	20400	16	13.5	C35-30B	EL296UH045XV36B	8260937
14ACXS018-230	TXV	20400	16	13.5	C35-30B	EL296UH070XV36B	8260939
14ACXS018-230	TXV	20400	16	13.5	C35-30B	SLP98UH070XV36B	8260934
14ACXS018-230	TXV	19000	14	12.2	C35-30B		8260932
14ACXS018-230	TXV	19400	16	13	CBA27UHE-018		10259479
14ACXS018-230	TXV	19400	16	13	CBA27UHE-024		10259387
14ACXS018-230	TXV	18700	14.25	12	CBX25UH-018		7625264
14ACXS018-230	TXV	18800	14.25	12	CBX25UH-024		7625266
14ACXS018-230	TXV	19000	15.5	12.5	CBX25UHV-018		7625267
14ACXS018-230	TXV	19200	16	13	CBX25UHV-024		7625269
14ACXS018-230	TXV	19700	16	13	CBX27UH-018		7625271
14ACXS018-230	TXV	19700	16	13	CBX27UH-024		7625273
14ACXS018-230	TXV	19100	14.5	12.2	CBX32M-018/024		7625274
14ACXS018-230	TXV	19300	14.5	12.5	CBX32M-030		7625276
14ACXS018-230	TXV	19600	16	13	CBX32MV-018/024		7625278
14ACXS018-230	TXV	19700	16	13	CBX32MV-024/030		7625280
14ACXS018-230	TXV	19900	16	13	CBX40UHV-024		7625281

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS018-230	TXV	19800	16	13	CBX40UHV-030		7625283
14ACXS018-230	TXV	17900	14.25	11.5	CH33-18A	EL180UH045E36A	7625287
14ACXS018-230	TXV	17900	14.25	11.5	CH33-18A	EL180UH045XE36A	7625285
14ACXS018-230	TXV	19400	16	13	CH33-19	EL180UH045E36A	7625385
14ACXS018-230	TXV	19400	16	13	CH33-19	EL180UH045XE36A	7625384
14ACXS018-230	TXV	18800	14	11.5	CH33-19		7625383
14ACXS018-230	TXV	19300	16	13	CH33-24/30	EL180UH045E36A	7625388
14ACXS018-230	TXV	19300	16	13	CH33-24/30	EL180UH045XE36A	7625387
14ACXS018-230	TXV	18700	14	11.5	CH33-24/30		7625386
14ACXS018-230	TXV	19800	16	13	CH33-25A	EL180UH045E36A	7625294
14ACXS018-230	TXV	19800	16	13	CH33-25A	EL180UH045XE36A	7625292
14ACXS018-230	TXV	19200	14.5	12.2	CH33-25A		7625290
14ACXS018-230	TXV	19400	15.5	12.5	CH33-25B	EL180UH070E36B	7625299
14ACXS018-230	TXV	19400	15.5	12.5	CH33-25B	EL180UH070XE36B	7625298
14ACXS018-230	TXV	18000	14.25	12	CH33-25B	EL195UH030XE24B	8606329
14ACXS018-230	TXV	18000	14.25	12	CH33-25B	EL195UH045XE24B	8606330
14ACXS018-230	TXV	19900	16	13	CH33-25B	EL195UH045XE36B	7625301
14ACXS018-230	TXV	19900	16	13	CH33-25B	EL296UH045XE36B	7625303
14ACXS018-230	TXV	20200	16	13	CH33-25B	EL296UH045XV36B	7625304
14ACXS018-230	TXV	19100	14.25	12	CH33-25B		7625296
14ACXS018-230	TXV	20200	16	13	CH33-31A	EL180UH045E36A	7625308
14ACXS018-230	TXV	20200	16	13	CH33-31A	EL180UH045XE36A	7625307
14ACXS018-230	TXV	19500	14.5	12.2	CH33-31A		7625306
14ACXS018-230	TXV	19900	16	13	CH33-31B	EL180UH070E36B	7625312
14ACXS018-230	TXV	19900	16	13	CH33-31B	EL180UH070XE36B	7625311
14ACXS018-230	TXV	18000	14.5	12.2	CH33-31B	EL195UH030XE24B	8606331
14ACXS018-230	TXV	18000	14.5	12.2	CH33-31B	EL195UH045XE24B	8606332
14ACXS018-230	TXV	19900	16	13	CH33-31B	EL195UH045XE36B	7625313
14ACXS018-230	TXV	19900	16	13	CH33-31B	EL296UH045XE36B	7625314
14ACXS018-230	TXV	20600	16	13.5	CH33-31B	EL296UH045XV36B	7625315
14ACXS018-230	TXV	19500	14.5	12.2	CH33-31B		7625310
14ACXS018-230	TXV	19400	16	13	CH35-18A	EL180UH045E36A	7625318
14ACXS018-230	TXV	19400	16	13	CH35-18A	EL180UH045XE36A	7625317
14ACXS018-230	TXV	18800	14	11.5	CH35-18A		7625316
14ACXS018-230	TXV	19900	16	13	CH35-24A	EL180UH045E36A	7625320
14ACXS018-230	TXV	19900	16	13	CH35-24A	EL180UH045XE36A	7625321
14ACXS018-230	TXV	19300	14.5	12.2	CH35-24A		7625319
14ACXS018-230	TXV	19500	15.5	12.5	CH35-24B	EL180UH070E36B	7625323
14ACXS018-230	TXV	19500	15.5	12.5	CH35-24B	EL180UH070XE36B	7625324
14ACXS018-230	TXV	18000	14.25	12	CH35-24B	EL195UH030XE24B	8606333
14ACXS018-230	TXV	18000	14.25	12	CH35-24B	EL195UH045XE24B	8606334
14ACXS018-230	TXV	19600	15.5	12.5	CH35-24B	EL195UH045XE36B	7625325
14ACXS018-230	TXV	19600	15.5	12.5	CH35-24B	EL296UH045XE36B	7625326
14ACXS018-230	TXV	20200	16	13	CH35-24B	EL296UH045XV36B	7625327
14ACXS018-230	TXV	19100	14.25	12	CH35-24B		7625322
14ACXS018-230	TXV	20200	16	13	CH35-30A	EL180UH045E36A	7625330
14ACXS018-230	TXV	20200	16	13	CH35-30A	EL180UH045XE36A	7625329
14ACXS018-230	TXV	19500	14.5	12.2	CH35-30A		7625328
14ACXS018-230	TXV	19900	16	13	CH35-30B	EL180UH070E36B	7625332

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS018-230	TXV	19900	16	13	CH35-30B	EL180UH070XE36B	7625333
14ACXS018-230	TXV	18000	14.5	12.2	CH35-30B	EL195UH030XE24B	8606335
14ACXS018-230	TXV	18000	14.5	12.2	CH35-30B	EL195UH045XE24B	8606336
14ACXS018-230	TXV	19900	16	13	CH35-30B	EL195UH045XE36B	7625334
14ACXS018-230	TXV	19900	16	13	CH35-30B	EL296UH045XE36B	7625335
14ACXS018-230	TXV	20600	16	13.5	CH35-30B	EL296UH045XV36B	7625336
14ACXS018-230	TXV	19500	14.5	12.2	CH35-30B		7625331
14ACXS018-230	TXV	19500	16	13	CH35-36A	EL180UH045E36A	10490887
14ACXS018-230	TXV	19200	15.5	12.5	CR33-18	EL180DF045E36A	7625338
14ACXS018-230	TXV	18700	14	11.5	CR33-18		7625337
14ACXS018-230	TXV	18600	15.1	12.5	CR33-24A	EL180DF045E36A	7625339
14ACXS018-230	TXV	18600	14.5	12.5	CR33-24B	EL180DF070E36B	7625340
14ACXS018-230	TXV	19800	16	13	CR33-30/36A	EL180DF045E36A	7625343
14ACXS018-230	TXV	19400	14.5	12.2	CR33-30/36A		7625342
14ACXS018-230	TXV	19800	15.5	12.5	CR33-30/36B	EL180DF070E36B	7625346
14ACXS018-230	TXV	19400	14.5	12.2	CR33-30/36B		7625345
14ACXS018-230	TXV	18400	15	12.5	CX35-18/24A	EL180UH045E36A	8260946
14ACXS018-230	TXV	18400	15	12.5	CX35-18/24A	EL180UH045XE36A	8260947
14ACXS018-230	TXV	18500	14.5	12.2	CX35-18/24B	EL180UH070E36B	8260949
14ACXS018-230	TXV	18500	14.5	12.2	CX35-18/24B	EL180UH070XE36B	8260951
14ACXS018-230	TXV	18600	14.5	12.5	CX35-18/24B	EL195UH045XE36B	8260952
14ACXS018-230	TXV	18600	14.5	12.5	CX35-18/24B	EL296UH045XE36B	8260954
14ACXS018-230	TXV	19700	16	13	CX35-24A	EL180UH045E36A	8260959
14ACXS018-230	TXV	19700	16	13	CX35-24A	EL180UH045XE36A	8260958
14ACXS018-230	TXV	19200	14.25	12.2	CX35-24A		8260956
14ACXS018-230	TXV	19500	15.5	12.5	CX35-24B	EL180UH070E36B	8260971
14ACXS018-230	TXV	19500	15.5	12.5	CX35-24B	EL180UH070XE36B	8260969
14ACXS018-230	TXV	18000	14.5	12.2	CX35-24B	EL195UH030XE24B	8606345
14ACXS018-230	TXV	18000	14.5	12.2	CX35-24B	EL195UH045XE24B	8606346
14ACXS018-230	TXV	20000	16	13	CX35-24B	EL195UH045XE36B	8260974
14ACXS018-230	TXV	20000	16	13	CX35-24B	EL296UH045XE36B	8260975
14ACXS018-230	TXV	20200	16	13	CX35-24B	EL296UH045XV36B	8260966
14ACXS018-230	TXV	20200	16	13	CX35-24B	EL296UH070XV36B	8260967
14ACXS018-230	TXV	20200	16	13	CX35-24B	SLP98UH070XV36B	8260964
14ACXS018-230	TXV	19200	14.25	12.2	CX35-24B		8260961
14ACXS018-230	TXV	19900	16	13	CX35-30A	EL180UH045E36A	8260979
14ACXS018-230	TXV	19900	16	13	CX35-30A	EL180UH045XE36A	8260981
14ACXS018-230	TXV	19300	14.5	12.2	CX35-30A		8260977
14ACXS018-230	TXV	19700	15.5	12.5	CX35-30B	EL180UH070E36B	8260995
14ACXS018-230	TXV	19700	15.5	12.5	CX35-30B	EL180UH070XE36B	8260986
14ACXS018-230	TXV	18000	14.5	12.2	CX35-30B	EL195UH030XE24B	8606347
14ACXS018-230	TXV	18000	14.5	12.2	CX35-30B	EL195UH045XE24B	8606348
14ACXS018-230	TXV	19800	16	13	CX35-30B	EL195UH045XE36B	8260988
14ACXS018-230	TXV	19800	16	13	CX35-30B	EL296UH045XE36B	8260990
14ACXS018-230	TXV	20400	16	13.5	CX35-30B	EL296UH045XV36B	8260992
14ACXS018-230	TXV	20400	16	13.5	CX35-30B	EL296UH070XV36B	8260993
14ACXS018-230	TXV	20400	16	13.5	CX35-30B	SLP98UH070XV36B	8260985
14ACXS018-230	TXV	19300	14.5	12.2	CX35-30B		8260983
14ACXS018-230	TXV	19200	14.25	12.2	CX38-25B		10547362

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	RFC	23400	14	12.2	C35-24A		8471025
14ACXS024-230	RFC	23400	14	12	C35-24B		8471027
14ACXS024-230	RFC	23600	14	12	C35-30/36A		8471028
14ACXS024-230	RFC	23600	14	12	C35-30/36B		8471029
14ACXS024-230	RFC	23600	14	12	C35-30/36C		8471030
14ACXS024-230	RFC	23600	14	12.2	C35-30A		8471031
14ACXS024-230	RFC	23600	14	12.2	C35-30B		8471034
14ACXS024-230	RFC	24000	14	12.2	C35-36A		8471037
14ACXS024-230	RFC	24000	14	12.2	C35-36B		8471040
14ACXS024-230	RFC	24000	14	12.2	CH33-25A		7625173
14ACXS024-230	RFC	23800	14	12.2	CH33-25B		7625175
14ACXS024-230	RFC	24000	14.5	12.2	CH33-31A		7625177
14ACXS024-230	RFC	24000	14.5	12.2	CH33-31B		7625178
14ACXS024-230	RFC	23600	14	12	CH33-36A		7624821
14ACXS024-230	RFC	23800	14	12.2	CH33-36C		7624853
14ACXS024-230	RFC	24000	14.2	12.2	CH33-42B		7625184
14ACXS024-230	RFC	24000	14.5	12.2	CH33-43B		7625185
14ACXS024-230	RFC	23400	14	12.2	CH35-24A		10514526
14ACXS024-230	RFC	23400	14	12	CH35-24B		10514527
14ACXS024-230	RFC	23600	14	12.2	CH35-30A		10514528
14ACXS024-230	RFC	23600	14	12.2	CH35-30B		10514529
14ACXS024-230	RFC	23400	14	12	CH35-36A		7625192
14ACXS024-230	RFC	23400	14	12	CH35-36B		7625180
14ACXS024-230	RFC	24000	14	12.2	CH35-36C		7625191
14ACXS024-230	RFC	24000	14	12.2	CR33-30/36A		7625187
14ACXS024-230	RFC	24000	14	12.2	CR33-30/36B		7625189
14ACXS024-230	RFC	24000	14	12.2	CR33-30/36C		7625182
14ACXS024-230	TXV	23400	15.1	12.5	C35-18/24B	EL195UH030XE24B	8606538
14ACXS024-230	TXV	23400	15.1	12.5	C35-18/24B	EL195UH045XE24B	8606540
14ACXS024-230	TXV	24000	16	13	C35-24A	EL180UH045E36A	8260522
14ACXS024-230	TXV	24000	16	13	C35-24A	EL180UH045XE36A	8260524
14ACXS024-230	TXV	24000	16	13	C35-24A	SL280UH070V36A	8260519
14ACXS024-230	TXV	24000	16	13	C35-24A	SL280UH070XV36A	8260520
14ACXS024-230	TXV	24000	14.25	12.2	C35-24A		8260517
14ACXS024-230	TXV	24000	16	13	C35-24B	EL180UH070E36B	8260541
14ACXS024-230	TXV	24000	16	13	C35-24B	EL180UH070XE36B	8260542
14ACXS024-230	TXV	24000	16	13	C35-24B	EL195UH030XE24B	8606541
14ACXS024-230	TXV	24000	16	13	C35-24B	EL195UH045XE24B	8606542
14ACXS024-230	TXV	24000	16	13	C35-24B	EL195UH045XE36B	8260528
14ACXS024-230	TXV	24000	16	13	C35-24B	EL195UH070XE36B	8260529
14ACXS024-230	TXV	24000	16	13	C35-24B	EL296UH045XE36B	8260531
14ACXS024-230	TXV	24000	16	13	C35-24B	EL296UH045XV36B	8260536
14ACXS024-230	TXV	24000	16	13	C35-24B	EL296UH070XE36B	8260532
14ACXS024-230	TXV	24000	16	13	C35-24B	EL296UH070XV36B	8260537
14ACXS024-230	TXV	24000	16	13	C35-24B	SL280UH090V36B	8260544
14ACXS024-230	TXV	24000	16	13	C35-24B	SL280UH090V48B	8260546
14ACXS024-230	TXV	24000	16	13	C35-24B	SL280UH090XV48B	8260534
14ACXS024-230	TXV	24000	16	13	C35-24B	SLP98UH070XV36B	8260539
14ACXS024-230	TXV	23800	14	12	C35-24B		8260525

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	TXV	24000	16	13	C35-30/36A	EL180UH045E36A	8260586
14ACXS024-230	TXV	24000	16	13	C35-30/36A	EL180UH045XE36A	8260588
14ACXS024-230	TXV	24000	16	13	C35-30/36A	SL280UH070V36A	8260583
14ACXS024-230	TXV	24000	16	13	C35-30/36A	SL280UH070XV36A	8260584
14ACXS024-230	TXV	23600	14	12	C35-30/36A		8260580
14ACXS024-230	TXV	24000	16	13	C35-30/36B	EL180UH070E36B	8260607
14ACXS024-230	TXV	24000	16	13	C35-30/36B	EL180UH070XE36B	8260609
14ACXS024-230	TXV	24000	15.5	12.5	C35-30/36B	EL195UH030XE24B	8606544
14ACXS024-230	TXV	24000	15.5	12.5	C35-30/36B	EL195UH045XE24B	8606545
14ACXS024-230	TXV	23400	15.5	12.5	C35-30/36B	EL195UH045XE36B	8260611
14ACXS024-230	TXV	23600	16	13	C35-30/36B	EL195UH070XE36B	8260592
14ACXS024-230	TXV	23400	15.5	12.5	C35-30/36B	EL296UH045XE36B	8260593
14ACXS024-230	TXV	24000	16	13	C35-30/36B	EL296UH045XV36B	8260596
14ACXS024-230	TXV	23600	16	13	C35-30/36B	EL296UH070XE36B	8260595
14ACXS024-230	TXV	24000	16	13	C35-30/36B	EL296UH070XV36B	8260598
14ACXS024-230	TXV	24000	16	13	C35-30/36B	SL280UH090V36B	8260602
14ACXS024-230	TXV	24000	16	13	C35-30/36B	SL280UH090V48B	8260603
14ACXS024-230	TXV	24000	16	13	C35-30/36B	SL280UH090XV48B	8260605
14ACXS024-230	TXV	24000	16	13	C35-30/36B	SLP98UH070XV36B	8260600
14ACXS024-230	TXV	23600	14	12	C35-30/36B		8260589
14ACXS024-230	TXV	24000	16	13	C35-30/36C	EL296UH090XV36C	8260615
14ACXS024-230	TXV	24000	16	13	C35-30/36C	SLP98UH090XV36C	8260617
14ACXS024-230	TXV	23600	14	12	C35-30/36C		8260613
14ACXS024-230	TXV	24000	16	13	C35-30A	EL180UH045E36A	8260550
14ACXS024-230	TXV	24000	16	13	C35-30A	EL180UH045XE36A	8260551
14ACXS024-230	TXV	24000	16	13	C35-30A	SL280UH070V36A	8260553
14ACXS024-230	TXV	24000	16	13	C35-30A	SL280UH070XV36A	8260555
14ACXS024-230	TXV	24000	14.5	12.2	C35-30A		8260548
14ACXS024-230	TXV	24000	16	13	C35-30B	EL180UH070E36B	8260578
14ACXS024-230	TXV	24000	16	13	C35-30B	EL180UH070XE36B	8260562
14ACXS024-230	TXV	24000	16	13	C35-30B	EL195UH030XE24B	8606547
14ACXS024-230	TXV	24000	16	13	C35-30B	EL195UH045XE24B	8606548
14ACXS024-230	TXV	24000	16	13	C35-30B	EL195UH045XE36B	8260564
14ACXS024-230	TXV	24000	16	13	C35-30B	EL195UH070XE36B	8260565
14ACXS024-230	TXV	24000	16	13	C35-30B	EL296UH045XE36B	8260567
14ACXS024-230	TXV	24000	16	13	C35-30B	EL296UH045XV36B	8260571
14ACXS024-230	TXV	24000	16	13	C35-30B	EL296UH070XE36B	8260569
14ACXS024-230	TXV	24000	16	13	C35-30B	EL296UH070XV36B	8260559
14ACXS024-230	TXV	24000	16	13	C35-30B	SL280UH090V36B	8260573
14ACXS024-230	TXV	24000	16	13	C35-30B	SL280UH090V48B	8260575
14ACXS024-230	TXV	24000	16	13	C35-30B	SL280UH090XV48B	8260576
14ACXS024-230	TXV	24000	16	13	C35-30B	SLP98UH070XV36B	8260560
14ACXS024-230	TXV	24000	14.5	12.2	C35-30B		8260556
14ACXS024-230	TXV	24000	16	13	C35-36A	EL180UH045E36A	8260624
14ACXS024-230	TXV	24000	16	13	C35-36A	EL180UH045XE36A	8260626
14ACXS024-230	TXV	24000	16	13.5	C35-36A	SL280UH070V36A	8260620
14ACXS024-230	TXV	24000	16	13.5	C35-36A	SL280UH070XV36A	8260622
14ACXS024-230	TXV	24000	14.5	12.5	C35-36A		8260618
14ACXS024-230	TXV	24000	16	13.5	C35-36B	EL180UH070E36B	8260645

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	TXV	24000	16	13.5	C35-36B	EL180UH070XE36B	8260647
14ACXS024-230	TXV	24000	16	13	C35-36B	EL195UH030XE24B	8606550
14ACXS024-230	TXV	24000	16	13	C35-36B	EL195UH045XE24B	8606551
14ACXS024-230	TXV	24000	16	13	C35-36B	EL195UH045XE36B	8260649
14ACXS024-230	TXV	24000	16	13	C35-36B	EL195UH070XE36B	8260630
14ACXS024-230	TXV	24000	16	13	C35-36B	EL296UH045XE36B	8260632
14ACXS024-230	TXV	24000	16	13	C35-36B	EL296UH045XV36B	8260636
14ACXS024-230	TXV	24000	16	13	C35-36B	EL296UH070XE36B	8260634
14ACXS024-230	TXV	24000	16	13	C35-36B	EL296UH070XV36B	8260637
14ACXS024-230	TXV	24000	16	13.5	C35-36B	SL280UH090V36B	8260641
14ACXS024-230	TXV	24000	16	13	C35-36B	SL280UH090V48B	8260642
14ACXS024-230	TXV	24000	16	13	C35-36B	SL280UH090XV48B	8260644
14ACXS024-230	TXV	24000	16	13	C35-36B	SLP98UH070XV36B	8260639
14ACXS024-230	TXV	24000	14.5	12.5	C35-36B		8260628
14ACXS024-230	TXV	24000	16	13	CBA27UHE-024		10259388
14ACXS024-230	TXV	24000	16	13	CBA27UHE-030		10259389
14ACXS024-230	TXV	23600	14.5	12.2	CBX25UH-024		7624682
14ACXS024-230	TXV	23800	14.5	12.2	CBX25UH-030		7624684
14ACXS024-230	TXV	24000	14.5	12.2	CBX25UH-036		7624685
14ACXS024-230	TXV	24000	16	13	CBX25UHV-024		7624687
14ACXS024-230	TXV	24000	16	13	CBX25UHV-030		7624689
14ACXS024-230	TXV	24000	16	13	CBX25UHV-036		7624690
14ACXS024-230	TXV	24000	16	13	CBX27UH-024		7624692
14ACXS024-230	TXV	24000	16	13	CBX27UH-030		7624694
14ACXS024-230	TXV	23800	14.5	12.2	CBX32M-018/024		7624695
14ACXS024-230	TXV	24000	15.1	12.5	CBX32M-030		7624697
14ACXS024-230	TXV	24000	15.5	12.5	CBX32MV-018/024		7624698
14ACXS024-230	TXV	24000	16	13	CBX32MV-024/030		7624700
14ACXS024-230	TXV	24000	16	13	CBX40UHV-024		10090928
14ACXS024-230	TXV	22800	15.1	12.5	CH23-31	EL180UH045E36A	7624703
14ACXS024-230	TXV	22800	15.1	12.5	CH23-31	EL180UH045XE36A	7624705
14ACXS024-230	TXV	23200	15.5	12.5	CH23-31	EL180UH070E36B	7624707
14ACXS024-230	TXV	23200	15.5	12.5	CH23-31	EL180UH070XE36B	7624708
14ACXS024-230	TXV	22800	14.5	12.5	CH23-31	EL195UH030XE24B	8606553
14ACXS024-230	TXV	22800	14.5	12.5	CH23-31	EL195UH045XE24B	8606554
14ACXS024-230	TXV	23000	15.1	12.5	CH23-31	EL195UH045XE36B	7624710
14ACXS024-230	TXV	23000	15.1	12.5	CH23-31	EL195UH070XE36B	7624711
14ACXS024-230	TXV	23000	15.1	12.5	CH23-31	EL296UH045XE36B	7624713
14ACXS024-230	TXV	23200	15.5	12.5	CH23-31	EL296UH045XV36B	7624716
14ACXS024-230	TXV	23000	15.1	12.5	CH23-31	EL296UH070XE36B	7624715
14ACXS024-230	TXV	23200	15.5	13	CH23-31	EL296UH070XV36B	7624718
14ACXS024-230	TXV	23400	15.1	13	CH23-31	SL280UH070V36A	7786572
14ACXS024-230	TXV	23200	16	13	CH23-31	SL280UH090V36B	7624702
14ACXS024-230	TXV	23200	15.5	13	CH23-31	SLP98UH070XV36B	7624720
14ACXS024-230	TXV	24000	16	13	CH23-41	EL180UH045E36A	7624728
14ACXS024-230	TXV	24000	16	13	CH23-41	EL180UH045XE36A	7624730
14ACXS024-230	TXV	24000	16	13	CH23-41	EL180UH070E36B	7624731
14ACXS024-230	TXV	24000	16	13	CH23-41	EL180UH070XE36B	7624733
14ACXS024-230	TXV	24000	15.5	12.5	CH23-41	EL195UH030XE24B	8606556

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	TXV	24000	15.5	12.5	CH23-41	EL195UH045XE24B	8606557
14ACXS024-230	TXV	24000	16	13	CH23-41	EL195UH045XE36B	7624735
14ACXS024-230	TXV	24000	16	13	CH23-41	EL195UH070XE36B	7624736
14ACXS024-230	TXV	24000	16	13	CH23-41	EL296UH045XE36B	7624738
14ACXS024-230	TXV	24000	16	13	CH23-41	EL296UH045XV36B	7624742
14ACXS024-230	TXV	24000	16	13	CH23-41	EL296UH070XE36B	7624740
14ACXS024-230	TXV	24000	16	13	CH23-41	EL296UH070XV36B	7624743
14ACXS024-230	TXV	24000	16	13	CH23-41	SL280UH070V36A	7624725
14ACXS024-230	TXV	24000	16	13	CH23-41	SL280UH090V36B	7624726
14ACXS024-230	TXV	24000	16	13	CH23-41	SLP98UH070XV36B	7624745
14ACXS024-230	TXV	23800	14.5	12	CH23-41		7624723
14ACXS024-230	TXV	23800	15.5	12.5	CH33-19	EL180UH045E36A	7624752
14ACXS024-230	TXV	23800	15.5	12.5	CH33-19	EL180UH045XE36A	7624754
14ACXS024-230	TXV	24000	15.1	13	CH33-19	SL280UH070V36A	7624749
14ACXS024-230	TXV	24000	15.1	13	CH33-19	SL280UH070XV36A	7624750
14ACXS024-230	TXV	23200	14	11.5	CH33-19		7624747
14ACXS024-230	TXV	23800	15.5	12.5	CH33-24/30	EL180UH045E36A	7624761
14ACXS024-230	TXV	23800	15.5	12.5	CH33-24/30	EL180UH045XE36A	7624763
14ACXS024-230	TXV	23800	15.1	13	CH33-24/30	SL280UH070V36A	7624758
14ACXS024-230	TXV	23800	15.1	13	CH33-24/30	SL280UH070XV36A	7624759
14ACXS024-230	TXV	23200	14	11.5	CH33-24/30		7624756
14ACXS024-230	TXV	24000	16	13	CH33-25A	EL180UH045E36A	7624770
14ACXS024-230	TXV	24000	16	13	CH33-25A	EL180UH045XE36A	7624772
14ACXS024-230	TXV	24000	16	13	CH33-25A	SL280UH070V36A	7624766
14ACXS024-230	TXV	24000	16	13	CH33-25A	SL280UH070XV36A	7624768
14ACXS024-230	TXV	24000	14.5	12.2	CH33-25A		7624765
14ACXS024-230	TXV	24000	16	13	CH33-25B	EL180UH070E36B	7624777
14ACXS024-230	TXV	24000	16	13	CH33-25B	EL180UH070XE36B	7624779
14ACXS024-230	TXV	24000	15.5	12.5	CH33-25B	EL195UH030XE24B	8606558
14ACXS024-230	TXV	24000	15.5	12.5	CH33-25B	EL195UH045XE24B	8606560
14ACXS024-230	TXV	24000	16	13	CH33-25B	EL195UH045XE36B	7624780
14ACXS024-230	TXV	24000	16	13	CH33-25B	EL195UH070XE36B	7624782
14ACXS024-230	TXV	24000	16	13	CH33-25B	EL296UH045XE36B	7624784
14ACXS024-230	TXV	24000	16	13	CH33-25B	EL296UH045XV36B	7624787
14ACXS024-230	TXV	24000	16	13	CH33-25B	EL296UH070XE36B	7624786
14ACXS024-230	TXV	24000	16	13	CH33-25B	EL296UH070XV36B	7624789
14ACXS024-230	TXV	24000	16	13	CH33-25B	SL280UH090V36B	7624775
14ACXS024-230	TXV	24000	16	13	CH33-25B	SLP98UH070XV36B	7624791
14ACXS024-230	TXV	23800	14.5	12	CH33-25B		7624773
14ACXS024-230	TXV	24000	16	13	CH33-31A	EL180UH045E36A	7624798
14ACXS024-230	TXV	24000	16	13	CH33-31A	EL180UH045XE36A	7624800
14ACXS024-230	TXV	24000	16	13	CH33-31A	SL280UH070V36A	7624795
14ACXS024-230	TXV	24000	16	13	CH33-31A	SL280UH070XV36A	7624796
14ACXS024-230	TXV	24000	14.5	12.5	CH33-31A		7624793
14ACXS024-230	TXV	24000	16	13.5	CH33-31B	EL180UH070E36B	7624805
14ACXS024-230	TXV	24000	16	13.5	CH33-31B	EL180UH070XE36B	7624807
14ACXS024-230	TXV	24000	16	13	CH33-31B	EL195UH030XE24B	8606561
14ACXS024-230	TXV	24000	16	13	CH33-31B	EL195UH045XE24B	8606563
14ACXS024-230	TXV	24000	16	13	CH33-31B	EL195UH045XE36B	7624809

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	TXV	24000	16	13	CH33-31B	EL195UH070XE36B	7624810
14ACXS024-230	TXV	24000	16	13	CH33-31B	EL296UH045XE36B	7624812
14ACXS024-230	TXV	24000	16	13	CH33-31B	EL296UH045XV36B	7624816
14ACXS024-230	TXV	24000	16	13	CH33-31B	EL296UH070XE36B	7624814
14ACXS024-230	TXV	24000	16	13	CH33-31B	EL296UH070XV36B	7624817
14ACXS024-230	TXV	24000	16	13.5	CH33-31B	SL280UH090V36B	7624803
14ACXS024-230	TXV	24000	16	13	CH33-31B	SLP98UH070XV36B	7624819
14ACXS024-230	TXV	24000	14.5	12.5	CH33-31B		7624802
14ACXS024-230	TXV	24000	16	13	CH33-36A	EL180UH045E36A	7624828
14ACXS024-230	TXV	24000	16	13	CH33-36A	EL180UH045XE36A	7624830
14ACXS024-230	TXV	24000	16	13	CH33-36A	SL280UH070V36A	7624825
14ACXS024-230	TXV	24000	16	13	CH33-36A	SL280UH070XV36A	7624826
14ACXS024-230	TXV	23800	14.25	12	CH33-36A		7624823
14ACXS024-230	TXV	24000	16	13	CH33-36B	EL180UH070E36B	7624837
14ACXS024-230	TXV	24000	16	13	CH33-36B	EL180UH070XE36B	7624839
14ACXS024-230	TXV	24000	15.5	12.5	CH33-36B	EL195UH030XE24B	8606564
14ACXS024-230	TXV	24000	15.5	12.5	CH33-36B	EL195UH045XE24B	8606565
14ACXS024-230	TXV	24000	16	13	CH33-36B	EL195UH045XE36B	7624840
14ACXS024-230	TXV	24000	16	13	CH33-36B	EL195UH070XE36B	7624842
14ACXS024-230	TXV	24000	16	13	CH33-36B	EL296UH045XE36B	7624844
14ACXS024-230	TXV	24000	16	13	CH33-36B	EL296UH045XV36B	7624847
14ACXS024-230	TXV	24000	16	13	CH33-36B	EL296UH070XE36B	7624846
14ACXS024-230	TXV	24000	16	13	CH33-36B	EL296UH070XV36B	7624849
14ACXS024-230	TXV	24000	16	13	CH33-36B	SL280UH090V36B	7624835
14ACXS024-230	TXV	24000	16	13	CH33-36B	SLP98UH070XV36B	7624851
14ACXS024-230	TXV	23800	14.5	12	CH33-36B		7624833
14ACXS024-230	TXV	24000	16	13	CH33-36C	EL296UH090XV36C	7624856
14ACXS024-230	TXV	24000	16	13	CH33-36C	SLP98UH090XV36C	7624858
14ACXS024-230	TXV	23600	14.2	12	CH33-36C		7624855
14ACXS024-230	TXV	24000	16	13	CH33-42	EL195UH030XE24B	8606567
14ACXS024-230	TXV	24000	16	13	CH33-42	EL195UH045XE24B	8606568
14ACXS024-230	TXV	24000	16	13	CH33-43B	EL195UH030XE24B	8606570
14ACXS024-230	TXV	24000	16	13	CH33-43B	EL195UH045XE24B	8606571
14ACXS024-230	TXV	24000	16	13	CH35-18A	EL180UH045E36A	7624865
14ACXS024-230	TXV	24000	16	13	CH35-18A	EL180UH045XE36A	7624867
14ACXS024-230	TXV	24000	16	13	CH35-18A	SL280UH070V36A	7624862
14ACXS024-230	TXV	24000	16	13	CH35-18A	SL280UH070XV36A	7624864
14ACXS024-230	TXV	23400	14.25	11.5	CH35-18A		7624860
14ACXS024-230	TXV	24000	16	13	CH35-24A	EL180UH045E36A	7624874
14ACXS024-230	TXV	24000	16	13	CH35-24A	EL180UH045XE36A	7624876
14ACXS024-230	TXV	24000	16	13	CH35-24A	SL280UH070V36A	7624871
14ACXS024-230	TXV	24000	16	13	CH35-24A	SL280UH070XV36A	7624872
14ACXS024-230	TXV	23800	14.5	12.2	CH35-24A		7624869
14ACXS024-230	TXV	24000	16	13	CH35-24B	EL180UH070E36B	7624881
14ACXS024-230	TXV	24000	16	13	CH35-24B	EL180UH070XE36B	7624883
14ACXS024-230	TXV	24000	15.5	12.5	CH35-24B	EL195UH030XE24B	8606572
14ACXS024-230	TXV	24000	15.5	12.5	CH35-24B	EL195UH045XE24B	8606574
14ACXS024-230	TXV	24000	16	13	CH35-24B	EL195UH045XE36B	7624885
14ACXS024-230	TXV	24000	16	13	CH35-24B	EL195UH070XE36B	7624887

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	TXV	24000	16	13	CH35-24B	EL296UH045XV36B	7624888
14ACXS024-230	TXV	24000	16	13	CH35-24B	EL296UH070XV36B	7624890
14ACXS024-230	TXV	24000	16	13	CH35-24B	SL280UH090V36B	7624880
14ACXS024-230	TXV	24000	16	13	CH35-24B	SLP98UH070XV36B	7624892
14ACXS024-230	TXV	24000	14.5	12.2	CH35-24B		7624878
14ACXS024-230	TXV	24000	16	13	CH35-30A	EL180UH045E36A	7624899
14ACXS024-230	TXV	24000	16	13	CH35-30A	EL180UH045XE36A	7624901
14ACXS024-230	TXV	24000	16	13	CH35-30A	SL280UH070V36A	7624896
14ACXS024-230	TXV	24000	16	13	CH35-30A	SL280UH070XV36A	7624897
14ACXS024-230	TXV	24000	15	12.5	CH35-30A		7624894
14ACXS024-230	TXV	24000	16	13.5	CH35-30B	EL180UH070E36B	7624906
14ACXS024-230	TXV	24000	16	13.5	CH35-30B	EL180UH070XE36B	7624908
14ACXS024-230	TXV	24000	16	13	CH35-30B	EL195UH030XE24B	8606575
14ACXS024-230	TXV	24000	16	13	CH35-30B	EL195UH045XE24B	8606577
14ACXS024-230	TXV	24000	16	13	CH35-30B	EL195UH045XE36B	7624910
14ACXS024-230	TXV	24000	16	13	CH35-30B	EL195UH070XE36B	7624911
14ACXS024-230	TXV	24000	16	13	CH35-30B	EL296UH045XV36B	7624913
14ACXS024-230	TXV	24000	16	13	CH35-30B	EL296UH070XV36B	7624915
14ACXS024-230	TXV	24000	16	13.5	CH35-30B	SL280UH090V36B	7624904
14ACXS024-230	TXV	24000	16	13	CH35-30B	SLP98UH070XV36B	7624917
14ACXS024-230	TXV	24000	14.5	12.5	CH35-30B		7624903
14ACXS024-230	TXV	24000	16	13	CH35-36A	EL180UH045E36A	7624924
14ACXS024-230	TXV	24000	16	13	CH35-36A	EL180UH045XE36A	7624925
14ACXS024-230	TXV	24000	16	13	CH35-36A	SL280UH070V36A	7624920
14ACXS024-230	TXV	24000	16	13	CH35-36A	SL280UH070XV36A	7624922
14ACXS024-230	TXV	23800	14.25	12.2	CH35-36A		7624918
14ACXS024-230	TXV	24000	16	13	CH35-36B	EL180UH070E36B	7624931
14ACXS024-230	TXV	24000	16	13	CH35-36B	EL180UH070XE36B	7624933
14ACXS024-230	TXV	24000	15.5	12.5	CH35-36B	EL195UH030XE24B	8606578
14ACXS024-230	TXV	24000	15.5	12.5	CH35-36B	EL195UH045XE24B	8606580
14ACXS024-230	TXV	24000	16	13	CH35-36B	EL195UH045XE36B	7624934
14ACXS024-230	TXV	24000	16	13	CH35-36B	EL195UH070XE36B	7624936
14ACXS024-230	TXV	24000	16	13	CH35-36B	EL296UH045XV36B	7624938
14ACXS024-230	TXV	24000	16	13	CH35-36B	EL296UH070XV36B	7624940
14ACXS024-230	TXV	24000	16	13	CH35-36B	SL280UH090V36B	7624929
14ACXS024-230	TXV	24000	16	13	CH35-36B	SLP98UH070XV36B	7624941
14ACXS024-230	TXV	23800	14	12.2	CH35-36B		7624927
14ACXS024-230	TXV	24000	16	13	CH35-36C	EL296UH090XV36C	7624945
14ACXS024-230	TXV	24000	16	13	CH35-36C	SLP98UH090XV36C	7624947
14ACXS024-230	TXV	24000	14.25	12.2	CH35-36C		7624943
14ACXS024-230	TXV	23400	15.1	12.5	CR33-24A	EL180DF045E36A	7624950
14ACXS024-230	TXV	23000	15.1	12.5	CR33-24A	SL280DF070V36A	7624948
14ACXS024-230	TXV	23000	15.1	12.5	CR33-24B	EL180DF070E36B	7624952
14ACXS024-230	TXV	22600	15	12.5	CR33-24B	EL195DF045XE36B	7624954
14ACXS024-230	TXV	22800	15	12.5	CR33-24B	EL195DF070XE48B	7624955
14ACXS024-230	TXV	22600	15	12.5	CR33-24B	EL296DF045XE36B	7624957
14ACXS024-230	TXV	23000	15.1	12.5	CR33-24B	EL296DF045XV36B	7624961
14ACXS024-230	TXV	22800	15	12.5	CR33-24B	EL296DF070XE48B	7624959
14ACXS024-230	TXV	23200	15.1	12.5	CR33-24B	SLP98DF070XV36B	7624962

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	TXV	24000	16	13	CR33-30/36A	EL180DF045E36A	7624968
14ACXS024-230	TXV	24000	16	13	CR33-30/36A	SL280DF070V36A	7624966
14ACXS024-230	TXV	24000	14.5	12.2	CR33-30/36A		7624964
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	EL180DF070E36B	7624971
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	EL195DF045XE36B	7624973
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	EL195DF070XE48B	7624974
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	EL296DF045XE36B	7624976
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	EL296DF045XV36B	7624981
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	EL296DF070XE48B	7624978
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	EL296DF070XV48B	7624982
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	SL280DF090V48B	7624979
14ACXS024-230	TXV	24000	16	13	CR33-30/36B	SLP98DF070XV36B	7624984
14ACXS024-230	TXV	24000	14.5	12.2	CR33-30/36B		7624969
14ACXS024-230	TXV	24000	16	13	CR33-30/36C	SLP98DF090XV36C	7624988
14ACXS024-230	TXV	24000	14.5	12.2	CR33-30/36C		7624986
14ACXS024-230	TXV	22800	15	12.5	CX35-18/24A	EL180UH045E36A	8260651
14ACXS024-230	TXV	22800	15	12.5	CX35-18/24A	EL180UH045XE36A	8260652
14ACXS024-230	TXV	23400	15.1	12.5	CX35-18/24B	EL195UH030XE24B	8606599
14ACXS024-230	TXV	23400	15	12.5	CX35-18/24B	EL195UH045XE24B	8606600
14ACXS024-230	TXV	24000	16	13	CX35-24A	EL180UH045E36A	8260659
14ACXS024-230	TXV	23600	15.5	11.5	CX35-24A	EL180UH045XE36A	8260661
14ACXS024-230	TXV	24000	16	13	CX35-24A	SL280UH070V36A	8260656
14ACXS024-230	TXV	24000	16	13	CX35-24A	SL280UH070XV36A	8260657
14ACXS024-230	TXV	24000	14.25	12.2	CX35-24A		8260654
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL180UH070E36B	8260664
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL180UH070XE36B	8260666
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL195UH030XE24B	8606602
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL195UH045XE24B	8606603
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL195UH045XE36B	8260668
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL195UH070XE36B	8260669
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL296UH045XE36B	8260671
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL296UH045XV36B	8260679
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL296UH070XE36B	8260673
14ACXS024-230	TXV	24000	16	13	CX35-24B	EL296UH070XV36B	8260681
14ACXS024-230	TXV	24000	16	13	CX35-24B	SL280UH090V36B	8260674
14ACXS024-230	TXV	24000	16	13	CX35-24B	SL280UH090V48B	8260676
14ACXS024-230	TXV	24000	16	13	CX35-24B	SL280UH090XV48B	8260678
14ACXS024-230	TXV	24000	16	13	CX35-24B	SLP98UH070XV36B	8260683
14ACXS024-230	TXV	24000	14.25	12.2	CX35-24B		8260662
14ACXS024-230	TXV	24000	16	13	CX35-30/36A	EL180UH045E36A	8260718
14ACXS024-230	TXV	24000	16	13	CX35-30/36A	EL180UH045XE36A	8260716
14ACXS024-230	TXV	24000	16	13	CX35-30/36A	SL280UH070V36A	8260719
14ACXS024-230	TXV	24000	16	13	CX35-30/36A	SL280UH070XV36A	8260721
14ACXS024-230	TXV	23800	14.5	12	CX35-30/36A		8260714
14ACXS024-230	TXV	24000	16	13	CX35-30/36B	EL180UH070E36B	8260744
14ACXS024-230	TXV	24000	16	13	CX35-30/36B	EL180UH070XE36B	8260728
14ACXS024-230	TXV	24000	15.5	12.5	CX35-30/36B	EL195UH030XE24B	8606605
14ACXS024-230	TXV	24000	15.5	12.5	CX35-30/36B	EL195UH045XE24B	8606606
14ACXS024-230	TXV	23400	15.5	12.5	CX35-30/36B	EL195UH045XE36B	8260730

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	TXV	23600	16	13	CX35-30/36B	EL195UH070XE36B	8260731
14ACXS024-230	TXV	23400	15.5	12.5	CX35-30/36B	EL296UH045XE36B	8260733
14ACXS024-230	TXV	24000	16	13	CX35-30/36B	EL296UH045XV36B	8260736
14ACXS024-230	TXV	23600	16	13	CX35-30/36B	EL296UH070XE36B	8260735
14ACXS024-230	TXV	24000	16	13	CX35-30/36B	EL296UH070XV36B	8260725
14ACXS024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090V36B	8260738
14ACXS024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090V48B	8260739
14ACXS024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090XV48B	8260741
14ACXS024-230	TXV	24000	16	13	CX35-30/36B	SLP98UH070XV36B	8260726
14ACXS024-230	TXV	23800	14.5	12	CX35-30/36B		8260723
14ACXS024-230	TXV	24000	16	13	CX35-30/36C	EL296UH090XV36C	8260747
14ACXS024-230	TXV	24000	16	13	CX35-30/36C	SLP98UH090XV36C	8260749
14ACXS024-230	TXV	23800	14.5	12	CX35-30/36C		8260746
14ACXS024-230	TXV	24000	16	13	CX35-30A	EL180UH045E36A	8260689
14ACXS024-230	TXV	24000	16	13	CX35-30A	EL180UH045XE36A	8260691
14ACXS024-230	TXV	24000	16	13	CX35-30A	SL280UH070V36A	8260686
14ACXS024-230	TXV	24000	16	13	CX35-30A	SL280UH070XV36A	8260688
14ACXS024-230	TXV	24000	14.5	12.2	CX35-30A		8260684
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL180UH070E36B	8260703
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL180UH070XE36B	8260704
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL195UH030XE24B	8606607
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL195UH045XE24B	8606609
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL195UH045XE36B	8260706
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL195UH070XE36B	8260708
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL296UH045XE36B	8260709
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL296UH045XV36B	8260696
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL296UH070XE36B	8260694
14ACXS024-230	TXV	24000	16	13	CX35-30B	EL296UH070XV36B	8260698
14ACXS024-230	TXV	24000	16	13	CX35-30B	SL280UH090V36B	8260711
14ACXS024-230	TXV	24000	16	13	CX35-30B	SL280UH090V48B	8260713
14ACXS024-230	TXV	24000	16	13	CX35-30B	SL280UH090XV48B	8260701
14ACXS024-230	TXV	24000	16	13	CX35-30B	SLP98UH070XV36B	8260699
14ACXS024-230	TXV	24000	14.5	12.2	CX35-30B		8260693
14ACXS024-230	TXV	24000	16	13	CX35-36A	EL180UH045E36A	8260752
14ACXS024-230	TXV	24000	16	13	CX35-36A	EL180UH045XE36A	8260754
14ACXS024-230	TXV	24000	16	13.5	CX35-36A	SL280UH070V36A	8260756
14ACXS024-230	TXV	24000	16	13.5	CX35-36A	SL280UH070XV36A	8260757
14ACXS024-230	TXV	24000	14.5	12.5	CX35-36A		8260751
14ACXS024-230	TXV	24000	16	13.5	CX35-36B	EL180UH070E36B	8260779
14ACXS024-230	TXV	24000	16	13.5	CX35-36B	EL180UH070XE36B	8260764
14ACXS024-230	TXV	24000	16	13	CX35-36B	EL195UH030XE24B	8606610
14ACXS024-230	TXV	24000	16	13	CX35-36B	EL195UH045XE24B	8606612
14ACXS024-230	TXV	24000	16	13	CX35-36B	EL195UH045XE36B	8260766
14ACXS024-230	TXV	24000	16	13	CX35-36B	EL195UH070XE36B	8260767
14ACXS024-230	TXV	24000	16	13	CX35-36B	EL296UH045XE36B	8260769
14ACXS024-230	TXV	24000	16	13	CX35-36B	EL296UH045XV36B	8260772
14ACXS024-230	TXV	24000	16	13	CX35-36B	EL296UH070XE36B	8260771
14ACXS024-230	TXV	24000	16	13	CX35-36B	EL296UH070XV36B	8260761
14ACXS024-230	TXV	24000	16	13.5	CX35-36B	SL280UH090V36B	8260774

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS024-230	TXV	24000	16	13	CX35-36B	SL280UH090V48B	8260776
14ACXS024-230	TXV	24000	16	13	CX35-36B	SL280UH090XV48B	8260778
14ACXS024-230	TXV	24000	16	13	CX35-36B	SLP98UH070XV36B	8260763
14ACXS024-230	TXV	24000	14.5	12.5	CX35-36B		8260759
14ACXS024-230	TXV	23800	14.25	12.2	CX38-25B		10547555
14ACXS030-230	RFC	27400	14	12	C35-24A		8471068
14ACXS030-230	RFC	27400	14	12	C35-24B		8471069
14ACXS030-230	RFC	28000	14	12.2	C35-30A		8471032
14ACXS030-230	RFC	28000	14	12.2	C35-30B		8471035
14ACXS030-230	RFC	28000	14	12.2	C35-36A		8471038
14ACXS030-230	RFC	28000	14	12.2	C35-36B		8471041
14ACXS030-230	RFC	27400	14	12.2	C35-48B		8471043
14ACXS030-230	RFC	27400	14	12.2	C35-48C		8471045
14ACXS030-230	RFC	27600	14	12	CH33-25A		7625653
14ACXS030-230	RFC	28000	14.25	12.2	CH33-31A		7625682
14ACXS030-230	RFC	28000	14.25	12.2	CH33-31B		7625692
14ACXS030-230	RFC	27600	14	12	CH33-36C		7625744
14ACXS030-230	RFC	28000	14	12.2	CH33-42B		7625754
14ACXS030-230	RFC	28000	14.5	12.5	CH33-43B		7625756
14ACXS030-230	RFC	27400	14	12	CH35-24A		10514530
14ACXS030-230	RFC	27400	14	12	CH35-24B		10514531
14ACXS030-230	RFC	28000	14	12.2	CH35-30A		10514532
14ACXS030-230	RFC	28000	14	12.2	CH35-30B		10514533
14ACXS030-230	RFC	28000	14	12.2	CH35-42B		10514534
14ACXS030-230	RFC	27400	14	12.2	CH35-48B		10514535
14ACXS030-230	RFC	27400	14	12.2	CH35-48C		10514536
14ACXS030-230	RFC	27800	14	12	CR33-30/36A		7625891
14ACXS030-230	RFC	27800	14	12	CR33-30/36B		7625898
14ACXS030-230	RFC	27800	14	12	CR33-30/36C		7625919
14ACXS030-230	TXV	28000	15.1	12.5	C35-24A	EL180UH045E36A	8260887
14ACXS030-230	TXV	28000	15.1	12.5	C35-24A	EL180UH045XE36A	8260888
14ACXS030-230	TXV	28000	15.5	12.5	C35-24A	SL280UH070V36A	8260883
14ACXS030-230	TXV	28000	15.5	12.5	C35-24A	SL280UH070XV36A	8260885
14ACXS030-230	TXV	27600	14	12	C35-24A		8260882
14ACXS030-230	TXV	28000	15.5	12.5	C35-24B	EL180UH070E36B	8259755
14ACXS030-230	TXV	28000	15.5	12.5	C35-24B	EL180UH070XE36B	8259757
14ACXS030-230	TXV	27800	15.5	12.5	C35-24B	EL180UH090E48B	8259746
14ACXS030-230	TXV	27800	15.5	12.5	C35-24B	EL180UH090XE48B	8259747
14ACXS030-230	TXV	28000	15.1	12.5	C35-24B	EL195UH045XE36B	8259759
14ACXS030-230	TXV	28000	15	12.5	C35-24B	EL195UH070XE36B	8259762
14ACXS030-230	TXV	28000	15.1	12.5	C35-24B	EL296UH045XE36B	8259760
14ACXS030-230	TXV	28000	15	12.5	C35-24B	EL296UH070XE36B	8259749
14ACXS030-230	TXV	28000	15.1	12.5	C35-24B	EL296UH070XV36B	8259751
14ACXS030-230	TXV	28000	15.5	12.5	C35-24B	SL280UH090V36B	8259754
14ACXS030-230	TXV	28000	15.1	12.5	C35-24B	SLP98UH070XV36B	8259752
14ACXS030-230	TXV	27600	14	12	C35-24B		8259744
14ACXS030-230	TXV	28000	15.1	12.5	C35-30/36A	EL180UH045E36A	8259799
14ACXS030-230	TXV	28000	15.1	12.5	C35-30/36A	EL180UH045XE36A	8259794
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36A	SL280UH070V36A	8259795

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36A	SL280UH070XV36A	8259797
14ACXS030-230	TXV	27600	14	12	C35-30/36A		8259792
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36B	EL180UH070E36B	8259817
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36B	EL180UH070XE36B	8259818
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36B	EL180UH090E48B	8259820
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36B	EL180UH090XE48B	8259803
14ACXS030-230	TXV	28000	15.1	12.5	C35-30/36B	EL195UH045XE36B	8259805
14ACXS030-230	TXV	28000	15.1	12.5	C35-30/36B	EL195UH070XE36B	8259808
14ACXS030-230	TXV	28000	15.1	12.5	C35-30/36B	EL296UH045XE36B	8259807
14ACXS030-230	TXV	27800	15.1	12.5	C35-30/36B	EL296UH045XV36B	8259802
14ACXS030-230	TXV	28000	15.1	12.5	C35-30/36B	EL296UH070XE36B	8259810
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36B	EL296UH070XV36B	8259813
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36B	SL280UH090V36B	8259815
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36B	SLP98UH070XV36B	8259812
14ACXS030-230	TXV	27600	14	12	C35-30/36B		8259800
14ACXS030-230	TXV	28000	15.1	12.5	C35-30/36C	EL195UH090XE48C	8259822
14ACXS030-230	TXV	28000	15.1	12.5	C35-30/36C	EL296UH090XE48C	8259823
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36C	EL296UH090XV36C	8259825
14ACXS030-230	TXV	28000	15.5	12.5	C35-30/36C	SLP98UH090XV36C	8259826
14ACXS030-230	TXV	28000	15.5	12.5	C35-30A	EL180UH045E36A	8259769
14ACXS030-230	TXV	28000	15.5	12.5	C35-30A	EL180UH045XE36A	8259770
14ACXS030-230	TXV	28000	16	13	C35-30A	SL280UH070V36A	8259766
14ACXS030-230	TXV	28000	16	13	C35-30A	SL280UH070XV36A	8259767
14ACXS030-230	TXV	28000	14.25	12.2	C35-30A		8259764
14ACXS030-230	TXV	28000	16	13	C35-30B	EL180UH070E36B	8259790
14ACXS030-230	TXV	28000	16	13	C35-30B	EL180UH070XE36B	8259779
14ACXS030-230	TXV	28000	16	13	C35-30B	EL180UH090E48B	8259780
14ACXS030-230	TXV	28000	16	13	C35-30B	EL180UH090XE48B	8259782
14ACXS030-230	TXV	28000	15.5	12.5	C35-30B	EL195UH045XE36B	8259784
14ACXS030-230	TXV	28000	15.1	12.5	C35-30B	EL195UH070XE36B	8259787
14ACXS030-230	TXV	28000	15.5	12.5	C35-30B	EL296UH045XE36B	8259785
14ACXS030-230	TXV	28000	15.1	12.5	C35-30B	EL296UH070XE36B	8259774
14ACXS030-230	TXV	28000	16	13	C35-30B	EL296UH070XV36B	8259775
14ACXS030-230	TXV	28000	16	13	C35-30B	SL280UH090V36B	8259789
14ACXS030-230	TXV	28000	16	13	C35-30B	SLP98UH070XV36B	8259777
14ACXS030-230	TXV	28000	14.25	12.2	C35-30B		8259772
14ACXS030-230	TXV	28000	16	13	C35-36A	EL180UH045E36A	8259830
14ACXS030-230	TXV	28000	16	13	C35-36A	EL180UH045XE36A	8259832
14ACXS030-230	TXV	28000	16	13	C35-36A	SL280UH070V36A	8259834
14ACXS030-230	TXV	28000	16	13	C35-36A	SL280UH070XV36A	8259836
14ACXS030-230	TXV	28000	14.25	12.2	C35-36A		8259828
14ACXS030-230	TXV	28000	16	13	C35-36B	EL180UH070E36B	8259854
14ACXS030-230	TXV	28000	16	13	C35-36B	EL180UH070XE36B	8259855
14ACXS030-230	TXV	28000	16	13	C35-36B	EL180UH090E48B	8259857
14ACXS030-230	TXV	28000	16	13	C35-36B	EL180UH090XE48B	8259842
14ACXS030-230	TXV	28000	15.5	12.5	C35-36B	EL195UH045XE36B	8259844
14ACXS030-230	TXV	28000	15.5	12.5	C35-36B	EL195UH070XE36B	8259847
14ACXS030-230	TXV	28000	15.5	12.5	C35-36B	EL296UH045XE36B	8259845
14ACXS030-230	TXV	28000	15.5	12.5	C35-36B	EL296UH045XV36B	8259850

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS030-230	TXV	28000	15.5	12.5	C35-36B	EL296UH070XE36B	8259849
14ACXS030-230	TXV	28000	16	13	C35-36B	EL296UH070XV36B	8259839
14ACXS030-230	TXV	28000	16	13	C35-36B	SL280UH090V36B	8259852
14ACXS030-230	TXV	28000	16	13	C35-36B	SLP98UH070XV36B	8259841
14ACXS030-230	TXV	28000	14.5	12.2	C35-36B		8259837
14ACXS030-230	TXV	28000	16	13	C35-48B	EL180UH070E36B	8259875
14ACXS030-230	TXV	28000	16	13	C35-48B	EL180UH070XE36B	8259877
14ACXS030-230	TXV	28000	16	13	C35-48B	EL180UH090E48B	8259878
14ACXS030-230	TXV	28000	16	13	C35-48B	EL180UH090XE48B	8259864
14ACXS030-230	TXV	28000	15.5	12.5	C35-48B	EL195UH045XE36B	8259865
14ACXS030-230	TXV	28000	15.5	12.5	C35-48B	EL195UH070XE36B	8259869
14ACXS030-230	TXV	28000	15.5	12.5	C35-48B	EL296UH045XE36B	8259867
14ACXS030-230	TXV	28000	15.5	12.5	C35-48B	EL296UH045XV36B	8259872
14ACXS030-230	TXV	28000	15.5	12.5	C35-48B	EL296UH070XE36B	8259870
14ACXS030-230	TXV	28000	16	13	C35-48B	EL296UH070XV36B	8259860
14ACXS030-230	TXV	28000	16	13	C35-48B	SL280UH090V36B	8259873
14ACXS030-230	TXV	28000	16	13	C35-48B	SLP98UH070XV36B	8259862
14ACXS030-230	TXV	28000	14.5	12.2	C35-48B		8259859
14ACXS030-230	TXV	28000	16	13	C35-48C	EL195UH090XE48C	8259885
14ACXS030-230	TXV	28000	16	13	C35-48C	EL296UH090XE48C	8259887
14ACXS030-230	TXV	28000	16	13	C35-48C	EL296UH090XV36C	8259888
14ACXS030-230	TXV	28000	16	13	C35-48C	EL296UH090XV48C	8259882
14ACXS030-230	TXV	28000	16	13	C35-48C	SLP98UH090XV36C	8259890
14ACXS030-230	TXV	28000	16	13	C35-48C	SLP98UH090XV48C	8259883
14ACXS030-230	TXV	28000	14.5	12.2	C35-48C		8259880
14ACXS030-230	TXV	28600	16	13	CBA27UHE-030		10259390
14ACXS030-230	TXV	28600	16	13	CBA27UHE-036		10259391
14ACXS030-230	TXV	27800	14	12	CBX25UH-030		7625598
14ACXS030-230	TXV	28000	14.5	12.2	CBX25UH-036		7625600
14ACXS030-230	TXV	28000	15.1	12.5	CBX25UHV-030		7625602
14ACXS030-230	TXV	28000	15.1	12.5	CBX25UHV-036		7625603
14ACXS030-230	TXV	28000	16	13	CBX27UH-030		7625605
14ACXS030-230	TXV	28000	16	13	CBX27UH-036		7625606
14ACXS030-230	TXV	28000	15	12.5	CBX32M-030		7625608
14ACXS030-230	TXV	28000	15	12.5	CBX32M-036		7625610
14ACXS030-230	TXV	28000	14.5	12.5	CBX32MV-024/030		7625611
14ACXS030-230	TXV	28000	15.1	12.5	CBX32MV-036		7625613
14ACXS030-230	TXV	28000	15.1	12.5	CBX40UHV-030		7625614
14ACXS030-230	TXV	28000	15.5	12.5	CBX40UHV-036		7783140
14ACXS030-230	TXV	26800	15	12.5	CH23-31	EL180UH070E36B	7628239
14ACXS030-230	TXV	26800	15	12.5	CH23-31	EL180UH070XE36B	7783141
14ACXS030-230	TXV	26800	15	12.5	CH23-31	EL180UH090E48B	7783227
14ACXS030-230	TXV	26800	15	12.5	CH23-31	EL180UH090XE48B	7628535
14ACXS030-230	TXV	26600	14.25	12.2	CH23-31	EL195UH045XE36B	7783226
14ACXS030-230	TXV	26600	14.25	14.6	CH23-31	EL195UH070XE36B	7783228
14ACXS030-230	TXV	26600	14.25	12.2	CH23-31	EL296UH045XE36B	7628532
14ACXS030-230	TXV	26600	14.5	12.2	CH23-31	EL296UH045XV36B	7625616
14ACXS030-230	TXV	26600	14.25	14.6	CH23-31	EL296UH070XE36B	7628538
14ACXS030-230	TXV	26800	14.5	12.5	CH23-31	EL296UH070XV36B	7625619

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS030-230	TXV	26800	15.1	12.5	CH23-31	SL280UH090V36B	7625618
14ACXS030-230	TXV	26800	14.5	12.5	CH23-31	SLP98UH070XV36B	7625621
14ACXS030-230	TXV	28000	15.5	12.5	CH23-41	EL180UH045E36A	7625626
14ACXS030-230	TXV	28000	15.5	12.5	CH23-41	EL180UH045XE36A	7625627
14ACXS030-230	TXV	28000	15.5	12.5	CH23-41	EL180UH070E36B	7625629
14ACXS030-230	TXV	28000	15.5	12.5	CH23-41	EL180UH070XE36B	7625631
14ACXS030-230	TXV	28000	16	13	CH23-41	EL180UH090E48B	7625632
14ACXS030-230	TXV	28000	16	13	CH23-41	EL180UH090XE48B	7625634
14ACXS030-230	TXV	28000	15.1	12.5	CH23-41	EL195UH045XE36B	7625635
14ACXS030-230	TXV	28000	15.1	12.5	CH23-41	EL195UH070XE36B	7625639
14ACXS030-230	TXV	28000	15.1	12.5	CH23-41	EL296UH045XE36B	7625637
14ACXS030-230	TXV	28000	15.1	12.5	CH23-41	EL296UH045XV36B	7625642
14ACXS030-230	TXV	28000	15.1	12.5	CH23-41	EL296UH070XE36B	7625640
14ACXS030-230	TXV	28000	15.5	12.5	CH23-41	EL296UH070XV36B	7625643
14ACXS030-230	TXV	28000	16	13	CH23-41	SL280UH090V36B	7625624
14ACXS030-230	TXV	28000	15.5	12.5	CH23-41	SLP98UH070XV36B	7625645
14ACXS030-230	TXV	27800	14	12	CH23-41		7625623
14ACXS030-230	TXV	27400	15	12.5	CH33-19	EL180UH045E36A	7625647
14ACXS030-230	TXV	27400	15	12.5	CH33-19	EL180UH045XE36A	7625648
14ACXS030-230	TXV	27600	15.1	12.5	CH33-19	SL280UH070V36A	7625650
14ACXS030-230	TXV	27600	15.1	12.5	CH33-19	SL280UH070XV36A	7625651
14ACXS030-230	TXV	27400	15	12.5	CH33-24/30	EL180UH045E36A	7628245
14ACXS030-230	TXV	27400	15	12.5	CH33-24/30	EL180UH045XE36A	7783143
14ACXS030-230	TXV	27400	15	12.5	CH33-24/30	SL280UH070V36A	7628242
14ACXS030-230	TXV	27400	15	12.5	CH33-24/30	SL280UH070XV36A	7783142
14ACXS030-230	TXV	28000	15.1	12.5	CH33-25A	EL180UH045E36A	7625660
14ACXS030-230	TXV	28000	15.1	12.5	CH33-25A	EL180UH045XE36A	7625661
14ACXS030-230	TXV	28000	15.5	12.5	CH33-25A	SL280UH070V36A	7625657
14ACXS030-230	TXV	28000	15.5	12.5	CH33-25A	SL280UH070XV36A	7625658
14ACXS030-230	TXV	27800	14	12	CH33-25A		7625655
14ACXS030-230	TXV	28000	15.5	12.5	CH33-25B	EL180UH070E36B	7625666
14ACXS030-230	TXV	28000	15.5	12.5	CH33-25B	EL180UH070XE36B	7625668
14ACXS030-230	TXV	28000	15.5	12.5	CH33-25B	EL180UH090E48B	7625669
14ACXS030-230	TXV	28000	15.5	12.5	CH33-25B	EL180UH090XE48B	7625671
14ACXS030-230	TXV	28000	15.1	12.5	CH33-25B	EL195UH045XE36B	7625673
14ACXS030-230	TXV	28000	15.1	12.5	CH33-25B	EL195UH070XE36B	7625676
14ACXS030-230	TXV	28000	15.1	12.5	CH33-25B	EL296UH045XE36B	7628248
14ACXS030-230	TXV	28000	15.1	12.5	CH33-25B	EL296UH045XV36B	7625674
14ACXS030-230	TXV	28000	15.1	12.5	CH33-25B	EL296UH070XE36B	7625677
14ACXS030-230	TXV	28000	15.5	12.5	CH33-25B	EL296UH070XV36B	7625679
14ACXS030-230	TXV	28000	16	13	CH33-25B	SL280UH090V36B	9150359
14ACXS030-230	TXV	28000	15.5	12.5	CH33-25B	SLP98UH070XV36B	7625681
14ACXS030-230	TXV	27600	14	12	CH33-25B		7625663
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31A	EL180UH045E36A	7625689
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31A	EL180UH045XE36A	7625691
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31A	SL280UH070V36A	7625686
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31A	SL280UH070XV36A	7625687
14ACXS030-230	TXV	28000	14.25	12.2	CH33-31A		7625684
14ACXS030-230	TXV	28000	16	13	CH33-31B	EL180UH070E36B	7625697

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS030-230	TXV	28000	16	13	CH33-31B	EL180UH070XE36B	7625699
14ACXS030-230	TXV	28000	16	13	CH33-31B	EL180UH090E48B	7625700
14ACXS030-230	TXV	28000	16	13	CH33-31B	EL180UH090XE48B	7625702
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31B	EL195UH045XE36B	7625704
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31B	EL195UH070XE36B	7625707
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31B	EL296UH045XE36B	7625705
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31B	EL296UH045XV36B	7625710
14ACXS030-230	TXV	28000	15.5	12.5	CH33-31B	EL296UH070XE36B	7625708
14ACXS030-230	TXV	28000	16	13	CH33-31B	EL296UH070XV36B	7625712
14ACXS030-230	TXV	28000	16	13	CH33-31B	SL280UH090V36B	7625696
14ACXS030-230	TXV	28000	16	13	CH33-31B	SLP98UH070XV36B	7625713
14ACXS030-230	TXV	28000	14.5	12.2	CH33-31B		7625694
14ACXS030-230	TXV	27800	15.1	12.5	CH33-36A	EL180UH045E36A	7625717
14ACXS030-230	TXV	27800	15.1	12.5	CH33-36A	EL180UH045XE36A	7625718
14ACXS030-230	TXV	28000	15.1	12.5	CH33-36A	SL280UH070V36A	7625720
14ACXS030-230	TXV	28000	15.1	12.5	CH33-36A	SL280UH070XV36A	7625721
14ACXS030-230	TXV	27400	14	11.5	CH33-36A		7625715
14ACXS030-230	TXV	28000	15.5	12.5	CH33-36B	EL180UH070E36B	7625728
14ACXS030-230	TXV	28000	15.5	12.5	CH33-36B	EL180UH070XE36B	7625730
14ACXS030-230	TXV	28000	15.5	12.5	CH33-36B	EL180UH090E48B	7625731
14ACXS030-230	TXV	28000	15.5	12.5	CH33-36B	EL180UH090XE48B	7625733
14ACXS030-230	TXV	28000	15.1	12.5	CH33-36B	EL195UH045XE36B	7625734
14ACXS030-230	TXV	28000	15.1	12.5	CH33-36B	EL195UH070XE36B	7625738
14ACXS030-230	TXV	28000	15.1	12.5	CH33-36B	EL296UH045XE36B	7625736
14ACXS030-230	TXV	27800	15.1	12.5	CH33-36B	EL296UH045XV36B	7625725
14ACXS030-230	TXV	28000	15.1	12.5	CH33-36B	EL296UH070XE36B	7625739
14ACXS030-230	TXV	28000	15.5	12.5	CH33-36B	SL280UH090V36B	7625726
14ACXS030-230	TXV	28000	15.5	12.5	CH33-36B	SLP98UH070XV36B	7625743
14ACXS030-230	TXV	27600	14	11.5	CH33-36B		7625723
14ACXS030-230	TXV	28000	15.1	12.5	CH33-36C	EL195UH090XE48C	7625748
14ACXS030-230	TXV	28000	15.1	12.5	CH33-36C	EL296UH090XE48C	7625749
14ACXS030-230	TXV	28000	15.5	12.5	CH33-36C	EL296UH090XV36C	7625751
14ACXS030-230	TXV	28000	15.5	12.5	CH33-36C	SLP98UH090XV36C	7625752
14ACXS030-230	TXV	27800	14	12	CH33-36C		7625746
14ACXS030-230	TXV	28000	14.25	12.2	CH33-42		7783144
14ACXS030-230	TXV	28000	16	13	CH33-42B	EL180UH070E36B	7783145
14ACXS030-230	TXV	28000	16	13	CH33-42B	EL180UH070XE36B	7628255
14ACXS030-230	TXV	28000	16	13	CH33-42B	EL180UH090E48B	7783146
14ACXS030-230	TXV	28000	16	13	CH33-42B	EL180UH090XE48B	7628258
14ACXS030-230	TXV	28000	15.5	12.5	CH33-42B	EL195UH045XE36B	7783147
14ACXS030-230	TXV	28000	15.5	12.5	CH33-42B	EL195UH070XE36B	7783148
14ACXS030-230	TXV	28000	15.5	12.5	CH33-42B	EL296UH045XE36B	7628261
14ACXS030-230	TXV	28000	15.5	12.5	CH33-42B	EL296UH045XV36B	7783149
14ACXS030-230	TXV	28000	15.5	12.5	CH33-42B	EL296UH070XE36B	7628264
14ACXS030-230	TXV	28000	15.5	12.5	CH33-42B	EL296UH070XV36B	7628267
14ACXS030-230	TXV	28000	15.5	12.5	CH33-42B	SLP98UH070XV36B	7783150
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL180UH070E36B	7625761
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL180UH070XE36B	7625762
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL180UH090E48B	7625764

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL180UH090XE48B	7625766
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL195UH045XE36B	7625767
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL195UH070XE36B	7625770
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL296UH045XE36B	7625769
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL296UH045XV36B	7625774
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL296UH070XE36B	7625772
14ACXS030-230	TXV	28000	16	13	CH33-43B	EL296UH070XV36B	7625775
14ACXS030-230	TXV	28000	16	13	CH33-43B	SL280UH090V36B	7625759
14ACXS030-230	TXV	28000	16	13	CH33-43B	SLP98UH070XV36B	7625777
14ACXS030-230	TXV	28000	14.5	12.5	CH33-43B		7625758
14ACXS030-230	TXV	28000	16	13	CH33-43C	EL195UH090XE48C	7625780
14ACXS030-230	TXV	28000	16	13	CH33-43C	EL296UH090XE48C	7625782
14ACXS030-230	TXV	28000	16	13	CH33-43C	EL296UH090XV36C	7625783
14ACXS030-230	TXV	28000	16	13	CH33-43C	SLP98UH090XV36C	7625785
14ACXS030-230	TXV	28000	14.5	12.2	CH33-43C		7625779
14ACXS030-230	TXV	27800	14	12	CH35-24A		7629938
14ACXS030-230	TXV	28000	15.5	12.5	CH35-24B	EL180UH070E36B	7625825
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30A	EL180UH045E36A	7625790
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30A	EL180UH045XE36A	7625791
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30A	SL280UH070V36A	7625787
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30A	SL280UH070XV36A	7625788
14ACXS030-230	TXV	28000	14.25	12.2	CH35-30A		7783665
14ACXS030-230	TXV	28000	16	13	CH35-30B	EL180UH070E36B	7625796
14ACXS030-230	TXV	28000	16	13	CH35-30B	EL180UH070XE36B	7625798
14ACXS030-230	TXV	28000	16	13	CH35-30B	EL180UH090E48B	7625799
14ACXS030-230	TXV	28000	16	13	CH35-30B	EL180UH090XE48B	7625801
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30B	EL195UH045XE36B	7625803
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30B	EL195UH070XE36B	7625806
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30B	EL296UH045XE36B	7625809
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30B	EL296UH045XV36B	7625804
14ACXS030-230	TXV	28000	15.5	12.5	CH35-30B	EL296UH070XE36B	7625807
14ACXS030-230	TXV	28000	16	13	CH35-30B	EL296UH070XV36B	7625811
14ACXS030-230	TXV	28000	16	13	CH35-30B	SL280UH090V36B	7625795
14ACXS030-230	TXV	28000	16	13	CH35-30B	SLP98UH070XV36B	7625812
14ACXS030-230	TXV	28000	14.5	12.2	CH35-30B		7625793
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36A	EL180UH045E36A	7625819
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36A	EL180UH045XE36A	7625820
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36A	SL280UH070V36A	7625816
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36A	SL280UH070XV36A	7625817
14ACXS030-230	TXV	27600	14	12	CH35-36A		7625814
14ACXS030-230	TXV	28000	15.5	12.5	CH35-36B	EL180UH070E36B	7625827
14ACXS030-230	TXV	28000	15.5	12.5	CH35-36B	EL180UH090E48B	7625829
14ACXS030-230	TXV	28000	15.5	12.5	CH35-36B	EL180UH090XE48B	7625830
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36B	EL195UH045XE36B	7625832
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36B	EL195UH070XE36B	7625836
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36B	EL296UH045XE36B	7625834
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36B	EL296UH045XV36B	7625839
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36B	EL296UH070XE36B	7625837
14ACXS030-230	TXV	28000	15.5	12.5	CH35-36B	EL296UH070XV36B	7625841

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS030-230	TXV	28000	16	13	CH35-36B	SL280UH090V36B	7625824
14ACXS030-230	TXV	28000	15.5	12.5	CH35-36B	SLP98UH070XV36B	7625842
14ACXS030-230	TXV	27600	14	12	CH35-36B		7625822
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36C	EL195UH090XE48C	7625846
14ACXS030-230	TXV	28000	15.1	12.5	CH35-36C	EL296UH090XE48C	7625848
14ACXS030-230	TXV	28000	16	13	CH35-36C	EL296UH090XV36C	7625849
14ACXS030-230	TXV	28000	16	13	CH35-36C	SLP98UH090XV36C	7625851
14ACXS030-230	TXV	27800	14.25	12	CH35-36C		7625844
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL180UH070E36B	7625856
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL180UH070XE36B	7625858
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL180UH090E48B	7625860
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL180UH090XE48B	7625861
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL195UH045XE36B	7625863
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL195UH070XE36B	7625868
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL296UH045XE36B	7625870
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL296UH045XV36B	7625865
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL296UH070XE36B	7625867
14ACXS030-230	TXV	28000	16	13	CH35-42B	EL296UH070XV36B	7625872
14ACXS030-230	TXV	28000	16	13	CH35-42B	SL280UH090V36B	7625855
14ACXS030-230	TXV	28000	16	13	CH35-42B	SLP98UH070XV36B	7625873
14ACXS030-230	TXV	28000	14.5	12.5	CH35-42B		7625853
14ACXS030-230	TXV	28000	15.5	12.5	CH35-42C	EL195UH090XE48C	7625877
14ACXS030-230	TXV	28000	15.5	12.5	CH35-42C	EL296UH090XE48C	7625879
14ACXS030-230	TXV	28000	16	13	CH35-42C	EL296UH090XV36C	7625880
14ACXS030-230	TXV	28000	16	13	CH35-42C	SLP98UH090XV36C	7625882
14ACXS030-230	TXV	28000	14.5	12.2	CH35-42C		7625875
14ACXS030-230	TXV	26800	14.5	12.2	CR33-24A	EL180DF045E36A	7625884
14ACXS030-230	TXV	26800	14.25	12.2	CR33-24B	EL180DF070E36B	7625889
14ACXS030-230	TXV	26600	14	12	CR33-24B	EL180DF090E48B	7783229
14ACXS030-230	TXV	26600	14.25	12.2	CR33-24B	EL296DF045XV36B	7783151
14ACXS030-230	TXV	26600	14	12	CR33-24B	EL296DF070XV48B	7625887
14ACXS030-230	TXV	26600	14.25	12.2	CR33-24B	SL280DF090V48B	7625885
14ACXS030-230	TXV	26600	14.25	12.2	CR33-24B	SLP98DF070XV36B	7628270
14ACXS030-230	TXV	28000	15.1	12.5	CR33-30/36A	EL180DF045E36A	7625896
14ACXS030-230	TXV	28000	15.5	12.5	CR33-30/36A	SL280DF070V36A	7625895
14ACXS030-230	TXV	28000	14.25	12	CR33-30/36A		7625893
14ACXS030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL180DF070E36B	7625904
14ACXS030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL180DF090E48B	7625905
14ACXS030-230	TXV	28000	15.1	12.5	CR33-30/36B	EL195DF045XE36B	7625907
14ACXS030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL195DF070XE48B	7625911
14ACXS030-230	TXV	28000	15.1	12.5	CR33-30/36B	EL296DF045XE36B	7625909
14ACXS030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL296DF045XV36B	7625914
14ACXS030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL296DF070XE48B	7625912
14ACXS030-230	TXV	28000	15.1	12.5	CR33-30/36B	EL296DF070XV48B	7625916
14ACXS030-230	TXV	28000	15.5	12.5	CR33-30/36B	SL280DF090V48B	7625902
14ACXS030-230	TXV	28000	15.5	12.5	CR33-30/36B	SLP98DF070XV36B	7625918
14ACXS030-230	TXV	28000	14.25	12	CR33-30/36B		7625900
14ACXS030-230	TXV	28000	16	13	CR33-30/36C	SLP98DF090XV36C	7625923
14ACXS030-230	TXV	28000	14.25	12	CR33-30/36C		7625921

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS030-230	TXV	28000	15.1	12.5	CX35-24A	EL180UH045E36A	8259898
14ACXS030-230	TXV	28000	15.1	12.5	CX35-24A	EL180UH045XE36A	8259893
14ACXS030-230	TXV	28000	15.5	12.5	CX35-24A	SL280UH070V36A	8259895
14ACXS030-230	TXV	28000	15.5	12.5	CX35-24A	SL280UH070XV36A	8259897
14ACXS030-230	TXV	27600	14	12	CX35-24A		8259892
14ACXS030-230	TXV	28000	15.5	12.5	CX35-24B	EL180UH070E36B	8259918
14ACXS030-230	TXV	28000	15.5	12.5	CX35-24B	EL180UH070XE36B	8259920
14ACXS030-230	TXV	27800	15.5	12.5	CX35-24B	EL180UH090E48B	8259913
14ACXS030-230	TXV	27800	15.5	12.5	CX35-24B	EL180UH090XE48B	8259915
14ACXS030-230	TXV	28000	15.1	12.5	CX35-24B	EL195UH045XE36B	8259903
14ACXS030-230	TXV	28000	15	12.5	CX35-24B	EL195UH070XE36B	8259907
14ACXS030-230	TXV	28000	15.1	12.5	CX35-24B	EL296UH045XE36B	8259905
14ACXS030-230	TXV	28000	15.1	12.5	CX35-24B	EL296UH045XV36B	8259910
14ACXS030-230	TXV	28000	15	12.5	CX35-24B	EL296UH070XE36B	8259908
14ACXS030-230	TXV	28000	15.1	12.5	CX35-24B	EL296UH070XV36B	8259912
14ACXS030-230	TXV	28000	15.5	12.5	CX35-24B	SL280UH090V36B	8259916
14ACXS030-230	TXV	28000	15.1	12.5	CX35-24B	SLP98UH070XV36B	8259902
14ACXS030-230	TXV	27600	14	12	CX35-24B		8259900
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30/36A	EL180UH045E36A	8259954
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30/36A	EL180UH045XE36A	8259958
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36A	SL280UH070V36A	8259953
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36A	SL280UH070XV36A	8259956
14ACXS030-230	TXV	27600	14	12	CX35-30/36A		8259951
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL180UH070E36B	8259977
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL180UH070XE36B	8259961
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL180UH090E48B	8259979
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL180UH090XE48B	8259963
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30/36B	EL195UH045XE36B	8259971
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30/36B	EL195UH070XE36B	8259972
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30/36B	EL296UH045XE36B	8259964
14ACXS030-230	TXV	27800	15.1	12.5	CX35-30/36B	EL296UH045XV36B	8259976
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30/36B	EL296UH070XE36B	8259966
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL296UH070XV36B	8259974
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36B	SL280UH090V36B	8259969
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36B	SLP98UH070XV36B	8259968
14ACXS030-230	TXV	27600	14	12	CX35-30/36B		8259959
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30/36C	EL195UH090XE48C	8259984
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30/36C	EL296UH090XE48C	8259982
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36C	EL296UH090XV36C	8259986
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30/36C	SLP98UH090XV36C	8259981
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30A	EL180UH045E36A	8259925
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30A	EL180UH045XE36A	8259926
14ACXS030-230	TXV	28000	16	13	CX35-30A	SL280UH070V36A	8259923
14ACXS030-230	TXV	28000	16	13	CX35-30A	SL280UH070XV36A	8259928
14ACXS030-230	TXV	28000	14.25	12.2	CX35-30A		8259921
14ACXS030-230	TXV	28000	16	13	CX35-30B	EL180UH070E36B	8259938
14ACXS030-230	TXV	28000	16	13	CX35-30B	EL180UH070XE36B	8259945
14ACXS030-230	TXV	28000	16	13	CX35-30B	EL180UH090E48B	8259940
14ACXS030-230	TXV	28000	16	13	CX35-30B	EL180UH090XE48B	8259946

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30B	EL195UH045XE36B	8259933
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30B	EL195UH070XE36B	8259935
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30B	EL296UH045XE36B	8259948
14ACXS030-230	TXV	28000	15.5	12.5	CX35-30B	EL296UH045XV36B	8259936
14ACXS030-230	TXV	28000	15.1	12.5	CX35-30B	EL296UH070XE36B	8259949
14ACXS030-230	TXV	28000	16	13	CX35-30B	EL296UH070XV36B	8259941
14ACXS030-230	TXV	28000	16	13	CX35-30B	SL280UH090V36B	8259943
14ACXS030-230	TXV	28000	16	13	CX35-30B	SLP98UH070XV36B	8259931
14ACXS030-230	TXV	28000	14.25	12.2	CX35-30B		8259930
14ACXS030-230	TXV	28000	16	13	CX35-36A	EL180UH045E36A	8259991
14ACXS030-230	TXV	28000	16	13	CX35-36A	EL180UH045XE36A	8259992
14ACXS030-230	TXV	28000	16	13	CX35-36A	SL280UH070V36A	8259989
14ACXS030-230	TXV	28000	16	13	CX35-36A	SL280UH070XV36A	8259994
14ACXS030-230	TXV	28000	14.5	12.2	CX35-36A		8259987
14ACXS030-230	TXV	28000	16	13	CX35-36B	EL180UH070E36B	8260002
14ACXS030-230	TXV	28000	16	13	CX35-36B	EL180UH070XE36B	8260011
14ACXS030-230	TXV	28000	16	13	CX35-36B	EL180UH090E48B	8260004
14ACXS030-230	TXV	28000	16	13	CX35-36B	EL180UH090XE48B	8260012
14ACXS030-230	TXV	28000	15.5	12.5	CX35-36B	EL195UH045XE36B	8260006
14ACXS030-230	TXV	28000	15.5	12.5	CX35-36B	EL195UH070XE36B	8259998
14ACXS030-230	TXV	28000	15.5	12.5	CX35-36B	EL296UH045XE36B	8260014
14ACXS030-230	TXV	28000	15.5	12.5	CX35-36B	EL296UH045XV36B	8259999
14ACXS030-230	TXV	28000	15.5	12.5	CX35-36B	EL296UH070XE36B	8260016
14ACXS030-230	TXV	28000	16	13	CX35-36B	EL296UH070XV36B	8260007
14ACXS030-230	TXV	28000	16	13	CX35-36B	SL280UH090V36B	8260009
14ACXS030-230	TXV	28000	16	13	CX35-36B	SLP98UH070XV36B	8260001
14ACXS030-230	TXV	28000	14.5	12.2	CX35-36B		8259996
14ACXS030-230	TXV	28000	16	13	CX35-48B	EL180UH070E36B	8260031
14ACXS030-230	TXV	28000	16	13	CX35-48B	EL180UH070XE36B	8260026
14ACXS030-230	TXV	28000	16	13	CX35-48B	EL180UH090E48B	8260032
14ACXS030-230	TXV	28000	16	13	CX35-48B	EL180UH090XE48B	8260027
14ACXS030-230	TXV	28000	15.5	12.5	CX35-48B	EL195UH045XE36B	8260034
14ACXS030-230	TXV	28000	15.5	12.5	CX35-48B	EL195UH070XE36B	8260036
14ACXS030-230	TXV	28000	15.5	12.5	CX35-48B	EL296UH045XE36B	8260019
14ACXS030-230	TXV	28000	15.5	12.5	CX35-48B	EL296UH045XV36B	8260038
14ACXS030-230	TXV	28000	15.5	12.5	CX35-48B	EL296UH070XE36B	8260021
14ACXS030-230	TXV	28000	16	13	CX35-48B	EL296UH070XV36B	8260022
14ACXS030-230	TXV	28000	16	13	CX35-48B	SL280UH090V36B	8260024
14ACXS030-230	TXV	28000	16	13	CX35-48B	SLP98UH070XV36B	8260029
14ACXS030-230	TXV	28000	14.5	12.2	CX35-48B		8260017
14ACXS030-230	TXV	28000	16	13	CX35-48C	EL195UH090XE48C	8260047
14ACXS030-230	TXV	28000	16	13	CX35-48C	EL296UH090XE48C	8260043
14ACXS030-230	TXV	28000	16	13	CX35-48C	EL296UH090XV36C	8260049
14ACXS030-230	TXV	28000	16	13	CX35-48C	EL296UH090XV48C	8260046
14ACXS030-230	TXV	28000	16	13	CX35-48C	SLP98UH090XV36C	8260044
14ACXS030-230	TXV	28000	16	13	CX35-48C	SLP98UH090XV48C	8260041
14ACXS030-230	TXV	28000	14.5	12.2	CX35-48C		8260039
14ACXS030-230	TXV	28000	14.25	12.2	CX38-31B		10547826
14ACXS036-230	RFC	33600	14	12	C35-30A		8471033

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	RFC	33600	14	12	C35-30B		8471036
14ACXS036-230	RFC	34000	14	12	C35-36A		8471039
14ACXS036-230	RFC	34000	14	12	C35-36B		8471042
14ACXS036-230	RFC	34000	14	12	C35-48B		8471044
14ACXS036-230	RFC	34000	14	12	C35-48C		8471046
14ACXS036-230	RFC	34400	14	12.2	C35-49C		8471047
14ACXS036-230	RFC	34000	14	12.2	C35-50/60C		8471049
14ACXS036-230	RFC	33800	14	12.2	CH33-31B		7782648
14ACXS036-230	RFC	34600	14.5	12.2	CH33-43B		7626526
14ACXS036-230	RFC	34000	14.25	12.2	CH33-44/48B		7626578
14ACXS036-230	RFC	34000	14.25	12.2	CH33-48		7628396
14ACXS036-230	RFC	34600	14.5	12.2	CH33-49		7783186
14ACXS036-230	RFC	34400	14.25	12.2	CH33-50/60C		7782716
14ACXS036-230	RFC	33600	14	12	CH35-30A		10514537
14ACXS036-230	RFC	33600	14	12	CH35-30B		10514538
14ACXS036-230	RFC	32400	14	11.5	CH35-36A		10514539
14ACXS036-230	RFC	32400	14	11.5	CH35-36B		10514540
14ACXS036-230	RFC	34000	14	12	CH35-42B		10514541
14ACXS036-230	RFC	34000	14	12	CH35-48B		10514542
14ACXS036-230	RFC	34000	14	12	CH35-48C		10514543
14ACXS036-230	RFC	34000	14	12.2	CH35-51C		10514544
14ACXS036-230	RFC	33600	14	12	CR33-48B		7628438
14ACXS036-230	RFC	33800	14	12	CR33-48C		7628456
14ACXS036-230	TXV	33200	14.5	12.2	C35-30/36A	EL180UH045E36A	8258960
14ACXS036-230	TXV	33200	14.5	12.2	C35-30/36A	EL180UH045XE36A	8258964
14ACXS036-230	TXV	33400	15	12.2	C35-30/36A	SL280UH070V36A	8258959
14ACXS036-230	TXV	33400	15	12.2	C35-30/36A	SL280UH070XV36A	8258962
14ACXS036-230	TXV	33000	14	11.5	C35-30/36A		8258957
14ACXS036-230	TXV	33400	15.5	12.5	C35-30/36B	EL180UH070E36B	8258970
14ACXS036-230	TXV	33400	15.5	12.5	C35-30/36B	EL180UH070XE36B	8258980
14ACXS036-230	TXV	33400	15.1	12.5	C35-30/36B	EL180UH090E48B	8258972
14ACXS036-230	TXV	33400	15.1	12.5	C35-30/36B	EL180UH090XE48B	8258982
14ACXS036-230	TXV	33000	15	12.5	C35-30/36B	EL195UH045XE36B	8258974
14ACXS036-230	TXV	33200	14.5	12	C35-30/36B	EL195UH070XE36B	8258975
14ACXS036-230	TXV	33000	15	12.5	C35-30/36B	EL296UH045XE36B	8258984
14ACXS036-230	TXV	33400	15	12.5	C35-30/36B	EL296UH045XV36B	8258977
14ACXS036-230	TXV	33200	14.5	12	C35-30/36B	EL296UH070XE36B	8258985
14ACXS036-230	TXV	33400	15	12.5	C35-30/36B	EL296UH070XV36B	8258987
14ACXS036-230	TXV	33600	15.5	12.5	C35-30/36B	SL280UH090V36B	8258989
14ACXS036-230	TXV	33600	15.5	12.5	C35-30/36B	SL280UH090V48B	8258969
14ACXS036-230	TXV	33600	15.5	12.5	C35-30/36B	SL280UH090XV48B	8258979
14ACXS036-230	TXV	33400	15	12.5	C35-30/36B	SLP98UH070XV36B	8258967
14ACXS036-230	TXV	33000	14	11.5	C35-30/36B		8258966
14ACXS036-230	TXV	33600	15.1	12.5	C35-30/36C	EL180UH090E60C	8258994
14ACXS036-230	TXV	33400	15.5	12.5	C35-30/36C	EL180UH110E60C	8259004
14ACXS036-230	TXV	33400	15.5	12.5	C35-30/36C	EL180UH110XE60C	8258995
14ACXS036-230	TXV	33200	15.1	12.5	C35-30/36C	EL195UH090XE48C	8259005
14ACXS036-230	TXV	33600	15.1	12.5	C35-30/36C	EL195UH110XE60C	8259007
14ACXS036-230	TXV	33200	15.1	12.5	C35-30/36C	EL296UH090XE48C	8258997

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	33600	15.5	12.5	C35-30/36C	EL296UH090XV36C	8259008
14ACXS036-230	TXV	33400	15.5	12.5	C35-30/36C	EL296UH090XV48C	8259010
14ACXS036-230	TXV	33600	15.1	12.5	C35-30/36C	EL296UH110XE60C	8258999
14ACXS036-230	TXV	33600	15.5	12.5	C35-30/36C	EL296UH110XV48C	8259012
14ACXS036-230	TXV	33600	15.5	12.5	C35-30/36C	SLP98UH090XV36C	8259000
14ACXS036-230	TXV	33400	15.5	12.5	C35-30/36C	SLP98UH090XV48C	8258992
14ACXS036-230	TXV	33800	15.5	12.5	C35-30/36C	SLP98UH110XV60C	8259002
14ACXS036-230	TXV	33000	14	11.5	C35-30/36C		8258990
14ACXS036-230	TXV	34200	15.1	12.5	C35-30A	EL180UH045E36A	8258930
14ACXS036-230	TXV	34200	15.1	12.5	C35-30A	EL180UH045XE36A	8258927
14ACXS036-230	TXV	34400	15.1	12.5	C35-30A	SL280UH070V36A	8258929
14ACXS036-230	TXV	34400	15.1	12.5	C35-30A	SL280UH070XV36A	8258926
14ACXS036-230	TXV	34000	14.5	12	C35-30A		8258924
14ACXS036-230	TXV	34400	15	12.5	C35-30B	EL180UH070E36B	8258949
14ACXS036-230	TXV	34400	15	12.5	C35-30B	EL180UH070XE36B	8258937
14ACXS036-230	TXV	34400	15.5	12.5	C35-30B	EL180UH090E48B	8258950
14ACXS036-230	TXV	34400	15.5	12.5	C35-30B	EL180UH090XE48B	8258939
14ACXS036-230	TXV	34000	14.5	12.2	C35-30B	EL195UH045XE36B	8258940
14ACXS036-230	TXV	34000	15.1	12.5	C35-30B	EL195UH070XE36B	8258942
14ACXS036-230	TXV	34000	14.5	12.2	C35-30B	EL296UH045XE36B	8258952
14ACXS036-230	TXV	34200	15.1	12.5	C35-30B	EL296UH045XV36B	8258944
14ACXS036-230	TXV	34000	15.1	12.5	C35-30B	EL296UH070XE36B	8258954
14ACXS036-230	TXV	34200	15.1	12.5	C35-30B	EL296UH070XV36B	8258955
14ACXS036-230	TXV	34400	15.5	12.5	C35-30B	SL280UH090V36B	8258934
14ACXS036-230	TXV	34400	15.5	12.5	C35-30B	SL280UH090V48B	8258947
14ACXS036-230	TXV	34400	15.5	12.5	C35-30B	SL280UH090XV48B	8258935
14ACXS036-230	TXV	34200	15.1	12.5	C35-30B	SLP98UH070XV36B	8258945
14ACXS036-230	TXV	34000	14.5	12	C35-30B		8258932
14ACXS036-230	TXV	34400	15.1	12.5	C35-36A	EL180UH045E36A	8260246
14ACXS036-230	TXV	34400	15.1	12.5	C35-36A	EL180UH045XE36A	8260249
14ACXS036-230	TXV	34600	15.5	12.5	C35-36A	SL280UH070V36A	8260244
14ACXS036-230	TXV	34600	15.5	12.5	C35-36A	SL280UH070XV36A	8260247
14ACXS036-230	TXV	34200	14.25	12.2	C35-36A		8260243
14ACXS036-230	TXV	34600	16	13	C35-36B	EL180UH070E36B	8260256
14ACXS036-230	TXV	34600	16	13	C35-36B	EL180UH070XE36B	8260274
14ACXS036-230	TXV	34600	16	13	C35-36B	EL180UH090E48B	8260260
14ACXS036-230	TXV	34600	16	13	C35-36B	EL180UH090XE48B	8260258
14ACXS036-230	TXV	34400	15	12.5	C35-36B	EL195UH045XE36B	8260262
14ACXS036-230	TXV	34400	15	12.5	C35-36B	EL195UH070XE36B	8260264
14ACXS036-230	TXV	34400	15	12.5	C35-36B	EL296UH045XE36B	8260259
14ACXS036-230	TXV	34600	15.5	12.5	C35-36B	EL296UH045XV36B	8260253
14ACXS036-230	TXV	34400	15	12.5	C35-36B	EL296UH070XE36B	8260265
14ACXS036-230	TXV	34600	15.5	12.5	C35-36B	EL296UH070XV36B	8260267
14ACXS036-230	TXV	34800	16	13	C35-36B	SL280UH090V36B	8260269
14ACXS036-230	TXV	34800	16	13	C35-36B	SL280UH090V48B	8260271
14ACXS036-230	TXV	34800	16	13	C35-36B	SL280UH090XV48B	8260272
14ACXS036-230	TXV	34600	15.5	12.5	C35-36B	SLP98UH070XV36B	8260254
14ACXS036-230	TXV	34200	14.25	12.2	C35-36B		8260251
14ACXS036-230	TXV	34800	16	13	C35-48B	EL180UH070E36B	8259029

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	34800	16	13	C35-48B	EL180UH070XE36B	8259026
14ACXS036-230	TXV	34800	16	13	C35-48B	EL180UH090E48B	8259031
14ACXS036-230	TXV	34800	16	13	C35-48B	EL180UH090XE48B	8259028
14ACXS036-230	TXV	34400	15	12.5	C35-48B	EL195UH045XE36B	8259033
14ACXS036-230	TXV	34600	15.1	12.5	C35-48B	EL195UH070XE36B	8259034
14ACXS036-230	TXV	34400	15	12.5	C35-48B	EL296UH045XE36B	8259018
14ACXS036-230	TXV	34800	15.5	12.5	C35-48B	EL296UH045XV36B	8259036
14ACXS036-230	TXV	34600	15.1	12.5	C35-48B	EL296UH070XE36B	8259020
14ACXS036-230	TXV	34800	15.5	12.5	C35-48B	EL296UH070XV36B	8259021
14ACXS036-230	TXV	34800	16	13	C35-48B	SL280UH090V36B	8259023
14ACXS036-230	TXV	35000	16	13	C35-48B	SL280UH090V48B	8259039
14ACXS036-230	TXV	35000	16	13	C35-48B	SL280UH090XV48B	8259024
14ACXS036-230	TXV	34800	15.5	12.5	C35-48B	SLP98UH070XV36B	8259038
14ACXS036-230	TXV	34400	14.5	12.2	C35-48B		8259016
14ACXS036-230	TXV	34800	16	13	C35-48C	EL180UH090E60C	8259066
14ACXS036-230	TXV	34800	16	13	C35-48C	EL180UH110E60C	8259056
14ACXS036-230	TXV	34800	16	13	C35-48C	EL180UH110XE60C	8259067
14ACXS036-230	TXV	34600	15.5	12.5	C35-48C	EL195UH090XE48C	8259043
14ACXS036-230	TXV	34800	16	13	C35-48C	EL195UH110XE60C	8259044
14ACXS036-230	TXV	34600	15.5	12.5	C35-48C	EL296UH090XE48C	8259069
14ACXS036-230	TXV	34800	16	13	C35-48C	EL296UH090XV36C	8259046
14ACXS036-230	TXV	34800	16	13	C35-48C	EL296UH090XV48C	8259048
14ACXS036-230	TXV	34600	16	13	C35-48C	EL296UH110XE60C	8259071
14ACXS036-230	TXV	35000	16	13	C35-48C	EL296UH110XV48C	8259049
14ACXS036-230	TXV	35200	16	13	C35-48C	EL296UH110XV60C	8259061
14ACXS036-230	TXV	35400	16	13	C35-48C	SL280UH090V60C	8259062
14ACXS036-230	TXV	35400	16	13	C35-48C	SL280UH090XV60C	8259053
14ACXS036-230	TXV	35200	16	13	C35-48C	SL280UH110V60C	8259064
14ACXS036-230	TXV	35200	16	13	C35-48C	SL280UH110XV60C	8259054
14ACXS036-230	TXV	34800	16	13	C35-48C	SLP98UH090XV36C	8259057
14ACXS036-230	TXV	34800	16	13	C35-48C	SLP98UH090XV48C	8259059
14ACXS036-230	TXV	35200	16	13	C35-48C	SLP98UH110XV60C	8259051
14ACXS036-230	TXV	34400	14.5	12.2	C35-48C		8259041
14ACXS036-230	TXV	35200	16	13	C35-49C	EL180UH090E60C	8259094
14ACXS036-230	TXV	35000	16	13	C35-49C	EL180UH110E60C	8259084
14ACXS036-230	TXV	35000	16	13	C35-49C	EL180UH110XE60C	8259096
14ACXS036-230	TXV	34800	16	13	C35-49C	EL195UH090XE48C	8259086
14ACXS036-230	TXV	35200	16	13	C35-49C	EL195UH110XE60C	8259087
14ACXS036-230	TXV	34800	16	13	C35-49C	EL296UH090XE48C	8259097
14ACXS036-230	TXV	35200	16	13	C35-49C	EL296UH090XV36C	8259074
14ACXS036-230	TXV	35000	16	13	C35-49C	EL296UH090XV48C	8259076
14ACXS036-230	TXV	35200	16	13	C35-49C	EL296UH110XE60C	8259099
14ACXS036-230	TXV	35200	16	13	C35-49C	EL296UH110XV48C	8259077
14ACXS036-230	TXV	35600	16	13	C35-49C	EL296UH110XV60C	8259091
14ACXS036-230	TXV	35600	16	13	C35-49C	SL280UH090V60C	8259102
14ACXS036-230	TXV	35600	16	13	C35-49C	SL280UH090XV60C	8259081
14ACXS036-230	TXV	35400	16	13	C35-49C	SL280UH110V60C	8259092
14ACXS036-230	TXV	35400	16	13	C35-49C	SL280UH110XV60C	8259082
14ACXS036-230	TXV	35200	16	13	C35-49C	SLP98UH090XV36C	8259101

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	35000	16	13	C35-49C	SLP98UH090XV48C	8259089
14ACXS036-230	TXV	35600	16	13	C35-49C	SLP98UH110XV60C	8259079
14ACXS036-230	TXV	34600	14.5	12.2	C35-49C		8259072
14ACXS036-230	TXV	34800	16	13	C35-50/60C	EL180UH090E60C	8259132
14ACXS036-230	TXV	34800	16	13	C35-50/60C	EL180UH110E60C	8259111
14ACXS036-230	TXV	34800	16	13	C35-50/60C	EL180UH110XE60C	8259134
14ACXS036-230	TXV	34600	15.5	12.5	C35-50/60C	EL195UH090XE48C	8259113
14ACXS036-230	TXV	34800	16	13	C35-50/60C	EL195UH110XE60C	8259114
14ACXS036-230	TXV	34600	15.5	12.5	C35-50/60C	EL296UH090XE48C	8259121
14ACXS036-230	TXV	34800	16	13	C35-50/60C	EL296UH090XV36C	8259116
14ACXS036-230	TXV	34800	16	13	C35-50/60C	EL296UH090XV48C	8259118
14ACXS036-230	TXV	34800	16	13	C35-50/60C	EL296UH110XE60C	8259123
14ACXS036-230	TXV	35000	16	13	C35-50/60C	EL296UH110XV48C	8259106
14ACXS036-230	TXV	35200	16	13	C35-50/60C	EL296UH110XV60C	8259128
14ACXS036-230	TXV	35200	16	13	C35-50/60C	SL280UH090V60C	8259129
14ACXS036-230	TXV	35200	16	13	C35-50/60C	SL280UH090XV60C	8259119
14ACXS036-230	TXV	35000	16	13	C35-50/60C	SL280UH110V60C	8259131
14ACXS036-230	TXV	35000	16	13	C35-50/60C	SL280UH110XV60C	8259109
14ACXS036-230	TXV	34800	16	13	C35-50/60C	SLP98UH090XV36C	8259124
14ACXS036-230	TXV	34800	16	13	C35-50/60C	SLP98UH090XV48C	8259126
14ACXS036-230	TXV	35200	16	13	C35-50/60C	SLP98UH110XV60C	8259108
14ACXS036-230	TXV	34200	14.5	12.2	C35-50/60C		8259104
14ACXS036-230	TXV	34600	16	13	CBA27UHE-036		10259480
14ACXS036-230	TXV	35600	16	13	CBA27UHE-042		10259392
14ACXS036-230	TXV	34200	14.5	12.2	CBX25UH-036		7626347
14ACXS036-230	TXV	34600	15	12.5	CBX25UH-042		7782615
14ACXS036-230	TXV	34400	15	12.5	CBX25UHV-036		7626350
14ACXS036-230	TXV	35200	16	13	CBX25UHV-042		7782616
14ACXS036-230	TXV	34200	16	13	CBX27UH-036		7626354
14ACXS036-230	TXV	35200	16	13	CBX27UH-042		7782617
14ACXS036-230	TXV	33400	14.5	12.2	CBX32M-030		7626357
14ACXS036-230	TXV	33800	14.5	12.2	CBX32M-036		7782618
14ACXS036-230	TXV	33800	14.5	12.2	CBX32M-042		7626360
14ACXS036-230	TXV	34800	15.1	12.5	CBX32M-048		7782619
14ACXS036-230	TXV	34000	15.1	12.5	CBX32MV-036		7626363
14ACXS036-230	TXV	35200	16	13	CBX32MV-048		7782620
14ACXS036-230	TXV	34200	15.1	12.5	CBX40UHV-036		7626366
14ACXS036-230	TXV	35000	15.5	12.5	CBX40UHV-042		7782621
14ACXS036-230	TXV	35000	16	13	CBX40UHV-048		7626369
14ACXS036-230	TXV	33600	15	12.5	CH23-41	EL180UH045E36A	7782623
14ACXS036-230	TXV	33600	15	12.5	CH23-41	EL180UH045XE36A	7626375
14ACXS036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH070E36B	7782624
14ACXS036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH070XE36B	7626378
14ACXS036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH090E48B	7782625
14ACXS036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH090XE48B	7626381
14ACXS036-230	TXV	33600	15.1	12.5	CH23-41	EL195UH045XE36B	7782626
14ACXS036-230	TXV	33800	15.1	12.5	CH23-41	EL195UH070XE36B	7782627
14ACXS036-230	TXV	33600	15.1	12.5	CH23-41	EL296UH045XE36B	7626384
14ACXS036-230	TXV	33800	15.1	12.5	CH23-41	EL296UH045XV36B	7782628

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	33800	15.1	12.5	CH23-41	EL296UH070XE36B	7626387
14ACXS036-230	TXV	33800	15.1	12.5	CH23-41	EL296UH070XV36B	7626390
14ACXS036-230	TXV	34000	16	13	CH23-41	SL280UH090V48B	7782622
14ACXS036-230	TXV	34000	16	13	CH23-41	SL280UH090XV48B	7626372
14ACXS036-230	TXV	33800	15.1	12.5	CH23-41	SLP98UH070XV36B	7782629
14ACXS036-230	TXV	33600	15	12.5	CH23-51	EL180UH045E36A	7626399
14ACXS036-230	TXV	33600	15	12.5	CH23-51	EL180UH045XE36A	7782632
14ACXS036-230	TXV	33800	15.5	12.5	CH23-51	EL180UH070E36B	7626402
14ACXS036-230	TXV	33800	15.5	12.5	CH23-51	EL180UH070XE36B	7782633
14ACXS036-230	TXV	33800	15.5	12.5	CH23-51	EL180UH090E48B	7626405
14ACXS036-230	TXV	34000	15.5	12.5	CH23-51	EL180UH090E60C	7782639
14ACXS036-230	TXV	33800	15.5	12.5	CH23-51	EL180UH090XE48B	7782634
14ACXS036-230	TXV	34000	15.5	12.5	CH23-51	EL180UH110E60C	7626423
14ACXS036-230	TXV	34000	15.5	12.5	CH23-51	EL180UH110XE60C	7782640
14ACXS036-230	TXV	33600	15.1	12.5	CH23-51	EL195UH045XE36B	7626408
14ACXS036-230	TXV	33800	15.1	12.5	CH23-51	EL195UH070XE36B	7626411
14ACXS036-230	TXV	33600	15.1	12.5	CH23-51	EL195UH090XE48C	7626426
14ACXS036-230	TXV	34000	15.5	12.5	CH23-51	EL195UH110XE60C	7626429
14ACXS036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH045XE36B	7782635
14ACXS036-230	TXV	34000	15.1	12.5	CH23-51	EL296UH045XV36B	7626414
14ACXS036-230	TXV	33800	15.1	12.5	CH23-51	EL296UH070XE36B	7782636
14ACXS036-230	TXV	34000	15.1	12.5	CH23-51	EL296UH070XV36B	7782637
14ACXS036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH090XE48C	7782641
14ACXS036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH090XV36C	7626432
14ACXS036-230	TXV	33800	15.5	12.5	CH23-51	EL296UH090XV48C	7626435
14ACXS036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH110XE60C	7782642
14ACXS036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH110XV48C	7626438
14ACXS036-230	TXV	34200	15.5	12.5	CH23-51	EL296UH110XV60C	7782645
14ACXS036-230	TXV	34000	16	13	CH23-51	SL280UH090V36B	7782630
14ACXS036-230	TXV	34200	16	13	CH23-51	SL280UH090V48B	7626396
14ACXS036-230	TXV	34400	15.5	12.5	CH23-51	SL280UH090V60C	7628359
14ACXS036-230	TXV	34200	16	13	CH23-51	SL280UH090XV48B	7782631
14ACXS036-230	TXV	34400	15.5	12.5	CH23-51	SL280UH090XV60C	7783179
14ACXS036-230	TXV	34200	15.5	12.5	CH23-51	SL280UH110V60C	7782638
14ACXS036-230	TXV	34200	15.5	12.5	CH23-51	SL280UH110XV60C	7626420
14ACXS036-230	TXV	34000	15.1	12.5	CH23-51	SLP98UH070XV36B	7626417
14ACXS036-230	TXV	34000	15.5	12.5	CH23-51	SLP98UH090XV36C	7782643
14ACXS036-230	TXV	33800	15.5	12.5	CH23-51	SLP98UH090XV48C	7782644
14ACXS036-230	TXV	34200	15.5	12.5	CH23-51	SLP98UH110XV60C	7626441
14ACXS036-230	TXV	33400	14.25	11.5	CH23-51		7626393
14ACXS036-230	TXV	34000	15	12.5	CH33-31A	EL180UH045E36A	7782647
14ACXS036-230	TXV	34000	15	12.5	CH33-31A	EL180UH045XE36A	7626447
14ACXS036-230	TXV	34200	15.1	12.5	CH33-31A	SL280UH070V36A	7782646
14ACXS036-230	TXV	34200	15.1	12.5	CH33-31A	SL280UH070XV36A	7626444
14ACXS036-230	TXV	34600	15.1	12.5	CH33-31B	EL180UH070E36B	7626457
14ACXS036-230	TXV	34600	15.1	12.5	CH33-31B	EL180UH070XE36B	7782651
14ACXS036-230	TXV	34600	15.5	12.5	CH33-31B	EL180UH090E48B	7626460
14ACXS036-230	TXV	34600	15.5	12.5	CH33-31B	EL180UH090XE48B	7782652
14ACXS036-230	TXV	34200	14.5	12.2	CH33-31B	EL195UH045XE36B	7626463

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	34400	15	12.5	CH33-31B	EL195UH070XE36B	7626466
14ACXS036-230	TXV	34200	14.5	12.2	CH33-31B	EL296UH045XE36B	7782653
14ACXS036-230	TXV	34600	15.1	12.5	CH33-31B	EL296UH045XV36B	7626469
14ACXS036-230	TXV	34400	15	12.5	CH33-31B	EL296UH070XE36B	7782654
14ACXS036-230	TXV	34600	15.1	12.5	CH33-31B	EL296UH070XV36B	7782655
14ACXS036-230	TXV	34800	16	13	CH33-31B	SL280UH090V36B	7782649
14ACXS036-230	TXV	34800	15.5	12.5	CH33-31B	SL280UH090V48B	7626454
14ACXS036-230	TXV	34800	15.5	12.5	CH33-31B	SL280UH090XV48B	7782650
14ACXS036-230	TXV	34600	15.1	12.5	CH33-31B	SLP98UH070XV36B	7626472
14ACXS036-230	TXV	34200	14.5	12.2	CH33-31B		7626451
14ACXS036-230	TXV	33000	14.5	12.2	CH33-36A	EL180UH045E36A	7782657
14ACXS036-230	TXV	33000	14.5	12.2	CH33-36A	EL180UH045XE36A	7626478
14ACXS036-230	TXV	33200	14.5	12.2	CH33-36A	SL280UH070V36A	7782656
14ACXS036-230	TXV	33200	14.5	12.2	CH33-36A	SL280UH070XV36A	7626475
14ACXS036-230	TXV	33400	15.5	12.5	CH33-36B	EL180UH070E36B	7782660
14ACXS036-230	TXV	33400	15.5	12.5	CH33-36B	EL180UH070XE36B	7626487
14ACXS036-230	TXV	33400	15.1	12.5	CH33-36B	EL180UH090E48B	7782661
14ACXS036-230	TXV	33400	15.1	12.5	CH33-36B	EL180UH090XE48B	7626490
14ACXS036-230	TXV	33000	15	12.5	CH33-36B	EL195UH045XE36B	7782662
14ACXS036-230	TXV	33200	15	12.5	CH33-36B	EL195UH070XE36B	7782663
14ACXS036-230	TXV	33000	15	12.5	CH33-36B	EL296UH045XE36B	7626493
14ACXS036-230	TXV	33400	14.5	12.2	CH33-36B	EL296UH045XV36B	7628362
14ACXS036-230	TXV	33200	15	12.5	CH33-36B	EL296UH070XE36B	7626496
14ACXS036-230	TXV	33400	15	12.5	CH33-36B	EL296UH070XV36B	7782664
14ACXS036-230	TXV	33400	15.5	12.5	CH33-36B	SL280UH090V36B	7626481
14ACXS036-230	TXV	33600	15.5	12.5	CH33-36B	SL280UH090V48B	7782659
14ACXS036-230	TXV	33600	15.5	12.5	CH33-36B	SL280UH090XV48B	7626484
14ACXS036-230	TXV	33400	15	12.5	CH33-36B	SLP98UH070XV36B	7626499
14ACXS036-230	TXV	33000	14	11.5	CH33-36B		7782658
14ACXS036-230	TXV	33800	15.5	12.5	CH33-36C	EL180UH090E60C	7626505
14ACXS036-230	TXV	33800	15.5	12.5	CH33-36C	EL180UH110E60C	7782667
14ACXS036-230	TXV	33800	15.5	12.5	CH33-36C	EL180UH110XE60C	7626508
14ACXS036-230	TXV	33600	15.1	12.5	CH33-36C	EL195UH090XE48C	7782668
14ACXS036-230	TXV	34000	15.5	12.5	CH33-36C	EL195UH110XE60C	7782669
14ACXS036-230	TXV	33600	15.1	12.5	CH33-36C	EL296UH090XE48C	7626511
14ACXS036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH090XV36C	7782670
14ACXS036-230	TXV	33800	15.5	12.5	CH33-36C	EL296UH090XV48C	7782671
14ACXS036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH110XE60C	7626514
14ACXS036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH110XV48C	7782672
14ACXS036-230	TXV	34200	15.5	12.5	CH33-36C	EL296UH110XV60C	7626523
14ACXS036-230	TXV	34400	15.5	12.5	CH33-36C	SL280UH090V60C	7783180
14ACXS036-230	TXV	34400	15.5	12.5	CH33-36C	SL280UH090XV60C	7628365
14ACXS036-230	TXV	34200	15.5	12.5	CH33-36C	SL280UH110V60C	7626502
14ACXS036-230	TXV	34200	15.5	12.5	CH33-36C	SL280UH110XV60C	7782666
14ACXS036-230	TXV	34000	15.5	12.5	CH33-36C	SLP98UH090XV36C	7626517
14ACXS036-230	TXV	33800	15.5	12.5	CH33-36C	SLP98UH090XV48C	7626520
14ACXS036-230	TXV	34200	15.5	12.5	CH33-36C	SLP98UH110XV60C	7782673
14ACXS036-230	TXV	33400	14.25	11.5	CH33-36C		7782665
14ACXS036-230	TXV	34200	15	12.5	CH33-42B	EL180UH070E36B	7628372

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	34200	15	12.5	CH33-42B	EL180UH070XE36B	7628375
14ACXS036-230	TXV	34200	15.5	12.5	CH33-42B	EL180UH090E48B	7628377
14ACXS036-230	TXV	34200	15.5	12.5	CH33-42B	EL180UH090XE48B	7628380
14ACXS036-230	TXV	34000	14.5	12.2	CH33-42B	EL195UH045XE36B	7628383
14ACXS036-230	TXV	34000	15.1	12.5	CH33-42B	EL195UH070XE36B	7628388
14ACXS036-230	TXV	34000	14.5	12.2	CH33-42B	EL296UH045XE36B	7628385
14ACXS036-230	TXV	34200	15	12.5	CH33-42B	EL296UH045XV36B	7783184
14ACXS036-230	TXV	34000	15.1	12.5	CH33-42B	EL296UH070XE36B	7628390
14ACXS036-230	TXV	34200	15.1	12.5	CH33-42B	EL296UH070XV36B	7628393
14ACXS036-230	TXV	34400	15.5	12.5	CH33-42B	SL280UH090V36B	7783182
14ACXS036-230	TXV	34400	15.5	12.5	CH33-42B	SL280UH090V48B	7628368
14ACXS036-230	TXV	34400	15.5	12.5	CH33-42B	SL280UH090XV48B	7783183
14ACXS036-230	TXV	34200	15.1	12.5	CH33-42B	SLP98UH070XV36B	7783185
14ACXS036-230	TXV	35000	16	13	CH33-43B	EL180UH070E36B	7782676
14ACXS036-230	TXV	35000	16	13	CH33-43B	EL180UH070XE36B	7626536
14ACXS036-230	TXV	35400	16	13	CH33-43B	EL180UH090E48B	7782677
14ACXS036-230	TXV	35400	16	13	CH33-43B	EL180UH090XE48B	7626539
14ACXS036-230	TXV	35000	15.1	12.5	CH33-43B	EL195UH045XE36B	7782678
14ACXS036-230	TXV	35000	15.1	12.5	CH33-43B	EL195UH070XE36B	7782679
14ACXS036-230	TXV	35000	15.1	12.5	CH33-43B	EL296UH045XE36B	7626542
14ACXS036-230	TXV	35400	15.5	12.5	CH33-43B	EL296UH045XV36B	7782680
14ACXS036-230	TXV	35000	15.1	12.5	CH33-43B	EL296UH070XE36B	7626545
14ACXS036-230	TXV	35400	15.5	12.5	CH33-43B	EL296UH070XV36B	7626548
14ACXS036-230	TXV	35400	16	13	CH33-43B	SL280UH090V36B	7626530
14ACXS036-230	TXV	35400	16	13	CH33-43B	SL280UH090V48B	7782675
14ACXS036-230	TXV	35400	16	13	CH33-43B	SL280UH090XV48B	7626533
14ACXS036-230	TXV	35400	15.5	12.5	CH33-43B	SLP98UH070XV36B	7782681
14ACXS036-230	TXV	35000	14.5	12.2	CH33-43B		7782674
14ACXS036-230	TXV	35000	16	13	CH33-43C	EL180UH090E60C	7626557
14ACXS036-230	TXV	35000	16	13	CH33-43C	EL180UH110E60C	7782684
14ACXS036-230	TXV	35000	16	13	CH33-43C	EL180UH110XE60C	7626560
14ACXS036-230	TXV	34800	16	13	CH33-43C	EL195UH090XE48C	7782685
14ACXS036-230	TXV	35000	16	13	CH33-43C	EL195UH110XE60C	7782686
14ACXS036-230	TXV	34800	16	13	CH33-43C	EL296UH090XE48C	7626563
14ACXS036-230	TXV	35000	16	13	CH33-43C	EL296UH090XV36C	7782687
14ACXS036-230	TXV	35000	16	13	CH33-43C	EL296UH090XV48C	7782688
14ACXS036-230	TXV	35000	16	13	CH33-43C	EL296UH110XE60C	7626566
14ACXS036-230	TXV	35200	16	13	CH33-43C	EL296UH110XV48C	7782689
14ACXS036-230	TXV	35400	16	13	CH33-43C	EL296UH110XV60C	7626575
14ACXS036-230	TXV	35600	16	13	CH33-43C	SL280UH090V60C	7626551
14ACXS036-230	TXV	35600	16	13	CH33-43C	SL280UH090XV60C	7782682
14ACXS036-230	TXV	35400	16	13	CH33-43C	SL280UH110V60C	7626554
14ACXS036-230	TXV	35400	16	13	CH33-43C	SL280UH110XV60C	7782683
14ACXS036-230	TXV	35000	16	13	CH33-43C	SLP98UH090XV36C	7626569
14ACXS036-230	TXV	35000	16	13	CH33-43C	SLP98UH090XV48C	7626572
14ACXS036-230	TXV	35400	16	13	CH33-43C	SLP98UH110XV60C	7782690
14ACXS036-230	TXV	34600	15.1	12.5	CH33-44/48B	EL180UH070E36B	7782692
14ACXS036-230	TXV	34600	15.1	12.5	CH33-44/48B	EL180UH070XE36B	7626588
14ACXS036-230	TXV	34600	15.5	12.5	CH33-44/48B	EL180UH090E48B	7782693

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	34600	15.5	12.5	CH33-44/48B	EL180UH090XE48B	7626591
14ACXS036-230	TXV	34400	14.5	12.2	CH33-44/48B	EL195UH045XE36B	7782694
14ACXS036-230	TXV	34400	15	12.5	CH33-44/48B	EL195UH070XE36B	7782695
14ACXS036-230	TXV	34400	14.5	12.2	CH33-44/48B	EL296UH045XE36B	7626594
14ACXS036-230	TXV	34600	15.1	12.5	CH33-44/48B	EL296UH045XV36B	7782696
14ACXS036-230	TXV	34400	15	12.5	CH33-44/48B	EL296UH070XE36B	7626597
14ACXS036-230	TXV	34600	15.1	12.5	CH33-44/48B	EL296UH070XV36B	7626600
14ACXS036-230	TXV	34800	16	13	CH33-44/48B	SL280UH090V36B	7626581
14ACXS036-230	TXV	34800	15.5	12.5	CH33-44/48B	SL280UH090V48B	7626584
14ACXS036-230	TXV	34800	15.5	12.5	CH33-44/48B	SL280UH090XV48B	7626585
14ACXS036-230	TXV	34600	15.1	12.5	CH33-44/48B	SLP98UH070XV36B	7782697
14ACXS036-230	TXV	34200	14.5	12.2	CH33-44/48B		7782691
14ACXS036-230	TXV	34800	16	13	CH33-48C	EL180UH090E60C	7782700
14ACXS036-230	TXV	34800	16	13	CH33-48C	EL180UH110E60C	7626613
14ACXS036-230	TXV	34800	16	13	CH33-48C	EL180UH110XE60C	7782701
14ACXS036-230	TXV	34600	15.5	12.5	CH33-48C	EL195UH090XE48C	7626616
14ACXS036-230	TXV	35000	16	13	CH33-48C	EL195UH110XE60C	7626619
14ACXS036-230	TXV	34600	15.5	12.5	CH33-48C	EL296UH090XE48C	7782702
14ACXS036-230	TXV	35000	16	13	CH33-48C	EL296UH090XV36C	7626622
14ACXS036-230	TXV	34800	16	13	CH33-48C	EL296UH090XV48C	7626625
14ACXS036-230	TXV	35000	16	13	CH33-48C	EL296UH110XE60C	7782703
14ACXS036-230	TXV	35000	16	13	CH33-48C	EL296UH110XV48C	7626628
14ACXS036-230	TXV	35200	16	13	CH33-48C	EL296UH110XV60C	7782706
14ACXS036-230	TXV	35400	16	13	CH33-48C	SL280UH090V60C	7782698
14ACXS036-230	TXV	35400	16	13	CH33-48C	SL280UH090XV60C	7626607
14ACXS036-230	TXV	35200	16	13	CH33-48C	SL280UH110V60C	7782699
14ACXS036-230	TXV	35200	16	13	CH33-48C	SL280UH110XV60C	7626610
14ACXS036-230	TXV	35000	16	13	CH33-48C	SLP98UH090XV36C	7782704
14ACXS036-230	TXV	34800	16	13	CH33-48C	SLP98UH090XV48C	7782705
14ACXS036-230	TXV	35200	16	13	CH33-48C	SLP98UH110XV60C	7626631
14ACXS036-230	TXV	34400	14.5	12.2	CH33-48C		7626604
14ACXS036-230	TXV	35400	16	13	CH33-49	EL180UH090E60C	7783189
14ACXS036-230	TXV	35400	16	13	CH33-49	EL180UH110E60C	7628408
14ACXS036-230	TXV	35400	16	13	CH33-49	EL180UH110XE60C	7783190
14ACXS036-230	TXV	35000	16	13	CH33-49	EL195UH090XE48C	7628411
14ACXS036-230	TXV	35400	16	13	CH33-49	EL195UH110XE60C	7628415
14ACXS036-230	TXV	35000	16	13	CH33-49	EL296UH090XE48C	7783191
14ACXS036-230	TXV	35400	16	13	CH33-49	EL296UH090XV36C	7783192
14ACXS036-230	TXV	35200	16	13	CH33-49	EL296UH090XV48C	7628423
14ACXS036-230	TXV	35400	16	13	CH33-49	EL296UH110XE60C	7628418
14ACXS036-230	TXV	35400	16	13	CH33-49	EL296UH110XV48C	7628429
14ACXS036-230	TXV	35800	16	13	CH33-49	EL296UH110XV60C	7628430
14ACXS036-230	TXV	35800	16	13	CH33-49	SL280UH090V60C	7783187
14ACXS036-230	TXV	35800	16	13	CH33-49	SL280UH090XV60C	7628402
14ACXS036-230	TXV	35600	16	13	CH33-49	SL280UH110V60C	7783188
14ACXS036-230	TXV	35600	16	13	CH33-49	SL280UH110XV60C	7628405
14ACXS036-230	TXV	35400	16	13	CH33-49	SLP98UH090XV36C	7628421
14ACXS036-230	TXV	35200	16	13	CH33-49	SLP98UH090XV48C	7628426
14ACXS036-230	TXV	35800	16	13	CH33-49	SLP98UH110XV60C	7783193

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	34800	14.5	12.2	CH33-49		7628399
14ACXS036-230	TXV	35200	16	13	CH33-50/60C	EL180UH090E60C	7782709
14ACXS036-230	TXV	35200	16	13	CH33-50/60C	EL180UH110E60C	7626640
14ACXS036-230	TXV	35200	16	13	CH33-50/60C	EL180UH110XE60C	7782710
14ACXS036-230	TXV	35000	16	13	CH33-50/60C	EL195UH090XE48C	7626643
14ACXS036-230	TXV	35200	16	13	CH33-50/60C	EL195UH110XE60C	7626646
14ACXS036-230	TXV	35000	16	13	CH33-50/60C	EL296UH090XE48C	7782711
14ACXS036-230	TXV	35200	16	13	CH33-50/60C	EL296UH090XV36C	7626649
14ACXS036-230	TXV	35000	16	13	CH33-50/60C	EL296UH090XV48C	7626652
14ACXS036-230	TXV	35200	16	13	CH33-50/60C	EL296UH110XE60C	7782712
14ACXS036-230	TXV	35200	16	13	CH33-50/60C	EL296UH110XV48C	7626655
14ACXS036-230	TXV	35600	16	13	CH33-50/60C	EL296UH110XV60C	7782715
14ACXS036-230	TXV	35600	16	13	CH33-50/60C	SL280UH090V60C	7782707
14ACXS036-230	TXV	35600	16	13	CH33-50/60C	SL280UH090XV60C	7626634
14ACXS036-230	TXV	35600	16	13	CH33-50/60C	SL280UH110V60C	7782708
14ACXS036-230	TXV	35600	16	13	CH33-50/60C	SL280UH110XV60C	7626637
14ACXS036-230	TXV	35200	16	13	CH33-50/60C	SLP98UH090XV36C	7782713
14ACXS036-230	TXV	35000	16	13	CH33-50/60C	SLP98UH090XV48C	7782714
14ACXS036-230	TXV	35600	16	13	CH33-50/60C	SLP98UH110XV60C	7626658
14ACXS036-230	TXV	34600	14.5	12.2	CH33-50/60C		7626661
14ACXS036-230	TXV	34000	15	12.5	CH35-30A	EL180UH045E36A	7782718
14ACXS036-230	TXV	34000	15	12.5	CH35-30A	EL180UH045XE36A	7626667
14ACXS036-230	TXV	34200	15.1	12.5	CH35-30A	SL280UH070V36A	7782717
14ACXS036-230	TXV	34200	15.1	12.5	CH35-30A	SL280UH070XV36A	7626664
14ACXS036-230	TXV	34800	15.1	12.5	CH35-30B	EL180UH070E36B	7782721
14ACXS036-230	TXV	34800	15.1	12.5	CH35-30B	EL180UH070XE36B	7626676
14ACXS036-230	TXV	34800	16	13	CH35-30B	EL180UH090E48B	7782722
14ACXS036-230	TXV	34800	16	13	CH35-30B	EL180UH090XE48B	7626679
14ACXS036-230	TXV	34400	14.5	12.2	CH35-30B	EL195UH045XE36B	7782723
14ACXS036-230	TXV	34400	15	12.5	CH35-30B	EL195UH070XE36B	7782724
14ACXS036-230	TXV	34400	14.5	12.2	CH35-30B	EL296UH045XE36B	7626682
14ACXS036-230	TXV	34600	15.1	12.5	CH35-30B	EL296UH045XV36B	7782725
14ACXS036-230	TXV	34400	15	12.5	CH35-30B	EL296UH070XE36B	7626685
14ACXS036-230	TXV	34600	15.1	12.5	CH35-30B	EL296UH070XV36B	7626688
14ACXS036-230	TXV	34800	16	13	CH35-30B	SL280UH090V36B	7626670
14ACXS036-230	TXV	34800	15.5	12.5	CH35-30B	SL280UH090V48B	7782720
14ACXS036-230	TXV	34800	15.5	12.5	CH35-30B	SL280UH090XV48B	7626673
14ACXS036-230	TXV	34600	15.1	12.5	CH35-30B	SLP98UH070XV36B	7782726
14ACXS036-230	TXV	34200	14.5	12.2	CH35-30B		7782719
14ACXS036-230	TXV	33000	14.5	12.2	CH35-36A	EL180UH045E36A	7626694
14ACXS036-230	TXV	33000	14.5	12.2	CH35-36A	EL180UH045XE36A	7782728
14ACXS036-230	TXV	33200	14.5	12.2	CH35-36A	SL280UH070V36A	7626691
14ACXS036-230	TXV	33200	14.5	12.2	CH35-36A	SL280UH070XV36A	7782727
14ACXS036-230	TXV	33400	15.5	12.5	CH35-36B	EL180UH070E36B	7626704
14ACXS036-230	TXV	33400	15.5	12.5	CH35-36B	EL180UH070XE36B	7782731
14ACXS036-230	TXV	33400	15.1	12.5	CH35-36B	EL180UH090E48B	7626707
14ACXS036-230	TXV	33400	15.1	12.5	CH35-36B	EL180UH090XE48B	7782732
14ACXS036-230	TXV	33000	15	12.5	CH35-36B	EL195UH045XE36B	7626710
14ACXS036-230	TXV	33200	14.5	12	CH35-36B	EL195UH070XE36B	7626714

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	33000	15	12.5	CH35-36B	EL296UH045XE36B	7782733
14ACXS036-230	TXV	33600	15	12.2	CH35-36B	EL296UH045XV36B	7626717
14ACXS036-230	TXV	33200	14.5	12	CH35-36B	EL296UH070XE36B	7782734
14ACXS036-230	TXV	33400	15	12.5	CH35-36B	EL296UH070XV36B	7782735
14ACXS036-230	TXV	33600	15.5	12.5	CH35-36B	SL280UH090V36B	7782729
14ACXS036-230	TXV	33800	15.5	12.5	CH35-36B	SL280UH090V48B	7626701
14ACXS036-230	TXV	33800	15.5	12.5	CH35-36B	SL280UH090XV48B	7782730
14ACXS036-230	TXV	33400	15	12.5	CH35-36B	SLP98UH070XV36B	7626720
14ACXS036-230	TXV	33000	14	11.5	CH35-36B		7626698
14ACXS036-230	TXV	34000	15.5	12.5	CH35-36C	EL180UH090E60C	7626727
14ACXS036-230	TXV	33800	15.5	12.5	CH35-36C	EL180UH110E60C	7782738
14ACXS036-230	TXV	33800	15.5	12.5	CH35-36C	EL180UH110XE60C	7626730
14ACXS036-230	TXV	33600	15.1	12.5	CH35-36C	EL195UH090XE48C	7782739
14ACXS036-230	TXV	34000	15.5	12.5	CH35-36C	EL195UH110XE60C	7782740
14ACXS036-230	TXV	33600	15.1	12.5	CH35-36C	EL296UH090XE48C	7626733
14ACXS036-230	TXV	34000	15.5	12.5	CH35-36C	EL296UH090XV36C	7782741
14ACXS036-230	TXV	33800	15.5	12.5	CH35-36C	EL296UH090XV48C	7782742
14ACXS036-230	TXV	34000	15.5	12.5	CH35-36C	EL296UH110XE60C	7626736
14ACXS036-230	TXV	34000	15.5	12.5	CH35-36C	EL296UH110XV48C	7782743
14ACXS036-230	TXV	34400	15.5	12.5	CH35-36C	EL296UH110XV60C	7783195
14ACXS036-230	TXV	34400	15.5	12.5	CH35-36C	SL280UH090V60C	7783194
14ACXS036-230	TXV	34400	15.5	12.5	CH35-36C	SL280UH090XV60C	7628435
14ACXS036-230	TXV	34200	15.5	12.5	CH35-36C	SL280UH110V60C	7626723
14ACXS036-230	TXV	34200	15.5	12.5	CH35-36C	SL280UH110XV60C	7782737
14ACXS036-230	TXV	34000	15.5	12.5	CH35-36C	SLP98UH090XV36C	7626739
14ACXS036-230	TXV	33800	15.5	12.5	CH35-36C	SLP98UH090XV48C	7626743
14ACXS036-230	TXV	34400	15.5	12.5	CH35-36C	SLP98UH110XV60C	7626746
14ACXS036-230	TXV	33400	14.25	11.5	CH35-36C		7782736
14ACXS036-230	TXV	35000	16	13	CH35-42B	EL180UH070E36B	7782746
14ACXS036-230	TXV	35000	16	13	CH35-42B	EL180UH070XE36B	7626755
14ACXS036-230	TXV	35400	16	13	CH35-42B	EL180UH090E48B	7782747
14ACXS036-230	TXV	35400	16	13	CH35-42B	EL180UH090XE48B	7626759
14ACXS036-230	TXV	35000	15.1	12.5	CH35-42B	EL195UH045XE36B	7782748
14ACXS036-230	TXV	35200	15.1	12.5	CH35-42B	EL195UH070XE36B	7782749
14ACXS036-230	TXV	35000	15.1	12.5	CH35-42B	EL296UH045XE36B	7626762
14ACXS036-230	TXV	35400	15.5	12.5	CH35-42B	EL296UH045XV36B	7782750
14ACXS036-230	TXV	35200	15.1	12.5	CH35-42B	EL296UH070XE36B	7626765
14ACXS036-230	TXV	35400	15.5	12.5	CH35-42B	EL296UH070XV36B	7626768
14ACXS036-230	TXV	35400	16	13	CH35-42B	SL280UH090V36B	7626749
14ACXS036-230	TXV	35600	16	13	CH35-42B	SL280UH090V48B	7782745
14ACXS036-230	TXV	35600	16	13	CH35-42B	SL280UH090XV48B	7626752
14ACXS036-230	TXV	35400	15.5	12.5	CH35-42B	SLP98UH070XV36B	7782751
14ACXS036-230	TXV	35000	14.5	12.2	CH35-42B		7782744
14ACXS036-230	TXV	35200	16	13	CH35-42C	EL180UH090E60C	7782754
14ACXS036-230	TXV	35000	16	13	CH35-42C	EL180UH110E60C	7626781
14ACXS036-230	TXV	35000	16	13	CH35-42C	EL180UH110XE60C	7782755
14ACXS036-230	TXV	34800	16	13	CH35-42C	EL195UH090XE48C	7626784
14ACXS036-230	TXV	35200	16	13	CH35-42C	EL195UH110XE60C	7626787
14ACXS036-230	TXV	34800	16	13	CH35-42C	EL296UH090XE48C	7782756

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	35200	16	13	CH35-42C	EL296UH090XV36C	7626791
14ACXS036-230	TXV	35000	16	13	CH35-42C	EL296UH090XV48C	7626794
14ACXS036-230	TXV	35200	16	13	CH35-42C	EL296UH110XE60C	7782757
14ACXS036-230	TXV	35200	16	13	CH35-42C	EL296UH110XV48C	7626799
14ACXS036-230	TXV	35400	16	13	CH35-42C	EL296UH110XV60C	7626802
14ACXS036-230	TXV	35600	16	13	CH35-42C	SL280UH090V60C	7782752
14ACXS036-230	TXV	35600	16	13	CH35-42C	SL280UH090XV60C	7626775
14ACXS036-230	TXV	35400	16	13	CH35-42C	SL280UH110V60C	7782753
14ACXS036-230	TXV	35400	16	13	CH35-42C	SL280UH110XV60C	7626778
14ACXS036-230	TXV	35200	16	13	CH35-42C	SLP98UH090XV36C	7782758
14ACXS036-230	TXV	35000	16	13	CH35-42C	SLP98UH090XV48C	7626796
14ACXS036-230	TXV	35400	16	13	CH35-42C	SLP98UH110XV60C	7782759
14ACXS036-230	TXV	34600	14.5	12.2	CH35-42C		7626772
14ACXS036-230	TXV	34800	15.1	12.5	CH35-48B	EL180UH070E36B	7626813
14ACXS036-230	TXV	34800	15.1	12.5	CH35-48B	EL180UH070XE36B	7626816
14ACXS036-230	TXV	34800	16	13	CH35-48B	EL180UH090E48B	7626818
14ACXS036-230	TXV	34800	16	13	CH35-48B	EL180UH090XE48B	7782761
14ACXS036-230	TXV	34400	15	12.2	CH35-48B	EL195UH045XE36B	7626821
14ACXS036-230	TXV	34600	15	12.5	CH35-48B	EL195UH070XE36B	7626827
14ACXS036-230	TXV	34400	15	12.2	CH35-48B	EL296UH045XE36B	7626824
14ACXS036-230	TXV	35000	15.1	12.5	CH35-48B	EL296UH045XV36B	7626832
14ACXS036-230	TXV	34600	15	12.5	CH35-48B	EL296UH070XE36B	7626829
14ACXS036-230	TXV	34800	15.5	12.5	CH35-48B	EL296UH070XV36B	7626835
14ACXS036-230	TXV	35000	16	13	CH35-48B	SL280UH090V36B	7782760
14ACXS036-230	TXV	35000	16	13	CH35-48B	SL280UH090V48B	7626808
14ACXS036-230	TXV	35000	16	13	CH35-48B	SL280UH090XV48B	7626811
14ACXS036-230	TXV	34800	15.5	12.5	CH35-48B	SLP98UH070XV36B	7626837
14ACXS036-230	TXV	34400	14.5	12.2	CH35-48B		7626805
14ACXS036-230	TXV	35000	16	13	CH35-48C	EL180UH090E60C	7626853
14ACXS036-230	TXV	35000	16	13	CH35-48C	EL180UH110E60C	7782762
14ACXS036-230	TXV	35000	16	13	CH35-48C	EL180UH110XE60C	7626856
14ACXS036-230	TXV	34800	16	13	CH35-48C	EL195UH090XE48C	7782763
14ACXS036-230	TXV	35000	16	13	CH35-48C	EL195UH110XE60C	7782764
14ACXS036-230	TXV	34800	16	13	CH35-48C	EL296UH090XE48C	7626859
14ACXS036-230	TXV	35000	16	13	CH35-48C	EL296UH090XV36C	7782765
14ACXS036-230	TXV	34800	16	13	CH35-48C	EL296UH090XV48C	7782766
14ACXS036-230	TXV	35000	16	13	CH35-48C	EL296UH110XE60C	7626863
14ACXS036-230	TXV	35000	16	13	CH35-48C	EL296UH110XV48C	7782767
14ACXS036-230	TXV	35400	16	13	CH35-48C	EL296UH110XV60C	7626872
14ACXS036-230	TXV	35400	16	13	CH35-48C	SL280UH090V60C	7626843
14ACXS036-230	TXV	35400	16	13	CH35-48C	SL280UH090XV60C	7626845
14ACXS036-230	TXV	35400	16	13	CH35-48C	SL280UH110V60C	7626848
14ACXS036-230	TXV	35400	16	13	CH35-48C	SL280UH110XV60C	7626851
14ACXS036-230	TXV	35000	16	13	CH35-48C	SLP98UH090XV36C	7626866
14ACXS036-230	TXV	34800	16	13	CH35-48C	SLP98UH090XV48C	7626869
14ACXS036-230	TXV	35400	16	13	CH35-48C	SLP98UH110XV60C	7626874
14ACXS036-230	TXV	34400	14.5	12.2	CH35-48C		7626840
14ACXS036-230	TXV	35400	16	13	CH35-51C	EL180UH090E60C	7782769
14ACXS036-230	TXV	35400	16	13	CH35-51C	EL180UH110E60C	7626888

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	35400	16	13	CH35-51C	EL180UH110XE60C	7782770
14ACXS036-230	TXV	35200	16	13	CH35-51C	EL195UH090XE48C	7626891
14ACXS036-230	TXV	35400	16	13	CH35-51C	EL195UH110XE60C	7626894
14ACXS036-230	TXV	35200	16	13	CH35-51C	EL296UH090XE48C	7782771
14ACXS036-230	TXV	35400	16	13	CH35-51C	EL296UH090XV36C	7626897
14ACXS036-230	TXV	35200	16	13	CH35-51C	EL296UH090XV48C	7626900
14ACXS036-230	TXV	35400	16	13	CH35-51C	EL296UH110XE60C	7782772
14ACXS036-230	TXV	35400	16	13	CH35-51C	EL296UH110XV48C	7626903
14ACXS036-230	TXV	35800	16	13	CH35-51C	EL296UH110XV60C	7782775
14ACXS036-230	TXV	36000	16	13	CH35-51C	SL280UH090V60C	7626880
14ACXS036-230	TXV	36000	16	13	CH35-51C	SL280UH090XV60C	7626882
14ACXS036-230	TXV	35800	16	13	CH35-51C	SL280UH110V60C	7782768
14ACXS036-230	TXV	35800	16	13	CH35-51C	SL280UH110XV60C	7626885
14ACXS036-230	TXV	35400	16	13	CH35-51C	SLP98UH090XV36C	7782773
14ACXS036-230	TXV	35200	16	13	CH35-51C	SLP98UH090XV48C	7782774
14ACXS036-230	TXV	35800	16	13	CH35-51C	SLP98UH110XV60C	7626906
14ACXS036-230	TXV	34800	14.5	12.2	CH35-51C		7626877
14ACXS036-230	TXV	33600	14.5	12.2	CR33-30/36A	EL180DF045E36A	7626909
14ACXS036-230	TXV	33600	15	12.5	CR33-30/36A	SL280DF070V36A	7782776
14ACXS036-230	TXV	33600	15.5	12.5	CR33-30/36B	EL180DF070E36B	7782778
14ACXS036-230	TXV	33600	15.1	12.5	CR33-30/36B	EL180DF090E48B	7626916
14ACXS036-230	TXV	33400	14.5	12	CR33-30/36B	EL195DF045XE36B	7782779
14ACXS036-230	TXV	33600	15.1	12.5	CR33-30/36B	EL195DF070XE48B	7782780
14ACXS036-230	TXV	33400	14.5	12	CR33-30/36B	EL296DF045XE36B	7626919
14ACXS036-230	TXV	33600	15	12.2	CR33-30/36B	EL296DF045XV36B	7626924
14ACXS036-230	TXV	33600	15.1	12.5	CR33-30/36B	EL296DF070XE48B	7626922
14ACXS036-230	TXV	33600	14.5	12.2	CR33-30/36B	EL296DF070XV48B	7626927
14ACXS036-230	TXV	33800	15.1	12.5	CR33-30/36B	SL280DF090V48B	7626913
14ACXS036-230	TXV	33800	15	12.5	CR33-30/36B	SLP98DF070XV36B	7626930
14ACXS036-230	TXV	33400	14.25	11.5	CR33-30/36B		7782777
14ACXS036-230	TXV	33800	15.5	12.5	CR33-30/36C	EL180DF110E60C	7626938
14ACXS036-230	TXV	33600	15.1	12.5	CR33-30/36C	EL195DF090XE48C	7626940
14ACXS036-230	TXV	33600	15.1	12.5	CR33-30/36C	EL195DF110XE60C	7782781
14ACXS036-230	TXV	33600	15.1	12.5	CR33-30/36C	EL296DF090XE48C	7626943
14ACXS036-230	TXV	34000	15.1	12.5	CR33-30/36C	EL296DF090XV60C	7782783
14ACXS036-230	TXV	33600	15.1	12.5	CR33-30/36C	EL296DF110XE60C	7626946
14ACXS036-230	TXV	34000	15.1	12.5	CR33-30/36C	EL296DF110XV60C	7782784
14ACXS036-230	TXV	34000	15.5	12.5	CR33-30/36C	SL280DF110V60C	7626935
14ACXS036-230	TXV	33800	15.1	12.5	CR33-30/36C	SLP98DF090XV36C	7782782
14ACXS036-230	TXV	33800	15.1	12.5	CR33-30/36C	SLP98DF090XV48C	7626949
14ACXS036-230	TXV	34000	15.1	12.5	CR33-30/36C	SLP98DF090XV60C	7626952
14ACXS036-230	TXV	34000	15.1	12.5	CR33-30/36C	SLP98DF110XV60C	7626955
14ACXS036-230	TXV	33400	14.25	11.5	CR33-30/36C		7626932
14ACXS036-230	TXV	34200	15	12.5	CR33-48B	EL180DF070E36B	7783197
14ACXS036-230	TXV	34200	15.5	12.5	CR33-48B	EL180DF090E48B	7628444
14ACXS036-230	TXV	34000	15.1	12.5	CR33-48B	EL195DF045XE36B	7783198
14ACXS036-230	TXV	34000	15.5	12.5	CR33-48B	EL195DF070XE48B	7783199
14ACXS036-230	TXV	34000	15.5	12.5	CR33-48B	EL296DF045XE36B	7628447
14ACXS036-230	TXV	34200	15.1	12.5	CR33-48B	EL296DF045XV36B	7783200

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	34000	15.5	12.5	CR33-48B	EL296DF070XE48B	7628450
14ACXS036-230	TXV	34200	15.1	12.5	CR33-48B	EL296DF070XV48B	7628453
14ACXS036-230	TXV	34600	15.5	12.5	CR33-48B	SL280DF090V48B	7628441
14ACXS036-230	TXV	34000	15.5	12.5	CR33-48B	SLP98DF070XV36B	7783201
14ACXS036-230	TXV	33800	14.25	12	CR33-48B		7783196
14ACXS036-230	TXV	34400	16	13	CR33-48C	EL180DF110E60C	7783203
14ACXS036-230	TXV	34200	15.5	12.5	CR33-48C	EL195DF090XE48C	7628462
14ACXS036-230	TXV	34200	15.5	12.5	CR33-48C	EL195DF110XE60C	7628465
14ACXS036-230	TXV	34200	15.5	12.5	CR33-48C	EL296DF090XE48C	7783204
14ACXS036-230	TXV	34600	15.5	12.5	CR33-48C	EL296DF090XV60C	7628471
14ACXS036-230	TXV	34200	15.5	12.5	CR33-48C	EL296DF110XE60C	7783205
14ACXS036-230	TXV	34600	15.5	12.5	CR33-48C	EL296DF110XV60C	7628474
14ACXS036-230	TXV	34600	16	13	CR33-48C	SL280DF110V60C	7628459
14ACXS036-230	TXV	34400	15.5	12.5	CR33-48C	SLP98DF090XV36C	7628468
14ACXS036-230	TXV	34400	16	13	CR33-48C	SLP98DF090XV48C	7783206
14ACXS036-230	TXV	34600	15.5	12.5	CR33-48C	SLP98DF090XV60C	7783207
14ACXS036-230	TXV	34600	15.5	12.5	CR33-48C	SLP98DF110XV60C	7783208
14ACXS036-230	TXV	33800	14.25	12	CR33-48C		7783202
14ACXS036-230	TXV	33200	14.5	12.2	CX35-30/36A	EL180UH045E36A	8259176
14ACXS036-230	TXV	33200	14.5	12.2	CX35-30/36A	EL180UH045XE36A	8259173
14ACXS036-230	TXV	33400	15	12.2	CX35-30/36A	SL280UH070V36A	8259175
14ACXS036-230	TXV	33400	15	12.2	CX35-30/36A	SL280UH070XV36A	8259171
14ACXS036-230	TXV	33000	14	11.5	CX35-30/36A		8259170
14ACXS036-230	TXV	33400	15.5	12.5	CX35-30/36B	EL180UH070E36B	8259191
14ACXS036-230	TXV	33400	15.5	12.5	CX35-30/36B	EL180UH070XE36B	8259180
14ACXS036-230	TXV	33400	15.1	12.5	CX35-30/36B	EL180UH090E48B	8259193
14ACXS036-230	TXV	33400	15.1	12.5	CX35-30/36B	EL180UH090XE48B	8259181
14ACXS036-230	TXV	33000	15	12.5	CX35-30/36B	EL195UH045XE36B	8259194
14ACXS036-230	TXV	33200	14.5	12	CX35-30/36B	EL195UH070XE36B	8259196
14ACXS036-230	TXV	33000	15	12.5	CX35-30/36B	EL296UH045XE36B	8259183
14ACXS036-230	TXV	33400	15	12.5	CX35-30/36B	EL296UH045XV36B	8259197
14ACXS036-230	TXV	33200	14.5	12	CX35-30/36B	EL296UH070XE36B	8259184
14ACXS036-230	TXV	33400	15	12.5	CX35-30/36B	EL296UH070XV36B	8259186
14ACXS036-230	TXV	33600	15.5	12.5	CX35-30/36B	SL280UH090V36B	8259188
14ACXS036-230	TXV	33600	15.5	12.5	CX35-30/36B	SL280UH090V48B	8259201
14ACXS036-230	TXV	33600	15.5	12.5	CX35-30/36B	SL280UH090XV48B	8259189
14ACXS036-230	TXV	33400	15	12.5	CX35-30/36B	SLP98UH070XV36B	8259199
14ACXS036-230	TXV	33000	14	11.5	CX35-30/36B		8259178
14ACXS036-230	TXV	33600	15.1	12.5	CX35-30/36C	EL180UH090E60C	8259216
14ACXS036-230	TXV	33400	15.5	12.5	CX35-30/36C	EL180UH110E60C	8259212
14ACXS036-230	TXV	33400	15.5	12.5	CX35-30/36C	EL180UH110XE60C	8259217
14ACXS036-230	TXV	33200	15.1	12.5	CX35-30/36C	EL195UH090XE48C	8259204
14ACXS036-230	TXV	33600	15.1	12.5	CX35-30/36C	EL195UH110XE60C	8259206
14ACXS036-230	TXV	33200	15.1	12.5	CX35-30/36C	EL296UH090XE48C	8259218
14ACXS036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL296UH090XV36C	8259208
14ACXS036-230	TXV	33400	15.5	12.5	CX35-30/36C	EL296UH090XV48C	8259209
14ACXS036-230	TXV	33600	15.1	12.5	CX35-30/36C	EL296UH110XE60C	8259220
14ACXS036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL296UH110XV48C	8259211
14ACXS036-230	TXV	33600	15.5	12.5	CX35-30/36C	SLP98UH090XV36C	8259222

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	33400	15.5	12.5	CX35-30/36C	SLP98UH090XV48C	8259223
14ACXS036-230	TXV	33800	15.5	12.5	CX35-30/36C	SLP98UH110XV60C	8259214
14ACXS036-230	TXV	33000	14	11.5	CX35-30/36C		8259203
14ACXS036-230	TXV	34200	15.1	12.5	CX35-30A	EL180UH045E36A	8259141
14ACXS036-230	TXV	34200	15.1	12.5	CX35-30A	EL180UH045XE36A	8259139
14ACXS036-230	TXV	34400	15.1	12.5	CX35-30A	SL280UH070V36A	8259143
14ACXS036-230	TXV	34400	15.1	12.5	CX35-30A	SL280UH070XV36A	8259138
14ACXS036-230	TXV	34000	14.5	12	CX35-30A		8259136
14ACXS036-230	TXV	34400	15	12.5	CX35-30B	EL180UH070E36B	8259164
14ACXS036-230	TXV	34400	15	12.5	CX35-30B	EL180UH070XE36B	8259151
14ACXS036-230	TXV	34400	15.5	12.5	CX35-30B	EL180UH090E48B	8259166
14ACXS036-230	TXV	34400	15.5	12.5	CX35-30B	EL180UH090XE48B	8259153
14ACXS036-230	TXV	34000	14.5	12.2	CX35-30B	EL195UH045XE36B	8259168
14ACXS036-230	TXV	34000	15.1	12.5	CX35-30B	EL195UH070XE36B	8259156
14ACXS036-230	TXV	34000	14.5	12.2	CX35-30B	EL296UH045XE36B	8259154
14ACXS036-230	TXV	34200	15.1	12.5	CX35-30B	EL296UH045XV36B	8259158
14ACXS036-230	TXV	34000	15.1	12.5	CX35-30B	EL296UH070XE36B	8259146
14ACXS036-230	TXV	34200	15.1	12.5	CX35-30B	EL296UH070XV36B	8259148
14ACXS036-230	TXV	34400	15.5	12.5	CX35-30B	SL280UH090V36B	8259149
14ACXS036-230	TXV	34400	15.5	12.5	CX35-30B	SL280UH090V48B	8259161
14ACXS036-230	TXV	34400	15.5	12.5	CX35-30B	SL280UH090XV48B	8259163
14ACXS036-230	TXV	34200	15.1	12.5	CX35-30B	SLP98UH070XV36B	8259159
14ACXS036-230	TXV	34000	14.5	12	CX35-30B		8259144
14ACXS036-230	TXV	34400	15.1	12.5	CX35-36A	EL180UH045E36A	8259227
14ACXS036-230	TXV	34400	15.1	12.5	CX35-36A	EL180UH045XE36A	8259232
14ACXS036-230	TXV	34600	15.5	12.5	CX35-36A	SL280UH070V36A	8259228
14ACXS036-230	TXV	34600	15.5	12.5	CX35-36A	SL280UH070XV36A	8259230
14ACXS036-230	TXV	34200	14.5	12.2	CX35-36A		8259225
14ACXS036-230	TXV	34600	16	13	CX35-36B	EL180UH070E36B	8259253
14ACXS036-230	TXV	34600	16	13	CX35-36B	EL180UH070XE36B	8259242
14ACXS036-230	TXV	34600	16	13	CX35-36B	EL180UH090E48B	8259255
14ACXS036-230	TXV	34600	16	13	CX35-36B	EL180UH090XE48B	8259243
14ACXS036-230	TXV	34400	15	12.5	CX35-36B	EL195UH045XE36B	8259257
14ACXS036-230	TXV	34400	15	12.5	CX35-36B	EL195UH070XE36B	8259247
14ACXS036-230	TXV	34400	15	12.5	CX35-36B	EL296UH045XE36B	8259245
14ACXS036-230	TXV	34600	15.5	12.5	CX35-36B	EL296UH045XV36B	8259248
14ACXS036-230	TXV	34400	15	12.5	CX35-36B	EL296UH070XE36B	8259235
14ACXS036-230	TXV	34600	15.5	12.5	CX35-36B	EL296UH070XV36B	8259237
14ACXS036-230	TXV	34800	16	13	CX35-36B	SL280UH090V36B	8259239
14ACXS036-230	TXV	34800	16	13	CX35-36B	SL280UH090V48B	8259252
14ACXS036-230	TXV	34800	16	13	CX35-36B	SL280UH090XV48B	8259240
14ACXS036-230	TXV	34600	15.5	12.5	CX35-36B	SLP98UH070XV36B	8259250
14ACXS036-230	TXV	34200	14.25	12.2	CX35-36B		8259233
14ACXS036-230	TXV	34800	16	13	CX35-48B	EL180UH070E36B	8259262
14ACXS036-230	TXV	34800	16	13	CX35-48B	EL180UH070XE36B	8259282
14ACXS036-230	TXV	34800	16	13	CX35-48B	EL180UH090E48B	8259263
14ACXS036-230	TXV	34800	16	13	CX35-48B	EL180UH090XE48B	8259269
14ACXS036-230	TXV	34400	15	12.5	CX35-48B	EL195UH045XE36B	8259271
14ACXS036-230	TXV	34600	15.1	12.5	CX35-48B	EL195UH070XE36B	8259274

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	34400	15	12.5	CX35-48B	EL296UH045XE36B	8259273
14ACXS036-230	TXV	34800	15.5	12.5	CX35-48B	EL296UH045XV36B	8259278
14ACXS036-230	TXV	34600	15.1	12.5	CX35-48B	EL296UH070XE36B	8259276
14ACXS036-230	TXV	34800	15.5	12.5	CX35-48B	EL296UH070XV36B	8259265
14ACXS036-230	TXV	34800	16	13	CX35-48B	SL280UH090V36B	8259279
14ACXS036-230	TXV	35000	16	13	CX35-48B	SL280UH090V48B	8259260
14ACXS036-230	TXV	35000	16	13	CX35-48B	SL280UH090XV48B	8259281
14ACXS036-230	TXV	34800	15.5	12.5	CX35-48B	SLP98UH070XV36B	8259267
14ACXS036-230	TXV	34400	14.5	12.2	CX35-48B		8259258
14ACXS036-230	TXV	34800	16	13	CX35-48C	EL180UH090E60C	8259314
14ACXS036-230	TXV	34800	16	13	CX35-48C	EL180UH110E60C	8259316
14ACXS036-230	TXV	34800	16	13	CX35-48C	EL180UH110XE60C	8259291
14ACXS036-230	TXV	34600	15.5	12.5	CX35-48C	EL195UH090XE48C	8259292
14ACXS036-230	TXV	34800	16	13	CX35-48C	EL195UH110XE60C	8259294
14ACXS036-230	TXV	34600	15.5	12.5	CX35-48C	EL296UH090XE48C	8259302
14ACXS036-230	TXV	34800	16	13	CX35-48C	EL296UH090XV36C	8259297
14ACXS036-230	TXV	34800	16	13	CX35-48C	EL296UH090XV48C	8259298
14ACXS036-230	TXV	34600	16	13	CX35-48C	EL296UH110XE60C	8259303
14ACXS036-230	TXV	35000	16	13	CX35-48C	EL296UH110XV48C	8259286
14ACXS036-230	TXV	35200	16	13	CX35-48C	EL296UH110XV60C	8259308
14ACXS036-230	TXV	35400	16	13	CX35-48C	SL280UH090V60C	8259300
14ACXS036-230	TXV	35400	16	13	CX35-48C	SL280UH090XV60C	8259310
14ACXS036-230	TXV	35200	16	13	CX35-48C	SL280UH110V60C	8259289
14ACXS036-230	TXV	35200	16	13	CX35-48C	SL280UH110XV60C	8259312
14ACXS036-230	TXV	34800	16	13	CX35-48C	SLP98UH090XV36C	8259305
14ACXS036-230	TXV	34800	16	13	CX35-48C	SLP98UH090XV48C	8259307
14ACXS036-230	TXV	35200	16	13	CX35-48C	SLP98UH110XV60C	8259287
14ACXS036-230	TXV	34400	14.5	12.2	CX35-48C		8259284
14ACXS036-230	TXV	35200	16	13	CX35-49C	EL180UH090E60C	8259330
14ACXS036-230	TXV	35000	16	13	CX35-49C	EL180UH110E60C	8259337
14ACXS036-230	TXV	35000	16	13	CX35-49C	EL180UH110XE60C	8259332
14ACXS036-230	TXV	34800	16	13	CX35-49C	EL195UH090XE48C	8259338
14ACXS036-230	TXV	35200	16	13	CX35-49C	EL195UH110XE60C	8259340
14ACXS036-230	TXV	34800	16	13	CX35-49C	EL296UH090XE48C	8259333
14ACXS036-230	TXV	35200	16	13	CX35-49C	EL296UH090XV36C	8259342
14ACXS036-230	TXV	35000	16	13	CX35-49C	EL296UH090XV48C	8259343
14ACXS036-230	TXV	35200	16	13	CX35-49C	EL296UH110XE60C	8259320
14ACXS036-230	TXV	35200	16	13	CX35-49C	EL296UH110XV48C	8259345
14ACXS036-230	TXV	35600	16	13	CX35-49C	EL296UH110XV60C	8259325
14ACXS036-230	TXV	35600	16	13	CX35-49C	SL280UH090V60C	8259327
14ACXS036-230	TXV	35600	16	13	CX35-49C	SL280UH090XV60C	8259347
14ACXS036-230	TXV	35400	16	13	CX35-49C	SL280UH110V60C	8259328
14ACXS036-230	TXV	35400	16	13	CX35-49C	SL280UH110XV60C	8259348
14ACXS036-230	TXV	35200	16	13	CX35-49C	SLP98UH090XV36C	8259322
14ACXS036-230	TXV	35000	16	13	CX35-49C	SLP98UH090XV48C	8259323
14ACXS036-230	TXV	35600	16	13	CX35-49C	SLP98UH110XV60C	8259335
14ACXS036-230	TXV	34600	14.5	12.2	CX35-49C		8259318
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	EL180UH090E60C	8259380
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	EL180UH110E60C	8259356

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	EL180UH110XE60C	8259367
14ACXS036-230	TXV	34600	15.5	12.5	CX35-50/60C	EL195UH090XE48C	8259369
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	EL195UH110XE60C	8259372
14ACXS036-230	TXV	34600	15.5	12.5	CX35-50/60C	EL296UH090XE48C	8259371
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	EL296UH090XV36C	8259375
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	EL296UH090XV48C	8259362
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	EL296UH110XE60C	8259374
14ACXS036-230	TXV	35000	16	13	CX35-50/60C	EL296UH110XV48C	8259364
14ACXS036-230	TXV	35200	16	13	CX35-50/60C	EL296UH110XV60C	8259361
14ACXS036-230	TXV	35200	16	13	CX35-50/60C	SL280UH090V60C	8259352
14ACXS036-230	TXV	35200	16	13	CX35-50/60C	SL280UH090XV60C	8259377
14ACXS036-230	TXV	35000	16	13	CX35-50/60C	SL280UH110V60C	8259354
14ACXS036-230	TXV	35000	16	13	CX35-50/60C	SL280UH110XV60C	8259378
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	SLP98UH090XV36C	8259357
14ACXS036-230	TXV	34800	16	13	CX35-50/60C	SLP98UH090XV48C	8259359
14ACXS036-230	TXV	35200	16	13	CX35-50/60C	SLP98UH110XV60C	8259366
14ACXS036-230	TXV	34200	14.5	12.2	CX35-50/60C		8259350
14ACXS036-230	TXV	34200	14.25	12.2	CX38-38A		10548153
14ACXS042-230	RFC	41500	14	12.2	C35-49C		8471048
14ACXS042-230	RFC	41000	14	12.2	C35-60D		8471050
14ACXS042-230	RFC	41500	14	12.2	CH33-43B		8452500
14ACXS042-230	RFC	41500	14	12.2	CH33-43C		7628211
14ACXS042-230	RFC	42000	14	12.2	CH33-49		7782981
14ACXS042-230	RFC	41500	14	12.2	CH33-50/60C		7782992
14ACXS042-230	RFC	40500	14	12.2	CH35-51C		10514545
14ACXS042-230	RFC	40500	14	12.2	CH35-60D		10514546
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36B	EL180UH090E48B	8258241
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36B	EL180UH090XE48B	8258236
14ACXS042-230	TXV	39000	14	11.5	C35-30/36B	EL296UH045XV36B	8258233
14ACXS042-230	TXV	39000	14	11.5	C35-30/36B	EL296UH070XV36B	8258234
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36B	SL280UH090V36B	8258243
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36B	SL280UH090V48B	8258231
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36B	SL280UH090XV48B	8258238
14ACXS042-230	TXV	39000	14	11.5	C35-30/36B	SLP98UH070XV36B	8258239
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	EL180UH090E60C	8258254
14ACXS042-230	TXV	39000	14.5	12.2	C35-30/36C	EL180UH110E60C	8258264
14ACXS042-230	TXV	39000	14.5	12.2	C35-30/36C	EL180UH110XE60C	8258256
14ACXS042-230	TXV	39000	14.5	12.2	C35-30/36C	EL195UH090XE48C	8258251
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	EL195UH110XE60C	8258253
14ACXS042-230	TXV	39000	14.5	12.2	C35-30/36C	EL296UH090XE48C	8258274
14ACXS042-230	TXV	39000	14.5	12	C35-30/36C	EL296UH090XV36C	8258245
14ACXS042-230	TXV	39000	14.5	12.2	C35-30/36C	EL296UH090XV48C	8258246
14ACXS042-230	TXV	39500	14.5	12	C35-30/36C	EL296UH090XV60C	8258266
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	EL296UH110XE60C	8258263
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	EL296UH110XV60C	8258268
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	SL280UH090V60C	8258269
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	SL280UH090XV60C	8258271
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	SL280UH110V60C	8258249
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	SL280UH110XV60C	8258273

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	39000	14.5	12	C35-30/36C	SLP98UH090XV36C	8258258
14ACXS042-230	TXV	39000	14.5	12.2	C35-30/36C	SLP98UH090XV48C	8258259
14ACXS042-230	TXV	39500	14.5	12	C35-30/36C	SLP98UH090XV60C	8258261
14ACXS042-230	TXV	39500	14.5	12.2	C35-30/36C	SLP98UH110XV60C	8258248
14ACXS042-230	TXV	41000	15.1	12.5	C35-36B	EL180UH090E48B	8258288
14ACXS042-230	TXV	41000	15.1	12.5	C35-36B	EL180UH090XE48B	8258283
14ACXS042-230	TXV	40500	14.5	12.2	C35-36B	EL296UH045XV36B	8258290
14ACXS042-230	TXV	40500	14.5	12.2	C35-36B	EL296UH070XV36B	8258285
14ACXS042-230	TXV	41000	15.1	12.5	C35-36B	SL280UH090V36B	8258279
14ACXS042-230	TXV	41000	15.1	12.5	C35-36B	SL280UH090V48B	8258286
14ACXS042-230	TXV	41000	15.1	12.5	C35-36B	SL280UH090XV48B	8258281
14ACXS042-230	TXV	40500	14.5	12.2	C35-36B	SLP98UH070XV36B	8258278
14ACXS042-230	TXV	40500	14.25	12	C35-36B		8258276
14ACXS042-230	TXV	41500	15.5	12.5	C35-48B	EL180UH090E48B	8258301
14ACXS042-230	TXV	41500	15.5	12.5	C35-48B	EL180UH090XE48B	8258298
14ACXS042-230	TXV	41000	14.5	12.2	C35-48B	EL296UH045XV36B	8258303
14ACXS042-230	TXV	41000	14.5	12.2	C35-48B	EL296UH070XV36B	8258305
14ACXS042-230	TXV	41000	15.1	12.5	C35-48B	SL280UH090V36B	8258295
14ACXS042-230	TXV	41500	15.1	12.5	C35-48B	SL280UH090V48B	8258300
14ACXS042-230	TXV	41500	15.1	12.5	C35-48B	SL280UH090XV48B	8258296
14ACXS042-230	TXV	41000	14.5	12.2	C35-48B	SLP98UH070XV36B	8258293
14ACXS042-230	TXV	41000	14.25	12	C35-48B		8258291
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	EL180UH090E60C	8258328
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	EL180UH110E60C	8258310
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	EL180UH110XE60C	8258330
14ACXS042-230	TXV	41000	15.5	12.5	C35-48C	EL195UH090XE48C	8258311
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	EL195UH110XE60C	8258313
14ACXS042-230	TXV	41000	15.5	12.5	C35-48C	EL296UH090XE48C	8258331
14ACXS042-230	TXV	41000	15.1	12.5	C35-48C	EL296UH090XV36C	8258335
14ACXS042-230	TXV	41000	15.1	12.5	C35-48C	EL296UH090XV48C	8258336
14ACXS042-230	TXV	41500	15.1	12.5	C35-48C	EL296UH090XV60C	8258320
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	EL296UH110XE60C	8258333
14ACXS042-230	TXV	41500	15.1	12.5	C35-48C	EL296UH110XV48C	8258318
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	EL296UH110XV60C	8258321
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	SL280UH090V60C	8258325
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	SL280UH090XV60C	8258323
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	SL280UH110V60C	8258326
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	SL280UH110XV60C	8258308
14ACXS042-230	TXV	41000	15.1	12.5	C35-48C	SLP98UH090XV36C	8258315
14ACXS042-230	TXV	41000	15.1	12.5	C35-48C	SLP98UH090XV48C	8258317
14ACXS042-230	TXV	41500	15.1	12.5	C35-48C	SLP98UH090XV60C	8258338
14ACXS042-230	TXV	41500	15.5	12.5	C35-48C	SLP98UH110XV60C	8258340
14ACXS042-230	TXV	41000	14.25	12	C35-48C		8258307
14ACXS042-230	TXV	42000	16	13	C35-49C	EL180UH090E60C	8258355
14ACXS042-230	TXV	42000	16	13	C35-49C	EL180UH110E60C	8258367
14ACXS042-230	TXV	42000	16	13	C35-49C	EL180UH110XE60C	8258356
14ACXS042-230	TXV	41500	15.5	12.5	C35-49C	EL195UH090XE48C	8258368
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	EL195UH110XE60C	8258345
14ACXS042-230	TXV	41500	15.5	12.5	C35-49C	EL296UH090XE48C	8258370

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	41500	15.5	12.5	C35-49C	EL296UH090XV36C	8258372
14ACXS042-230	TXV	41500	15.5	12.5	C35-49C	EL296UH090XV48C	8258373
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	EL296UH090XV60C	8258375
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	EL296UH110XE60C	8258358
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	EL296UH110XV48C	8258346
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	EL296UH110XV60C	8258360
14ACXS042-230	TXV	42000	16	13	C35-49C	SL280UH090V60C	8258348
14ACXS042-230	TXV	42000	16	13	C35-49C	SL280UH090XV60C	8258362
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	SL280UH110V60C	8258350
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	SL280UH110XV60C	8258363
14ACXS042-230	TXV	41500	15.5	12.5	C35-49C	SLP98UH090XV36C	8258351
14ACXS042-230	TXV	41500	15.5	12.5	C35-49C	SLP98UH090XV48C	8258353
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	SLP98UH090XV60C	8258365
14ACXS042-230	TXV	42000	15.5	12.5	C35-49C	SLP98UH110XV60C	8258343
14ACXS042-230	TXV	41500	14.25	12.2	C35-49C		8258341
14ACXS042-230	TXV	41000	15.5	12.5	C35-50/60C	EL180UH090E60C	8258404
14ACXS042-230	TXV	41000	15.5	12.5	C35-50/60C	EL180UH110E60C	8258385
14ACXS042-230	TXV	41000	15.5	12.5	C35-50/60C	EL180UH110XE60C	8258406
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL195UH090XE48C	8258387
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL195UH110XE60C	8258408
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH090XE48C	8258388
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH090XV36C	8258409
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH090XV48C	8258390
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH090XV60C	8258394
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH110XE60C	8258391
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH110XV48C	8258396
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH110XV60C	8258393
14ACXS042-230	TXV	41500	15.1	12.5	C35-50/60C	SL280UH090V60C	8258397
14ACXS042-230	TXV	41500	15.1	12.5	C35-50/60C	SL280UH090XV60C	8258378
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	SL280UH110V60C	8258399
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	SL280UH110XV60C	8258380
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	SLP98UH090XV36C	8258401
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	SLP98UH090XV48C	8258382
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	SLP98UH090XV60C	8258403
14ACXS042-230	TXV	41000	15.1	12.5	C35-50/60C	SLP98UH110XV60C	8258383
14ACXS042-230	TXV	40500	14.25	12	C35-50/60C		8258377
14ACXS042-230	TXV	42000	16	13	C35-60C	EL180UH090E60C	8258419
14ACXS042-230	TXV	42000	16	13	C35-60C	EL180UH110E60C	8258439
14ACXS042-230	TXV	42000	16	13	C35-60C	EL180UH110XE60C	8258421
14ACXS042-230	TXV	42000	16	13	C35-60C	EL195UH090XE48C	8258441
14ACXS042-230	TXV	42000	16	13	C35-60C	EL195UH110XE60C	8258423
14ACXS042-230	TXV	42000	16	13	C35-60C	EL296UH090XE48C	8258443
14ACXS042-230	TXV	42000	15.5	12.5	C35-60C	EL296UH090XV36C	8258424
14ACXS042-230	TXV	42000	16	13	C35-60C	EL296UH090XV48C	8258444
14ACXS042-230	TXV	42000	15.5	12.5	C35-60C	EL296UH090XV60C	8258426
14ACXS042-230	TXV	42000	16	13	C35-60C	EL296UH110XE60C	8258429
14ACXS042-230	TXV	42000	16	13	C35-60C	EL296UH110XV48C	8258428
14ACXS042-230	TXV	42000	16	13	C35-60C	EL296UH110XV60C	8258431
14ACXS042-230	TXV	42000	16	13	C35-60C	SL280UH090V60C	8258413

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	42000	16	13	C35-60C	SL280UH090XV60C	8258432
14ACXS042-230	TXV	42000	16	13	C35-60C	SL280UH110V60C	8258414
14ACXS042-230	TXV	42000	16	13	C35-60C	SL280UH110XV60C	8258434
14ACXS042-230	TXV	42000	15.5	12.5	C35-60C	SLP98UH090XV36C	8258416
14ACXS042-230	TXV	42000	16	13	C35-60C	SLP98UH090XV48C	8258436
14ACXS042-230	TXV	42000	15.5	12.5	C35-60C	SLP98UH090XV60C	8258418
14ACXS042-230	TXV	42000	16	13	C35-60C	SLP98UH110XV60C	8258438
14ACXS042-230	TXV	42000	14.25	12.2	C35-60C		8258411
14ACXS042-230	TXV	42000	16	13	C35-60D	EL180UH135E60D	8258451
14ACXS042-230	TXV	42000	15.5	12.5	C35-60D	EL195UH135XE60D	8258448
14ACXS042-230	TXV	42000	15.5	12.5	C35-60D	EL296UH135XE60D	8258452
14ACXS042-230	TXV	42000	16	13	C35-60D	SL280UH135V60D	8258449
14ACXS042-230	TXV	41500	14.25	12.2	C35-60D		8258446
14ACXS042-230	TXV	41500	15.5	12.5	CBA27UHE-042		10259393
14ACXS042-230	TXV	41500	15.5	12.5	CBA27UHE-048		10259394
14ACXS042-230	TXV	41500	14	12.2	CBX25UH-042		7627464
14ACXS042-230	TXV	42000	14.5	12.5	CBX25UH-048		7782935
14ACXS042-230	TXV	42000	15.1	12.5	CBX25UHV-042		7627467
14ACXS042-230	TXV	42000	15.5	12.5	CBX25UHV-048		7782936
14ACXS042-230	TXV	41500	15.5	12.5	CBX27UH-042		7627461
14ACXS042-230	TXV	42000	15.1	12.5	CBX27UH-048		7782934
14ACXS042-230	TXV	40500	14	12.2	CBX32M-042		7627470
14ACXS042-230	TXV	41500	14.25	12.2	CBX32M-048		7627472
14ACXS042-230	TXV	42000	15.1	12.5	CBX32MV-048		7627475
14ACXS042-230	TXV	42000	15	12.5	CBX40UHV-042		7627477
14ACXS042-230	TXV	42000	15	12.5	CBX40UHV-048		7782937
14ACXS042-230	TXV	40500	15.1	12.5	CH23-51	EL180UH090E60C	7627480
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	EL180UH110E60C	7782938
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	EL180UH110XE60C	7627483
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	EL296UH090XV48C	7782939
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	EL296UH090XV60C	7627487
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	EL296UH110XV48C	7627489
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	EL296UH110XV60C	7627492
14ACXS042-230	TXV	40500	15.1	12.5	CH23-51	SL280UH090V60C	7627494
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	SL280UH110V60C	7782940
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	SL280UH110XV60C	7782941
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	SLP98UH090XV48C	7627498
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	SLP98UH090XV60C	7782942
14ACXS042-230	TXV	40000	15.1	12.5	CH23-51	SLP98UH110XV60C	7627501
14ACXS042-230	TXV	40500	15.5	12.5	CH23-65	EL180UH090E60C	7782943
14ACXS042-230	TXV	40500	15.5	12.5	CH23-65	EL180UH110E60C	7627504
14ACXS042-230	TXV	40500	15.5	12.5	CH23-65	EL180UH110XE60C	7782944
14ACXS042-230	TXV	40500	15.1	12.5	CH23-65	EL296UH090XV48C	7782945
14ACXS042-230	TXV	40500	15.1	12.5	CH23-65	EL296UH090XV60C	7627509
14ACXS042-230	TXV	40500	15.1	12.5	CH23-65	EL296UH110XV48C	7782946
14ACXS042-230	TXV	40500	15.1	12.5	CH23-65	EL296UH110XV60C	7627512
14ACXS042-230	TXV	41000	15.5	12.5	CH23-65	SL280UH090V60C	7782947
14ACXS042-230	TXV	40500	15.5	12.5	CH23-65	SL280UH110V60C	7627515
14ACXS042-230	TXV	40500	15.5	12.5	CH23-65	SL280UH110XV60C	7782948

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	40500	15.1	12.5	CH23-65	SLP98UH090XV48C	7627518
14ACXS042-230	TXV	40500	15.1	12.5	CH23-65	SLP98UH090XV60C	7782949
14ACXS042-230	TXV	40500	15.1	12.5	CH23-65	SLP98UH110XV60C	7627521
14ACXS042-230	TXV	40500	15.1	12.5	CH33-42B	EL180UH090E48B	7782950
14ACXS042-230	TXV	40500	15.1	12.5	CH33-42B	EL180UH090XE48B	7627524
14ACXS042-230	TXV	40000	14.5	12	CH33-42B	EL296UH070XV36B	7782951
14ACXS042-230	TXV	40500	15	12.5	CH33-42B	SL280UH090V36B	7627527
14ACXS042-230	TXV	40500	15	12.5	CH33-42B	SL280UH090V48B	7782952
14ACXS042-230	TXV	40500	15	12.5	CH33-42B	SL280UH090XV48B	7627530
14ACXS042-230	TXV	40000	14.5	12	CH33-42B	SLP98UH070XV36B	7782953
14ACXS042-230	TXV	42000	15.5	12.5	CH33-43B	EL180UH090E48B	8565949
14ACXS042-230	TXV	42000	15.5	12.5	CH33-43B	EL180UH090XE48B	8565950
14ACXS042-230	TXV	41500	15	12.5	CH33-43B	EL296UH045XV36B	7627533
14ACXS042-230	TXV	41500	15	12.5	CH33-43B	EL296UH070XV36B	7627536
14ACXS042-230	TXV	42000	15.5	12.5	CH33-43B	SL280UH090V36B	7782955
14ACXS042-230	TXV	42000	15.5	12.5	CH33-43B	SL280UH090V48B	7627539
14ACXS042-230	TXV	42000	15.5	12.5	CH33-43B	SL280UH090XV48B	7782956
14ACXS042-230	TXV	41500	15	12.5	CH33-43B	SLP98UH070XV36B	7782954
14ACXS042-230	TXV	41500	14	12.2	CH33-43B		8452497
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL180UH090E60C	7627545
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL180UH110E60C	7782958
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL180UH110XE60C	7627548
14ACXS042-230	TXV	41000	15.5	12.5	CH33-43C	EL195UH090XE48C	7782959
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL195UH110XE60C	7627551
14ACXS042-230	TXV	41000	15.5	12.5	CH33-43C	EL296UH090XE48C	7782960
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH090XV36C	7627554
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH090XV48C	7782961
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH090XV60C	7627557
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH110XE60C	7782962
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH110XV48C	7627560
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH110XV60C	7782963
14ACXS042-230	TXV	42000	16	13	CH33-43C	SL280UH090V60C	7627563
14ACXS042-230	TXV	42000	16	13	CH33-43C	SL280UH090XV60C	7782964
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	SL280UH110V60C	7627566
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	SL280UH110XV60C	7782965
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	SLP98UH090XV36C	7627569
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	SLP98UH090XV48C	7782966
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	SLP98UH090XV60C	7627572
14ACXS042-230	TXV	41500	15.5	12.5	CH33-43C	SLP98UH110XV60C	7782967
14ACXS042-230	TXV	41500	14	12.2	CH33-43C		7782957
14ACXS042-230	TXV	41000	15.1	12.5	CH33-44/48B	EL180UH090E48B	7627575
14ACXS042-230	TXV	41000	15.1	12.5	CH33-44/48B	EL180UH090XE48B	7782968
14ACXS042-230	TXV	40500	14.5	12.2	CH33-44/48B	EL296UH070XV36B	7627578
14ACXS042-230	TXV	41000	15.1	12.5	CH33-44/48B	SL280UH090V36B	7782969
14ACXS042-230	TXV	41000	15.1	12.5	CH33-44/48B	SL280UH090V48B	7627581
14ACXS042-230	TXV	41000	15.1	12.5	CH33-44/48B	SL280UH090XV48B	7782970
14ACXS042-230	TXV	40500	14.5	12.2	CH33-44/48B	SLP98UH070XV36B	9150353
14ACXS042-230	TXV	41000	15	12.5	CH33-48	EL180UH090E48B	8552650
14ACXS042-230	TXV	41000	15.5	12.5	CH33-48C	EL180UH090E60C	7782971

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	41000	15.5	12.5	CH33-48C	EL180UH110E60C	7627587
14ACXS042-230	TXV	41000	15.5	12.5	CH33-48C	EL180UH110XE60C	7782972
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	EL195UH090XE48C	7627590
14ACXS042-230	TXV	41500	15.1	12.5	CH33-48C	EL195UH110XE60C	7782973
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH090XE48C	7627593
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH090XV36C	7782974
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH090XV48C	7627596
14ACXS042-230	TXV	41500	15.1	12.5	CH33-48C	EL296UH090XV60C	7782975
14ACXS042-230	TXV	41500	15.1	12.5	CH33-48C	EL296UH110XE60C	7627599
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH110XV48C	7782976
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH110XV60C	7627602
14ACXS042-230	TXV	41500	15.5	12.5	CH33-48C	SL280UH090V60C	7782977
14ACXS042-230	TXV	41500	15.5	12.5	CH33-48C	SL280UH090XV60C	7627605
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	SL280UH110V60C	7782978
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	SL280UH110XV60C	7627608
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	SLP98UH090XV36C	7782979
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	SLP98UH090XV48C	7627611
14ACXS042-230	TXV	41500	15.1	12.5	CH33-48C	SLP98UH090XV60C	7782980
14ACXS042-230	TXV	41000	15.1	12.5	CH33-48C	SLP98UH110XV60C	7627615
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL180UH090E60C	7782982
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL180UH110E60C	7627621
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL180UH110XE60C	7782983
14ACXS042-230	TXV	41500	15.5	12.5	CH33-49	EL195UH090XE48C	7627624
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL195UH110XE60C	7782984
14ACXS042-230	TXV	41500	15.5	12.5	CH33-49	EL296UH090XE48C	7627628
14ACXS042-230	TXV	41500	15.5	12.5	CH33-49	EL296UH090XV36C	7782985
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH090XV48C	7627631
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH090XV60C	7782986
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH110XE60C	7627634
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH110XV48C	7782987
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH110XV60C	7627637
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	SL280UH090V60C	7782988
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	SL280UH090XV60C	7627640
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	SL280UH110V60C	7782989
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	SL280UH110XV60C	7627644
14ACXS042-230	TXV	41500	15.5	12.5	CH33-49	SLP98UH090XV36C	7782990
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	SLP98UH090XV48C	7627647
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	SLP98UH090XV60C	7782991
14ACXS042-230	TXV	42000	15.5	12.5	CH33-49	SLP98UH110XV60C	7627650
14ACXS042-230	TXV	42000	14	12.2	CH33-49		7627618
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL180UH090E60C	7782993
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL180UH110E60C	7627658
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL180UH110XE60C	7627661
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL195UH090XE48C	7627663
14ACXS042-230	TXV	42000	15.5	12.5	CH33-50/60C	EL195UH110XE60C	7627666
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH090XE48C	7627669
14ACXS042-230	TXV	41500	15.1	12.5	CH33-50/60C	EL296UH090XV36C	7627672
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH090XV48C	7782994
14ACXS042-230	TXV	42000	15.1	12.5	CH33-50/60C	EL296UH090XV60C	7627675

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	42000	15.5	12.5	CH33-50/60C	EL296UH110XE60C	7782995
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH110XV48C	7627678
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH110XV60C	7782996
14ACXS042-230	TXV	42000	15.5	12.5	CH33-50/60C	SL280UH090V60C	7627681
14ACXS042-230	TXV	42000	15.5	12.5	CH33-50/60C	SL280UH090XV60C	7782997
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	SL280UH110V60C	7627684
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	SL280UH110XV60C	7782998
14ACXS042-230	TXV	41500	15.1	12.5	CH33-50/60C	SLP98UH090XV36C	7627688
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	SLP98UH090XV48C	7782999
14ACXS042-230	TXV	42000	15.1	12.5	CH33-50/60C	SLP98UH090XV60C	7627691
14ACXS042-230	TXV	41500	15.5	12.5	CH33-50/60C	SLP98UH110XV60C	7783000
14ACXS042-230	TXV	41500	14	12.2	CH33-50/60C		7627654
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42B	EL180UH090E48B	7627694
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42B	EL180UH090XE48B	7783001
14ACXS042-230	TXV	42000	15.1	12.5	CH35-42B	EL296UH045XV36B	7627697
14ACXS042-230	TXV	41500	15	12.5	CH35-42B	EL296UH070XV36B	7783002
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42B	SL280UH090V36B	7627700
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42B	SL280UH090V48B	7783003
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42B	SL280UH090XV48B	7627704
14ACXS042-230	TXV	41500	15	12.5	CH35-42B	SLP98UH070XV36B	7783004
14ACXS042-230	TXV	41500	14.25	12	CH35-42B		8341995
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL180UH090E60C	7783005
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL180UH110E60C	7627710
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL180UH110XE60C	7783006
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL195UH090XE48C	7627713
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42C	EL195UH110XE60C	7783007
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH090XE48C	7627716
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH090XV36C	7783008
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH090XV48C	7627719
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42C	EL296UH090XV60C	7783009
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42C	EL296UH110XE60C	7627722
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH110XV48C	7783010
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH110XV60C	7627725
14ACXS042-230	TXV	42000	16	13	CH35-42C	SL280UH090V60C	7783011
14ACXS042-230	TXV	42000	16	13	CH35-42C	SL280UH090XV60C	7627728
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	SL280UH110V60C	7783012
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	SL280UH110XV60C	7627731
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	SLP98UH090XV36C	7783013
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	SLP98UH090XV48C	7627734
14ACXS042-230	TXV	42000	15.5	12.5	CH35-42C	SLP98UH090XV60C	7783014
14ACXS042-230	TXV	41500	15.5	12.5	CH35-42C	SLP98UH110XV60C	7627737
14ACXS042-230	TXV	41500	14	12.2	CH35-42C		7627707
14ACXS042-230	TXV	41500	15.5	12.5	CH35-48B	EL180UH090E48B	7783015
14ACXS042-230	TXV	41500	15.5	12.5	CH35-48B	EL180UH090XE48B	7627740
14ACXS042-230	TXV	41000	14.5	12.2	CH35-48B	EL296UH045XV36B	7783016
14ACXS042-230	TXV	41000	14.5	12.2	CH35-48B	EL296UH070XV36B	7627743
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48B	SL280UH090V36B	7783017
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48B	SL280UH090V48B	7627746
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48B	SL280UH090XV48B	7783018

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	41000	14.5	12.2	CH35-48B	SLP98UH070XV36B	7627749
14ACXS042-230	TXV	41500	15.5	12.5	CH35-48C	EL180UH090E60C	7627752
14ACXS042-230	TXV	41500	15.5	12.5	CH35-48C	EL180UH110E60C	7783020
14ACXS042-230	TXV	41500	15.5	12.5	CH35-48C	EL180UH110XE60C	7627755
14ACXS042-230	TXV	41000	15.1	12.5	CH35-48C	EL195UH090XE48C	7783021
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	EL195UH110XE60C	7627758
14ACXS042-230	TXV	41000	15.1	12.5	CH35-48C	EL296UH090XE48C	7783023
14ACXS042-230	TXV	41000	15.1	12.5	CH35-48C	EL296UH090XV36C	7627761
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	EL296UH090XV48C	7783024
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	EL296UH090XV60C	7627764
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	EL296UH110XE60C	7783025
14ACXS042-230	TXV	41500	15.5	12.5	CH35-48C	EL296UH110XV48C	7627767
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	EL296UH110XV60C	7783026
14ACXS042-230	TXV	41500	15.5	12.5	CH35-48C	SL280UH090V60C	7627770
14ACXS042-230	TXV	41500	15.5	12.5	CH35-48C	SL280UH090XV60C	7783027
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	SL280UH110V60C	7627773
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	SL280UH110XV60C	7783028
14ACXS042-230	TXV	41000	15.1	12.5	CH35-48C	SLP98UH090XV36C	7627776
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	SLP98UH090XV48C	7783029
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	SLP98UH090XV60C	7627779
14ACXS042-230	TXV	41500	15.1	12.5	CH35-48C	SLP98UH110XV60C	7783030
14ACXS042-230	TXV	41500	14	12.2	CH35-48C		7783019
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL180UH090E60C	7783031
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL180UH110E60C	7627786
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL180UH110XE60C	7783032
14ACXS042-230	TXV	41500	15.5	12.5	CH35-51C	EL195UH090XE48C	7627789
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL195UH110XE60C	7783033
14ACXS042-230	TXV	41500	15.5	12.5	CH35-51C	EL296UH090XE48C	7627792
14ACXS042-230	TXV	41500	15.5	12.5	CH35-51C	EL296UH090XV36C	7783034
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH090XV48C	7627795
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH090XV60C	7783035
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH110XE60C	7627798
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH110XV48C	7783036
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH110XV60C	7627801
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	SL280UH090V60C	7783037
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	SL280UH090XV60C	7627804
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	SL280UH110V60C	7783038
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	SL280UH110XV60C	7627807
14ACXS042-230	TXV	41500	15.5	12.5	CH35-51C	SLP98UH090XV36C	7783039
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	SLP98UH090XV48C	7627810
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	SLP98UH090XV60C	7783040
14ACXS042-230	TXV	42000	15.5	12.5	CH35-51C	SLP98UH110XV60C	7627813
14ACXS042-230	TXV	42000	14	12.2	CH35-51C		7627783
14ACXS042-230	TXV	40500	15.1	12.5	CR33-48	EL180DF110E60C	7627816
14ACXS042-230	TXV	40500	15.1	12.5	CR33-48	EL195DF090XE48C	7783042
14ACXS042-230	TXV	40500	15.1	12.5	CR33-48	EL195DF110XE60C	7627819
14ACXS042-230	TXV	40500	15.1	12.5	CR33-48	EL296DF090XE48C	7783044
14ACXS042-230	TXV	40500	15	12.2	CR33-48	EL296DF090XV60C	7627822
14ACXS042-230	TXV	40500	15.1	12.5	CR33-48	EL296DF110XE60C	7783045

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	40500	15.1	12.5	CR33-48	SL280DF090V60C	7627825
14ACXS042-230	TXV	40500	15.1	12.5	CR33-48	SL280DF110V60C	7783046
14ACXS042-230	TXV	40500	15	12.2	CR33-48	SLP98DF090XV60C	7783047
14ACXS042-230	TXV	40500	14.5	12.2	CR33-48B	SL280DF090V48B	7783041
14ACXS042-230	TXV	41500	15.5	12.5	CR33-50/60	EL180DF110E60C	7627831
14ACXS042-230	TXV	41000	15.1	12.5	CR33-50/60	EL195DF090XE48C	7783048
14ACXS042-230	TXV	41500	15.5	12.5	CR33-50/60	EL195DF110XE60C	7627834
14ACXS042-230	TXV	41000	15.1	12.5	CR33-50/60	EL296DF090XE48C	7783049
14ACXS042-230	TXV	41500	15.1	12.5	CR33-50/60	EL296DF090XV60C	7627837
14ACXS042-230	TXV	41500	15.5	12.5	CR33-50/60	EL296DF110XE60C	7783050
14ACXS042-230	TXV	41500	15.5	12.5	CR33-50/60	EL296DF110XV60C	7627840
14ACXS042-230	TXV	41000	15.5	12.5	CR33-50/60	SL280DF090V60C	7783051
14ACXS042-230	TXV	41500	15.5	12.5	CR33-50/60	SL280DF110V60C	7627843
14ACXS042-230	TXV	41000	15.1	12.5	CR33-50/60	SLP98DF090XV36C	7783052
14ACXS042-230	TXV	41000	15.1	12.5	CR33-50/60	SLP98DF090XV48C	7627846
14ACXS042-230	TXV	41500	15.1	12.5	CR33-50/60	SLP98DF090XV60C	7783053
14ACXS042-230	TXV	41500	15.5	12.5	CR33-50/60	SLP98DF110XV60C	7627849
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36B	EL180UH090E48B	8258464
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36B	EL180UH090XE48B	8258466
14ACXS042-230	TXV	39000	14	11.5	CX35-30/36B	EL296UH045XV36B	8258461
14ACXS042-230	TXV	39000	14	11.5	CX35-30/36B	EL296UH070XV36B	8258462
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36B	SL280UH090V36B	8258454
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36B	SL280UH090V48B	8258459
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36B	SL280UH090XV48B	8258456
14ACXS042-230	TXV	39000	14	11.5	CX35-30/36B	SLP98UH070XV36B	8258457
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	EL180UH090E60C	8258498
14ACXS042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL180UH110E60C	8258488
14ACXS042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL180UH110XE60C	8258490
14ACXS042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL195UH090XE48C	8258491
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	EL195UH110XE60C	8258493
14ACXS042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL296UH090XE48C	8258475
14ACXS042-230	TXV	39000	14.5	12	CX35-30/36C	EL296UH090XV36C	8258477
14ACXS042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL296UH090XV48C	8258495
14ACXS042-230	TXV	39500	14.5	12	CX35-30/36C	EL296UH090XV60C	8258479
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	EL296UH110XE60C	8258496
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	EL296UH110XV60C	8258467
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	SL280UH090V60C	8258480
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	SL280UH090XV60C	8258469
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	SL280UH110V60C	8258483
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	SL280UH110XV60C	8258470
14ACXS042-230	TXV	39000	14.5	12	CX35-30/36C	SLP98UH090XV36C	8258485
14ACXS042-230	TXV	39000	14.5	12.2	CX35-30/36C	SLP98UH090XV48C	8258472
14ACXS042-230	TXV	39500	14.5	12	CX35-30/36C	SLP98UH090XV60C	8258486
14ACXS042-230	TXV	39500	14.5	12.2	CX35-30/36C	SLP98UH110XV60C	8258474
14ACXS042-230	TXV	41000	15.1	12.5	CX35-36B	EL180UH090E48B	8258503
14ACXS042-230	TXV	41000	15.1	12.5	CX35-36B	EL180UH090XE48B	8258511
14ACXS042-230	TXV	40500	14.5	12.2	CX35-36B	EL296UH045XV36B	8258513
14ACXS042-230	TXV	40500	14.5	12.2	CX35-36B	EL296UH070XV36B	8258504
14ACXS042-230	TXV	41000	15.1	12.5	CX35-36B	SL280UH090V36B	8258501

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	41000	15.1	12.5	CX35-36B	SL280UH090V48B	8258506
14ACXS042-230	TXV	41000	15.1	12.5	CX35-36B	SL280UH090XV48B	8258508
14ACXS042-230	TXV	40500	14.5	12.2	CX35-36B	SLP98UH070XV36B	8258509
14ACXS042-230	TXV	40500	14.25	12	CX35-36B		8258500
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48B	EL180UH090E48B	8258516
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48B	EL180UH090XE48B	8258520
14ACXS042-230	TXV	41000	14.5	12.2	CX35-48B	EL296UH045XV36B	8258521
14ACXS042-230	TXV	41000	14.5	12.2	CX35-48B	EL296UH070XV36B	8258523
14ACXS042-230	TXV	41000	15.1	12.5	CX35-48B	SL280UH090V36B	8258525
14ACXS042-230	TXV	41500	15.1	12.5	CX35-48B	SL280UH090V48B	8258527
14ACXS042-230	TXV	41500	15.1	12.5	CX35-48B	SL280UH090XV48B	8258528
14ACXS042-230	TXV	41000	14.5	12.2	CX35-48B	SLP98UH070XV36B	8258518
14ACXS042-230	TXV	41000	14.25	12	CX35-48B		8258514
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	EL180UH090E60C	8258542
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	EL180UH110E60C	8258556
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	EL180UH110XE60C	8258543
14ACXS042-230	TXV	41000	15.5	12.5	CX35-48C	EL195UH090XE48C	8258557
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	EL195UH110XE60C	8258545
14ACXS042-230	TXV	41000	15.5	12.5	CX35-48C	EL296UH090XE48C	8258559
14ACXS042-230	TXV	41000	15.1	12.5	CX35-48C	EL296UH090XV36C	8258561
14ACXS042-230	TXV	41000	15.1	12.5	CX35-48C	EL296UH090XV48C	8258562
14ACXS042-230	TXV	41500	15.1	12.5	CX35-48C	EL296UH090XV60C	8258532
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	EL296UH110XE60C	8258564
14ACXS042-230	TXV	41500	15.1	12.5	CX35-48C	EL296UH110XV48C	8258533
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	EL296UH110XV60C	8258547
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	SL280UH090V60C	8258535
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	SL280UH090XV60C	8258549
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	SL280UH110V60C	8258537
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	SL280UH110XV60C	8258550
14ACXS042-230	TXV	41000	15.1	12.5	CX35-48C	SLP98UH090XV36C	8258539
14ACXS042-230	TXV	41000	15.1	12.5	CX35-48C	SLP98UH090XV48C	8258552
14ACXS042-230	TXV	41500	15.1	12.5	CX35-48C	SLP98UH090XV60C	8258540
14ACXS042-230	TXV	41500	15.5	12.5	CX35-48C	SLP98UH110XV60C	8258554
14ACXS042-230	TXV	41000	14.25	12	CX35-48C		8258530
14ACXS042-230	TXV	42000	16	13	CX35-49C	EL180UH090E60C	8258592
14ACXS042-230	TXV	42000	16	13	CX35-49C	EL180UH110E60C	8258572
14ACXS042-230	TXV	42000	16	13	CX35-49C	EL180UH110XE60C	8258594
14ACXS042-230	TXV	41500	15.5	12.5	CX35-49C	EL195UH090XE48C	8258574
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	EL195UH110XE60C	8258596
14ACXS042-230	TXV	41500	15.5	12.5	CX35-49C	EL296UH090XE48C	8258576
14ACXS042-230	TXV	41500	15.5	12.5	CX35-49C	EL296UH090XV36C	8258597
14ACXS042-230	TXV	41500	15.5	12.5	CX35-49C	EL296UH090XV48C	8258577
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	EL296UH090XV60C	8258599
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	EL296UH110XE60C	8258582
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	EL296UH110XV48C	8258568
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	EL296UH110XV60C	8258584
14ACXS042-230	TXV	42000	16	13	CX35-49C	SL280UH090V60C	8258569
14ACXS042-230	TXV	42000	16	13	CX35-49C	SL280UH090XV60C	8258586
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	SL280UH110V60C	8258587

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	SL280UH110XV60C	8258589
14ACXS042-230	TXV	41500	15.5	12.5	CX35-49C	SLP98UH090XV36C	8258591
14ACXS042-230	TXV	41500	15.5	12.5	CX35-49C	SLP98UH090XV48C	8258571
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	SLP98UH090XV60C	8258579
14ACXS042-230	TXV	42000	15.5	12.5	CX35-49C	SLP98UH110XV60C	8258581
14ACXS042-230	TXV	41500	14.25	12.2	CX35-49C		8258566
14ACXS042-230	TXV	41000	15	12.5	CX35-50/60C	EL180UH090E48B	10025832
14ACXS042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL180UH090E60C	8258628
14ACXS042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL180UH110E60C	8258629
14ACXS042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL180UH110XE60C	8258631
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL195UH090XE48C	8258632
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL195UH110XE60C	8258605
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH090XE48C	8258618
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH090XV36C	8258620
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH090XV48C	8258621
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH090XV60C	8258623
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH110XE60C	8258624
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH110XV48C	8258626
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH110XV60C	8258610
14ACXS042-230	TXV	41500	15.1	12.5	CX35-50/60C	SL280UH090V60C	8258607
14ACXS042-230	TXV	41500	15.1	12.5	CX35-50/60C	SL280UH090XV60C	8258612
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	SL280UH110V60C	8258609
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	SL280UH110XV60C	8258613
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	SLP98UH090XV36C	8258602
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	SLP98UH090XV48C	8258615
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	SLP98UH090XV60C	8258604
14ACXS042-230	TXV	41000	15.1	12.5	CX35-50/60C	SLP98UH110XV60C	8258616
14ACXS042-230	TXV	40500	14.25	12	CX35-50/60C		8258601
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL180UH090E60C	8258649
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL180UH110E60C	8258659
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL180UH110XE60C	8258651
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL195UH090XE48C	8258660
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL195UH110XE60C	8258639
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL296UH090XE48C	8258662
14ACXS042-230	TXV	42000	15.5	12.5	CX35-60C	EL296UH090XV36C	8258641
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL296UH090XV48C	8258664
14ACXS042-230	TXV	42000	15.5	12.5	CX35-60C	EL296UH090XV60C	8258642
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL296UH110XE60C	8258666
14ACXS042-230	TXV	42000	16	13	CX35-60C	EL296UH110XV60C	8258644
14ACXS042-230	TXV	42000	16	13	CX35-60C	SL280UH090V60C	8258652
14ACXS042-230	TXV	42000	16	13	CX35-60C	SL280UH090XV60C	8258646
14ACXS042-230	TXV	42000	16	13	CX35-60C	SL280UH110V60C	8258654
14ACXS042-230	TXV	42000	16	13	CX35-60C	SL280UH110XV60C	8258647
14ACXS042-230	TXV	42000	15.5	12.5	CX35-60C	SLP98UH090XV36C	8258655
14ACXS042-230	TXV	42000	16	13	CX35-60C	SLP98UH090XV48C	8258636
14ACXS042-230	TXV	42000	15.5	12.5	CX35-60C	SLP98UH090XV60C	8258657
14ACXS042-230	TXV	42000	16	13	CX35-60C	SLP98UH110XV60C	8258637
14ACXS042-230	TXV	42000	14.25	12.2	CX35-60C		8258634
14ACXS042-230	TXV	42000	16	13	CX35-60D	EL180UH135E60D	8258669

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - NORTH / SOUTH REGION - S018-S024-S030-S036-S042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACXS042-230	TXV	42000	15.5	12.5	CX35-60D	EL195UH135XE60D	8258672
14ACXS042-230	TXV	42000	15.5	12.5	CX35-60D	EL296UH135XE60D	8258671
14ACXS042-230	TXV	42000	16	13	CX35-60D	SL280UH135V60D	8258674
14ACXS042-230	TXV	41500	14.5	12.2	CX35-60D		8258667
14ACXS042-230	TXV	41500	14.25	12.2	CX38-49C		10548593

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-018-230	RFC	18000	14	12.2	C35-18/24A		8471005
14ACX-018-230	RFC	18000	14	12.2	C35-18/24B		8471006
14ACX-018-230	RFC	19200	14.25	12.2	CH33-31A		7186942
14ACX-018-230	RFC	19100	14.25	12.2	CH33-31B		7186946
14ACX-018-230	RFC	19000	14	12.2	CR33-30/36A		7186983
14ACX-018-230	RFC	19000	14	12.2	CR33-30/36B		7186986
14ACX-018-230	TXV	19700	16	13	C35-24A	EL180UH045E36A	8267474
14ACX-018-230	TXV	19700	16	13	C35-24A	EL180UH045XE36A	8267473
14ACX-018-230	TXV	19200	14.25	12.2	C35-24A		8267472
14ACX-018-230	TXV	19500	15.5	12.5	C35-24B	EL180UH070E36B	8267479
14ACX-018-230	TXV	19500	15.5	12.5	C35-24B	EL180UH070XE36B	8267478
14ACX-018-230	TXV	18000	14.5	12.2	C35-24B	EL195UH030XE24B	8608820
14ACX-018-230	TXV	18000	14.5	12.2	C35-24B	EL195UH045XE24B	8608821
14ACX-018-230	TXV	20000	16	13	C35-24B	EL195UH045XE36B	8267480
14ACX-018-230	TXV	20000	16	13	C35-24B	EL296UH045XE36B	8267481
14ACX-018-230	TXV	20200	16	13	C35-24B	EL296UH045XV36B	8267482
14ACX-018-230	TXV	20200	16	13	C35-24B	EL296UH070XV36B	8267476
14ACX-018-230	TXV	20200	16	13	C35-24B	SLP98UH070XV36B	8267477
14ACX-018-230	TXV	19200	14.25	12.2	C35-24B		8267475
14ACX-018-230	TXV	19900	16	13	C35-30A	EL180UH045E36A	8267484
14ACX-018-230	TXV	19900	16	13	C35-30A	EL180UH045XE36A	8267485
14ACX-018-230	TXV	19300	14.5	12.2	C35-30A		8267483
14ACX-018-230	TXV	19700	15.5	12.5	C35-30B	EL180UH070E36B	8267490
14ACX-018-230	TXV	19700	15.5	12.5	C35-30B	EL180UH070XE36B	8267491
14ACX-018-230	TXV	18000	14.5	12.2	C35-30B	EL195UH030XE24B	8608822
14ACX-018-230	TXV	18000	14.5	12.2	C35-30B	EL195UH045XE24B	8608823
14ACX-018-230	TXV	19800	16	13	C35-30B	EL195UH045XE36B	8267492
14ACX-018-230	TXV	19800	16	13	C35-30B	EL296UH045XE36B	8267493
14ACX-018-230	TXV	20400	16	13.5	C35-30B	EL296UH045XV36B	8267488
14ACX-018-230	TXV	20400	16	13.5	C35-30B	EL296UH070XV36B	8267489
14ACX-018-230	TXV	20400	16	13.5	C35-30B	SLP98UH070XV36B	8267487
14ACX-018-230	TXV	19300	14.5	12.2	C35-30B		8267486
14ACX-018-230	TXV	19400	16	13	CBA27UHE-018		10259477
14ACX-018-230	TXV	19400	16	13	CBA27UHE-024		10259373
14ACX-018-230	TXV	19000	15.5	12.5	CBX25UHV-018		7186920
14ACX-018-230	TXV	19200	16	13	CBX25UHV-024		7186921
14ACX-018-230	TXV	19700	16	13	CBX27UH-018		7186922
14ACX-018-230	TXV	19700	16	13	CBX27UH-024		7186923
14ACX-018-230	TXV	19100	14.5	12.2	CBX32M-018/024		7186924
14ACX-018-230	TXV	19300	14.5	12.5	CBX32M-030		7186925
14ACX-018-230	TXV	19600	16	13	CBX32MV-018/024		7186926
14ACX-018-230	TXV	19700	16	13	CBX32MV-024/030		7186927
14ACX-018-230	TXV	19900	16	13	CBX40UHV-024		7186928
14ACX-018-230	TXV	19800	16	13	CBX40UHV-030		7186929
14ACX-018-230	TXV	19400	16	13	CH33-19	EL180UH045E36A	7187234
14ACX-018-230	TXV	19400	16	13	CH33-19	EL180UH045XE36A	7187233
14ACX-018-230	TXV	19300	16	13	CH33-24/30	EL180UH045E36A	7187239
14ACX-018-230	TXV	19300	16	13	CH33-24/30	EL180UH045XE36A	7187237
14ACX-018-230	TXV	19800	16	13	CH33-25A	EL180UH045E36A	7186935

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-018-230	TXV	19800	16	13	CH33-25A	EL180UH045XE36A	7186934
14ACX-018-230	TXV	19200	14.5	12.2	CH33-25A		7186933
14ACX-018-230	TXV	19400	15.5	12.5	CH33-25B	EL180UH070E36B	7186938
14ACX-018-230	TXV	19400	15.5	12.5	CH33-25B	EL180UH070XE36B	7186937
14ACX-018-230	TXV	19900	16	13	CH33-25B	EL195UH045XE36B	7186939
14ACX-018-230	TXV	19900	16	13	CH33-25B	EL296UH045XE36B	7186940
14ACX-018-230	TXV	20200	16	13	CH33-25B	EL296UH045XV36B	7186941
14ACX-018-230	TXV	20200	16	13	CH33-31A	EL180UH045E36A	7186945
14ACX-018-230	TXV	20200	16	13	CH33-31A	EL180UH045XE36A	7186944
14ACX-018-230	TXV	19500	14.5	12.2	CH33-31A		7186943
14ACX-018-230	TXV	19900	16	13	CH33-31B	EL180UH070E36B	7186949
14ACX-018-230	TXV	19900	16	13	CH33-31B	EL180UH070XE36B	7186948
14ACX-018-230	TXV	18000	14.5	12.2	CH33-31B	EL195UH030XE24B	8608824
14ACX-018-230	TXV	18000	14.5	12.2	CH33-31B	EL195UH045XE24B	8608825
14ACX-018-230	TXV	19900	16	13	CH33-31B	EL195UH045XE36B	7186950
14ACX-018-230	TXV	19900	16	13	CH33-31B	EL296UH045XE36B	7186951
14ACX-018-230	TXV	20600	16	13.5	CH33-31B	EL296UH045XV36B	7186952
14ACX-018-230	TXV	19500	14.5	12.2	CH33-31B		7186947
14ACX-018-230	TXV	19400	16	13	CH35-18A	EL180UH045E36A	7186955
14ACX-018-230	TXV	19400	16	13	CH35-18A	EL180UH045XE36A	7186954
14ACX-018-230	TXV	19900	16	13	CH35-24A	EL180UH045E36A	7186958
14ACX-018-230	TXV	19900	16	13	CH35-24A	EL180UH045XE36A	7186959
14ACX-018-230	TXV	19300	14.5	12.2	CH35-24A		7186957
14ACX-018-230	TXV	19500	15.5	12.5	CH35-24B	EL180UH070E36B	7186961
14ACX-018-230	TXV	19500	15.5	12.5	CH35-24B	EL180UH070XE36B	7186962
14ACX-018-230	TXV	19600	15.5	12.5	CH35-24B	EL195UH045XE36B	7186963
14ACX-018-230	TXV	19600	15.5	12.5	CH35-24B	EL296UH045XE36B	7186964
14ACX-018-230	TXV	20200	16	13	CH35-24B	EL296UH045XV36B	7186965
14ACX-018-230	TXV	20200	16	13	CH35-30A	EL180UH045E36A	7186969
14ACX-018-230	TXV	20200	16	13	CH35-30A	EL180UH045XE36A	7186968
14ACX-018-230	TXV	19500	14.5	12.2	CH35-30A		7186967
14ACX-018-230	TXV	19900	16	13	CH35-30B	EL180UH070E36B	7186972
14ACX-018-230	TXV	19900	16	13	CH35-30B	EL180UH070XE36B	7186973
14ACX-018-230	TXV	18000	14.5	12.2	CH35-30B	EL195UH030XE24B	8608826
14ACX-018-230	TXV	18000	14.5	12.2	CH35-30B	EL195UH045XE24B	8608827
14ACX-018-230	TXV	19900	16	13	CH35-30B	EL195UH045XE36B	7186974
14ACX-018-230	TXV	19900	16	13	CH35-30B	EL296UH045XE36B	7186975
14ACX-018-230	TXV	20600	16	13.5	CH35-30B	EL296UH045XV36B	7186976
14ACX-018-230	TXV	19500	14.5	12.2	CH35-30B		7186971
14ACX-018-230	TXV	19200	15.5	12.5	CR33-18	EL180DF045E36A	7186978
14ACX-018-230	TXV	18600	15.1	12.5	CR33-24A	EL180DF045E36A	7186979
14ACX-018-230	TXV	18600	14.5	12.5	CR33-24B	EL180DF070E36B	7186980
14ACX-018-230	TXV	19800	16	13	CR33-30/36A	EL180DF045E36A	7186985
14ACX-018-230	TXV	19400	14.5	12.2	CR33-30/36A		7186984
14ACX-018-230	TXV	19800	15.5	12.5	CR33-30/36B	EL180DF070E36B	7186988
14ACX-018-230	TXV	19400	14.5	12.2	CR33-30/36B		7186987
14ACX-018-230	TXV	18400	15	12.5	CX35-18/24A	EL180UH045E36A	8267494
14ACX-018-230	TXV	18400	15	12.5	CX35-18/24A	EL180UH045XE36A	8267495
14ACX-018-230	TXV	18500	14.5	12.2	CX35-18/24B	EL180UH070E36B	8267499

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-018-230	TXV	18500	14.5	12.2	CX35-18/24B	EL180UH070XE36B	8267496
14ACX-018-230	TXV	18600	15	12.5	CX35-18/24B	EL195UH045XE36B	8267497
14ACX-018-230	TXV	18600	15	12.5	CX35-18/24B	EL296UH045XE36B	8267498
14ACX-018-230	TXV	19700	16	13	CX35-24A	EL180UH045E36A	8267501
14ACX-018-230	TXV	19700	16	13	CX35-24A	EL180UH045XE36A	8267502
14ACX-018-230	TXV	19200	14.25	12.2	CX35-24A		8267500
14ACX-018-230	TXV	19500	15.5	12.5	CX35-24B	EL180UH070E36B	8267507
14ACX-018-230	TXV	19500	15.5	12.5	CX35-24B	EL180UH070XE36B	8267506
14ACX-018-230	TXV	18000	14.5	12.2	CX35-24B	EL195UH030XE24B	8608836
14ACX-018-230	TXV	18000	14.5	12.2	CX35-24B	EL195UH045XE24B	8608837
14ACX-018-230	TXV	20000	16	13	CX35-24B	EL195UH045XE36B	8267508
14ACX-018-230	TXV	20000	16	13	CX35-24B	EL296UH045XE36B	8267509
14ACX-018-230	TXV	20200	16	13	CX35-24B	EL296UH045XV36B	8267510
14ACX-018-230	TXV	20200	16	13	CX35-24B	EL296UH070XV36B	8267505
14ACX-018-230	TXV	20200	16	13	CX35-24B	SLP98UH070XV36B	8267504
14ACX-018-230	TXV	19200	14.25	12.2	CX35-24B		8267503
14ACX-018-230	TXV	19900	16	13	CX35-30A	EL180UH045E36A	8267512
14ACX-018-230	TXV	19900	16	13	CX35-30A	EL180UH045XE36A	8267513
14ACX-018-230	TXV	19300	14.5	12.2	CX35-30A		8267511
14ACX-018-230	TXV	19700	15.5	12.5	CX35-30B	EL180UH070E36B	8267520
14ACX-018-230	TXV	19700	15.5	12.5	CX35-30B	EL180UH070XE36B	8267521
14ACX-018-230	TXV	18000	14.5	12.2	CX35-30B	EL195UH030XE24B	8608838
14ACX-018-230	TXV	18000	14.5	12.2	CX35-30B	EL195UH045XE24B	8608839
14ACX-018-230	TXV	19800	16	13	CX35-30B	EL195UH045XE36B	8267516
14ACX-018-230	TXV	19800	16	13	CX35-30B	EL296UH045XE36B	8267517
14ACX-018-230	TXV	20400	16	13.5	CX35-30B	EL296UH045XV36B	8267518
14ACX-018-230	TXV	20400	16	13.5	CX35-30B	EL296UH070XV36B	8267519
14ACX-018-230	TXV	20400	16	13.5	CX35-30B	SLP98UH070XV36B	8267515
14ACX-018-230	TXV	19300	14.5	12.2	CX35-30B		8267514
14ACX-018-230	TXV	19200	14.25	12.2	CX38-25B		10546097
14ACX-024-230	RFC	23400	14	12.2	C35-24A		8471007
14ACX-024-230	RFC	23600	14	12.2	C35-30A		8471008
14ACX-024-230	RFC	23600	14	12.2	C35-30B		8471010
14ACX-024-230	RFC	24000	14	12.2	C35-36A		8471012
14ACX-024-230	RFC	24000	14	12.2	C35-36B		8471014
14ACX-024-230	RFC	24000	14	12.2	CH33-25A		7175368
14ACX-024-230	RFC	24000	14.5	12.2	CH33-31A		7175370
14ACX-024-230	RFC	24000	14.5	12.2	CH33-31B		7175371
14ACX-024-230	RFC	23800	14	12.2	CH33-36C		7174712
14ACX-024-230	RFC	24000	14.2	12.2	CH33-42B		7175388
14ACX-024-230	RFC	24000	14.5	12.2	CH33-43B		7175389
14ACX-024-230	RFC	23400	14	12.2	CH35-24A		10516724
14ACX-024-230	RFC	23600	14	12.2	CH35-30A		10516725
14ACX-024-230	RFC	23600	14	12.2	CH35-30B		10516726
14ACX-024-230	RFC	23800	14	12.2	CH35-36A		7175413
14ACX-024-230	RFC	24000	14	12.2	CH35-36C		7175407
14ACX-024-230	RFC	24000	14	12.2	CH35-42B		10514547
14ACX-024-230	RFC	24000	14	12.2	CR33-30/36A		7175391
14ACX-024-230	RFC	24000	14	12.2	CR33-30/36B		7175392

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-024-230	RFC	24000	14	12.2	CR33-30/36C		7175373
14ACX-024-230	TXV	23400	15.1	12.5	C35-18/24B	EL195UH030XE24B	8608852
14ACX-024-230	TXV	23400	15.1	12.5	C35-18/24B	EL195UH045XE24B	8608853
14ACX-024-230	TXV	24000	16	13	C35-24A	EL180UH045E36A	8268497
14ACX-024-230	TXV	24000	16	13	C35-24A	EL180UH045XE36A	8268498
14ACX-024-230	TXV	24000	16	13	C35-24A	SL280UH070V36A	8268495
14ACX-024-230	TXV	24000	16	13	C35-24A	SL280UH070XV36A	8268496
14ACX-024-230	TXV	24000	14.25	12.2	C35-24A		8268494
14ACX-024-230	TXV	24000	16	13	C35-24B	EL180UH070E36B	8268508
14ACX-024-230	TXV	24000	16	13	C35-24B	EL180UH070XE36B	8268509
14ACX-024-230	TXV	24000	16	13	C35-24B	EL195UH030XE24B	8608854
14ACX-024-230	TXV	24000	16	13	C35-24B	EL195UH045XE24B	8608855
14ACX-024-230	TXV	24000	16	13	C35-24B	EL195UH045XE36B	8268500
14ACX-024-230	TXV	24000	16	13	C35-24B	EL195UH070XE36B	8268501
14ACX-024-230	TXV	24000	16	13	C35-24B	EL296UH045XE36B	8268502
14ACX-024-230	TXV	24000	16	13	C35-24B	EL296UH045XV36B	8268505
14ACX-024-230	TXV	24000	16	13	C35-24B	EL296UH070XE36B	8268503
14ACX-024-230	TXV	24000	16	13	C35-24B	EL296UH070XV36B	8268506
14ACX-024-230	TXV	24000	16	13	C35-24B	SL280UH090V36B	8268510
14ACX-024-230	TXV	24000	16	13	C35-24B	SL280UH090V48B	8268511
14ACX-024-230	TXV	24000	16	13	C35-24B	SL280UH090XV48B	8268504
14ACX-024-230	TXV	24000	16	13	C35-24B	SLP98UH070XV36B	8268507
14ACX-024-230	TXV	24000	14.25	12.2	C35-24B		8268499
14ACX-024-230	TXV	24000	16	13	C35-30/36A	EL180UH045E36A	8268532
14ACX-024-230	TXV	24000	16	13	C35-30/36A	EL180UH045XE36A	8268533
14ACX-024-230	TXV	24000	16	13	C35-30/36A	SL280UH070V36A	8268530
14ACX-024-230	TXV	24000	16	13	C35-30/36A	SL280UH070XV36A	8268531
14ACX-024-230	TXV	24000	16	13	C35-30/36B	EL180UH070E36B	8268543
14ACX-024-230	TXV	24000	16	13	C35-30/36B	EL180UH070XE36B	8268544
14ACX-024-230	TXV	24000	15.5	12.5	C35-30/36B	EL195UH030XE24B	8608856
14ACX-024-230	TXV	24000	15.5	12.5	C35-30/36B	EL195UH045XE24B	8608857
14ACX-024-230	TXV	23400	15.5	12.5	C35-30/36B	EL195UH045XE36B	8268545
14ACX-024-230	TXV	23600	16	13	C35-30/36B	EL195UH070XE36B	8268534
14ACX-024-230	TXV	23400	15.5	12.5	C35-30/36B	EL296UH045XE36B	8268535
14ACX-024-230	TXV	24000	16	13	C35-30/36B	EL296UH045XV36B	8268537
14ACX-024-230	TXV	23600	16	13	C35-30/36B	EL296UH070XE36B	8268536
14ACX-024-230	TXV	24000	16	13	C35-30/36B	EL296UH070XV36B	8268538
14ACX-024-230	TXV	24000	16	13	C35-30/36B	SL280UH090V36B	8268540
14ACX-024-230	TXV	24000	16	13	C35-30/36B	SL280UH090V48B	8268541
14ACX-024-230	TXV	24000	16	13	C35-30/36B	SL280UH090XV48B	8268542
14ACX-024-230	TXV	24000	16	13	C35-30/36B	SLP98UH070XV36B	8268539
14ACX-024-230	TXV	24000	16	13	C35-30/36C	EL296UH090XV36C	8268546
14ACX-024-230	TXV	24000	16	13	C35-30/36C	SLP98UH090XV36C	8268547
14ACX-024-230	TXV	24000	16	13	C35-30A	EL180UH045E36A	8268513
14ACX-024-230	TXV	24000	16	13	C35-30A	EL180UH045XE36A	8268514
14ACX-024-230	TXV	24000	16	13	C35-30A	SL280UH070V36A	8268515
14ACX-024-230	TXV	24000	16	13	C35-30A	SL280UH070XV36A	8268516
14ACX-024-230	TXV	24000	14.5	12.2	C35-30A		8268512
14ACX-024-230	TXV	24000	16	13	C35-30B	EL180UH070E36B	8268529

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-024-230	TXV	24000	16	13	C35-30B	EL180UH070XE36B	8268520
14ACX-024-230	TXV	24000	16	13	C35-30B	EL195UH030XE24B	8608858
14ACX-024-230	TXV	24000	16	13	C35-30B	EL195UH045XE24B	8608859
14ACX-024-230	TXV	24000	16	13	C35-30B	EL195UH045XE36B	8268521
14ACX-024-230	TXV	24000	16	13	C35-30B	EL195UH070XE36B	8268522
14ACX-024-230	TXV	24000	16	13	C35-30B	EL296UH045XE36B	8268523
14ACX-024-230	TXV	24000	16	13	C35-30B	EL296UH045XV36B	8268525
14ACX-024-230	TXV	24000	16	13	C35-30B	EL296UH070XE36B	8268524
14ACX-024-230	TXV	24000	16	13	C35-30B	EL296UH070XV36B	8268518
14ACX-024-230	TXV	24000	16	13	C35-30B	SL280UH090V36B	8268526
14ACX-024-230	TXV	24000	16	13	C35-30B	SL280UH090V48B	8268527
14ACX-024-230	TXV	24000	16	13	C35-30B	SL280UH090XV48B	8268528
14ACX-024-230	TXV	24000	16	13	C35-30B	SLP98UH070XV36B	8268519
14ACX-024-230	TXV	24000	14.5	12.2	C35-30B		8268517
14ACX-024-230	TXV	24000	16	13	C35-36A	EL180UH045E36A	8268551
14ACX-024-230	TXV	24000	16	13	C35-36A	EL180UH045XE36A	8268552
14ACX-024-230	TXV	24000	16	13.5	C35-36A	SL280UH070V36A	8268549
14ACX-024-230	TXV	24000	16	13.5	C35-36A	SL280UH070XV36A	8268550
14ACX-024-230	TXV	24000	14.5	12.5	C35-36A		8268548
14ACX-024-230	TXV	24000	16	13.5	C35-36B	EL180UH070E36B	8268563
14ACX-024-230	TXV	24000	16	13.5	C35-36B	EL180UH070XE36B	8268564
14ACX-024-230	TXV	24000	16	13	C35-36B	EL195UH030XE24B	8608860
14ACX-024-230	TXV	24000	16	13	C35-36B	EL195UH045XE24B	8608861
14ACX-024-230	TXV	24000	16	13	C35-36B	EL195UH045XE36B	8268565
14ACX-024-230	TXV	24000	16	13	C35-36B	EL195UH070XE36B	8268554
14ACX-024-230	TXV	24000	16	13	C35-36B	EL296UH045XE36B	8268555
14ACX-024-230	TXV	24000	16	13	C35-36B	EL296UH045XV36B	8268557
14ACX-024-230	TXV	24000	16	13	C35-36B	EL296UH070XE36B	8268556
14ACX-024-230	TXV	24000	16	13	C35-36B	EL296UH070XV36B	8268558
14ACX-024-230	TXV	24000	16	13.5	C35-36B	SL280UH090V36B	8268560
14ACX-024-230	TXV	24000	16	13	C35-36B	SL280UH090V48B	8268561
14ACX-024-230	TXV	24000	16	13	C35-36B	SL280UH090XV48B	8268562
14ACX-024-230	TXV	24000	16	13	C35-36B	SLP98UH070XV36B	8268559
14ACX-024-230	TXV	24000	14.5	12.5	C35-36B		8268553
14ACX-024-230	TXV	24000	16	13	CBA27UHE-024		10259374
14ACX-024-230	TXV	24000	16	13	CBA27UHE-030		10259375
14ACX-024-230	TXV	23600	14.5	12.2	CBX25UH-024		7174613
14ACX-024-230	TXV	23800	14.5	12.2	CBX25UH-030		7174614
14ACX-024-230	TXV	24000	14.5	12.2	CBX25UH-036		7174615
14ACX-024-230	TXV	24000	16	13	CBX25UHV-024		7174616
14ACX-024-230	TXV	24000	16	13	CBX25UHV-030		7174617
14ACX-024-230	TXV	24000	16	13	CBX25UHV-036		7174618
14ACX-024-230	TXV	24000	16	13	CBX27UH-024		7174619
14ACX-024-230	TXV	24000	16	13	CBX27UH-030		7174620
14ACX-024-230	TXV	23800	14.5	12.2	CBX32M-018/024		7174621
14ACX-024-230	TXV	24000	15.1	12.5	CBX32M-030		7174622
14ACX-024-230	TXV	24000	15.5	12.5	CBX32MV-018/024		7174623
14ACX-024-230	TXV	24000	16	13	CBX32MV-024/030		7174624
14ACX-024-230	TXV	24000	16	13	CBX40UHV-024		8560058

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-024-230	TXV	22800	15.1	12.5	CH23-31	EL180UH045E36A	7174626
14ACX-024-230	TXV	22800	15.1	12.5	CH23-31	EL180UH045XE36A	7174627
14ACX-024-230	TXV	23200	15.5	12.5	CH23-31	EL180UH070E36B	7174628
14ACX-024-230	TXV	23200	15.5	12.5	CH23-31	EL180UH070XE36B	7174629
14ACX-024-230	TXV	22800	14.5	12.5	CH23-31	EL195UH030XE24B	8608862
14ACX-024-230	TXV	22800	14.5	12.5	CH23-31	EL195UH045XE24B	8608863
14ACX-024-230	TXV	23000	15.1	12.5	CH23-31	EL195UH045XE36B	7174630
14ACX-024-230	TXV	23000	15.1	12.5	CH23-31	EL195UH070XE36B	7174631
14ACX-024-230	TXV	23000	15.1	12.5	CH23-31	EL296UH045XE36B	7174632
14ACX-024-230	TXV	23200	15.5	12.5	CH23-31	EL296UH045XV36B	7174634
14ACX-024-230	TXV	23000	15.1	12.5	CH23-31	EL296UH070XE36B	7174633
14ACX-024-230	TXV	23200	15.5	13	CH23-31	EL296UH070XV36B	7174635
14ACX-024-230	TXV	23400	15.1	13	CH23-31	SL280UH070V36A	7175365
14ACX-024-230	TXV	23400	16	13	CH23-31	SL280UH070XV36A	7175366
14ACX-024-230	TXV	23200	16	13	CH23-31	SL280UH090V36B	7174625
14ACX-024-230	TXV	23200	15.5	13	CH23-31	SLP98UH070XV36B	7174636
14ACX-024-230	TXV	24000	16	13	CH23-41	EL180UH045E36A	7174641
14ACX-024-230	TXV	24000	16	13	CH23-41	EL180UH045XE36A	7174642
14ACX-024-230	TXV	24000	16	13	CH23-41	EL180UH070E36B	7174643
14ACX-024-230	TXV	24000	16	13	CH23-41	EL180UH070XE36B	7174644
14ACX-024-230	TXV	24000	15.5	12.5	CH23-41	EL195UH030XE24B	8608864
14ACX-024-230	TXV	24000	15.5	12.5	CH23-41	EL195UH045XE24B	8608865
14ACX-024-230	TXV	24000	16	13	CH23-41	EL195UH045XE36B	7174645
14ACX-024-230	TXV	24000	16	13	CH23-41	EL195UH070XE36B	7174646
14ACX-024-230	TXV	24000	16	13	CH23-41	EL296UH045XE36B	7174647
14ACX-024-230	TXV	24000	16	13	CH23-41	EL296UH045XV36B	7174649
14ACX-024-230	TXV	24000	16	13	CH23-41	EL296UH070XE36B	7174648
14ACX-024-230	TXV	24000	16	13	CH23-41	EL296UH070XV36B	7174650
14ACX-024-230	TXV	24000	16	13	CH23-41	SL280UH070V36A	7174639
14ACX-024-230	TXV	24000	16	13	CH23-41	SL280UH070XV36A	7175367
14ACX-024-230	TXV	24000	16	13	CH23-41	SL280UH090V36B	7174640
14ACX-024-230	TXV	24000	16	13	CH23-41	SLP98UH070XV36B	7174651
14ACX-024-230	TXV	23800	15.5	12.5	CH33-19	EL180UH045E36A	7174655
14ACX-024-230	TXV	23800	15.5	12.5	CH33-19	EL180UH045XE36A	7174656
14ACX-024-230	TXV	24000	15.1	13	CH33-19	SL280UH070V36A	7174653
14ACX-024-230	TXV	24000	15.1	13	CH33-19	SL280UH070XV36A	7174654
14ACX-024-230	TXV	23800	15.5	12.5	CH33-24/30	EL180UH045E36A	7174660
14ACX-024-230	TXV	23800	15.5	12.5	CH33-24/30	EL180UH045XE36A	7174661
14ACX-024-230	TXV	23800	15.1	13	CH33-24/30	SL280UH070V36A	7174658
14ACX-024-230	TXV	23800	15.1	13	CH33-24/30	SL280UH070XV36A	7174659
14ACX-024-230	TXV	24000	16	13	CH33-25A	EL180UH045E36A	7174665
14ACX-024-230	TXV	24000	16	13	CH33-25A	EL180UH045XE36A	7174666
14ACX-024-230	TXV	24000	16	13	CH33-25A	SL280UH070V36A	7174663
14ACX-024-230	TXV	24000	16	13	CH33-25A	SL280UH070XV36A	7174664
14ACX-024-230	TXV	24000	14.5	12.2	CH33-25A		7174662
14ACX-024-230	TXV	24000	16	13	CH33-25B	EL180UH070E36B	7174669
14ACX-024-230	TXV	24000	16	13	CH33-25B	EL180UH070XE36B	7174670
14ACX-024-230	TXV	24000	15.5	12.5	CH33-25B	EL195UH030XE24B	8608866
14ACX-024-230	TXV	24000	15.5	12.5	CH33-25B	EL195UH045XE24B	8608867

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-024-230	TXV	24000	16	13	CH33-25B	EL195UH045XE36B	7174671
14ACX-024-230	TXV	24000	16	13	CH33-25B	EL195UH070XE36B	7174672
14ACX-024-230	TXV	24000	16	13	CH33-25B	EL296UH045XE36B	7174673
14ACX-024-230	TXV	24000	16	13	CH33-25B	EL296UH045XV36B	7174675
14ACX-024-230	TXV	24000	16	13	CH33-25B	EL296UH070XE36B	7174674
14ACX-024-230	TXV	24000	16	13	CH33-25B	EL296UH070XV36B	7174676
14ACX-024-230	TXV	24000	16	13	CH33-25B	SL280UH090V36B	7174668
14ACX-024-230	TXV	24000	16	13	CH33-25B	SLP98UH070XV36B	7174677
14ACX-024-230	TXV	24000	16	13	CH33-31A	EL180UH045E36A	7174681
14ACX-024-230	TXV	24000	16	13	CH33-31A	EL180UH045XE36A	7174682
14ACX-024-230	TXV	24000	16	13	CH33-31A	SL280UH070V36A	7174679
14ACX-024-230	TXV	24000	16	13	CH33-31A	SL280UH070XV36A	7174680
14ACX-024-230	TXV	24000	14.5	12.5	CH33-31A		7174678
14ACX-024-230	TXV	24000	16	13.5	CH33-31B	EL180UH070E36B	7174685
14ACX-024-230	TXV	24000	16	13.5	CH33-31B	EL180UH070XE36B	7174686
14ACX-024-230	TXV	24000	16	13	CH33-31B	EL195UH030XE24B	8608868
14ACX-024-230	TXV	24000	16	13	CH33-31B	EL195UH045XE24B	8608869
14ACX-024-230	TXV	24000	16	13	CH33-31B	EL195UH045XE36B	7174687
14ACX-024-230	TXV	24000	16	13	CH33-31B	EL195UH070XE36B	7174688
14ACX-024-230	TXV	24000	16	13	CH33-31B	EL296UH045XE36B	7174689
14ACX-024-230	TXV	24000	16	13	CH33-31B	EL296UH045XV36B	7174691
14ACX-024-230	TXV	24000	16	13	CH33-31B	EL296UH070XE36B	7174690
14ACX-024-230	TXV	24000	16	13	CH33-31B	EL296UH070XV36B	7174692
14ACX-024-230	TXV	24000	16	13.5	CH33-31B	SL280UH090V36B	7174684
14ACX-024-230	TXV	24000	16	13	CH33-31B	SLP98UH070XV36B	7174693
14ACX-024-230	TXV	24000	14.5	12.5	CH33-31B		7174683
14ACX-024-230	TXV	24000	16	13	CH33-36A	EL180UH045E36A	7174698
14ACX-024-230	TXV	24000	16	13	CH33-36A	EL180UH045XE36A	7174699
14ACX-024-230	TXV	24000	16	13	CH33-36A	SL280UH070V36A	7174696
14ACX-024-230	TXV	24000	16	13	CH33-36A	SL280UH070XV36A	7174697
14ACX-024-230	TXV	24000	16	13	CH33-36B	EL180UH070E36B	7174703
14ACX-024-230	TXV	24000	16	13	CH33-36B	EL180UH070XE36B	7174704
14ACX-024-230	TXV	24000	15.5	12.5	CH33-36B	EL195UH030XE24B	8608870
14ACX-024-230	TXV	24000	15.5	12.5	CH33-36B	EL195UH045XE24B	8608871
14ACX-024-230	TXV	24000	16	13	CH33-36B	EL195UH045XE36B	7174705
14ACX-024-230	TXV	24000	16	13	CH33-36B	EL195UH070XE36B	7174706
14ACX-024-230	TXV	24000	16	13	CH33-36B	EL296UH045XE36B	7174707
14ACX-024-230	TXV	24000	16	13	CH33-36B	EL296UH045XV36B	7174709
14ACX-024-230	TXV	24000	16	13	CH33-36B	EL296UH070XE36B	7174708
14ACX-024-230	TXV	24000	16	13	CH33-36B	EL296UH070XV36B	7174710
14ACX-024-230	TXV	24000	16	13	CH33-36B	SL280UH090V36B	7174702
14ACX-024-230	TXV	24000	16	13	CH33-36B	SLP98UH070XV36B	7174711
14ACX-024-230	TXV	24000	16	13	CH33-36C	EL296UH090XV36C	7174714
14ACX-024-230	TXV	24000	16	13	CH33-36C	SLP98UH090XV36C	7174715
14ACX-024-230	TXV	24000	16	13	CH33-42	EL195UH030XE24B	8608872
14ACX-024-230	TXV	24000	16	13	CH33-42	EL195UH045XE24B	8608873
14ACX-024-230	TXV	24000	16	13	CH33-43B	EL195UH030XE24B	8608874
14ACX-024-230	TXV	24000	16	13	CH33-43B	EL195UH045XE24B	8608875
14ACX-024-230	TXV	24000	16	13	CH33-43B	EL195UH045XE36B	8237805

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-024-230	TXV	24000	16	13	CH35-18A	EL180UH045E36A	7174719
14ACX-024-230	TXV	24000	16	13	CH35-18A	EL180UH045XE36A	7174720
14ACX-024-230	TXV	24000	16	13	CH35-18A	SL280UH070V36A	7174717
14ACX-024-230	TXV	24000	16	13	CH35-18A	SL280UH070XV36A	7174718
14ACX-024-230	TXV	24000	16	13	CH35-24A	EL180UH045E36A	7174725
14ACX-024-230	TXV	24000	16	13	CH35-24A	EL180UH045XE36A	7174726
14ACX-024-230	TXV	24000	16	13	CH35-24A	SL280UH070V36A	7174723
14ACX-024-230	TXV	24000	16	13	CH35-24A	SL280UH070XV36A	7174724
14ACX-024-230	TXV	23800	14.5	12.2	CH35-24A		7174722
14ACX-024-230	TXV	24000	16	13	CH35-24B	EL180UH070E36B	7174730
14ACX-024-230	TXV	24000	16	13	CH35-24B	EL180UH070XE36B	7174731
14ACX-024-230	TXV	24000	15.5	12.5	CH35-24B	EL195UH030XE24B	8608876
14ACX-024-230	TXV	24000	15.5	12.5	CH35-24B	EL195UH045XE24B	8608877
14ACX-024-230	TXV	24000	16	13	CH35-24B	EL195UH045XE36B	7174732
14ACX-024-230	TXV	24000	16	13	CH35-24B	EL195UH070XE36B	7174733
14ACX-024-230	TXV	24000	16	13	CH35-24B	EL296UH045XV36B	7174734
14ACX-024-230	TXV	24000	16	13	CH35-24B	EL296UH070XV36B	7174735
14ACX-024-230	TXV	24000	16	13	CH35-24B	SL280UH090V36B	7174729
14ACX-024-230	TXV	24000	16	13	CH35-24B	SLP98UH070XV36B	7174736
14ACX-024-230	TXV	24000	14.5	12.2	CH35-24B		7174728
14ACX-024-230	TXV	24000	16	13	CH35-30A	EL180UH045E36A	7174741
14ACX-024-230	TXV	24000	16	13	CH35-30A	EL180UH045XE36A	7174742
14ACX-024-230	TXV	24000	16	13	CH35-30A	SL280UH070V36A	7174739
14ACX-024-230	TXV	24000	16	13	CH35-30A	SL280UH070XV36A	7174740
14ACX-024-230	TXV	24000	15	12.5	CH35-30A		7174738
14ACX-024-230	TXV	24000	16	13.5	CH35-30B	EL180UH070E36B	7174746
14ACX-024-230	TXV	24000	16	13.5	CH35-30B	EL180UH070XE36B	7174747
14ACX-024-230	TXV	24000	16	13	CH35-30B	EL195UH030XE24B	8608878
14ACX-024-230	TXV	24000	16	13	CH35-30B	EL195UH045XE24B	8608879
14ACX-024-230	TXV	24000	16	13	CH35-30B	EL195UH045XE36B	7174748
14ACX-024-230	TXV	24000	16	13	CH35-30B	EL195UH070XE36B	7174749
14ACX-024-230	TXV	24000	16	13	CH35-30B	EL296UH045XV36B	7174750
14ACX-024-230	TXV	24000	16	13	CH35-30B	EL296UH070XV36B	7174751
14ACX-024-230	TXV	24000	16	13.5	CH35-30B	SL280UH090V36B	7174745
14ACX-024-230	TXV	24000	16	13	CH35-30B	SLP98UH070XV36B	7174752
14ACX-024-230	TXV	24000	14.5	12.5	CH35-30B		7174744
14ACX-024-230	TXV	24000	16	13	CH35-36A	EL180UH045E36A	7174756
14ACX-024-230	TXV	24000	16	13	CH35-36A	EL180UH045XE36A	7174757
14ACX-024-230	TXV	24000	16	13	CH35-36A	SL280UH070V36A	7174754
14ACX-024-230	TXV	24000	16	13	CH35-36A	SL280UH070XV36A	7174755
14ACX-024-230	TXV	23800	14.25	12.2	CH35-36A		7174753
14ACX-024-230	TXV	24000	16	13	CH35-36B	EL180UH070E36B	7174760
14ACX-024-230	TXV	24000	16	13	CH35-36B	EL180UH070XE36B	7174761
14ACX-024-230	TXV	24000	15.5	12.5	CH35-36B	EL195UH030XE24B	8608880
14ACX-024-230	TXV	24000	15.5	12.5	CH35-36B	EL195UH045XE24B	8608881
14ACX-024-230	TXV	24000	16	13	CH35-36B	EL195UH045XE36B	7174762
14ACX-024-230	TXV	24000	16	13	CH35-36B	EL195UH070XE36B	7174763
14ACX-024-230	TXV	24000	16	13	CH35-36B	EL296UH045XV36B	7174764
14ACX-024-230	TXV	24000	16	13	CH35-36B	EL296UH070XV36B	7174765

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-024-230	TXV	24000	16	13	CH35-36B	SL280UH090V36B	7174759
14ACX-024-230	TXV	24000	16	13	CH35-36B	SLP98UH070XV36B	7174766
14ACX-024-230	TXV	23800	14	12.2	CH35-36B		7174758
14ACX-024-230	TXV	24000	16	13	CH35-36C	EL296UH090XV36C	7174768
14ACX-024-230	TXV	24000	16	13	CH35-36C	SLP98UH090XV36C	7174769
14ACX-024-230	TXV	24000	14.25	12.2	CH35-36C		7174767
14ACX-024-230	TXV	23400	15.1	12.5	CR33-24A	EL180DF045E36A	7174771
14ACX-024-230	TXV	23000	15.1	12.5	CR33-24A	SL280DF070V36A	7174770
14ACX-024-230	TXV	23000	15.1	12.5	CR33-24B	EL180DF070E36B	7174772
14ACX-024-230	TXV	22600	15	12.5	CR33-24B	EL195DF045XE36B	7174773
14ACX-024-230	TXV	22800	15	12.5	CR33-24B	EL195DF070XE48B	7174774
14ACX-024-230	TXV	22600	15	12.5	CR33-24B	EL296DF045XE36B	7174775
14ACX-024-230	TXV	23000	15.1	12.5	CR33-24B	EL296DF045XV36B	7174777
14ACX-024-230	TXV	22800	15	12.5	CR33-24B	EL296DF070XE48B	7174776
14ACX-024-230	TXV	23400	15	12.5	CR33-24B	EL296DF070XV48B	8247147
14ACX-024-230	TXV	23200	15.1	12.5	CR33-24B	SLP98DF070XV36B	7174778
14ACX-024-230	TXV	24000	16	13	CR33-30/36A	EL180DF045E36A	7174781
14ACX-024-230	TXV	24000	16	13	CR33-30/36A	SL280DF070V36A	7174780
14ACX-024-230	TXV	24000	14.5	12.2	CR33-30/36A		7174779
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	EL180DF070E36B	7174783
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	EL195DF045XE36B	7174784
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	EL195DF070XE48B	7174785
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	EL296DF045XE36B	7174786
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	EL296DF045XV36B	7174789
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	EL296DF070XE48B	7174787
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	EL296DF070XV48B	7174790
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	SL280DF090V48B	7174788
14ACX-024-230	TXV	24000	16	13	CR33-30/36B	SLP98DF070XV36B	7174791
14ACX-024-230	TXV	24000	14.5	12.2	CR33-30/36B		7174782
14ACX-024-230	TXV	24000	16	13	CR33-30/36C	SLP98DF090XV36C	7174793
14ACX-024-230	TXV	24000	14.5	12.2	CR33-30/36C		7174792
14ACX-024-230	TXV	22800	15	12.5	CX35-18/24A	EL180UH045E36A	8268566
14ACX-024-230	TXV	22800	15	12.5	CX35-18/24A	EL180UH045XE36A	8268567
14ACX-024-230	TXV	23400	15.1	12.5	CX35-18/24B	EL195UH030XE24B	8608894
14ACX-024-230	TXV	23400	15	12.5	CX35-18/24B	EL195UH045XE24B	8608895
14ACX-024-230	TXV	24000	16	13	CX35-24A	EL180UH045E36A	8268569
14ACX-024-230	TXV	24000	16	13	CX35-24A	EL180UH045XE36A	8268570
14ACX-024-230	TXV	24000	16	13	CX35-24A	SL280UH070V36A	8268571
14ACX-024-230	TXV	24000	16	13	CX35-24A	SL280UH070XV36A	8268572
14ACX-024-230	TXV	24000	14.25	12.2	CX35-24A		8268568
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL180UH070E36B	8268578
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL180UH070XE36B	8268579
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL195UH030XE24B	8608896
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL195UH045XE24B	8608897
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL195UH045XE36B	8268580
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL195UH070XE36B	8268581
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL296UH045XE36B	8268574
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL296UH045XV36B	8268585
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL296UH070XE36B	8268575

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-024-230	TXV	24000	16	13	CX35-24B	EL296UH070XV36B	8268576
14ACX-024-230	TXV	24000	16	13	CX35-24B	SL280UH090V36B	8268582
14ACX-024-230	TXV	24000	16	13	CX35-24B	SL280UH090V48B	8268583
14ACX-024-230	TXV	24000	16	13	CX35-24B	SL280UH090XV48B	8268584
14ACX-024-230	TXV	24000	16	13	CX35-24B	SLP98UH070XV36B	8268577
14ACX-024-230	TXV	24000	14.25	12.2	CX35-24B		8268573
14ACX-024-230	TXV	24000	16	13	CX35-30/36A	EL180UH045E36A	8268607
14ACX-024-230	TXV	24000	16	13	CX35-30/36A	EL180UH045XE36A	8268606
14ACX-024-230	TXV	24000	16	13	CX35-30/36A	SL280UH070V36A	8268604
14ACX-024-230	TXV	24000	16	13	CX35-30/36A	SL280UH070XV36A	8268605
14ACX-024-230	TXV	24000	16	13	CX35-30/36B	EL180UH070E36B	8268613
14ACX-024-230	TXV	24000	16	13	CX35-30/36B	EL180UH070XE36B	8268614
14ACX-024-230	TXV	24000	15.5	12.5	CX35-30/36B	EL195UH030XE24B	8608898
14ACX-024-230	TXV	24000	15.5	12.5	CX35-30/36B	EL195UH045XE24B	8608899
14ACX-024-230	TXV	23400	15.5	12.5	CX35-30/36B	EL195UH045XE36B	8268615
14ACX-024-230	TXV	23600	16	13	CX35-30/36B	EL195UH070XE36B	8268616
14ACX-024-230	TXV	23400	15.5	12.5	CX35-30/36B	EL296UH045XE36B	8268617
14ACX-024-230	TXV	24000	16	13	CX35-30/36B	EL296UH045XV36B	8268609
14ACX-024-230	TXV	23600	16	13	CX35-30/36B	EL296UH070XE36B	8268608
14ACX-024-230	TXV	24000	16	13	CX35-30/36B	EL296UH070XV36B	8268610
14ACX-024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090V36B	8268618
14ACX-024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090V48B	8268619
14ACX-024-230	TXV	24000	16	13	CX35-30/36B	SL280UH090XV48B	8268612
14ACX-024-230	TXV	24000	16	13	CX35-30/36B	SLP98UH070XV36B	8268611
14ACX-024-230	TXV	24000	16	13	CX35-30/36C	EL296UH090XV36C	8268620
14ACX-024-230	TXV	24000	16	13	CX35-30/36C	SLP98UH090XV36C	8268621
14ACX-024-230	TXV	24000	16	13	CX35-30A	EL180UH045E36A	8268589
14ACX-024-230	TXV	24000	16	13	CX35-30A	EL180UH045XE36A	8268590
14ACX-024-230	TXV	24000	16	13	CX35-30A	SL280UH070V36A	8268587
14ACX-024-230	TXV	24000	16	13	CX35-30A	SL280UH070XV36A	8268588
14ACX-024-230	TXV	24000	14.5	12.2	CX35-30A		8268586
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL180UH070E36B	8268601
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL180UH070XE36B	8268602
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL195UH030XE24B	8608900
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL195UH045XE24B	8608901
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL195UH045XE36B	8268603
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL195UH070XE36B	8268592
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL296UH045XE36B	8268593
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL296UH045XV36B	8268595
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL296UH070XE36B	8268594
14ACX-024-230	TXV	24000	16	13	CX35-30B	EL296UH070XV36B	8268596
14ACX-024-230	TXV	24000	16	13	CX35-30B	SL280UH090V36B	8268598
14ACX-024-230	TXV	24000	16	13	CX35-30B	SL280UH090V48B	8268599
14ACX-024-230	TXV	24000	16	13	CX35-30B	SL280UH090XV48B	8268600
14ACX-024-230	TXV	24000	16	13	CX35-30B	SLP98UH070XV36B	8268597
14ACX-024-230	TXV	24000	14.5	12.2	CX35-30B		8268591
14ACX-024-230	TXV	24000	16	13	CX35-36A	EL180UH045E36A	8268625
14ACX-024-230	TXV	24000	16	13	CX35-36A	EL180UH045XE36A	8268626
14ACX-024-230	TXV	24000	16	13.5	CX35-36A	SL280UH070V36A	8268623

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-024-230	TXV	24000	16	13.5	CX35-36A	SL280UH070XV36A	8268624
14ACX-024-230	TXV	24000	14.5	12.5	CX35-36A		8268622
14ACX-024-230	TXV	24000	16	13.5	CX35-36B	EL180UH070E36B	8268633
14ACX-024-230	TXV	24000	16	13.5	CX35-36B	EL180UH070XE36B	8268634
14ACX-024-230	TXV	24000	16	13	CX35-36B	EL195UH030XE24B	8608902
14ACX-024-230	TXV	24000	16	13	CX35-36B	EL195UH045XE24B	8608903
14ACX-024-230	TXV	24000	16	13	CX35-36B	EL195UH045XE36B	8268635
14ACX-024-230	TXV	24000	16	13	CX35-36B	EL195UH070XE36B	8268636
14ACX-024-230	TXV	24000	16	13	CX35-36B	EL296UH045XE36B	8268637
14ACX-024-230	TXV	24000	16	13	CX35-36B	EL296UH045XV36B	8268629
14ACX-024-230	TXV	24000	16	13	CX35-36B	EL296UH070XE36B	8268628
14ACX-024-230	TXV	24000	16	13	CX35-36B	EL296UH070XV36B	8268630
14ACX-024-230	TXV	24000	16	13.5	CX35-36B	SL280UH090V36B	8268638
14ACX-024-230	TXV	24000	16	13	CX35-36B	SL280UH090V48B	8268639
14ACX-024-230	TXV	24000	16	13	CX35-36B	SL280UH090XV48B	8268632
14ACX-024-230	TXV	24000	16	13	CX35-36B	SLP98UH070XV36B	8268631
14ACX-024-230	TXV	24000	14.5	12.5	CX35-36B		8268627
14ACX-024-230	TXV	23800	14.25	12.2	CX38-25B		10546159
14ACX-030-230	RFC	28000	14	12.2	C35-30A		8471009
14ACX-030-230	RFC	28000	14	12.2	C35-30B		8471011
14ACX-030-230	RFC	28000	14	12.2	C35-36A		8471013
14ACX-030-230	RFC	28000	14	12.2	C35-36B		8471015
14ACX-030-230	RFC	27400	14	12.2	C35-48B		8471016
14ACX-030-230	RFC	27400	14	12.2	C35-48C		8471017
14ACX-030-230	RFC	28000	14.25	12.2	CH33-31A		7509971
14ACX-030-230	RFC	28000	14.25	12.2	CH33-31B		7509977
14ACX-030-230	RFC	28000	14	12.2	CH33-42B		7510015
14ACX-030-230	RFC	28000	14.5	12.5	CH33-43B		7510016
14ACX-030-230	RFC	28000	14	12.2	CH35-30A		10516727
14ACX-030-230	RFC	28000	14	12.2	CH35-30B		10516728
14ACX-030-230	RFC	28000	14	12.2	CH35-42B		10514548
14ACX-030-230	RFC	27400	14	12.2	CH35-48B		10514549
14ACX-030-230	RFC	27400	14	12.2	CH35-48C		10514550
14ACX-030-230	TXV	28000	15.1	12.5	C35-24A	EL180UH045E36A	8268314
14ACX-030-230	TXV	28000	15.1	12.5	C35-24A	EL180UH045XE36A	8268315
14ACX-030-230	TXV	28000	15.5	12.5	C35-24A	SL280UH070V36A	8268312
14ACX-030-230	TXV	28000	15.5	12.5	C35-24A	SL280UH070XV36A	8268313
14ACX-030-230	TXV	28000	15.5	12.5	C35-24B	EL180UH070E36B	8268318
14ACX-030-230	TXV	28000	15.5	12.5	C35-24B	EL180UH070XE36B	8268319
14ACX-030-230	TXV	27800	15.5	12.5	C35-24B	EL180UH090E48B	8268316
14ACX-030-230	TXV	27800	15.5	12.5	C35-24B	EL180UH090XE48B	8268317
14ACX-030-230	TXV	28000	15.1	12.5	C35-24B	EL195UH045XE36B	8268320
14ACX-030-230	TXV	28000	15	12.5	C35-24B	EL195UH070XE36B	8268322
14ACX-030-230	TXV	28000	15.1	12.5	C35-24B	EL296UH045XE36B	8268321
14ACX-030-230	TXV	28000	15	12.5	C35-24B	EL296UH070XE36B	8268326
14ACX-030-230	TXV	28000	15.1	12.5	C35-24B	EL296UH070XV36B	8268323
14ACX-030-230	TXV	28000	15.5	12.5	C35-24B	SL280UH090V36B	8268325
14ACX-030-230	TXV	28000	15.1	12.5	C35-24B	SLP98UH070XV36B	8268324
14ACX-030-230	TXV	28000	15.1	12.5	C35-30/36A	EL180UH045E36A	8268346

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-030-230	TXV	28000	15.1	12.5	C35-30/36A	EL180UH045XE36A	8268347
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36A	SL280UH070V36A	8268344
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36A	SL280UH070XV36A	8268345
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36B	EL180UH070E36B	8268350
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36B	EL180UH070XE36B	8268351
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36B	EL180UH090E48B	8268352
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36B	EL180UH090XE48B	8268358
14ACX-030-230	TXV	28000	15.1	12.5	C35-30/36B	EL195UH045XE36B	8268353
14ACX-030-230	TXV	28000	15.1	12.5	C35-30/36B	EL195UH070XE36B	8268355
14ACX-030-230	TXV	28000	15.1	12.5	C35-30/36B	EL296UH045XE36B	8268354
14ACX-030-230	TXV	27800	15.1	12.5	C35-30/36B	EL296UH045XV36B	8268359
14ACX-030-230	TXV	28000	15.1	12.5	C35-30/36B	EL296UH070XE36B	8268356
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36B	EL296UH070XV36B	8268348
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36B	SL280UH090V36B	8268349
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36B	SLP98UH070XV36B	8268357
14ACX-030-230	TXV	28000	15.1	12.5	C35-30/36C	EL195UH090XE48C	8268363
14ACX-030-230	TXV	28000	15.1	12.5	C35-30/36C	EL296UH090XE48C	8268360
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36C	EL296UH090XV36C	8268361
14ACX-030-230	TXV	28000	15.5	12.5	C35-30/36C	SLP98UH090XV36C	8268362
14ACX-030-230	TXV	28000	15.5	12.5	C35-30A	EL180UH045E36A	8268329
14ACX-030-230	TXV	28000	15.5	12.5	C35-30A	EL180UH045XE36A	8268330
14ACX-030-230	TXV	28000	16	13	C35-30A	SL280UH070V36A	8268331
14ACX-030-230	TXV	28000	16	13	C35-30A	SL280UH070XV36A	8268328
14ACX-030-230	TXV	28000	14.25	12.2	C35-30A		8268327
14ACX-030-230	TXV	28000	16	13	C35-30B	EL180UH070E36B	8268334
14ACX-030-230	TXV	28000	16	13	C35-30B	EL180UH070XE36B	8268342
14ACX-030-230	TXV	28000	16	13	C35-30B	EL180UH090E48B	8268335
14ACX-030-230	TXV	28000	16	13	C35-30B	EL180UH090XE48B	8268336
14ACX-030-230	TXV	28000	15.5	12.5	C35-30B	EL195UH045XE36B	8268337
14ACX-030-230	TXV	28000	15.1	12.5	C35-30B	EL195UH070XE36B	8268339
14ACX-030-230	TXV	28000	15.5	12.5	C35-30B	EL296UH045XE36B	8268338
14ACX-030-230	TXV	28000	15.1	12.5	C35-30B	EL296UH070XE36B	8268343
14ACX-030-230	TXV	28000	16	13	C35-30B	EL296UH070XV36B	8268340
14ACX-030-230	TXV	28000	16	13	C35-30B	SL280UH090V36B	8268333
14ACX-030-230	TXV	28000	16	13	C35-30B	SLP98UH070XV36B	8268341
14ACX-030-230	TXV	28000	14.25	12.2	C35-30B		8268332
14ACX-030-230	TXV	28000	16	13	C35-36A	EL180UH045E36A	8268368
14ACX-030-230	TXV	28000	16	13	C35-36A	EL180UH045XE36A	8268367
14ACX-030-230	TXV	28000	16	13	C35-36A	SL280UH070V36A	8268365
14ACX-030-230	TXV	28000	16	13	C35-36A	SL280UH070XV36A	8268366
14ACX-030-230	TXV	28000	14.5	12.2	C35-36A		8268364
14ACX-030-230	TXV	28000	16	13	C35-36B	EL180UH070E36B	8268371
14ACX-030-230	TXV	28000	16	13	C35-36B	EL180UH070XE36B	8268372
14ACX-030-230	TXV	28000	16	13	C35-36B	EL180UH090E48B	8268373
14ACX-030-230	TXV	28000	16	13	C35-36B	EL180UH090XE48B	8268380
14ACX-030-230	TXV	28000	15.5	12.5	C35-36B	EL195UH045XE36B	8268374
14ACX-030-230	TXV	28000	15.5	12.5	C35-36B	EL195UH070XE36B	8268376
14ACX-030-230	TXV	28000	15.5	12.5	C35-36B	EL296UH045XE36B	8268375
14ACX-030-230	TXV	28000	15.5	12.5	C35-36B	EL296UH045XV36B	8268378

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-030-230	TXV	28000	15.5	12.5	C35-36B	EL296UH070XE36B	8268377
14ACX-030-230	TXV	28000	16	13	C35-36B	EL296UH070XV36B	8268381
14ACX-030-230	TXV	28000	16	13	C35-36B	SL280UH090V36B	8268370
14ACX-030-230	TXV	28000	16	13	C35-36B	SLP98UH070XV36B	8268379
14ACX-030-230	TXV	28000	14.5	12.2	C35-36B		8268369
14ACX-030-230	TXV	28000	16	13	C35-48B	EL180UH070E36B	8268384
14ACX-030-230	TXV	28000	16	13	C35-48B	EL180UH070XE36B	8268385
14ACX-030-230	TXV	28000	16	13	C35-48B	EL180UH090E48B	8268386
14ACX-030-230	TXV	28000	16	13	C35-48B	EL180UH090XE48B	8268393
14ACX-030-230	TXV	28000	15.5	12.5	C35-48B	EL195UH045XE36B	8268387
14ACX-030-230	TXV	28000	15.5	12.5	C35-48B	EL195UH070XE36B	8268389
14ACX-030-230	TXV	28000	15.5	12.5	C35-48B	EL296UH045XE36B	8268388
14ACX-030-230	TXV	28000	15.5	12.5	C35-48B	EL296UH045XV36B	8268391
14ACX-030-230	TXV	28000	15.5	12.5	C35-48B	EL296UH070XE36B	8268390
14ACX-030-230	TXV	28000	16	13	C35-48B	EL296UH070XV36B	8268394
14ACX-030-230	TXV	28000	16	13	C35-48B	SL280UH090V36B	8268383
14ACX-030-230	TXV	28000	16	13	C35-48B	SLP98UH070XV36B	8268392
14ACX-030-230	TXV	28000	14.5	12.2	C35-48B		8268382
14ACX-030-230	TXV	28000	16	13	C35-48C	EL195UH090XE48C	8268396
14ACX-030-230	TXV	28000	16	13	C35-48C	EL296UH090XE48C	8268397
14ACX-030-230	TXV	28000	16	13	C35-48C	EL296UH090XV36C	8268398
14ACX-030-230	TXV	28000	16	13	C35-48C	EL296UH090XV48C	8268400
14ACX-030-230	TXV	28000	16	13	C35-48C	SLP98UH090XV36C	8268399
14ACX-030-230	TXV	28000	16	13	C35-48C	SLP98UH090XV48C	8268401
14ACX-030-230	TXV	28000	14.5	12.2	C35-48C		8268395
14ACX-030-230	TXV	28600	16	13	CBA27UHE-030		10259376
14ACX-030-230	TXV	28600	16	13	CBA27UHE-036		10259377
14ACX-030-230	TXV	28000	14.5	12.2	CBX25UH-036		7509920
14ACX-030-230	TXV	28000	15.1	12.5	CBX25UHV-030		7509921
14ACX-030-230	TXV	28000	15.1	12.5	CBX25UHV-036		7509922
14ACX-030-230	TXV	28000	16	13	CBX27UH-030		7509923
14ACX-030-230	TXV	28000	16	13	CBX27UH-036		7509924
14ACX-030-230	TXV	28000	15	12.5	CBX32M-030		7509925
14ACX-030-230	TXV	28000	15	12.5	CBX32M-036		7509926
14ACX-030-230	TXV	28000	14.5	12.5	CBX32MV-024/030		7509927
14ACX-030-230	TXV	28000	15.1	12.5	CBX32MV-036		7509928
14ACX-030-230	TXV	28000	15.1	12.5	CBX40UHV-030		7509929
14ACX-030-230	TXV	28000	15.5	12.5	CBX40UHV-036		7513089
14ACX-030-230	TXV	26800	15	12.5	CH23-31	EL180UH070E36B	7513090
14ACX-030-230	TXV	26800	15	12.5	CH23-31	EL180UH070XE36B	7513091
14ACX-030-230	TXV	26600	14.25	12.2	CH23-31	EL195UH045XE36B	7513281
14ACX-030-230	TXV	26600	14.25	12.2	CH23-31	EL195UH070XE36B	7513285
14ACX-030-230	TXV	26600	14.25	12.2	CH23-31	EL296UH045XE36B	7513282
14ACX-030-230	TXV	26600	14.5	12.2	CH23-31	EL296UH045XV36B	7509930
14ACX-030-230	TXV	26600	14.25	12.2	CH23-31	EL296UH070XE36B	7513286
14ACX-030-230	TXV	26800	14.5	12.5	CH23-31	EL296UH070XV36B	7509932
14ACX-030-230	TXV	26800	15.1	12.5	CH23-31	SL280UH090V36B	7509931
14ACX-030-230	TXV	26800	14.5	12.5	CH23-31	SLP98UH070XV36B	7509933
14ACX-030-230	TXV	28000	15.5	12.5	CH23-41	EL180UH045E36A	7509936

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-030-230	TXV	28000	15.5	12.5	CH23-41	EL180UH045XE36A	7509937
14ACX-030-230	TXV	28000	15.5	12.5	CH23-41	EL180UH070E36B	7509938
14ACX-030-230	TXV	28000	15.5	12.5	CH23-41	EL180UH070XE36B	7509939
14ACX-030-230	TXV	28000	16	13	CH23-41	EL180UH090E48B	7509940
14ACX-030-230	TXV	28000	16	13	CH23-41	EL180UH090XE48B	7509941
14ACX-030-230	TXV	28000	15.1	12.5	CH23-41	EL195UH045XE36B	7509942
14ACX-030-230	TXV	28000	15.1	12.5	CH23-41	EL195UH070XE36B	7509944
14ACX-030-230	TXV	28000	15.1	12.5	CH23-41	EL296UH045XE36B	7509943
14ACX-030-230	TXV	28000	15.1	12.5	CH23-41	EL296UH045XV36B	7509946
14ACX-030-230	TXV	28000	15.1	12.5	CH23-41	EL296UH070XE36B	7509945
14ACX-030-230	TXV	28000	15.5	12.5	CH23-41	EL296UH070XV36B	7509947
14ACX-030-230	TXV	28000	16	13	CH23-41	SL280UH090V36B	7509935
14ACX-030-230	TXV	28000	15.5	12.5	CH23-41	SLP98UH070XV36B	7509948
14ACX-030-230	TXV	27400	15	12.5	CH33-19	EL180UH045E36A	7509949
14ACX-030-230	TXV	27400	15	12.5	CH33-19	EL180UH045XE36A	7509950
14ACX-030-230	TXV	27600	15.1	12.5	CH33-19	SL280UH070V36A	7509951
14ACX-030-230	TXV	27600	15.1	12.5	CH33-19	SL280UH070XV36A	7509952
14ACX-030-230	TXV	27400	15	12.5	CH33-24/30	EL180UH045E36A	7513094
14ACX-030-230	TXV	27400	15	12.5	CH33-24/30	EL180UH045XE36A	7513095
14ACX-030-230	TXV	27400	15	12.5	CH33-24/30	SL280UH070V36A	7513092
14ACX-030-230	TXV	27400	15	12.5	CH33-24/30	SL280UH070XV36A	7513093
14ACX-030-230	TXV	28000	15.1	12.5	CH33-25A	EL180UH045E36A	7509957
14ACX-030-230	TXV	28000	15.1	12.5	CH33-25A	EL180UH045XE36A	7509958
14ACX-030-230	TXV	28000	15.5	12.5	CH33-25A	SL280UH070V36A	7509955
14ACX-030-230	TXV	28000	15.5	12.5	CH33-25A	SL280UH070XV36A	7509956
14ACX-030-230	TXV	28000	15.5	12.5	CH33-25B	EL180UH070E36B	7509961
14ACX-030-230	TXV	28000	15.5	12.5	CH33-25B	EL180UH070XE36B	7509962
14ACX-030-230	TXV	28000	15.5	12.5	CH33-25B	EL180UH090E48B	7509963
14ACX-030-230	TXV	28000	15.5	12.5	CH33-25B	EL180UH090XE48B	7509964
14ACX-030-230	TXV	28000	15.1	12.5	CH33-25B	EL195UH045XE36B	7509965
14ACX-030-230	TXV	28000	15.1	12.5	CH33-25B	EL195UH070XE36B	7509967
14ACX-030-230	TXV	28000	15.1	12.5	CH33-25B	EL296UH045XE36B	7513096
14ACX-030-230	TXV	28000	15.1	12.5	CH33-25B	EL296UH045XV36B	7509966
14ACX-030-230	TXV	28000	15.1	12.5	CH33-25B	EL296UH070XE36B	7509968
14ACX-030-230	TXV	28000	15.5	12.5	CH33-25B	EL296UH070XV36B	7509969
14ACX-030-230	TXV	28000	16	13	CH33-25B	SL280UH090V36B	9150358
14ACX-030-230	TXV	28000	15.5	12.5	CH33-25B	SLP98UH070XV36B	7509970
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31A	EL180UH045E36A	7509975
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31A	EL180UH045XE36A	7509976
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31A	SL280UH070V36A	7509973
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31A	SL280UH070XV36A	7509974
14ACX-030-230	TXV	28000	14.25	12.2	CH33-31A		7509972
14ACX-030-230	TXV	28000	16	13	CH33-31B	EL180UH070E36B	7509980
14ACX-030-230	TXV	28000	16	13	CH33-31B	EL180UH070XE36B	7509981
14ACX-030-230	TXV	28000	16	13	CH33-31B	EL180UH090E48B	7509982
14ACX-030-230	TXV	28000	16	13	CH33-31B	EL180UH090XE48B	7509983
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31B	EL195UH045XE36B	7509984
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31B	EL195UH070XE36B	7509986
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31B	EL296UH045XE36B	7509985

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31B	EL296UH045XV36B	7509988
14ACX-030-230	TXV	28000	15.5	12.5	CH33-31B	EL296UH070XE36B	7509987
14ACX-030-230	TXV	28000	16	13	CH33-31B	EL296UH070XV36B	7509989
14ACX-030-230	TXV	28000	16	13	CH33-31B	SL280UH090V36B	7509979
14ACX-030-230	TXV	28000	16	13	CH33-31B	SLP98UH070XV36B	7509990
14ACX-030-230	TXV	28000	14.5	12.2	CH33-31B		7509978
14ACX-030-230	TXV	27800	15.1	12.5	CH33-36A	EL180UH045E36A	7509992
14ACX-030-230	TXV	27800	15.1	12.5	CH33-36A	EL180UH045XE36A	7509993
14ACX-030-230	TXV	28000	15.1	12.5	CH33-36A	SL280UH070V36A	7509994
14ACX-030-230	TXV	28000	15.1	12.5	CH33-36A	SL280UH070XV36A	7509995
14ACX-030-230	TXV	28000	15.5	12.5	CH33-36B	EL180UH070E36B	7509999
14ACX-030-230	TXV	28000	15.5	12.5	CH33-36B	EL180UH070XE36B	7510000
14ACX-030-230	TXV	28000	15.5	12.5	CH33-36B	EL180UH090E48B	7510001
14ACX-030-230	TXV	28000	15.5	12.5	CH33-36B	EL180UH090XE48B	7510002
14ACX-030-230	TXV	28000	15.1	12.5	CH33-36B	EL195UH045XE36B	7510003
14ACX-030-230	TXV	28000	15.1	12.5	CH33-36B	EL195UH070XE36B	7510005
14ACX-030-230	TXV	28000	15.1	12.5	CH33-36B	EL296UH045XE36B	7510004
14ACX-030-230	TXV	27800	15.1	12.5	CH33-36B	EL296UH045XV36B	7509997
14ACX-030-230	TXV	28000	15.1	12.5	CH33-36B	EL296UH070XE36B	7510006
14ACX-030-230	TXV	28000	15.5	12.5	CH33-36B	SL280UH090V36B	7509998
14ACX-030-230	TXV	28000	15.5	12.5	CH33-36B	SLP98UH070XV36B	7510008
14ACX-030-230	TXV	28000	15.1	12.5	CH33-36C	EL195UH090XE48C	7510011
14ACX-030-230	TXV	28000	15.1	12.5	CH33-36C	EL296UH090XE48C	7510012
14ACX-030-230	TXV	28000	15.5	12.5	CH33-36C	EL296UH090XV36C	7614670
14ACX-030-230	TXV	28000	15.5	12.5	CH33-36C	SLP98UH090XV36C	7510014
14ACX-030-230	TXV	28000	16	13	CH33-42	EL180UH070E36B	7513099
14ACX-030-230	TXV	28000	16	13	CH33-42	EL180UH070XE36B	7513100
14ACX-030-230	TXV	28000	16	13	CH33-42	EL180UH090E48B	7513101
14ACX-030-230	TXV	28000	16	13	CH33-42	EL180UH090XE48B	7513102
14ACX-030-230	TXV	28000	15.5	12.5	CH33-42	EL195UH045XE36B	7513103
14ACX-030-230	TXV	28000	15.5	12.5	CH33-42	EL195UH070XE36B	7513105
14ACX-030-230	TXV	28000	15.5	12.5	CH33-42	EL296UH045XE36B	7513104
14ACX-030-230	TXV	28000	15.5	12.5	CH33-42	EL296UH045XV36B	7513107
14ACX-030-230	TXV	28000	15.5	12.5	CH33-42	EL296UH070XE36B	7513106
14ACX-030-230	TXV	28000	15.5	12.5	CH33-42	EL296UH070XV36B	7513108
14ACX-030-230	TXV	28000	15.5	12.5	CH33-42	SLP98UH070XV36B	7513109
14ACX-030-230	TXV	28000	14.25	12.2	CH33-42		7513097
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL180UH070E36B	7510019
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL180UH070XE36B	7510020
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL180UH090E48B	7510021
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL180UH090XE48B	7510022
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL195UH045XE36B	7510023
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL195UH070XE36B	7510025
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL296UH045XE36B	7510024
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL296UH045XV36B	7510027
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL296UH070XE36B	7510026
14ACX-030-230	TXV	28000	16	13	CH33-43B	EL296UH070XV36B	7510028
14ACX-030-230	TXV	28000	16	13	CH33-43B	SL280UH090V36B	7510018
14ACX-030-230	TXV	28000	16	13	CH33-43B	SLP98UH070XV36B	7510029

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-030-230	TXV	28000	14.5	12.5	CH33-43B		7510017
14ACX-030-230	TXV	28000	16	13	CH33-43C	EL195UH090XE48C	7510031
14ACX-030-230	TXV	28000	16	13	CH33-43C	EL296UH090XE48C	7510032
14ACX-030-230	TXV	28000	16	13	CH33-43C	EL296UH090XV36C	7510033
14ACX-030-230	TXV	28000	16	13	CH33-43C	SLP98UH090XV36C	7510034
14ACX-030-230	TXV	28000	14.5	12.2	CH33-43C		7510030
14ACX-030-230	TXV	28000	15.5	12.5	CH35-24B	EL180UH070E36B	7510061
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30A	EL180UH045E36A	7510038
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30A	EL180UH045XE36A	7510039
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30A	SL280UH070V36A	7510036
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30A	SL280UH070XV36A	7510037
14ACX-030-230	TXV	28000	14.25	12.2	CH35-30A		7565653
14ACX-030-230	TXV	28000	16	13	CH35-30B	EL180UH070E36B	7510043
14ACX-030-230	TXV	28000	16	13	CH35-30B	EL180UH070XE36B	7510044
14ACX-030-230	TXV	28000	16	13	CH35-30B	EL180UH090E48B	7510045
14ACX-030-230	TXV	28000	16	13	CH35-30B	EL180UH090XE48B	7510046
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30B	EL195UH045XE36B	7510047
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30B	EL195UH070XE36B	7510049
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30B	EL296UH045XE36B	7510051
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30B	EL296UH045XV36B	7510048
14ACX-030-230	TXV	28000	15.5	12.5	CH35-30B	EL296UH070XE36B	7510050
14ACX-030-230	TXV	28000	16	13	CH35-30B	EL296UH070XV36B	7510052
14ACX-030-230	TXV	28000	16	13	CH35-30B	SL280UH090V36B	7622670
14ACX-030-230	TXV	28000	16	13	CH35-30B	SLP98UH070XV36B	7510053
14ACX-030-230	TXV	28000	14.5	12.2	CH35-30B		7510041
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36A	EL180UH045E36A	7510057
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36A	EL180UH045XE36A	7510058
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36A	SL280UH070V36A	7510055
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36A	SL280UH070XV36A	7510056
14ACX-030-230	TXV	28000	15.5	12.5	CH35-36B	EL180UH070E36B	7510062
14ACX-030-230	TXV	28000	15.5	12.5	CH35-36B	EL180UH070XE36B	7614647
14ACX-030-230	TXV	28000	15.5	12.5	CH35-36B	EL180UH090E48B	7510060
14ACX-030-230	TXV	28000	15.5	12.5	CH35-36B	EL180UH090XE48B	7614648
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36B	EL195UH045XE36B	7510065
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36B	EL195UH070XE36B	7510067
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36B	EL296UH045XE36B	7510066
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36B	EL296UH045XV36B	7510069
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36B	EL296UH070XE36B	7510068
14ACX-030-230	TXV	28000	15.5	12.5	CH35-36B	EL296UH070XV36B	7510070
14ACX-030-230	TXV	28000	15.5	12.5	CH35-36B	SLP98UH070XV36B	7510071
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36C	EL195UH090XE48C	7510074
14ACX-030-230	TXV	28000	15.1	12.5	CH35-36C	EL296UH090XE48C	7510075
14ACX-030-230	TXV	28000	16	13	CH35-36C	EL296UH090XV36C	7510076
14ACX-030-230	TXV	28000	16	13	CH35-36C	SLP98UH090XV36C	7510077
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL180UH070E36B	7510080
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL180UH070XE36B	7510081
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL180UH090E48B	7510082
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL180UH090XE48B	7510083
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL195UH045XE36B	7510084

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL195UH070XE36B	7510087
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL296UH045XE36B	7510088
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL296UH045XV36B	7510085
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL296UH070XE36B	7510086
14ACX-030-230	TXV	28000	16	13	CH35-42B	EL296UH070XV36B	7510089
14ACX-030-230	TXV	28000	16	13	CH35-42B	SL280UH090V36B	7510079
14ACX-030-230	TXV	28000	16	13	CH35-42B	SLP98UH070XV36B	7510090
14ACX-030-230	TXV	28000	14.5	12.5	CH35-42B		7510078
14ACX-030-230	TXV	28000	15.5	12.5	CH35-42C	EL195UH090XE48C	7510092
14ACX-030-230	TXV	28000	15.5	12.5	CH35-42C	EL296UH090XE48C	7510093
14ACX-030-230	TXV	28000	16	13	CH35-42C	EL296UH090XV36C	7510094
14ACX-030-230	TXV	28000	16	13	CH35-42C	SLP98UH090XV36C	7510095
14ACX-030-230	TXV	28000	14.5	12.2	CH35-42C		7510091
14ACX-030-230	TXV	26800	14.5	12.2	CR33-24A	EL180DF045E36A	7510096
14ACX-030-230	TXV	26800	14.25	12.2	CR33-24B	EL180DF070E36B	7510100
14ACX-030-230	TXV	26600	14.25	12.2	CR33-24B	EL296DF045XV36B	7513111
14ACX-030-230	TXV	26600	14.25	12.2	CR33-24B	SL280DF090V48B	7510097
14ACX-030-230	TXV	26600	14.25	12.2	CR33-24B	SLP98DF070XV36B	7513110
14ACX-030-230	TXV	28000	15.1	12.5	CR33-30/36A	EL180DF045E36A	7510104
14ACX-030-230	TXV	28000	15.5	12.5	CR33-30/36A	SL280DF070V36A	7510103
14ACX-030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL180DF070E36B	7510108
14ACX-030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL180DF090E48B	7510109
14ACX-030-230	TXV	28000	15.1	12.5	CR33-30/36B	EL195DF045XE36B	7510110
14ACX-030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL195DF070XE48B	7510112
14ACX-030-230	TXV	28000	15.1	12.5	CR33-30/36B	EL296DF045XE36B	7510111
14ACX-030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL296DF045XV36B	7510114
14ACX-030-230	TXV	28000	15.5	12.5	CR33-30/36B	EL296DF070XE48B	7510113
14ACX-030-230	TXV	28000	15.1	12.5	CR33-30/36B	EL296DF070XV48B	7614661
14ACX-030-230	TXV	28000	15.5	12.5	CR33-30/36B	SL280DF090V48B	7622672
14ACX-030-230	TXV	28000	15.5	12.5	CR33-30/36B	SLP98DF070XV36B	7510116
14ACX-030-230	TXV	28000	16	13	CR33-30/36C	SLP98DF090XV36C	7510119
14ACX-030-230	TXV	28000	15.1	12.5	CX35-24A	EL180UH045E36A	8268404
14ACX-030-230	TXV	28000	15.1	12.5	CX35-24A	EL180UH045XE36A	8268405
14ACX-030-230	TXV	28000	15.5	12.5	CX35-24A	SL280UH070V36A	8268402
14ACX-030-230	TXV	28000	15.5	12.5	CX35-24A	SL280UH070XV36A	8268403
14ACX-030-230	TXV	28000	15.5	12.5	CX35-24B	EL180UH070E36B	8268411
14ACX-030-230	TXV	28000	15.5	12.5	CX35-24B	EL180UH070XE36B	8268406
14ACX-030-230	TXV	27800	15.5	12.5	CX35-24B	EL180UH090E48B	8268408
14ACX-030-230	TXV	27800	15.5	12.5	CX35-24B	EL180UH090XE48B	8268409
14ACX-030-230	TXV	28000	15.1	12.5	CX35-24B	EL195UH045XE36B	8268412
14ACX-030-230	TXV	28000	15	12.5	CX35-24B	EL195UH070XE36B	8268414
14ACX-030-230	TXV	28000	15.1	12.5	CX35-24B	EL296UH045XE36B	8268413
14ACX-030-230	TXV	28000	15.1	12.5	CX35-24B	EL296UH045XV36B	8268416
14ACX-030-230	TXV	28000	15	12.5	CX35-24B	EL296UH070XE36B	8268415
14ACX-030-230	TXV	28000	15.1	12.5	CX35-24B	EL296UH070XV36B	8268407
14ACX-030-230	TXV	28000	15.5	12.5	CX35-24B	SL280UH090V36B	8268410
14ACX-030-230	TXV	28000	15.1	12.5	CX35-24B	SLP98UH070XV36B	8268417
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30/36A	EL180UH045E36A	8268436
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30/36A	EL180UH045XE36A	8268439

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36A	SL280UH070V36A	8268437
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36A	SL280UH070XV36A	8268438
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL180UH070E36B	8268446
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL180UH070XE36B	8268440
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL180UH090E48B	8268441
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL180UH090XE48B	8268447
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30/36B	EL195UH045XE36B	8268448
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30/36B	EL195UH070XE36B	8268450
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30/36B	EL296UH045XE36B	8268449
14ACX-030-230	TXV	27800	15.1	12.5	CX35-30/36B	EL296UH045XV36B	8268444
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30/36B	EL296UH070XE36B	8268442
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36B	EL296UH070XV36B	8268443
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36B	SL280UH090V36B	8268445
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36B	SLP98UH070XV36B	8268451
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30/36C	EL195UH090XE48C	8268453
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30/36C	EL296UH090XE48C	8268454
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36C	EL296UH090XV36C	8268455
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30/36C	SLP98UH090XV36C	8268452
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30A	EL180UH045E36A	8268421
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30A	EL180UH045XE36A	8268422
14ACX-030-230	TXV	28000	16	13	CX35-30A	SL280UH070V36A	8268419
14ACX-030-230	TXV	28000	16	13	CX35-30A	SL280UH070XV36A	8268420
14ACX-030-230	TXV	28000	14.25	12.2	CX35-30A		8268418
14ACX-030-230	TXV	28000	16	13	CX35-30B	EL180UH070E36B	8268428
14ACX-030-230	TXV	28000	16	13	CX35-30B	EL180UH070XE36B	8268425
14ACX-030-230	TXV	28000	16	13	CX35-30B	EL180UH090E48B	8268429
14ACX-030-230	TXV	28000	16	13	CX35-30B	EL180UH090XE48B	8268430
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30B	EL195UH045XE36B	8268431
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30B	EL195UH070XE36B	8268433
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30B	EL296UH045XE36B	8268432
14ACX-030-230	TXV	28000	15.5	12.5	CX35-30B	EL296UH045XV36B	8268434
14ACX-030-230	TXV	28000	15.1	12.5	CX35-30B	EL296UH070XE36B	8268426
14ACX-030-230	TXV	28000	16	13	CX35-30B	EL296UH070XV36B	8268435
14ACX-030-230	TXV	28000	16	13	CX35-30B	SL280UH090V36B	8268427
14ACX-030-230	TXV	28000	16	13	CX35-30B	SLP98UH070XV36B	8268424
14ACX-030-230	TXV	28000	14.25	12.2	CX35-30B		8268423
14ACX-030-230	TXV	28000	16	13	CX35-36A	EL180UH045E36A	8268459
14ACX-030-230	TXV	28000	16	13	CX35-36A	EL180UH045XE36A	8268460
14ACX-030-230	TXV	28000	16	13	CX35-36A	SL280UH070V36A	8268457
14ACX-030-230	TXV	28000	16	13	CX35-36A	SL280UH070XV36A	8268458
14ACX-030-230	TXV	28000	14.5	12.2	CX35-36A		8268456
14ACX-030-230	TXV	28000	16	13	CX35-36B	EL180UH070E36B	8268462
14ACX-030-230	TXV	28000	16	13	CX35-36B	EL180UH070XE36B	8268463
14ACX-030-230	TXV	28000	16	13	CX35-36B	EL180UH090E48B	8268467
14ACX-030-230	TXV	28000	16	13	CX35-36B	EL180UH090XE48B	8268468
14ACX-030-230	TXV	28000	15.5	12.5	CX35-36B	EL195UH045XE36B	8268469
14ACX-030-230	TXV	28000	15.5	12.5	CX35-36B	EL195UH070XE36B	8268464
14ACX-030-230	TXV	28000	15.5	12.5	CX35-36B	EL296UH045XE36B	8268470
14ACX-030-230	TXV	28000	15.5	12.5	CX35-36B	EL296UH045XV36B	8268471

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-030-230	TXV	28000	15.5	12.5	CX35-36B	EL296UH070XE36B	8268465
14ACX-030-230	TXV	28000	16	13	CX35-36B	EL296UH070XV36B	8268472
14ACX-030-230	TXV	28000	16	13	CX35-36B	SL280UH090V36B	8268466
14ACX-030-230	TXV	28000	16	13	CX35-36B	SLP98UH070XV36B	8268473
14ACX-030-230	TXV	28000	14.5	12.2	CX35-36B		8268461
14ACX-030-230	TXV	28000	16	13	CX35-48B	EL180UH070E36B	8268475
14ACX-030-230	TXV	28000	16	13	CX35-48B	EL180UH070XE36B	8268476
14ACX-030-230	TXV	28000	16	13	CX35-48B	EL180UH090E48B	8268480
14ACX-030-230	TXV	28000	16	13	CX35-48B	EL180UH090XE48B	8268481
14ACX-030-230	TXV	28000	15.5	12.5	CX35-48B	EL195UH045XE36B	8268482
14ACX-030-230	TXV	28000	15.5	12.5	CX35-48B	EL195UH070XE36B	8268477
14ACX-030-230	TXV	28000	15.5	12.5	CX35-48B	EL296UH045XE36B	8268483
14ACX-030-230	TXV	28000	15.5	12.5	CX35-48B	EL296UH045XV36B	8268484
14ACX-030-230	TXV	28000	15.5	12.5	CX35-48B	EL296UH070XE36B	8268478
14ACX-030-230	TXV	28000	16	13	CX35-48B	EL296UH070XV36B	8268485
14ACX-030-230	TXV	28000	16	13	CX35-48B	SL280UH090V36B	8268479
14ACX-030-230	TXV	28000	16	13	CX35-48B	SLP98UH070XV36B	8268486
14ACX-030-230	TXV	28000	14.5	12.2	CX35-48B		8268474
14ACX-030-230	TXV	28000	16	13	CX35-48C	EL195UH090XE48C	8268490
14ACX-030-230	TXV	28000	16	13	CX35-48C	EL296UH090XE48C	8268488
14ACX-030-230	TXV	28000	16	13	CX35-48C	EL296UH090XV36C	8268489
14ACX-030-230	TXV	28000	16	13	CX35-48C	EL296UH090XV48C	8268492
14ACX-030-230	TXV	28000	16	13	CX35-48C	SLP98UH090XV36C	8268491
14ACX-030-230	TXV	28000	16	13	CX35-48C	SLP98UH090XV48C	8268493
14ACX-030-230	TXV	28000	14.5	12.2	CX35-48C		8268487
14ACX-030-230	TXV	28000	14.25	12.2	CX38-31B		10546290
14ACX-036-230	RFC	34400	14	12.2	C35-49C		8471018
14ACX-036-230	RFC	34000	14	12.2	C35-50/60C		8471020
14ACX-036-230	RFC	33800	14	12.2	CH33-31B		7510456
14ACX-036-230	RFC	34600	14.5	12.2	CH33-43B		7510507
14ACX-036-230	RFC	34000	14.25	12.2	CH33-44/48B		7510541
14ACX-036-230	RFC	34000	14.25	12.2	CH33-48		7513192
14ACX-036-230	RFC	34600	14.5	12.2	CH33-49		7513193
14ACX-036-230	RFC	34400	14.25	12.2	CH33-50/60C		7510594
14ACX-036-230	RFC	34000	14	12.2	CH35-48C		10514552
14ACX-036-230	RFC	34000	14	12.2	CH35-51C		10514551
14ACX-036-230	TXV	33200	14.5	12.2	C35-30/36A	EL180UH045E36A	8268054
14ACX-036-230	TXV	33200	14.5	12.2	C35-30/36A	EL180UH045XE36A	8268055
14ACX-036-230	TXV	33400	15	12.2	C35-30/36A	SL280UH070V36A	8268052
14ACX-036-230	TXV	33400	15	12.2	C35-30/36A	SL280UH070XV36A	8268053
14ACX-036-230	TXV	33400	15.5	12.5	C35-30/36B	EL180UH070E36B	8268061
14ACX-036-230	TXV	33400	15.5	12.5	C35-30/36B	EL180UH070XE36B	8268062
14ACX-036-230	TXV	33400	15.1	12.5	C35-30/36B	EL180UH090E48B	8268063
14ACX-036-230	TXV	33400	15.1	12.5	C35-30/36B	EL180UH090XE48B	8268064
14ACX-036-230	TXV	33000	15	12.5	C35-30/36B	EL195UH045XE36B	8268065
14ACX-036-230	TXV	33000	15	12.5	C35-30/36B	EL296UH045XE36B	8268056
14ACX-036-230	TXV	33400	15	12.5	C35-30/36B	EL296UH045XV36B	8268057
14ACX-036-230	TXV	33400	15	12.5	C35-30/36B	EL296UH070XV36B	8268058
14ACX-036-230	TXV	33600	15.5	12.5	C35-30/36B	SL280UH090V36B	8268066

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	33600	15.5	12.5	C35-30/36B	SL280UH090V48B	8268067
14ACX-036-230	TXV	33600	15.5	12.5	C35-30/36B	SL280UH090XV48B	8268060
14ACX-036-230	TXV	33400	15	12.5	C35-30/36B	SLP98UH070XV36B	8268059
14ACX-036-230	TXV	33600	15.1	12.5	C35-30/36C	EL180UH090E60C	8268075
14ACX-036-230	TXV	33400	15.5	12.5	C35-30/36C	EL180UH110E60C	8268076
14ACX-036-230	TXV	33400	15.5	12.5	C35-30/36C	EL180UH110XE60C	8268077
14ACX-036-230	TXV	33200	15.1	12.5	C35-30/36C	EL195UH090XE48C	8268078
14ACX-036-230	TXV	33600	15.1	12.5	C35-30/36C	EL195UH110XE60C	8268080
14ACX-036-230	TXV	33200	15.1	12.5	C35-30/36C	EL296UH090XE48C	8268079
14ACX-036-230	TXV	33600	15.5	12.5	C35-30/36C	EL296UH090XV36C	8268070
14ACX-036-230	TXV	33400	15.5	12.5	C35-30/36C	EL296UH090XV48C	8268072
14ACX-036-230	TXV	33600	15.1	12.5	C35-30/36C	EL296UH110XE60C	8268069
14ACX-036-230	TXV	33600	15.5	12.5	C35-30/36C	EL296UH110XV48C	8268074
14ACX-036-230	TXV	33600	15.5	12.5	C35-30/36C	SLP98UH090XV36C	8268071
14ACX-036-230	TXV	33400	15.5	12.5	C35-30/36C	SLP98UH090XV48C	8268073
14ACX-036-230	TXV	33800	15.5	12.5	C35-30/36C	SLP98UH110XV60C	8268068
14ACX-036-230	TXV	34200	15.1	12.5	C35-30A	EL180UH045E36A	8268036
14ACX-036-230	TXV	34200	15.1	12.5	C35-30A	EL180UH045XE36A	8268037
14ACX-036-230	TXV	34400	15.1	12.5	C35-30A	SL280UH070V36A	8268034
14ACX-036-230	TXV	34400	15.1	12.5	C35-30A	SL280UH070XV36A	8268035
14ACX-036-230	TXV	34400	15	12.5	C35-30B	EL180UH070E36B	8268047
14ACX-036-230	TXV	34400	15	12.5	C35-30B	EL180UH070XE36B	8268048
14ACX-036-230	TXV	34400	15.5	12.5	C35-30B	EL180UH090E48B	8268049
14ACX-036-230	TXV	34400	15.5	12.5	C35-30B	EL180UH090XE48B	8268050
14ACX-036-230	TXV	34000	14.5	12.2	C35-30B	EL195UH045XE36B	8268051
14ACX-036-230	TXV	34000	15.1	12.5	C35-30B	EL195UH070XE36B	8268041
14ACX-036-230	TXV	34000	14.5	12.2	C35-30B	EL296UH045XE36B	8268040
14ACX-036-230	TXV	34200	15.1	12.5	C35-30B	EL296UH045XV36B	8268043
14ACX-036-230	TXV	34000	15.1	12.5	C35-30B	EL296UH070XE36B	8268042
14ACX-036-230	TXV	34200	15.1	12.5	C35-30B	EL296UH070XV36B	8268044
14ACX-036-230	TXV	34400	15.5	12.5	C35-30B	SL280UH090V36B	8268038
14ACX-036-230	TXV	34400	15.5	12.5	C35-30B	SL280UH090V48B	8268039
14ACX-036-230	TXV	34400	15.5	12.5	C35-30B	SL280UH090XV48B	8268046
14ACX-036-230	TXV	34200	15.1	12.5	C35-30B	SLP98UH070XV36B	8268045
14ACX-036-230	TXV	34400	15.1	12.5	C35-36A	EL180UH045E36A	8268084
14ACX-036-230	TXV	34400	15.1	12.5	C35-36A	EL180UH045XE36A	8268085
14ACX-036-230	TXV	34600	15.5	12.5	C35-36A	SL280UH070V36A	8268082
14ACX-036-230	TXV	34600	15.5	12.5	C35-36A	SL280UH070XV36A	8268083
14ACX-036-230	TXV	34200	14.25	12.2	C35-36A		8268081
14ACX-036-230	TXV	34600	16	13	C35-36B	EL180UH070E36B	8268094
14ACX-036-230	TXV	34600	16	13	C35-36B	EL180UH070XE36B	8268095
14ACX-036-230	TXV	34600	16	13	C35-36B	EL180UH090E48B	8268096
14ACX-036-230	TXV	34600	16	13	C35-36B	EL180UH090XE48B	8268097
14ACX-036-230	TXV	34400	15	12.5	C35-36B	EL195UH045XE36B	8268098
14ACX-036-230	TXV	34400	15	12.5	C35-36B	EL195UH070XE36B	8268088
14ACX-036-230	TXV	34400	15	12.5	C35-36B	EL296UH045XE36B	8268087
14ACX-036-230	TXV	34600	15.5	12.5	C35-36B	EL296UH045XV36B	8268090
14ACX-036-230	TXV	34400	15	12.5	C35-36B	EL296UH070XE36B	8268089
14ACX-036-230	TXV	34600	15.5	12.5	C35-36B	EL296UH070XV36B	8268091

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	34800	16	13	C35-36B	SL280UH090V36B	8268099
14ACX-036-230	TXV	34800	16	13	C35-36B	SL280UH090V48B	8268100
14ACX-036-230	TXV	34800	16	13	C35-36B	SL280UH090XV48B	8268093
14ACX-036-230	TXV	34600	15.5	12.5	C35-36B	SLP98UH070XV36B	8268092
14ACX-036-230	TXV	34200	14.25	12.2	C35-36B		8268086
14ACX-036-230	TXV	34800	16	13	C35-48B	EL180UH070E36B	8268113
14ACX-036-230	TXV	34800	16	13	C35-48B	EL180UH070XE36B	8268114
14ACX-036-230	TXV	34800	16	13	C35-48B	EL180UH090E48B	8268115
14ACX-036-230	TXV	34800	16	13	C35-48B	EL180UH090XE48B	8268104
14ACX-036-230	TXV	34400	15	12.5	C35-48B	EL195UH045XE36B	8268105
14ACX-036-230	TXV	34600	15.1	12.5	C35-48B	EL195UH070XE36B	8268107
14ACX-036-230	TXV	34400	15	12.5	C35-48B	EL296UH045XE36B	8268106
14ACX-036-230	TXV	34800	15.5	12.5	C35-48B	EL296UH045XV36B	8268109
14ACX-036-230	TXV	34600	15.1	12.5	C35-48B	EL296UH070XE36B	8268108
14ACX-036-230	TXV	34800	15.5	12.5	C35-48B	EL296UH070XV36B	8268102
14ACX-036-230	TXV	34800	16	13	C35-48B	SL280UH090V36B	8268110
14ACX-036-230	TXV	35000	16	13	C35-48B	SL280UH090V48B	8268111
14ACX-036-230	TXV	35000	16	13	C35-48B	SL280UH090XV48B	8268112
14ACX-036-230	TXV	34800	15.5	12.5	C35-48B	SLP98UH070XV36B	8268103
14ACX-036-230	TXV	34400	14.5	12.2	C35-48B		8268101
14ACX-036-230	TXV	34800	16	13	C35-48C	EL180UH090E60C	8268125
14ACX-036-230	TXV	34800	16	13	C35-48C	EL180UH110E60C	8268126
14ACX-036-230	TXV	34800	16	13	C35-48C	EL180UH110XE60C	8268127
14ACX-036-230	TXV	34600	15.5	12.5	C35-48C	EL195UH090XE48C	8268128
14ACX-036-230	TXV	34800	16	13	C35-48C	EL195UH110XE60C	8268130
14ACX-036-230	TXV	34600	15.5	12.5	C35-48C	EL296UH090XE48C	8268129
14ACX-036-230	TXV	34800	16	13	C35-48C	EL296UH090XV36C	8268120
14ACX-036-230	TXV	34800	16	13	C35-48C	EL296UH090XV48C	8268122
14ACX-036-230	TXV	34600	16	13	C35-48C	EL296UH110XE60C	8268119
14ACX-036-230	TXV	35000	16	13	C35-48C	EL296UH110XV48C	8268124
14ACX-036-230	TXV	35200	16	13	C35-48C	EL296UH110XV60C	8268117
14ACX-036-230	TXV	35400	16	13	C35-48C	SL280UH090V60C	8268131
14ACX-036-230	TXV	35400	16	13	C35-48C	SL280UH090XV60C	8268132
14ACX-036-230	TXV	35200	16	13	C35-48C	SL280UH110V60C	8268133
14ACX-036-230	TXV	35200	16	13	C35-48C	SL280UH110XV60C	8268134
14ACX-036-230	TXV	34800	16	13	C35-48C	SLP98UH090XV36C	8268121
14ACX-036-230	TXV	34800	16	13	C35-48C	SLP98UH090XV48C	8268123
14ACX-036-230	TXV	35200	16	13	C35-48C	SLP98UH110XV60C	8268118
14ACX-036-230	TXV	34400	14.5	12.2	C35-48C		8268116
14ACX-036-230	TXV	35200	16	13	C35-49C	EL180UH090E60C	8268150
14ACX-036-230	TXV	35000	16	13	C35-49C	EL180UH110E60C	8268151
14ACX-036-230	TXV	35000	16	13	C35-49C	EL180UH110XE60C	8268152
14ACX-036-230	TXV	34800	16	13	C35-49C	EL195UH090XE48C	8268141
14ACX-036-230	TXV	35200	16	13	C35-49C	EL195UH110XE60C	8268143
14ACX-036-230	TXV	34800	16	13	C35-49C	EL296UH090XE48C	8268142
14ACX-036-230	TXV	35200	16	13	C35-49C	EL296UH090XV36C	8268145
14ACX-036-230	TXV	35000	16	13	C35-49C	EL296UH090XV48C	8268136
14ACX-036-230	TXV	35200	16	13	C35-49C	EL296UH110XE60C	8268144
14ACX-036-230	TXV	35200	16	13	C35-49C	EL296UH110XV48C	8268138

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	35600	16	13	C35-49C	EL296UH110XV60C	8268139
14ACX-036-230	TXV	35600	16	13	C35-49C	SL280UH090V60C	8268153
14ACX-036-230	TXV	35600	16	13	C35-49C	SL280UH090XV60C	8268147
14ACX-036-230	TXV	35400	16	13	C35-49C	SL280UH110V60C	8268148
14ACX-036-230	TXV	35400	16	13	C35-49C	SL280UH110XV60C	8268149
14ACX-036-230	TXV	35200	16	13	C35-49C	SLP98UH090XV36C	8268146
14ACX-036-230	TXV	35000	16	13	C35-49C	SLP98UH090XV48C	8268137
14ACX-036-230	TXV	35600	16	13	C35-49C	SLP98UH110XV60C	8268140
14ACX-036-230	TXV	34600	14.5	12.2	C35-49C		8268135
14ACX-036-230	TXV	34800	16	13	C35-50/60C	EL180UH090E60C	8268171
14ACX-036-230	TXV	34800	16	13	C35-50/60C	EL180UH110E60C	8268172
14ACX-036-230	TXV	34800	16	13	C35-50/60C	EL180UH110XE60C	8268161
14ACX-036-230	TXV	34400	15.5	12.5	C35-50/60C	EL195UH090XE48C	8268162
14ACX-036-230	TXV	34800	16	13	C35-50/60C	EL195UH110XE60C	8268164
14ACX-036-230	TXV	34400	15.5	12.5	C35-50/60C	EL296UH090XE48C	8268163
14ACX-036-230	TXV	34800	16	13	C35-50/60C	EL296UH090XV36C	8268166
14ACX-036-230	TXV	34600	16	13	C35-50/60C	EL296UH090XV48C	8268156
14ACX-036-230	TXV	34800	16	13	C35-50/60C	EL296UH110XE60C	8268165
14ACX-036-230	TXV	34800	16	13	C35-50/60C	EL296UH110XV48C	8268158
14ACX-036-230	TXV	35200	16	13	C35-50/60C	EL296UH110XV60C	8268159
14ACX-036-230	TXV	35200	16	13	C35-50/60C	SL280UH090V60C	8268167
14ACX-036-230	TXV	35200	16	13	C35-50/60C	SL280UH090XV60C	8268168
14ACX-036-230	TXV	35000	16	13	C35-50/60C	SL280UH110V60C	8268169
14ACX-036-230	TXV	35000	16	13	C35-50/60C	SL280UH110XV60C	8268170
14ACX-036-230	TXV	34800	16	13	C35-50/60C	SLP98UH090XV36C	8268155
14ACX-036-230	TXV	34600	16	13	C35-50/60C	SLP98UH090XV48C	8268157
14ACX-036-230	TXV	35200	16	13	C35-50/60C	SLP98UH110XV60C	8268160
14ACX-036-230	TXV	34200	14.5	12.2	C35-50/60C		8268154
14ACX-036-230	TXV	34600	16	13	CBA27UHE-036		10259478
14ACX-036-230	TXV	35600	16	13	CBA27UHE-042		10259378
14ACX-036-230	TXV	34200	14.5	12.2	CBX25UH-036		7510388
14ACX-036-230	TXV	34600	15	12.5	CBX25UH-042		7510389
14ACX-036-230	TXV	34400	15	12.5	CBX25UHV-036		7510390
14ACX-036-230	TXV	35200	16	13	CBX25UHV-042		7510391
14ACX-036-230	TXV	34200	16	13	CBX27UH-036		7510392
14ACX-036-230	TXV	35200	16	13	CBX27UH-042		7510393
14ACX-036-230	TXV	33400	14.5	12.2	CBX32M-030		7510394
14ACX-036-230	TXV	33800	14.5	12.2	CBX32M-036		7510395
14ACX-036-230	TXV	33800	14.5	12.2	CBX32M-042		7510396
14ACX-036-230	TXV	34800	15.1	12.5	CBX32M-048		7510397
14ACX-036-230	TXV	34000	15.1	12.5	CBX32MV-036		7510398
14ACX-036-230	TXV	35200	16	13	CBX32MV-048		7510399
14ACX-036-230	TXV	34200	15.1	12.5	CBX40UHV-036		7510400
14ACX-036-230	TXV	35000	15.5	12.5	CBX40UHV-042		7510401
14ACX-036-230	TXV	35000	16	13	CBX40UHV-048		7510402
14ACX-036-230	TXV	33600	15	12.5	CH23-41	EL180UH045E36A	7510406
14ACX-036-230	TXV	33600	15	12.5	CH23-41	EL180UH045XE36A	7510407
14ACX-036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH070E36B	7510408
14ACX-036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH070XE36B	7510409

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH090E48B	7510410
14ACX-036-230	TXV	33800	15.5	12.5	CH23-41	EL180UH090XE48B	7510411
14ACX-036-230	TXV	33600	15.1	12.5	CH23-41	EL195UH045XE36B	7510412
14ACX-036-230	TXV	33800	15.1	12.5	CH23-41	EL195UH070XE36B	7510414
14ACX-036-230	TXV	33600	15.1	12.5	CH23-41	EL296UH045XE36B	7510413
14ACX-036-230	TXV	33800	15.1	12.5	CH23-41	EL296UH045XV36B	7510416
14ACX-036-230	TXV	33800	15.1	12.5	CH23-41	EL296UH070XE36B	7510415
14ACX-036-230	TXV	33800	15.1	12.5	CH23-41	EL296UH070XV36B	7510417
14ACX-036-230	TXV	34000	16	13	CH23-41	SL280UH090V48B	7510404
14ACX-036-230	TXV	34000	16	13	CH23-41	SL280UH090XV48B	7510405
14ACX-036-230	TXV	33800	15.1	12.5	CH23-41	SLP98UH070XV36B	7510418
14ACX-036-230	TXV	33600	15	12.5	CH23-51	EL180UH045E36A	7510423
14ACX-036-230	TXV	33600	15	12.5	CH23-51	EL180UH045XE36A	7510424
14ACX-036-230	TXV	33800	15.5	12.5	CH23-51	EL180UH070E36B	7510425
14ACX-036-230	TXV	33800	15.5	12.5	CH23-51	EL180UH070XE36B	7510426
14ACX-036-230	TXV	33800	15.5	12.5	CH23-51	EL180UH090E48B	7510427
14ACX-036-230	TXV	34000	15.5	12.5	CH23-51	EL180UH090E60C	7510438
14ACX-036-230	TXV	33800	15.5	12.5	CH23-51	EL180UH090XE48B	7510428
14ACX-036-230	TXV	34000	15.5	12.5	CH23-51	EL180UH110E60C	7510439
14ACX-036-230	TXV	34000	15.5	12.5	CH23-51	EL180UH110XE60C	7510440
14ACX-036-230	TXV	33600	15.1	12.5	CH23-51	EL195UH045XE36B	7510429
14ACX-036-230	TXV	33800	15.1	12.5	CH23-51	EL195UH070XE36B	7510431
14ACX-036-230	TXV	33600	15.1	12.5	CH23-51	EL195UH090XE48C	7510441
14ACX-036-230	TXV	34000	15.5	12.5	CH23-51	EL195UH110XE60C	7510443
14ACX-036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH045XE36B	7510430
14ACX-036-230	TXV	34000	15.1	12.5	CH23-51	EL296UH045XV36B	7510433
14ACX-036-230	TXV	33800	15.1	12.5	CH23-51	EL296UH070XE36B	7510432
14ACX-036-230	TXV	34000	15.1	12.5	CH23-51	EL296UH070XV36B	7510434
14ACX-036-230	TXV	33600	15.1	12.5	CH23-51	EL296UH090XE48C	7510442
14ACX-036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH090XV36C	7510445
14ACX-036-230	TXV	33800	15.5	12.5	CH23-51	EL296UH090XV48C	7510447
14ACX-036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH110XE60C	7510444
14ACX-036-230	TXV	34000	15.5	12.5	CH23-51	EL296UH110XV48C	7510449
14ACX-036-230	TXV	34200	15.5	12.5	CH23-51	EL296UH110XV60C	7510450
14ACX-036-230	TXV	34000	16	13	CH23-51	SL280UH090V36B	7510420
14ACX-036-230	TXV	34200	16	13	CH23-51	SL280UH090V48B	7510421
14ACX-036-230	TXV	34400	15.5	12.5	CH23-51	SL280UH090V60C	7513171
14ACX-036-230	TXV	34200	16	13	CH23-51	SL280UH090XV48B	7510422
14ACX-036-230	TXV	34400	15.5	12.5	CH23-51	SL280UH090XV60C	7513172
14ACX-036-230	TXV	34200	15.5	12.5	CH23-51	SL280UH110V60C	7510436
14ACX-036-230	TXV	34200	15.5	12.5	CH23-51	SL280UH110XV60C	7510437
14ACX-036-230	TXV	34000	15.1	12.5	CH23-51	SLP98UH070XV36B	7510435
14ACX-036-230	TXV	34000	15.5	12.5	CH23-51	SLP98UH090XV36C	7510446
14ACX-036-230	TXV	33800	15.5	12.5	CH23-51	SLP98UH090XV48C	7510448
14ACX-036-230	TXV	34200	15.5	12.5	CH23-51	SLP98UH110XV60C	7510451
14ACX-036-230	TXV	34000	15	12.5	CH33-31A	EL180UH045E36A	7510454
14ACX-036-230	TXV	34000	15	12.5	CH33-31A	EL180UH045XE36A	7510455
14ACX-036-230	TXV	34200	15.1	12.5	CH33-31A	SL280UH070V36A	7510452
14ACX-036-230	TXV	34200	15.1	12.5	CH33-31A	SL280UH070XV36A	7510453

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	34600	15.1	12.5	CH33-31B	EL180UH070E36B	7510461
14ACX-036-230	TXV	34600	15.1	12.5	CH33-31B	EL180UH070XE36B	7510462
14ACX-036-230	TXV	34600	15.5	12.5	CH33-31B	EL180UH090E48B	7510463
14ACX-036-230	TXV	34600	15.5	12.5	CH33-31B	EL180UH090XE48B	7510464
14ACX-036-230	TXV	34200	14.5	12.2	CH33-31B	EL195UH045XE36B	7510465
14ACX-036-230	TXV	34400	15	12.5	CH33-31B	EL195UH070XE36B	7510467
14ACX-036-230	TXV	34200	14.5	12.2	CH33-31B	EL296UH045XE36B	7510466
14ACX-036-230	TXV	34600	15.1	12.5	CH33-31B	EL296UH045XV36B	7510469
14ACX-036-230	TXV	34400	15	12.5	CH33-31B	EL296UH070XE36B	7510468
14ACX-036-230	TXV	34600	15.1	12.5	CH33-31B	EL296UH070XV36B	7510470
14ACX-036-230	TXV	34800	16	13	CH33-31B	SL280UH090V36B	7510458
14ACX-036-230	TXV	34800	15.5	12.5	CH33-31B	SL280UH090V48B	7510459
14ACX-036-230	TXV	34800	15.5	12.5	CH33-31B	SL280UH090XV48B	7510460
14ACX-036-230	TXV	34600	15.1	12.5	CH33-31B	SLP98UH070XV36B	7510471
14ACX-036-230	TXV	34200	14.5	12.2	CH33-31B		7510457
14ACX-036-230	TXV	33000	14.5	12.2	CH33-36A	EL180UH045E36A	7510474
14ACX-036-230	TXV	33000	14.5	12.2	CH33-36A	EL180UH045XE36A	7510475
14ACX-036-230	TXV	33200	14.5	12.2	CH33-36A	SL280UH070V36A	7510472
14ACX-036-230	TXV	33200	14.5	12.2	CH33-36A	SL280UH070XV36A	7510473
14ACX-036-230	TXV	33400	15.5	12.5	CH33-36B	EL180UH070E36B	7510480
14ACX-036-230	TXV	33400	15.5	12.5	CH33-36B	EL180UH070XE36B	7510481
14ACX-036-230	TXV	33400	15.1	12.5	CH33-36B	EL180UH090E48B	7510482
14ACX-036-230	TXV	33400	15.1	12.5	CH33-36B	EL180UH090XE48B	7510483
14ACX-036-230	TXV	33000	15	12.5	CH33-36B	EL195UH045XE36B	7510484
14ACX-036-230	TXV	33200	15	12.5	CH33-36B	EL195UH070XE36B	7510486
14ACX-036-230	TXV	33000	15	12.5	CH33-36B	EL296UH045XE36B	7510485
14ACX-036-230	TXV	33400	14.5	12.2	CH33-36B	EL296UH045XV36B	7513173
14ACX-036-230	TXV	33200	15	12.5	CH33-36B	EL296UH070XE36B	7510487
14ACX-036-230	TXV	33400	15	12.5	CH33-36B	EL296UH070XV36B	7510488
14ACX-036-230	TXV	33400	15.5	12.5	CH33-36B	SL280UH090V36B	7510477
14ACX-036-230	TXV	33600	15.5	12.5	CH33-36B	SL280UH090V48B	7510478
14ACX-036-230	TXV	33600	15.5	12.5	CH33-36B	SL280UH090XV48B	7510479
14ACX-036-230	TXV	33400	15	12.5	CH33-36B	SLP98UH070XV36B	7510489
14ACX-036-230	TXV	33800	15.5	12.5	CH33-36C	EL180UH090E60C	7510493
14ACX-036-230	TXV	33800	15.5	12.5	CH33-36C	EL180UH110E60C	7510494
14ACX-036-230	TXV	33800	15.5	12.5	CH33-36C	EL180UH110XE60C	7510495
14ACX-036-230	TXV	33600	15.1	12.5	CH33-36C	EL195UH090XE48C	7510496
14ACX-036-230	TXV	34000	15.5	12.5	CH33-36C	EL195UH110XE60C	7510498
14ACX-036-230	TXV	33600	15.1	12.5	CH33-36C	EL296UH090XE48C	7510497
14ACX-036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH090XV36C	7510500
14ACX-036-230	TXV	33800	15.5	12.5	CH33-36C	EL296UH090XV48C	7510502
14ACX-036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH110XE60C	7510499
14ACX-036-230	TXV	34000	15.5	12.5	CH33-36C	EL296UH110XV48C	7510504
14ACX-036-230	TXV	34200	15.5	12.5	CH33-36C	EL296UH110XV60C	7510505
14ACX-036-230	TXV	34400	15.5	12.5	CH33-36C	SL280UH090V60C	7513175
14ACX-036-230	TXV	34400	15.5	12.5	CH33-36C	SL280UH090XV60C	7513177
14ACX-036-230	TXV	34200	15.5	12.5	CH33-36C	SL280UH110V60C	7510491
14ACX-036-230	TXV	34200	15.5	12.5	CH33-36C	SL280UH110XV60C	7510492
14ACX-036-230	TXV	34000	15.5	12.5	CH33-36C	SLP98UH090XV36C	7510501

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	33800	15.5	12.5	CH33-36C	SLP98UH090XV48C	7510503
14ACX-036-230	TXV	34200	15.5	12.5	CH33-36C	SLP98UH110XV60C	7510506
14ACX-036-230	TXV	34200	15	12.5	CH33-42B	EL180UH070E36B	7513181
14ACX-036-230	TXV	34200	15	12.5	CH33-42B	EL180UH070XE36B	7513182
14ACX-036-230	TXV	34200	15.5	12.5	CH33-42B	EL180UH090E48B	7513183
14ACX-036-230	TXV	34200	15.5	12.5	CH33-42B	EL180UH090XE48B	7513184
14ACX-036-230	TXV	34000	14.5	12.2	CH33-42B	EL195UH045XE36B	7513185
14ACX-036-230	TXV	34000	15.1	12.5	CH33-42B	EL195UH070XE36B	7513187
14ACX-036-230	TXV	34000	14.5	12.2	CH33-42B	EL296UH045XE36B	7513186
14ACX-036-230	TXV	34200	15	12.5	CH33-42B	EL296UH045XV36B	7513189
14ACX-036-230	TXV	34000	15.1	12.5	CH33-42B	EL296UH070XE36B	7513188
14ACX-036-230	TXV	34200	15.1	12.5	CH33-42B	EL296UH070XV36B	7513190
14ACX-036-230	TXV	34400	15.5	12.5	CH33-42B	SL280UH090V36B	7513178
14ACX-036-230	TXV	34400	15.5	12.5	CH33-42B	SL280UH090V48B	7513179
14ACX-036-230	TXV	34400	15.5	12.5	CH33-42B	SL280UH090XV48B	7513180
14ACX-036-230	TXV	34200	15.1	12.5	CH33-42B	SLP98UH070XV36B	7513191
14ACX-036-230	TXV	35000	16	13	CH33-43B	EL180UH070E36B	7510512
14ACX-036-230	TXV	35000	16	13	CH33-43B	EL180UH070XE36B	7510513
14ACX-036-230	TXV	35400	16	13	CH33-43B	EL180UH090E48B	7510514
14ACX-036-230	TXV	35400	16	13	CH33-43B	EL180UH090XE48B	7510515
14ACX-036-230	TXV	35000	15.1	12.5	CH33-43B	EL195UH045XE36B	7510516
14ACX-036-230	TXV	35000	15.1	12.5	CH33-43B	EL195UH070XE36B	7510518
14ACX-036-230	TXV	35000	15.1	12.5	CH33-43B	EL296UH045XE36B	7510517
14ACX-036-230	TXV	35400	15.5	12.5	CH33-43B	EL296UH045XV36B	7510520
14ACX-036-230	TXV	35000	15.1	12.5	CH33-43B	EL296UH070XE36B	7510519
14ACX-036-230	TXV	35400	15.5	12.5	CH33-43B	EL296UH070XV36B	7510521
14ACX-036-230	TXV	35400	16	13	CH33-43B	SL280UH090V36B	7510509
14ACX-036-230	TXV	35400	16	13	CH33-43B	SL280UH090V48B	7510510
14ACX-036-230	TXV	35400	16	13	CH33-43B	SL280UH090XV48B	7510511
14ACX-036-230	TXV	35400	15.5	12.5	CH33-43B	SLP98UH070XV36B	7510522
14ACX-036-230	TXV	35000	14.5	12.2	CH33-43B		7510508
14ACX-036-230	TXV	35000	16	13	CH33-43C	EL180UH090E60C	7510527
14ACX-036-230	TXV	35000	16	13	CH33-43C	EL180UH110E60C	7510528
14ACX-036-230	TXV	35000	16	13	CH33-43C	EL180UH110XE60C	7510529
14ACX-036-230	TXV	34800	16	13	CH33-43C	EL195UH090XE48C	7510530
14ACX-036-230	TXV	35000	16	13	CH33-43C	EL195UH110XE60C	7510532
14ACX-036-230	TXV	34800	16	13	CH33-43C	EL296UH090XE48C	7510531
14ACX-036-230	TXV	35000	16	13	CH33-43C	EL296UH090XV36C	7510534
14ACX-036-230	TXV	35000	16	13	CH33-43C	EL296UH090XV48C	7510536
14ACX-036-230	TXV	35000	16	13	CH33-43C	EL296UH110XE60C	7510533
14ACX-036-230	TXV	35200	16	13	CH33-43C	EL296UH110XV48C	7510538
14ACX-036-230	TXV	35400	16	13	CH33-43C	EL296UH110XV60C	7510539
14ACX-036-230	TXV	35600	16	13	CH33-43C	SL280UH090V60C	7510523
14ACX-036-230	TXV	35600	16	13	CH33-43C	SL280UH090XV60C	7510524
14ACX-036-230	TXV	35400	16	13	CH33-43C	SL280UH110V60C	7510525
14ACX-036-230	TXV	35400	16	13	CH33-43C	SL280UH110XV60C	7510526
14ACX-036-230	TXV	35000	16	13	CH33-43C	SLP98UH090XV36C	7510535
14ACX-036-230	TXV	35000	16	13	CH33-43C	SLP98UH090XV48C	7510537
14ACX-036-230	TXV	35400	16	13	CH33-43C	SLP98UH110XV60C	7510540

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	34600	15.1	12.5	CH33-44/48B	EL180UH070E36B	7510546
14ACX-036-230	TXV	34600	15.1	12.5	CH33-44/48B	EL180UH070XE36B	7510547
14ACX-036-230	TXV	34600	15.5	12.5	CH33-44/48B	EL180UH090E48B	7510548
14ACX-036-230	TXV	34600	15.5	12.5	CH33-44/48B	EL180UH090XE48B	7510549
14ACX-036-230	TXV	34400	14.5	12.2	CH33-44/48B	EL195UH045XE36B	7510550
14ACX-036-230	TXV	34400	15	12.5	CH33-44/48B	EL195UH070XE36B	7510552
14ACX-036-230	TXV	34400	14.5	12.2	CH33-44/48B	EL296UH045XE36B	7510551
14ACX-036-230	TXV	34600	15.1	12.5	CH33-44/48B	EL296UH045XV36B	7510554
14ACX-036-230	TXV	34400	15	12.5	CH33-44/48B	EL296UH070XE36B	7510553
14ACX-036-230	TXV	34600	15.1	12.5	CH33-44/48B	EL296UH070XV36B	7510555
14ACX-036-230	TXV	34800	16	13	CH33-44/48B	SL280UH090V36B	7510543
14ACX-036-230	TXV	34800	15.5	12.5	CH33-44/48B	SL280UH090V48B	7510544
14ACX-036-230	TXV	34800	15.5	12.5	CH33-44/48B	SL280UH090XV48B	7510545
14ACX-036-230	TXV	34600	15.1	12.5	CH33-44/48B	SLP98UH070XV36B	7510556
14ACX-036-230	TXV	34200	14.5	12.2	CH33-44/48B		7510542
14ACX-036-230	TXV	34800	16	13	CH33-48C	EL180UH090E60C	7510562
14ACX-036-230	TXV	34800	16	13	CH33-48C	EL180UH110E60C	7510563
14ACX-036-230	TXV	34800	16	13	CH33-48C	EL180UH110XE60C	7510564
14ACX-036-230	TXV	34600	15.5	12.5	CH33-48C	EL195UH090XE48C	7510565
14ACX-036-230	TXV	35000	16	13	CH33-48C	EL195UH110XE60C	7510567
14ACX-036-230	TXV	34600	15.5	12.5	CH33-48C	EL296UH090XE48C	7510566
14ACX-036-230	TXV	35000	16	13	CH33-48C	EL296UH090XV36C	7510569
14ACX-036-230	TXV	34800	16	13	CH33-48C	EL296UH090XV48C	7510571
14ACX-036-230	TXV	35000	16	13	CH33-48C	EL296UH110XE60C	7510568
14ACX-036-230	TXV	35000	16	13	CH33-48C	EL296UH110XV48C	7510573
14ACX-036-230	TXV	35200	16	13	CH33-48C	EL296UH110XV60C	7510574
14ACX-036-230	TXV	35400	16	13	CH33-48C	SL280UH090V60C	7510558
14ACX-036-230	TXV	35400	16	13	CH33-48C	SL280UH090XV60C	7510559
14ACX-036-230	TXV	35200	16	13	CH33-48C	SL280UH110V60C	7510560
14ACX-036-230	TXV	35200	16	13	CH33-48C	SL280UH110XV60C	7510561
14ACX-036-230	TXV	35000	16	13	CH33-48C	SLP98UH090XV36C	7510570
14ACX-036-230	TXV	34800	16	13	CH33-48C	SLP98UH090XV48C	7510572
14ACX-036-230	TXV	35200	16	13	CH33-48C	SLP98UH110XV60C	7510575
14ACX-036-230	TXV	34400	14.5	12.2	CH33-48C		7510557
14ACX-036-230	TXV	35400	16	13	CH33-49	EL180UH090E60C	7513199
14ACX-036-230	TXV	35400	16	13	CH33-49	EL180UH110E60C	7513200
14ACX-036-230	TXV	35400	16	13	CH33-49	EL180UH110XE60C	7513201
14ACX-036-230	TXV	35000	16	13	CH33-49	EL195UH090XE48C	7513202
14ACX-036-230	TXV	35400	16	13	CH33-49	EL195UH110XE60C	7513204
14ACX-036-230	TXV	35000	16	13	CH33-49	EL296UH090XE48C	7513203
14ACX-036-230	TXV	35400	16	13	CH33-49	EL296UH090XV36C	7513206
14ACX-036-230	TXV	35200	16	13	CH33-49	EL296UH090XV48C	7513208
14ACX-036-230	TXV	35400	16	13	CH33-49	EL296UH110XE60C	7513205
14ACX-036-230	TXV	35400	16	13	CH33-49	EL296UH110XV48C	7513210
14ACX-036-230	TXV	35800	16	13	CH33-49	EL296UH110XV60C	7513211
14ACX-036-230	TXV	35800	16	13	CH33-49	SL280UH090V60C	7513195
14ACX-036-230	TXV	35800	16	13	CH33-49	SL280UH090XV60C	7513196
14ACX-036-230	TXV	35600	16	13	CH33-49	SL280UH110V60C	7513197
14ACX-036-230	TXV	35600	16	13	CH33-49	SL280UH110XV60C	7513198

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	35400	16	13	CH33-49	SLP98UH090XV36C	7513207
14ACX-036-230	TXV	35200	16	13	CH33-49	SLP98UH090XV48C	7513209
14ACX-036-230	TXV	35800	16	13	CH33-49	SLP98UH110XV60C	7513212
14ACX-036-230	TXV	34800	14.5	12.2	CH33-49		7513194
14ACX-036-230	TXV	35200	16	13	CH33-50/60C	EL180UH090E60C	7510580
14ACX-036-230	TXV	35200	16	13	CH33-50/60C	EL180UH110E60C	7510581
14ACX-036-230	TXV	35200	16	13	CH33-50/60C	EL180UH110XE60C	7510582
14ACX-036-230	TXV	35000	16	13	CH33-50/60C	EL195UH090XE48C	7510583
14ACX-036-230	TXV	35200	16	13	CH33-50/60C	EL195UH110XE60C	7510585
14ACX-036-230	TXV	35000	16	13	CH33-50/60C	EL296UH090XE48C	7510584
14ACX-036-230	TXV	35200	16	13	CH33-50/60C	EL296UH090XV36C	7510587
14ACX-036-230	TXV	35000	16	13	CH33-50/60C	EL296UH090XV48C	7510589
14ACX-036-230	TXV	35200	16	13	CH33-50/60C	EL296UH110XE60C	7510586
14ACX-036-230	TXV	35200	16	13	CH33-50/60C	EL296UH110XV48C	7510591
14ACX-036-230	TXV	35600	16	13	CH33-50/60C	EL296UH110XV60C	7510592
14ACX-036-230	TXV	35600	16	13	CH33-50/60C	SL280UH090V60C	7510576
14ACX-036-230	TXV	35600	16	13	CH33-50/60C	SL280UH090XV60C	7510577
14ACX-036-230	TXV	35600	16	13	CH33-50/60C	SL280UH110V60C	7510578
14ACX-036-230	TXV	35600	16	13	CH33-50/60C	SL280UH110XV60C	7510579
14ACX-036-230	TXV	35200	16	13	CH33-50/60C	SLP98UH090XV36C	7510588
14ACX-036-230	TXV	35000	16	13	CH33-50/60C	SLP98UH090XV48C	7510590
14ACX-036-230	TXV	35600	16	13	CH33-50/60C	SLP98UH110XV60C	7510593
14ACX-036-230	TXV	34600	14.5	12.2	CH33-50/60C		7510595
14ACX-036-230	TXV	34000	15	12.5	CH35-30A	EL180UH045E36A	7510598
14ACX-036-230	TXV	34000	15	12.5	CH35-30A	EL180UH045XE36A	7510599
14ACX-036-230	TXV	34200	15.1	12.5	CH35-30A	SL280UH070V36A	7510596
14ACX-036-230	TXV	34200	15.1	12.5	CH35-30A	SL280UH070XV36A	7510597
14ACX-036-230	TXV	34800	15.1	12.5	CH35-30B	EL180UH070E36B	7510605
14ACX-036-230	TXV	34800	15.1	12.5	CH35-30B	EL180UH070XE36B	7510606
14ACX-036-230	TXV	34800	16	13	CH35-30B	EL180UH090E48B	7510607
14ACX-036-230	TXV	34800	16	13	CH35-30B	EL180UH090XE48B	7510608
14ACX-036-230	TXV	34400	14.5	12.2	CH35-30B	EL195UH045XE36B	7510609
14ACX-036-230	TXV	34400	15	12.5	CH35-30B	EL195UH070XE36B	7510611
14ACX-036-230	TXV	34400	14.5	12.2	CH35-30B	EL296UH045XE36B	7510610
14ACX-036-230	TXV	34600	15.1	12.5	CH35-30B	EL296UH045XV36B	7510613
14ACX-036-230	TXV	34400	15	12.5	CH35-30B	EL296UH070XE36B	7510612
14ACX-036-230	TXV	34600	15.1	12.5	CH35-30B	EL296UH070XV36B	7510614
14ACX-036-230	TXV	34800	16	13	CH35-30B	SL280UH090V36B	7510602
14ACX-036-230	TXV	34800	15.5	12.5	CH35-30B	SL280UH090V48B	7510603
14ACX-036-230	TXV	34800	15.5	12.5	CH35-30B	SL280UH090XV48B	7510604
14ACX-036-230	TXV	34600	15.1	12.5	CH35-30B	SLP98UH070XV36B	7510615
14ACX-036-230	TXV	34200	14.5	12.2	CH35-30B		7510601
14ACX-036-230	TXV	33000	14.5	12.2	CH35-36A	EL180UH045E36A	7510618
14ACX-036-230	TXV	33000	14.5	12.2	CH35-36A	EL180UH045XE36A	7510619
14ACX-036-230	TXV	33200	14.5	12.2	CH35-36A	SL280UH070V36A	7510616
14ACX-036-230	TXV	33200	14.5	12.2	CH35-36A	SL280UH070XV36A	7510617
14ACX-036-230	TXV	33400	15.5	12.5	CH35-36B	EL180UH070E36B	7510624
14ACX-036-230	TXV	33400	15.5	12.5	CH35-36B	EL180UH070XE36B	7510625
14ACX-036-230	TXV	33400	15.1	12.5	CH35-36B	EL180UH090E48B	7510626

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	33400	15.1	12.5	CH35-36B	EL180UH090XE48B	7510627
14ACX-036-230	TXV	33000	15	12.5	CH35-36B	EL195UH045XE36B	7510628
14ACX-036-230	TXV	33000	15	12.5	CH35-36B	EL296UH045XE36B	7510629
14ACX-036-230	TXV	33600	15	12.2	CH35-36B	EL296UH045XV36B	7510632
14ACX-036-230	TXV	33400	15	12.5	CH35-36B	EL296UH070XV36B	7510633
14ACX-036-230	TXV	33600	15.5	12.5	CH35-36B	SL280UH090V36B	7510621
14ACX-036-230	TXV	33800	15.5	12.5	CH35-36B	SL280UH090V48B	7510622
14ACX-036-230	TXV	33800	15.5	12.5	CH35-36B	SL280UH090XV48B	7510623
14ACX-036-230	TXV	33400	15	12.5	CH35-36B	SLP98UH070XV36B	7510634
14ACX-036-230	TXV	34000	15.5	12.5	CH35-36C	EL180UH090E60C	7510638
14ACX-036-230	TXV	33800	15.5	12.5	CH35-36C	EL180UH110E60C	7510639
14ACX-036-230	TXV	33800	15.5	12.5	CH35-36C	EL180UH110XE60C	7510640
14ACX-036-230	TXV	33600	15.1	12.5	CH35-36C	EL195UH090XE48C	7510641
14ACX-036-230	TXV	34000	15.5	12.5	CH35-36C	EL195UH110XE60C	7510643
14ACX-036-230	TXV	33600	15.1	12.5	CH35-36C	EL296UH090XE48C	7510642
14ACX-036-230	TXV	34000	15.5	12.5	CH35-36C	EL296UH090XV36C	7510645
14ACX-036-230	TXV	33800	15.5	12.5	CH35-36C	EL296UH090XV48C	7510647
14ACX-036-230	TXV	34000	15.5	12.5	CH35-36C	EL296UH110XE60C	7510644
14ACX-036-230	TXV	34000	15.5	12.5	CH35-36C	EL296UH110XV48C	7510649
14ACX-036-230	TXV	34400	15.5	12.5	CH35-36C	EL296UH110XV60C	7513215
14ACX-036-230	TXV	34400	15.5	12.5	CH35-36C	SL280UH090V60C	7513213
14ACX-036-230	TXV	34400	15.5	12.5	CH35-36C	SL280UH090XV60C	7513214
14ACX-036-230	TXV	34200	15.5	12.5	CH35-36C	SL280UH110V60C	7510636
14ACX-036-230	TXV	34200	15.5	12.5	CH35-36C	SL280UH110XV60C	7510637
14ACX-036-230	TXV	34000	15.5	12.5	CH35-36C	SLP98UH090XV36C	7510646
14ACX-036-230	TXV	33800	15.5	12.5	CH35-36C	SLP98UH090XV48C	7510648
14ACX-036-230	TXV	34400	15.5	12.5	CH35-36C	SLP98UH110XV60C	7510650
14ACX-036-230	TXV	35000	16	13	CH35-42B	EL180UH070E36B	7510655
14ACX-036-230	TXV	35000	16	13	CH35-42B	EL180UH070XE36B	7510656
14ACX-036-230	TXV	35400	16	13	CH35-42B	EL180UH090E48B	7510657
14ACX-036-230	TXV	35400	16	13	CH35-42B	EL180UH090XE48B	7510658
14ACX-036-230	TXV	35000	15.1	12.5	CH35-42B	EL195UH045XE36B	7510659
14ACX-036-230	TXV	35200	15.1	12.5	CH35-42B	EL195UH070XE36B	7510661
14ACX-036-230	TXV	35000	15.1	12.5	CH35-42B	EL296UH045XE36B	7510660
14ACX-036-230	TXV	35400	15.5	12.5	CH35-42B	EL296UH045XV36B	7510663
14ACX-036-230	TXV	35200	15.1	12.5	CH35-42B	EL296UH070XE36B	7510662
14ACX-036-230	TXV	35400	15.5	12.5	CH35-42B	EL296UH070XV36B	7510664
14ACX-036-230	TXV	35400	16	13	CH35-42B	SL280UH090V36B	7510652
14ACX-036-230	TXV	35600	16	13	CH35-42B	SL280UH090V48B	7510653
14ACX-036-230	TXV	35600	16	13	CH35-42B	SL280UH090XV48B	7510654
14ACX-036-230	TXV	35400	15.5	12.5	CH35-42B	SLP98UH070XV36B	7510665
14ACX-036-230	TXV	35000	14.5	12.2	CH35-42B		7510651
14ACX-036-230	TXV	35200	16	13	CH35-42C	EL180UH090E60C	7510671
14ACX-036-230	TXV	35000	16	13	CH35-42C	EL180UH110E60C	7510672
14ACX-036-230	TXV	35000	16	13	CH35-42C	EL180UH110XE60C	7510673
14ACX-036-230	TXV	34800	16	13	CH35-42C	EL195UH090XE48C	7510674
14ACX-036-230	TXV	35200	16	13	CH35-42C	EL195UH110XE60C	7510676
14ACX-036-230	TXV	34800	16	13	CH35-42C	EL296UH090XE48C	7510675
14ACX-036-230	TXV	35200	16	13	CH35-42C	EL296UH090XV36C	7510678

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	35000	16	13	CH35-42C	EL296UH090XV48C	7510680
14ACX-036-230	TXV	35200	16	13	CH35-42C	EL296UH110XE60C	7510677
14ACX-036-230	TXV	35200	16	13	CH35-42C	EL296UH110XV48C	7510682
14ACX-036-230	TXV	35400	16	13	CH35-42C	EL296UH110XV60C	7510683
14ACX-036-230	TXV	35600	16	13	CH35-42C	SL280UH090V60C	7510667
14ACX-036-230	TXV	35600	16	13	CH35-42C	SL280UH090XV60C	7510668
14ACX-036-230	TXV	35400	16	13	CH35-42C	SL280UH110V60C	7510669
14ACX-036-230	TXV	35400	16	13	CH35-42C	SL280UH110XV60C	7510670
14ACX-036-230	TXV	35200	16	13	CH35-42C	SLP98UH090XV36C	7510679
14ACX-036-230	TXV	35000	16	13	CH35-42C	SLP98UH090XV48C	7510681
14ACX-036-230	TXV	35400	16	13	CH35-42C	SLP98UH110XV60C	7510684
14ACX-036-230	TXV	34600	14.5	12.2	CH35-42C		7510666
14ACX-036-230	TXV	34800	15.1	12.5	CH35-48B	EL180UH070E36B	7510689
14ACX-036-230	TXV	34800	15.1	12.5	CH35-48B	EL180UH070XE36B	7510690
14ACX-036-230	TXV	34800	16	13	CH35-48B	EL180UH090E48B	7510691
14ACX-036-230	TXV	34800	16	13	CH35-48B	EL180UH090XE48B	7510692
14ACX-036-230	TXV	34400	15	12.2	CH35-48B	EL195UH045XE36B	7510693
14ACX-036-230	TXV	34600	15	12.5	CH35-48B	EL195UH070XE36B	7510695
14ACX-036-230	TXV	34400	15	12.2	CH35-48B	EL296UH045XE36B	7510694
14ACX-036-230	TXV	35000	15.1	12.5	CH35-48B	EL296UH045XV36B	7510697
14ACX-036-230	TXV	34600	15	12.5	CH35-48B	EL296UH070XE36B	7510696
14ACX-036-230	TXV	34800	15.5	12.5	CH35-48B	EL296UH070XV36B	7510698
14ACX-036-230	TXV	35000	16	13	CH35-48B	SL280UH090V36B	7510686
14ACX-036-230	TXV	35000	16	13	CH35-48B	SL280UH090V48B	7510687
14ACX-036-230	TXV	35000	16	13	CH35-48B	SL280UH090XV48B	7510688
14ACX-036-230	TXV	34800	15.5	12.5	CH35-48B	SLP98UH070XV36B	7510699
14ACX-036-230	TXV	34400	14.5	12.2	CH35-48B		7510685
14ACX-036-230	TXV	35000	16	13	CH35-48C	EL180UH090E60C	7510705
14ACX-036-230	TXV	35000	16	13	CH35-48C	EL180UH110E60C	7510706
14ACX-036-230	TXV	35000	16	13	CH35-48C	EL180UH110XE60C	7510707
14ACX-036-230	TXV	34800	16	13	CH35-48C	EL195UH090XE48C	7510708
14ACX-036-230	TXV	35000	16	13	CH35-48C	EL195UH110XE60C	7510710
14ACX-036-230	TXV	34800	16	13	CH35-48C	EL296UH090XE48C	7510709
14ACX-036-230	TXV	35000	16	13	CH35-48C	EL296UH090XV36C	7510712
14ACX-036-230	TXV	34800	16	13	CH35-48C	EL296UH090XV48C	7510714
14ACX-036-230	TXV	35000	16	13	CH35-48C	EL296UH110XE60C	7510711
14ACX-036-230	TXV	35000	16	13	CH35-48C	EL296UH110XV48C	7510716
14ACX-036-230	TXV	35400	16	13	CH35-48C	EL296UH110XV60C	7510717
14ACX-036-230	TXV	35400	16	13	CH35-48C	SL280UH090V60C	7510701
14ACX-036-230	TXV	35400	16	13	CH35-48C	SL280UH090XV60C	7510702
14ACX-036-230	TXV	35400	16	13	CH35-48C	SL280UH110V60C	7510703
14ACX-036-230	TXV	35400	16	13	CH35-48C	SL280UH110XV60C	7510704
14ACX-036-230	TXV	35000	16	13	CH35-48C	SLP98UH090XV36C	7510713
14ACX-036-230	TXV	34800	16	13	CH35-48C	SLP98UH090XV48C	7510715
14ACX-036-230	TXV	35400	16	13	CH35-48C	SLP98UH110XV60C	7510718
14ACX-036-230	TXV	34400	14.5	12.2	CH35-48C		7510700
14ACX-036-230	TXV	35400	16	13	CH35-51C	EL180UH090E60C	7510724
14ACX-036-230	TXV	35400	16	13	CH35-51C	EL180UH110E60C	7510725
14ACX-036-230	TXV	35400	16	13	CH35-51C	EL180UH110XE60C	7510726

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	35200	16	13	CH35-51C	EL195UH090XE48C	7510727
14ACX-036-230	TXV	35400	16	13	CH35-51C	EL195UH110XE60C	7510729
14ACX-036-230	TXV	35200	16	13	CH35-51C	EL296UH090XE48C	7510728
14ACX-036-230	TXV	35400	16	13	CH35-51C	EL296UH090XV36C	7510731
14ACX-036-230	TXV	35200	16	13	CH35-51C	EL296UH090XV48C	7510733
14ACX-036-230	TXV	35400	16	13	CH35-51C	EL296UH110XE60C	7510730
14ACX-036-230	TXV	35400	16	13	CH35-51C	EL296UH110XV48C	7510735
14ACX-036-230	TXV	35800	16	13	CH35-51C	EL296UH110XV60C	7510736
14ACX-036-230	TXV	36000	16	13	CH35-51C	SL280UH090V60C	7510720
14ACX-036-230	TXV	36000	16	13	CH35-51C	SL280UH090XV60C	7510721
14ACX-036-230	TXV	35800	16	13	CH35-51C	SL280UH110V60C	7510722
14ACX-036-230	TXV	35800	16	13	CH35-51C	SL280UH110XV60C	7510723
14ACX-036-230	TXV	35400	16	13	CH35-51C	SLP98UH090XV36C	7510732
14ACX-036-230	TXV	35200	16	13	CH35-51C	SLP98UH090XV48C	7510734
14ACX-036-230	TXV	35800	16	13	CH35-51C	SLP98UH110XV60C	7510737
14ACX-036-230	TXV	34800	14.5	12.2	CH35-51C		7510719
14ACX-036-230	TXV	33600	14.5	12.2	CR33-30/36A	EL180DF045E36A	7510739
14ACX-036-230	TXV	33600	15	12.5	CR33-30/36A	SL280DF070V36A	7510738
14ACX-036-230	TXV	33600	15.5	12.5	CR33-30/36B	EL180DF070E36B	7510742
14ACX-036-230	TXV	33600	15.1	12.5	CR33-30/36B	EL180DF090E48B	7510743
14ACX-036-230	TXV	33600	15.1	12.5	CR33-30/36B	EL195DF070XE48B	7510746
14ACX-036-230	TXV	33600	15	12.2	CR33-30/36B	EL296DF045XV36B	7510748
14ACX-036-230	TXV	33600	15.1	12.5	CR33-30/36B	EL296DF070XE48B	7510747
14ACX-036-230	TXV	33600	14.5	12.2	CR33-30/36B	EL296DF070XV48B	7510749
14ACX-036-230	TXV	33800	15.1	12.5	CR33-30/36B	SL280DF090V48B	7510741
14ACX-036-230	TXV	33800	15	12.5	CR33-30/36B	SLP98DF070XV36B	7510750
14ACX-036-230	TXV	33800	15.5	12.5	CR33-30/36C	EL180DF110E60C	7510753
14ACX-036-230	TXV	33600	15.1	12.5	CR33-30/36C	EL195DF090XE48C	7510754
14ACX-036-230	TXV	33600	15.1	12.5	CR33-30/36C	EL195DF110XE60C	7510756
14ACX-036-230	TXV	33600	15.1	12.5	CR33-30/36C	EL296DF090XE48C	7615392
14ACX-036-230	TXV	34000	15.1	12.5	CR33-30/36C	EL296DF090XV60C	7615394
14ACX-036-230	TXV	33600	15.1	12.5	CR33-30/36C	EL296DF110XE60C	7615393
14ACX-036-230	TXV	34000	15.1	12.5	CR33-30/36C	EL296DF110XV60C	7615395
14ACX-036-230	TXV	34000	15.5	12.5	CR33-30/36C	SL280DF110V60C	7510752
14ACX-036-230	TXV	33800	15.1	12.5	CR33-30/36C	SLP98DF090XV36C	7510758
14ACX-036-230	TXV	33800	15.1	12.5	CR33-30/36C	SLP98DF090XV48C	7510759
14ACX-036-230	TXV	34000	15.1	12.5	CR33-30/36C	SLP98DF090XV60C	7510761
14ACX-036-230	TXV	34000	15.1	12.5	CR33-30/36C	SLP98DF110XV60C	7510763
14ACX-036-230	TXV	34200	15	12.5	CR33-48B	EL180DF070E36B	7513219
14ACX-036-230	TXV	34200	15.5	12.5	CR33-48B	EL180DF090E48B	7513220
14ACX-036-230	TXV	34000	15.1	12.5	CR33-48B	EL195DF045XE36B	7513221
14ACX-036-230	TXV	34000	15.5	12.5	CR33-48B	EL195DF070XE48B	7513223
14ACX-036-230	TXV	34000	15.5	12.5	CR33-48B	EL296DF045XE36B	7513222
14ACX-036-230	TXV	34200	15.1	12.5	CR33-48B	EL296DF045XV36B	7622675
14ACX-036-230	TXV	34000	15.5	12.5	CR33-48B	EL296DF070XE48B	7513224
14ACX-036-230	TXV	34200	15.1	12.5	CR33-48B	EL296DF070XV48B	7513226
14ACX-036-230	TXV	34600	15.5	12.5	CR33-48B	SL280DF090V48B	7513218
14ACX-036-230	TXV	34000	15.5	12.5	CR33-48B	SLP98DF070XV36B	7513227
14ACX-036-230	TXV	34400	16	13	CR33-48C	EL180DF110E60C	7513231

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	34200	15.5	12.5	CR33-48C	EL195DF090XE48C	7513232
14ACX-036-230	TXV	34200	15.5	12.5	CR33-48C	EL195DF110XE60C	7513234
14ACX-036-230	TXV	34200	15.5	12.5	CR33-48C	EL296DF090XE48C	7513233
14ACX-036-230	TXV	34600	15.5	12.5	CR33-48C	EL296DF090XV60C	7513238
14ACX-036-230	TXV	34200	15.5	12.5	CR33-48C	EL296DF110XE60C	7513235
14ACX-036-230	TXV	34600	15.5	12.5	CR33-48C	EL296DF110XV60C	7513240
14ACX-036-230	TXV	34600	16	13	CR33-48C	SL280DF110V60C	7513230
14ACX-036-230	TXV	34400	15.5	12.5	CR33-48C	SLP98DF090XV36C	7513236
14ACX-036-230	TXV	34400	16	13	CR33-48C	SLP98DF090XV48C	7513237
14ACX-036-230	TXV	34600	15.5	12.5	CR33-48C	SLP98DF090XV60C	7513239
14ACX-036-230	TXV	34600	15.5	12.5	CR33-48C	SLP98DF110XV60C	7513241
14ACX-036-230	TXV	33200	14.5	12.2	CX35-30/36A	EL180UH045E36A	8268191
14ACX-036-230	TXV	33200	14.5	12.2	CX35-30/36A	EL180UH045XE36A	8268192
14ACX-036-230	TXV	33400	15	12.2	CX35-30/36A	SL280UH070V36A	8268193
14ACX-036-230	TXV	33400	15	12.2	CX35-30/36A	SL280UH070XV36A	8268194
14ACX-036-230	TXV	33400	15.5	12.5	CX35-30/36B	EL180UH070E36B	8268206
14ACX-036-230	TXV	33400	15.5	12.5	CX35-30/36B	EL180UH070XE36B	8268198
14ACX-036-230	TXV	33400	15.1	12.5	CX35-30/36B	EL180UH090E48B	8268199
14ACX-036-230	TXV	33400	15.1	12.5	CX35-30/36B	EL180UH090XE48B	8268200
14ACX-036-230	TXV	33000	15	12.5	CX35-30/36B	EL195UH045XE36B	8268201
14ACX-036-230	TXV	33000	15	12.5	CX35-30/36B	EL296UH045XE36B	8268202
14ACX-036-230	TXV	33400	15	12.5	CX35-30/36B	EL296UH045XV36B	8268195
14ACX-036-230	TXV	33400	15	12.5	CX35-30/36B	EL296UH070XV36B	8268196
14ACX-036-230	TXV	33600	15.5	12.5	CX35-30/36B	SL280UH090V36B	8268203
14ACX-036-230	TXV	33600	15.5	12.5	CX35-30/36B	SL280UH090V48B	8268204
14ACX-036-230	TXV	33600	15.5	12.5	CX35-30/36B	SL280UH090XV48B	8268205
14ACX-036-230	TXV	33400	15	12.5	CX35-30/36B	SLP98UH070XV36B	8268197
14ACX-036-230	TXV	33600	15.1	12.5	CX35-30/36C	EL180UH090E60C	8268218
14ACX-036-230	TXV	33400	15.5	12.5	CX35-30/36C	EL180UH110E60C	8268219
14ACX-036-230	TXV	33400	15.5	12.5	CX35-30/36C	EL180UH110XE60C	8268212
14ACX-036-230	TXV	33200	15.1	12.5	CX35-30/36C	EL195UH090XE48C	8268213
14ACX-036-230	TXV	33600	15.1	12.5	CX35-30/36C	EL195UH110XE60C	8268215
14ACX-036-230	TXV	33200	15.1	12.5	CX35-30/36C	EL296UH090XE48C	8268214
14ACX-036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL296UH090XV36C	8268217
14ACX-036-230	TXV	33400	15.5	12.5	CX35-30/36C	EL296UH090XV48C	8268209
14ACX-036-230	TXV	33600	15.1	12.5	CX35-30/36C	EL296UH110XE60C	8268216
14ACX-036-230	TXV	33600	15.5	12.5	CX35-30/36C	EL296UH110XV48C	8268211
14ACX-036-230	TXV	33600	15.5	12.5	CX35-30/36C	SLP98UH090XV36C	8268208
14ACX-036-230	TXV	33400	15.5	12.5	CX35-30/36C	SLP98UH090XV48C	8268210
14ACX-036-230	TXV	33800	15.5	12.5	CX35-30/36C	SLP98UH110XV60C	8268207
14ACX-036-230	TXV	34200	15.1	12.5	CX35-30A	EL180UH045E36A	8268173
14ACX-036-230	TXV	34200	15.1	12.5	CX35-30A	EL180UH045XE36A	8268174
14ACX-036-230	TXV	34400	15.1	12.5	CX35-30A	SL280UH070V36A	8268175
14ACX-036-230	TXV	34400	15.1	12.5	CX35-30A	SL280UH070XV36A	8268176
14ACX-036-230	TXV	34400	15	12.5	CX35-30B	EL180UH070E36B	8268190
14ACX-036-230	TXV	34400	15	12.5	CX35-30B	EL180UH070XE36B	8268181
14ACX-036-230	TXV	34400	15.5	12.5	CX35-30B	EL180UH090E48B	8268182
14ACX-036-230	TXV	34400	15.5	12.5	CX35-30B	EL180UH090XE48B	8268183
14ACX-036-230	TXV	34000	14.5	12.2	CX35-30B	EL195UH045XE36B	8268184

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	34000	15.1	12.5	CX35-30B	EL195UH070XE36B	8268186
14ACX-036-230	TXV	34000	14.5	12.2	CX35-30B	EL296UH045XE36B	8268185
14ACX-036-230	TXV	34200	15.1	12.5	CX35-30B	EL296UH045XV36B	8268178
14ACX-036-230	TXV	34000	15.1	12.5	CX35-30B	EL296UH070XE36B	8268177
14ACX-036-230	TXV	34200	15.1	12.5	CX35-30B	EL296UH070XV36B	8268179
14ACX-036-230	TXV	34400	15.5	12.5	CX35-30B	SL280UH090V36B	8268187
14ACX-036-230	TXV	34400	15.5	12.5	CX35-30B	SL280UH090V48B	8268188
14ACX-036-230	TXV	34400	15.5	12.5	CX35-30B	SL280UH090XV48B	8268189
14ACX-036-230	TXV	34200	15.1	12.5	CX35-30B	SLP98UH070XV36B	8268180
14ACX-036-230	TXV	34400	15.1	12.5	CX35-36A	EL180UH045E36A	8268221
14ACX-036-230	TXV	34400	15.1	12.5	CX35-36A	EL180UH045XE36A	8268222
14ACX-036-230	TXV	34600	15.5	12.5	CX35-36A	SL280UH070V36A	8268223
14ACX-036-230	TXV	34600	15.5	12.5	CX35-36A	SL280UH070XV36A	8268224
14ACX-036-230	TXV	34200	14.25	12.2	CX35-36A		8268220
14ACX-036-230	TXV	34600	16	13	CX35-36B	EL180UH070E36B	8268239
14ACX-036-230	TXV	34600	16	13	CX35-36B	EL180UH070XE36B	8268230
14ACX-036-230	TXV	34600	16	13	CX35-36B	EL180UH090E48B	8268231
14ACX-036-230	TXV	34600	16	13	CX35-36B	EL180UH090XE48B	8268232
14ACX-036-230	TXV	34400	15	12.5	CX35-36B	EL195UH045XE36B	8268233
14ACX-036-230	TXV	34400	15	12.5	CX35-36B	EL195UH070XE36B	8268235
14ACX-036-230	TXV	34400	15	12.5	CX35-36B	EL296UH045XE36B	8268234
14ACX-036-230	TXV	34600	15.5	12.5	CX35-36B	EL296UH045XV36B	8268227
14ACX-036-230	TXV	34400	15	12.5	CX35-36B	EL296UH070XE36B	8268226
14ACX-036-230	TXV	34600	15.5	12.5	CX35-36B	EL296UH070XV36B	8268228
14ACX-036-230	TXV	34800	16	13	CX35-36B	SL280UH090V36B	8268236
14ACX-036-230	TXV	34800	16	13	CX35-36B	SL280UH090V48B	8268237
14ACX-036-230	TXV	34800	16	13	CX35-36B	SL280UH090XV48B	8268238
14ACX-036-230	TXV	34600	15.5	12.5	CX35-36B	SLP98UH070XV36B	8268229
14ACX-036-230	TXV	34200	14.25	12.2	CX35-36B		8268225
14ACX-036-230	TXV	34800	16	13	CX35-48B	EL180UH070E36B	8268248
14ACX-036-230	TXV	34800	16	13	CX35-48B	EL180UH070XE36B	8268249
14ACX-036-230	TXV	34800	16	13	CX35-48B	EL180UH090E48B	8268250
14ACX-036-230	TXV	34800	16	13	CX35-48B	EL180UH090XE48B	8268251
14ACX-036-230	TXV	34400	15	12.5	CX35-48B	EL195UH045XE36B	8268252
14ACX-036-230	TXV	34600	15.1	12.5	CX35-48B	EL195UH070XE36B	8268242
14ACX-036-230	TXV	34400	15	12.5	CX35-48B	EL296UH045XE36B	8268241
14ACX-036-230	TXV	34800	15.5	12.5	CX35-48B	EL296UH045XV36B	8268244
14ACX-036-230	TXV	34600	15.1	12.5	CX35-48B	EL296UH070XE36B	8268243
14ACX-036-230	TXV	34800	15.5	12.5	CX35-48B	EL296UH070XV36B	8268245
14ACX-036-230	TXV	34800	16	13	CX35-48B	SL280UH090V36B	8268253
14ACX-036-230	TXV	35000	16	13	CX35-48B	SL280UH090V48B	8268254
14ACX-036-230	TXV	35000	16	13	CX35-48B	SL280UH090XV48B	8268247
14ACX-036-230	TXV	34800	15.5	12.5	CX35-48B	SLP98UH070XV36B	8268246
14ACX-036-230	TXV	34400	14.5	12.2	CX35-48B		8268240
14ACX-036-230	TXV	34800	16	13	CX35-48C	EL180UH090E60C	8268272
14ACX-036-230	TXV	34800	16	13	CX35-48C	EL180UH110E60C	8268273
14ACX-036-230	TXV	34800	16	13	CX35-48C	EL180UH110XE60C	8268262
14ACX-036-230	TXV	34600	15.5	12.5	CX35-48C	EL195UH090XE48C	8268263
14ACX-036-230	TXV	34800	16	13	CX35-48C	EL195UH110XE60C	8268265

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	34600	15.5	12.5	CX35-48C	EL296UH090XE48C	8268264
14ACX-036-230	TXV	34800	16	13	CX35-48C	EL296UH090XV36C	8268267
14ACX-036-230	TXV	34800	16	13	CX35-48C	EL296UH090XV48C	8268257
14ACX-036-230	TXV	34600	16	13	CX35-48C	EL296UH110XE60C	8268266
14ACX-036-230	TXV	35000	16	13	CX35-48C	EL296UH110XV48C	8268259
14ACX-036-230	TXV	35200	16	13	CX35-48C	EL296UH110XV60C	8268260
14ACX-036-230	TXV	35400	16	13	CX35-48C	SL280UH090V60C	8268268
14ACX-036-230	TXV	35400	16	13	CX35-48C	SL280UH090XV60C	8268269
14ACX-036-230	TXV	35200	16	13	CX35-48C	SL280UH110V60C	8268270
14ACX-036-230	TXV	35200	16	13	CX35-48C	SL280UH110XV60C	8268271
14ACX-036-230	TXV	34800	16	13	CX35-48C	SLP98UH090XV36C	8268256
14ACX-036-230	TXV	34800	16	13	CX35-48C	SLP98UH090XV48C	8268258
14ACX-036-230	TXV	35200	16	13	CX35-48C	SLP98UH110XV60C	8268261
14ACX-036-230	TXV	34400	14.5	12.2	CX35-48C		8268255
14ACX-036-230	TXV	35200	16	13	CX35-49C	EL180UH090E60C	8268287
14ACX-036-230	TXV	35000	16	13	CX35-49C	EL180UH110E60C	8268288
14ACX-036-230	TXV	35000	16	13	CX35-49C	EL180UH110XE60C	8268289
14ACX-036-230	TXV	34800	16	13	CX35-49C	EL195UH090XE48C	8268290
14ACX-036-230	TXV	35200	16	13	CX35-49C	EL195UH110XE60C	8268280
14ACX-036-230	TXV	34800	16	13	CX35-49C	EL296UH090XE48C	8268279
14ACX-036-230	TXV	35200	16	13	CX35-49C	EL296UH090XV36C	8268282
14ACX-036-230	TXV	35000	16	13	CX35-49C	EL296UH090XV48C	8268284
14ACX-036-230	TXV	35200	16	13	CX35-49C	EL296UH110XE60C	8268281
14ACX-036-230	TXV	35200	16	13	CX35-49C	EL296UH110XV48C	8268276
14ACX-036-230	TXV	35600	16	13	CX35-49C	EL296UH110XV60C	8268277
14ACX-036-230	TXV	35600	16	13	CX35-49C	SL280UH090V60C	8268291
14ACX-036-230	TXV	35600	16	13	CX35-49C	SL280UH090XV60C	8268292
14ACX-036-230	TXV	35400	16	13	CX35-49C	SL280UH110V60C	8268285
14ACX-036-230	TXV	35400	16	13	CX35-49C	SL280UH110XV60C	8268286
14ACX-036-230	TXV	35200	16	13	CX35-49C	SLP98UH090XV36C	8268283
14ACX-036-230	TXV	35000	16	13	CX35-49C	SLP98UH090XV48C	8268275
14ACX-036-230	TXV	35600	16	13	CX35-49C	SLP98UH110XV60C	8268278
14ACX-036-230	TXV	34600	14.5	12.2	CX35-49C		8268274
14ACX-036-230	TXV	34800	16	13	CX35-50/60C	EL180UH090E60C	8268302
14ACX-036-230	TXV	34800	16	13	CX35-50/60C	EL180UH110E60C	8268303
14ACX-036-230	TXV	34800	16	13	CX35-50/60C	EL180UH110XE60C	8268304
14ACX-036-230	TXV	34400	15.5	12.5	CX35-50/60C	EL195UH090XE48C	8268305
14ACX-036-230	TXV	34800	16	13	CX35-50/60C	EL195UH110XE60C	8268307
14ACX-036-230	TXV	34400	15.5	12.5	CX35-50/60C	EL296UH090XE48C	8268306
14ACX-036-230	TXV	34800	16	13	CX35-50/60C	EL296UH090XV36C	8268297
14ACX-036-230	TXV	34600	16	13	CX35-50/60C	EL296UH090XV48C	8268299
14ACX-036-230	TXV	34800	16	13	CX35-50/60C	EL296UH110XE60C	8268296
14ACX-036-230	TXV	34800	16	13	CX35-50/60C	EL296UH110XV48C	8268301
14ACX-036-230	TXV	35200	16	13	CX35-50/60C	EL296UH110XV60C	8268294
14ACX-036-230	TXV	35200	16	13	CX35-50/60C	SL280UH090V60C	8268308
14ACX-036-230	TXV	35200	16	13	CX35-50/60C	SL280UH090XV60C	8268309
14ACX-036-230	TXV	35000	16	13	CX35-50/60C	SL280UH110V60C	8268310
14ACX-036-230	TXV	35000	16	13	CX35-50/60C	SL280UH110XV60C	8268311
14ACX-036-230	TXV	34800	16	13	CX35-50/60C	SLP98UH090XV36C	8268298

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-036-230	TXV	34600	16	13	CX35-50/60C	SLP98UH090XV48C	8268300
14ACX-036-230	TXV	35200	16	13	CX35-50/60C	SLP98UH110XV60C	8268295
14ACX-036-230	TXV	34200	14.5	12.2	CX35-50/60C		8268293
14ACX-036-230	TXV	34200	14.25	12.2	CX38-38A		10546412
14ACX-042-230	RFC	41500	14	12.2	C35-49C		8471019
14ACX-042-230	RFC	41000	14	12.2	C35-60D		8471021
14ACX-042-230	RFC	41500	14	12.2	CH33-43C		7513072
14ACX-042-230	RFC	42000	14	12.2	CH33-49		7511217
14ACX-042-230	RFC	41500	14	12.2	CH33-50/60C		7511239
14ACX-042-230	RFC	41500	14	12.2	CH35-51C		10514553
14ACX-042-230	RFC	41000	14	12.2	CH35-60D		10514554
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36B	EL180UH090E48B	8267691
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36B	EL180UH090XE48B	8267692
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36B	SL280UH090V36B	8267688
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36B	SL280UH090V48B	8267689
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36B	SL280UH090XV48B	8267690
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	EL180UH090E60C	8267693
14ACX-042-230	TXV	39000	14.5	12.2	C35-30/36C	EL180UH110E60C	8267694
14ACX-042-230	TXV	39000	14.5	12.2	C35-30/36C	EL180UH110XE60C	8267695
14ACX-042-230	TXV	39000	14.5	12.2	C35-30/36C	EL195UH090XE48C	8267698
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	EL195UH110XE60C	8267700
14ACX-042-230	TXV	39000	14.5	12.2	C35-30/36C	EL296UH090XE48C	8267699
14ACX-042-230	TXV	39000	14.5	12.2	C35-30/36C	EL296UH090XV36C	9143757
14ACX-042-230	TXV	39000	14.5	12.2	C35-30/36C	EL296UH090XV48C	8267707
14ACX-042-230	TXV	39500	14.5	12.5	C35-30/36C	EL296UH090XV60C	9143758
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	EL296UH110XE60C	8267701
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	EL296UH110XV60C	8267703
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	SL280UH090V60C	8267704
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	SL280UH090XV60C	8267705
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	SL280UH110V60C	8267696
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	SL280UH110XV60C	8267697
14ACX-042-230	TXV	39000	14.5	12.2	C35-30/36C	SLP98UH090XV36C	9143759
14ACX-042-230	TXV	39000	14.5	12.2	C35-30/36C	SLP98UH090XV48C	8267706
14ACX-042-230	TXV	39500	14.5	12.5	C35-30/36C	SLP98UH090XV60C	9143760
14ACX-042-230	TXV	39500	14.5	12.2	C35-30/36C	SLP98UH110XV60C	8267702
14ACX-042-230	TXV	41000	15.1	12.5	C35-36B	EL180UH090E48B	8267710
14ACX-042-230	TXV	41000	15.1	12.5	C35-36B	EL180UH090XE48B	8267711
14ACX-042-230	TXV	40500	14.5	12.2	C35-36B	EL296UH045XV36B	8267712
14ACX-042-230	TXV	40500	14.5	12.2	C35-36B	EL296UH070XV36B	8267714
14ACX-042-230	TXV	41000	15.1	12.5	C35-36B	SL280UH090V36B	8267715
14ACX-042-230	TXV	41000	15.1	12.5	C35-36B	SL280UH090V48B	8267708
14ACX-042-230	TXV	41000	15.1	12.5	C35-36B	SL280UH090XV48B	8267709
14ACX-042-230	TXV	40500	14.5	12.2	C35-36B	SLP98UH070XV36B	8267713
14ACX-042-230	TXV	41500	15.5	12.5	C35-48B	EL180UH090E48B	8267717
14ACX-042-230	TXV	41500	15.5	12.5	C35-48B	EL180UH090XE48B	8267718
14ACX-042-230	TXV	41000	14.5	12.2	C35-48B	EL296UH045XV36B	8267719
14ACX-042-230	TXV	41000	14.5	12.2	C35-48B	EL296UH070XV36B	8267721
14ACX-042-230	TXV	41000	15.1	12.5	C35-48B	SL280UH090V36B	8267722
14ACX-042-230	TXV	41500	15.1	12.5	C35-48B	SL280UH090V48B	8267723

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	41500	15.1	12.5	C35-48B	SL280UH090XV48B	8267716
14ACX-042-230	TXV	41000	14.5	12.2	C35-48B	SLP98UH070XV36B	8267720
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	EL180UH090E60C	8267733
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	EL180UH110E60C	8267734
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	EL180UH110XE60C	8267724
14ACX-042-230	TXV	41000	15.5	12.5	C35-48C	EL195UH090XE48C	8267725
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	EL195UH110XE60C	8267727
14ACX-042-230	TXV	41000	15.5	12.5	C35-48C	EL296UH090XE48C	8267726
14ACX-042-230	TXV	41000	15.1	12.5	C35-48C	EL296UH090XV36C	8267742
14ACX-042-230	TXV	41000	15.1	12.5	C35-48C	EL296UH090XV48C	8267735
14ACX-042-230	TXV	41500	15.1	12.5	C35-48C	EL296UH090XV60C	8267738
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	EL296UH110XE60C	8267728
14ACX-042-230	TXV	41500	15.1	12.5	C35-48C	EL296UH110XV48C	8267736
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	EL296UH110XV60C	8267740
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	SL280UH090V60C	8267729
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	SL280UH090XV60C	8267730
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	SL280UH110V60C	8267731
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	SL280UH110XV60C	8267732
14ACX-042-230	TXV	41000	15.1	12.5	C35-48C	SLP98UH090XV36C	8267741
14ACX-042-230	TXV	41000	15.1	12.5	C35-48C	SLP98UH090XV48C	8267743
14ACX-042-230	TXV	41500	15.1	12.5	C35-48C	SLP98UH090XV60C	8267737
14ACX-042-230	TXV	41500	15.5	12.5	C35-48C	SLP98UH110XV60C	8267739
14ACX-042-230	TXV	42000	16	13	C35-49C	EL180UH090E60C	8267764
14ACX-042-230	TXV	42000	16	13	C35-49C	EL180UH110E60C	8267758
14ACX-042-230	TXV	42000	16	13	C35-49C	EL180UH110XE60C	8267759
14ACX-042-230	TXV	41500	15.5	12.5	C35-49C	EL195UH090XE48C	8267760
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	EL195UH110XE60C	8267761
14ACX-042-230	TXV	41500	15.5	12.5	C35-49C	EL296UH090XE48C	8267762
14ACX-042-230	TXV	41500	15.5	12.5	C35-49C	EL296UH090XV36C	8267763
14ACX-042-230	TXV	41500	15.5	12.5	C35-49C	EL296UH090XV48C	8267752
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	EL296UH090XV60C	8267753
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	EL296UH110XE60C	8267754
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	EL296UH110XV48C	8267755
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	EL296UH110XV60C	8267756
14ACX-042-230	TXV	42000	16	13	C35-49C	SL280UH090V60C	8267757
14ACX-042-230	TXV	42000	16	13	C35-49C	SL280UH090XV60C	8267746
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	SL280UH110V60C	8267747
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	SL280UH110XV60C	8267748
14ACX-042-230	TXV	41500	15.5	12.5	C35-49C	SLP98UH090XV36C	8267749
14ACX-042-230	TXV	41500	15.5	12.5	C35-49C	SLP98UH090XV48C	8267750
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	SLP98UH090XV60C	8267751
14ACX-042-230	TXV	42000	15.5	12.5	C35-49C	SLP98UH110XV60C	8267745
14ACX-042-230	TXV	41500	14.25	12.2	C35-49C		8267744
14ACX-042-230	TXV	41000	15.5	12.5	C35-50/60C	EL180UH090E60C	8267782
14ACX-042-230	TXV	41000	15.5	12.5	C35-50/60C	EL180UH110E60C	8267783
14ACX-042-230	TXV	41000	15.5	12.5	C35-50/60C	EL180UH110XE60C	8267784
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL195UH090XE48C	8267776
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL195UH110XE60C	8267777
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH090XE48C	8267778

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH090XV36C	8267779
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH090XV48C	8267780
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH090XV60C	8267781
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH110XE60C	8267770
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH110XV48C	8267771
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	EL296UH110XV60C	8267772
14ACX-042-230	TXV	41500	15.1	12.5	C35-50/60C	SL280UH090V60C	8267773
14ACX-042-230	TXV	41500	15.1	12.5	C35-50/60C	SL280UH090XV60C	8267774
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	SL280UH110V60C	8267775
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	SL280UH110XV60C	8267765
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	SLP98UH090XV36C	8267766
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	SLP98UH090XV48C	8267767
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	SLP98UH090XV60C	8267768
14ACX-042-230	TXV	41000	15.1	12.5	C35-50/60C	SLP98UH110XV60C	8267769
14ACX-042-230	TXV	40500	14.5	12.2	C35-50/60C		9143761
14ACX-042-230	TXV	42000	16	13	C35-60C	EL180UH090E60C	8267803
14ACX-042-230	TXV	42000	16	13	C35-60C	EL180UH110E60C	8267804
14ACX-042-230	TXV	42000	16	13	C35-60C	EL180UH110XE60C	8267805
14ACX-042-230	TXV	42000	16	13	C35-60C	EL195UH090XE48C	8267797
14ACX-042-230	TXV	42000	16	13	C35-60C	EL195UH110XE60C	8267798
14ACX-042-230	TXV	42000	16	13	C35-60C	EL296UH090XE48C	8267799
14ACX-042-230	TXV	42000	15.5	12.5	C35-60C	EL296UH090XV36C	8267800
14ACX-042-230	TXV	42000	16	13	C35-60C	EL296UH090XV48C	8267801
14ACX-042-230	TXV	42000	15.5	12.5	C35-60C	EL296UH090XV60C	8267802
14ACX-042-230	TXV	42000	16	13	C35-60C	EL296UH110XE60C	8267791
14ACX-042-230	TXV	42000	16	13	C35-60C	EL296UH110XV48C	8267792
14ACX-042-230	TXV	42000	16	13	C35-60C	EL296UH110XV60C	8267793
14ACX-042-230	TXV	42000	16	13	C35-60C	SL280UH090V60C	8267794
14ACX-042-230	TXV	42000	16	13	C35-60C	SL280UH090XV60C	8267795
14ACX-042-230	TXV	42000	16	13	C35-60C	SL280UH110V60C	8267796
14ACX-042-230	TXV	42000	16	13	C35-60C	SL280UH110XV60C	8267786
14ACX-042-230	TXV	42000	15.5	12.5	C35-60C	SLP98UH090XV36C	8267787
14ACX-042-230	TXV	42000	16	13	C35-60C	SLP98UH090XV48C	8267788
14ACX-042-230	TXV	42000	15.5	12.5	C35-60C	SLP98UH090XV60C	8267789
14ACX-042-230	TXV	42000	16	13	C35-60C	SLP98UH110XV60C	8267790
14ACX-042-230	TXV	42000	14.25	12.2	C35-60C		8267785
14ACX-042-230	TXV	42000	16	13	C35-60D	EL180UH135E60D	8267810
14ACX-042-230	TXV	42000	15.5	12.5	C35-60D	EL195UH135XE60D	8267807
14ACX-042-230	TXV	42000	15.5	12.5	C35-60D	EL296UH135XE60D	8267808
14ACX-042-230	TXV	42000	16	13	C35-60D	SL280UH135V60D	8267809
14ACX-042-230	TXV	41500	14.25	12.2	C35-60D		8267806
14ACX-042-230	TXV	41500	15.5	12.5	CBA27UHE-042		10259380
14ACX-042-230	TXV	41500	15.5	12.5	CBA27UHE-048		10259381
14ACX-042-230	TXV	41500	14	12.2	CBX25UH-042		7511120
14ACX-042-230	TXV	42000	14.5	12.5	CBX25UH-048		7511121
14ACX-042-230	TXV	42000	15.1	12.5	CBX25UHV-042		7511122
14ACX-042-230	TXV	42000	15.5	12.5	CBX25UHV-048		7511123
14ACX-042-230	TXV	41500	15.5	12.5	CBX27UH-042		7511118
14ACX-042-230	TXV	42000	15.1	12.5	CBX27UH-048		7511119

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	40500	14	12.2	CBX32M-042		7511124
14ACX-042-230	TXV	41500	14.25	12.2	CBX32M-048		7511125
14ACX-042-230	TXV	42000	15.1	12.5	CBX32MV-048		7511126
14ACX-042-230	TXV	42000	15	12.5	CBX40UHV-042		7511127
14ACX-042-230	TXV	42000	15	12.5	CBX40UHV-048		7511128
14ACX-042-230	TXV	40500	15.1	12.5	CH23-51	EL180UH090E60C	7511129
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	EL180UH110E60C	7511130
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	EL180UH110XE60C	7511131
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	EL296UH090XV48C	7511132
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	EL296UH090XV60C	7511133
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	EL296UH110XV48C	7511134
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	EL296UH110XV60C	7511135
14ACX-042-230	TXV	40500	15.1	12.5	CH23-51	SL280UH090V60C	7511136
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	SL280UH110V60C	7511137
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	SL280UH110XV60C	7511138
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	SLP98UH090XV48C	7511139
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	SLP98UH090XV60C	7511140
14ACX-042-230	TXV	40000	15.1	12.5	CH23-51	SLP98UH110XV60C	7511141
14ACX-042-230	TXV	40500	15.5	12.5	CH23-65	EL180UH090E60C	7511142
14ACX-042-230	TXV	40500	15.5	12.5	CH23-65	EL180UH110E60C	7511143
14ACX-042-230	TXV	40500	15.5	12.5	CH23-65	EL180UH110XE60C	7511144
14ACX-042-230	TXV	40500	15.1	12.5	CH23-65	EL296UH090XV48C	7511145
14ACX-042-230	TXV	40500	15.1	12.5	CH23-65	EL296UH090XV60C	7511146
14ACX-042-230	TXV	40500	15.1	12.5	CH23-65	EL296UH110XV48C	7511147
14ACX-042-230	TXV	40500	15.1	12.5	CH23-65	EL296UH110XV60C	7511148
14ACX-042-230	TXV	41000	15.5	12.5	CH23-65	SL280UH090V60C	7511149
14ACX-042-230	TXV	40500	15.5	12.5	CH23-65	SL280UH110V60C	7511150
14ACX-042-230	TXV	40500	15.5	12.5	CH23-65	SL280UH110XV60C	7511151
14ACX-042-230	TXV	40500	15.1	12.5	CH23-65	SLP98UH090XV48C	7511152
14ACX-042-230	TXV	40500	15.1	12.5	CH23-65	SLP98UH090XV60C	7511153
14ACX-042-230	TXV	40500	15.1	12.5	CH23-65	SLP98UH110XV60C	7511154
14ACX-042-230	TXV	40500	15.1	12.5	CH33-42	EL180UH090E48B	7511155
14ACX-042-230	TXV	40500	15.1	12.5	CH33-42	EL180UH090XE48B	7511156
14ACX-042-230	TXV	40500	15	12.5	CH33-42	SL280UH090V36B	7511158
14ACX-042-230	TXV	40500	15	12.5	CH33-42	SL280UH090V48B	7511159
14ACX-042-230	TXV	40500	15	12.5	CH33-42	SL280UH090XV48B	7511160
14ACX-042-230	TXV	42000	15.5	12.5	CH33-43B	EL180UH090E48B	8565947
14ACX-042-230	TXV	42000	15.5	12.5	CH33-43B	EL180UH090XE48B	8565948
14ACX-042-230	TXV	41500	15	12.5	CH33-43B	EL296UH045XV36B	7511162
14ACX-042-230	TXV	41500	15	12.5	CH33-43B	EL296UH070XV36B	7511164
14ACX-042-230	TXV	42000	15.5	12.5	CH33-43B	SL280UH090V36B	7511165
14ACX-042-230	TXV	42000	15.5	12.5	CH33-43B	SL280UH090V48B	7511166
14ACX-042-230	TXV	42000	15.5	12.5	CH33-43B	SL280UH090XV48B	7511167
14ACX-042-230	TXV	41500	15	12.5	CH33-43B	SLP98UH070XV36B	7511163
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL180UH090E60C	7511170
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL180UH110E60C	7511171
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL180UH110XE60C	7511172
14ACX-042-230	TXV	41000	15.5	12.5	CH33-43C	EL195UH090XE48C	7511173
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL195UH110XE60C	7511174

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	41000	15.5	12.5	CH33-43C	EL296UH090XE48C	7511175
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH090XV36C	7511176
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH090XV48C	7511177
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH090XV60C	7511178
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH110XE60C	7511179
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH110XV48C	7511180
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	EL296UH110XV60C	7511181
14ACX-042-230	TXV	42000	16	13	CH33-43C	SL280UH090V60C	7511182
14ACX-042-230	TXV	42000	16	13	CH33-43C	SL280UH090XV60C	7511183
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	SL280UH110V60C	7511184
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	SL280UH110XV60C	7511185
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	SLP98UH090XV36C	7511186
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	SLP98UH090XV48C	7511187
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	SLP98UH090XV60C	7511188
14ACX-042-230	TXV	41500	15.5	12.5	CH33-43C	SLP98UH110XV60C	7511189
14ACX-042-230	TXV	41500	14	12.2	CH33-43C		7511169
14ACX-042-230	TXV	41000	15.1	12.5	CH33-44/48B	EL180UH090E48B	7511190
14ACX-042-230	TXV	41000	15.1	12.5	CH33-44/48B	EL180UH090XE48B	7511191
14ACX-042-230	TXV	40500	14.5	12.2	CH33-44/48B	EL296UH070XV36B	7511192
14ACX-042-230	TXV	41000	15.1	12.5	CH33-44/48B	SL280UH090V36B	7511193
14ACX-042-230	TXV	41000	15.1	12.5	CH33-44/48B	SL280UH090V48B	7511194
14ACX-042-230	TXV	41000	15.1	12.5	CH33-44/48B	SL280UH090XV48B	7511195
14ACX-042-230	TXV	40500	14.5	12.2	CH33-44/48B	SLP98UH070XV36B	9150351
14ACX-042-230	TXV	41000	15.5	12.5	CH33-48C	EL180UH090E60C	7511197
14ACX-042-230	TXV	41000	15.5	12.5	CH33-48C	EL180UH110E60C	7511198
14ACX-042-230	TXV	41000	15.5	12.5	CH33-48C	EL180UH110XE60C	7511199
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	EL195UH090XE48C	7511200
14ACX-042-230	TXV	41500	15.1	12.5	CH33-48C	EL195UH110XE60C	7511201
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH090XE48C	7511202
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH090XV36C	7511203
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH090XV48C	7511204
14ACX-042-230	TXV	41500	15.1	12.5	CH33-48C	EL296UH090XV60C	7511205
14ACX-042-230	TXV	41500	15.1	12.5	CH33-48C	EL296UH110XE60C	7511206
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH110XV48C	7511207
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	EL296UH110XV60C	7511208
14ACX-042-230	TXV	41500	15.5	12.5	CH33-48C	SL280UH090V60C	7511209
14ACX-042-230	TXV	41500	15.5	12.5	CH33-48C	SL280UH090XV60C	7511210
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	SL280UH110V60C	7511211
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	SL280UH110XV60C	7511212
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	SLP98UH090XV36C	7511213
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	SLP98UH090XV48C	7511214
14ACX-042-230	TXV	41500	15.1	12.5	CH33-48C	SLP98UH090XV60C	7511215
14ACX-042-230	TXV	41000	15.1	12.5	CH33-48C	SLP98UH110XV60C	7511216
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL180UH090E60C	7511219
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL180UH110E60C	7511220
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL180UH110XE60C	7511221
14ACX-042-230	TXV	41500	15.5	12.5	CH33-49	EL195UH090XE48C	7511222
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL195UH110XE60C	7511223
14ACX-042-230	TXV	41500	15.5	12.5	CH33-49	EL296UH090XE48C	7511224

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	41500	15.5	12.5	CH33-49	EL296UH090XV36C	7511225
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH090XV48C	7511226
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH090XV60C	7511227
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH110XE60C	7511228
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH110XV48C	7511229
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	EL296UH110XV60C	7511230
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	SL280UH090V60C	7511231
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	SL280UH090XV60C	7511232
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	SL280UH110V60C	7511233
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	SL280UH110XV60C	7511234
14ACX-042-230	TXV	41500	15.5	12.5	CH33-49	SLP98UH090XV36C	7511235
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	SLP98UH090XV48C	7511236
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	SLP98UH090XV60C	7511237
14ACX-042-230	TXV	42000	15.5	12.5	CH33-49	SLP98UH110XV60C	7511238
14ACX-042-230	TXV	42000	14	12.2	CH33-49		7511218
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL180UH090E60C	7511241
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL180UH110E60C	7511242
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL180UH110XE60C	7511243
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL195UH090XE48C	7511244
14ACX-042-230	TXV	42000	15.5	12.5	CH33-50/60C	EL195UH110XE60C	7511245
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH090XE48C	7511246
14ACX-042-230	TXV	41500	15.1	12.5	CH33-50/60C	EL296UH090XV36C	7511247
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH090XV48C	7511248
14ACX-042-230	TXV	42000	15.1	12.5	CH33-50/60C	EL296UH090XV60C	7511249
14ACX-042-230	TXV	42000	15.5	12.5	CH33-50/60C	EL296UH110XE60C	7511250
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH110XV48C	7511251
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	EL296UH110XV60C	7511252
14ACX-042-230	TXV	42000	15.5	12.5	CH33-50/60C	SL280UH090V60C	7511253
14ACX-042-230	TXV	42000	15.5	12.5	CH33-50/60C	SL280UH090XV60C	7511254
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	SL280UH110V60C	7511255
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	SL280UH110XV60C	7511256
14ACX-042-230	TXV	41500	15.1	12.5	CH33-50/60C	SLP98UH090XV36C	7511257
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	SLP98UH090XV48C	7511258
14ACX-042-230	TXV	42000	15.1	12.5	CH33-50/60C	SLP98UH090XV60C	7511259
14ACX-042-230	TXV	41500	15.5	12.5	CH33-50/60C	SLP98UH110XV60C	7511260
14ACX-042-230	TXV	41500	14	12.2	CH33-50/60C		7511240
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42B	EL180UH090E48B	7511261
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42B	EL180UH090XE48B	7511262
14ACX-042-230	TXV	42000	15.1	12.5	CH35-42B	EL296UH045XV36B	7511263
14ACX-042-230	TXV	41500	15	12.5	CH35-42B	EL296UH070XV36B	7511264
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42B	SL280UH090V36B	7511265
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42B	SL280UH090V48B	7511266
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42B	SL280UH090XV48B	7511267
14ACX-042-230	TXV	41500	15	12.5	CH35-42B	SLP98UH070XV36B	7511268
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL180UH090E60C	7511270
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL180UH110E60C	7511271
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL180UH110XE60C	7511272
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL195UH090XE48C	7511273
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42C	EL195UH110XE60C	7511274

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH090XE48C	7511275
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH090XV36C	7511276
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH090XV48C	7511277
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42C	EL296UH090XV60C	7511278
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42C	EL296UH110XE60C	7511279
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH110XV48C	7511280
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	EL296UH110XV60C	7511281
14ACX-042-230	TXV	42000	16	13	CH35-42C	SL280UH090V60C	7511282
14ACX-042-230	TXV	42000	16	13	CH35-42C	SL280UH090XV60C	7511283
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	SL280UH110V60C	7511284
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	SL280UH110XV60C	7511285
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	SLP98UH090XV36C	7511286
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	SLP98UH090XV48C	7511287
14ACX-042-230	TXV	42000	15.5	12.5	CH35-42C	SLP98UH090XV60C	7511288
14ACX-042-230	TXV	41500	15.5	12.5	CH35-42C	SLP98UH110XV60C	7511289
14ACX-042-230	TXV	41500	14	12.2	CH35-42C		7511269
14ACX-042-230	TXV	41500	15.5	12.5	CH35-48B	EL180UH090E48B	7511290
14ACX-042-230	TXV	41500	15.5	12.5	CH35-48B	EL180UH090XE48B	7511291
14ACX-042-230	TXV	41000	14.5	12.2	CH35-48B	EL296UH045XV36B	7511292
14ACX-042-230	TXV	41000	14.5	12.2	CH35-48B	EL296UH070XV36B	7511293
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48B	SL280UH090V36B	7511294
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48B	SL280UH090V48B	7511295
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48B	SL280UH090XV48B	7511296
14ACX-042-230	TXV	41000	14.5	12.2	CH35-48B	SLP98UH070XV36B	7511297
14ACX-042-230	TXV	41500	15.5	12.5	CH35-48C	EL180UH090E60C	7511299
14ACX-042-230	TXV	41500	15.5	12.5	CH35-48C	EL180UH110E60C	7511300
14ACX-042-230	TXV	41500	15.5	12.5	CH35-48C	EL180UH110XE60C	7511301
14ACX-042-230	TXV	41000	15.1	12.5	CH35-48C	EL195UH090XE48C	7511302
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	EL195UH110XE60C	7511303
14ACX-042-230	TXV	41000	15.1	12.5	CH35-48C	EL296UH090XE48C	7511304
14ACX-042-230	TXV	41000	15.1	12.5	CH35-48C	EL296UH090XV36C	7511305
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	EL296UH090XV48C	7511306
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	EL296UH090XV60C	7511307
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	EL296UH110XE60C	7511308
14ACX-042-230	TXV	41500	15.5	12.5	CH35-48C	EL296UH110XV48C	7511309
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	EL296UH110XV60C	7511310
14ACX-042-230	TXV	41500	15.5	12.5	CH35-48C	SL280UH090V60C	7511311
14ACX-042-230	TXV	41500	15.5	12.5	CH35-48C	SL280UH090XV60C	7511312
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	SL280UH110V60C	7511313
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	SL280UH110XV60C	7511314
14ACX-042-230	TXV	41000	15.1	12.5	CH35-48C	SLP98UH090XV36C	7511315
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	SLP98UH090XV48C	7511316
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	SLP98UH090XV60C	7511317
14ACX-042-230	TXV	41500	15.1	12.5	CH35-48C	SLP98UH110XV60C	7511318
14ACX-042-230	TXV	41500	14	12.2	CH35-48C		7511298
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL180UH090E48B	10040431
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL180UH090E60C	7511320
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL180UH110E60C	7511321
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL180UH110XE60C	7511322

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	41500	15.5	12.5	CH35-51C	EL195UH090XE48C	7511323
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL195UH110XE60C	7511324
14ACX-042-230	TXV	41500	15.5	12.5	CH35-51C	EL296UH090XE48C	7511325
14ACX-042-230	TXV	41500	15.5	12.5	CH35-51C	EL296UH090XV36C	7511326
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH090XV48C	7511327
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH090XV60C	7511328
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH110XE60C	7511329
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH110XV48C	7511330
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	EL296UH110XV60C	7511331
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	SL280UH090V60C	7511332
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	SL280UH090XV60C	7511333
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	SL280UH110V60C	7511334
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	SL280UH110XV60C	7511335
14ACX-042-230	TXV	41500	15.5	12.5	CH35-51C	SLP98UH090XV36C	7511336
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	SLP98UH090XV48C	7511337
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	SLP98UH090XV60C	7511338
14ACX-042-230	TXV	42000	15.5	12.5	CH35-51C	SLP98UH110XV60C	7511339
14ACX-042-230	TXV	42000	14	12.2	CH35-51C		7511319
14ACX-042-230	TXV	40500	15.1	12.5	CR33-48	EL180DF110E60C	7511341
14ACX-042-230	TXV	40500	15.1	12.5	CR33-48	EL195DF090XE48C	7511342
14ACX-042-230	TXV	40500	15.1	12.5	CR33-48	EL195DF110XE60C	7511343
14ACX-042-230	TXV	40500	15.1	12.5	CR33-48	EL296DF090XE48C	7511344
14ACX-042-230	TXV	40500	15	12.2	CR33-48	EL296DF090XV60C	7511345
14ACX-042-230	TXV	40500	15.1	12.5	CR33-48	EL296DF110XE60C	7511346
14ACX-042-230	TXV	40500	14.5	12.2	CR33-48	SL280DF090V48B	7511340
14ACX-042-230	TXV	40500	15.1	12.5	CR33-48	SL280DF090V60C	7511347
14ACX-042-230	TXV	40500	15.1	12.5	CR33-48	SL280DF110V60C	7511348
14ACX-042-230	TXV	40500	15.1	12.5	CR33-48	SLP98DF090XV36C	9143762
14ACX-042-230	TXV	40500	15	12.2	CR33-48	SLP98DF090XV60C	7511350
14ACX-042-230	TXV	41500	15.5	12.5	CR33-50/60	EL180DF110E60C	7511351
14ACX-042-230	TXV	41000	15.1	12.5	CR33-50/60	EL195DF090XE48C	7511352
14ACX-042-230	TXV	41500	15.5	12.5	CR33-50/60	EL195DF110XE60C	7511353
14ACX-042-230	TXV	41000	15.1	12.5	CR33-50/60	EL296DF090XE48C	7511354
14ACX-042-230	TXV	41500	15.1	12.5	CR33-50/60	EL296DF090XV60C	7511355
14ACX-042-230	TXV	41500	15.5	12.5	CR33-50/60	EL296DF110XE60C	7511356
14ACX-042-230	TXV	41500	15.5	12.5	CR33-50/60	EL296DF110XV60C	7511357
14ACX-042-230	TXV	41000	15.5	12.5	CR33-50/60	SL280DF090V60C	7511358
14ACX-042-230	TXV	41500	15.5	12.5	CR33-50/60	SL280DF110V60C	7511359
14ACX-042-230	TXV	41000	15.1	12.5	CR33-50/60	SLP98DF090XV36C	7511360
14ACX-042-230	TXV	41000	15.1	12.5	CR33-50/60	SLP98DF090XV48C	7511361
14ACX-042-230	TXV	41500	15.1	12.5	CR33-50/60	SLP98DF090XV60C	7511362
14ACX-042-230	TXV	41500	15.5	12.5	CR33-50/60	SLP98DF110XV60C	7511363
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36B	EL180UH090E48B	8267811
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36B	EL180UH090XE48B	8267812
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36B	SL280UH090V36B	8267813
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36B	SL280UH090V48B	8267814
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36B	SL280UH090XV48B	8267815
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	EL180UH090E60C	8267828
14ACX-042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL180UH110E60C	8267829

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL180UH110XE60C	8267830
14ACX-042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL195UH090XE48C	8267824
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	EL195UH110XE60C	8267825
14ACX-042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL296UH090XE48C	8267826
14ACX-042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL296UH090XV36C	9143763
14ACX-042-230	TXV	39000	14.5	12.2	CX35-30/36C	EL296UH090XV48C	8267827
14ACX-042-230	TXV	39500	14.5	12.5	CX35-30/36C	EL296UH090XV60C	9143764
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	EL296UH110XE60C	8267818
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	EL296UH110XV60C	8267819
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	SL280UH090V60C	8267820
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	SL280UH090XV60C	8267821
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	SL280UH110V60C	8267822
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	SL280UH110XV60C	8267823
14ACX-042-230	TXV	39000	14.5	12.2	CX35-30/36C	SLP98UH090XV36C	9143765
14ACX-042-230	TXV	39000	14.5	12.2	CX35-30/36C	SLP98UH090XV48C	8267816
14ACX-042-230	TXV	39500	14.5	12.5	CX35-30/36C	SLP98UH090XV60C	9143766
14ACX-042-230	TXV	39500	14.5	12.2	CX35-30/36C	SLP98UH110XV60C	8267817
14ACX-042-230	TXV	41000	15.1	12.5	CX35-36B	EL180UH090E48B	8267837
14ACX-042-230	TXV	41000	15.1	12.5	CX35-36B	EL180UH090XE48B	8267838
14ACX-042-230	TXV	40500	14.5	12.2	CX35-36B	EL296UH045XV36B	8267831
14ACX-042-230	TXV	40500	14.5	12.2	CX35-36B	EL296UH070XV36B	8267832
14ACX-042-230	TXV	41000	15.1	12.5	CX35-36B	SL280UH090V36B	8267833
14ACX-042-230	TXV	41000	15.1	12.5	CX35-36B	SL280UH090V48B	8267834
14ACX-042-230	TXV	41000	15.1	12.5	CX35-36B	SL280UH090XV48B	8267835
14ACX-042-230	TXV	40500	14.5	12.2	CX35-36B	SLP98UH070XV36B	8267836
14ACX-042-230	TXV	41000	14.5	12.2	CX35-36B		9143767
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48B	EL180UH090E48B	8267843
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48B	EL180UH090XE48B	8267844
14ACX-042-230	TXV	41000	14.5	12.2	CX35-48B	EL296UH045XV36B	8267845
14ACX-042-230	TXV	41000	14.5	12.2	CX35-48B	EL296UH070XV36B	8267846
14ACX-042-230	TXV	41000	15.1	12.5	CX35-48B	SL280UH090V36B	8267839
14ACX-042-230	TXV	41500	15.1	12.5	CX35-48B	SL280UH090V48B	8267840
14ACX-042-230	TXV	41500	15.1	12.5	CX35-48B	SL280UH090XV48B	8267841
14ACX-042-230	TXV	41000	14.5	12.2	CX35-48B	SLP98UH070XV36B	8267842
14ACX-042-230	TXV	41000	14.5	12.2	CX35-48B		9143768
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	EL180UH090E60C	8267865
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	EL180UH110E60C	8267866
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	EL180UH110XE60C	8267859
14ACX-042-230	TXV	41000	15.5	12.5	CX35-48C	EL195UH090XE48C	8267860
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	EL195UH110XE60C	8267861
14ACX-042-230	TXV	41000	15.5	12.5	CX35-48C	EL296UH090XE48C	8267862
14ACX-042-230	TXV	41000	15.1	12.5	CX35-48C	EL296UH090XV36C	8267863
14ACX-042-230	TXV	41000	15.1	12.5	CX35-48C	EL296UH090XV48C	8267864
14ACX-042-230	TXV	41500	15.1	12.5	CX35-48C	EL296UH090XV60C	8267853
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	EL296UH110XE60C	8267854
14ACX-042-230	TXV	41500	15.1	12.5	CX35-48C	EL296UH110XV48C	8267855
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	EL296UH110XV60C	8267856
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	SL280UH090V60C	8267857
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	SL280UH090XV60C	8267858

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	SL280UH110V60C	8267847
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	SL280UH110XV60C	8267848
14ACX-042-230	TXV	41000	15.1	12.5	CX35-48C	SLP98UH090XV36C	8267849
14ACX-042-230	TXV	41000	15.1	12.5	CX35-48C	SLP98UH090XV48C	8267850
14ACX-042-230	TXV	41500	15.1	12.5	CX35-48C	SLP98UH090XV60C	8267851
14ACX-042-230	TXV	41500	15.5	12.5	CX35-48C	SLP98UH110XV60C	8267852
14ACX-042-230	TXV	41000	14.5	12.2	CX35-48C		9143769
14ACX-042-230	TXV	42000	16	13	CX35-49C	EL180UH090E60C	8267886
14ACX-042-230	TXV	42000	16	13	CX35-49C	EL180UH110E60C	8267887
14ACX-042-230	TXV	42000	16	13	CX35-49C	EL180UH110XE60C	8267880
14ACX-042-230	TXV	41500	15.5	12.5	CX35-49C	EL195UH090XE48C	8267881
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	EL195UH110XE60C	8267882
14ACX-042-230	TXV	41500	15.5	12.5	CX35-49C	EL296UH090XE48C	8267883
14ACX-042-230	TXV	41500	15.5	12.5	CX35-49C	EL296UH090XV36C	8267884
14ACX-042-230	TXV	41500	15.5	12.5	CX35-49C	EL296UH090XV48C	8267885
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	EL296UH090XV60C	8267874
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	EL296UH110XE60C	8267875
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	EL296UH110XV48C	8267876
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	EL296UH110XV60C	8267877
14ACX-042-230	TXV	42000	16	13	CX35-49C	SL280UH090V60C	8267878
14ACX-042-230	TXV	42000	16	13	CX35-49C	SL280UH090XV60C	8267879
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	SL280UH110V60C	8267868
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	SL280UH110XV60C	8267869
14ACX-042-230	TXV	41500	15.5	12.5	CX35-49C	SLP98UH090XV36C	8267870
14ACX-042-230	TXV	41500	15.5	12.5	CX35-49C	SLP98UH090XV48C	8267871
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	SLP98UH090XV60C	8267872
14ACX-042-230	TXV	42000	15.5	12.5	CX35-49C	SLP98UH110XV60C	8267873
14ACX-042-230	TXV	41500	14.25	12.2	CX35-49C		8267867
14ACX-042-230	TXV	41000	15	12.5	CX35-50/60C	EL180UH090E48B	10040430
14ACX-042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL180UH090E60C	8267902
14ACX-042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL180UH110E60C	8267903
14ACX-042-230	TXV	41000	15.5	12.5	CX35-50/60C	EL180UH110XE60C	8267904
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL195UH090XE48C	8267905
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL195UH110XE60C	8267906
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH090XE48C	8267907
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH090XV36C	8267896
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH090XV48C	8267897
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH090XV60C	8267898
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH110XE60C	8267899
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH110XV48C	8267900
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	EL296UH110XV60C	8267901
14ACX-042-230	TXV	41500	15.1	12.5	CX35-50/60C	SL280UH090V60C	8267890
14ACX-042-230	TXV	41500	15.1	12.5	CX35-50/60C	SL280UH090XV60C	8267891
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	SL280UH110V60C	8267892
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	SL280UH110XV60C	8267893
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	SLP98UH090XV36C	8267894
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	SLP98UH090XV48C	8267895
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	SLP98UH090XV60C	8267888
14ACX-042-230	TXV	41000	15.1	12.5	CX35-50/60C	SLP98UH110XV60C	8267889

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

AHRI SYSTEM MATCHES - SOUTHWEST REGION - 018-024-030-036-042

NOTE - For the latest up-to-date system matches please visit the AHRI web site at <http://www.ahridirectory.org>

Model No.	Expansion Device	Capacity	SEER	EER	Coil or Air Handler	Furnace	AHRI Reference
14ACX-042-230	TXV	40500	14.5	12.2	CX35-50/60C		9143770
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL180UH090E60C	8267921
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL180UH110E60C	8267922
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL180UH110XE60C	8267923
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL195UH090XE48C	8267924
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL195UH110XE60C	8267925
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL296UH090XE48C	8267926
14ACX-042-230	TXV	42000	15.5	12.5	CX35-60C	EL296UH090XV36C	8267915
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL296UH090XV48C	8267916
14ACX-042-230	TXV	42000	15.5	12.5	CX35-60C	EL296UH090XV60C	8267917
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL296UH110XE60C	8267918
14ACX-042-230	TXV	42000	16	13	CX35-60C	EL296UH110XV60C	8267919
14ACX-042-230	TXV	42000	16	13	CX35-60C	SL280UH090V60C	8267920
14ACX-042-230	TXV	42000	16	13	CX35-60C	SL280UH090XV60C	8267909
14ACX-042-230	TXV	42000	16	13	CX35-60C	SL280UH110V60C	8267910
14ACX-042-230	TXV	42000	16	13	CX35-60C	SL280UH110XV60C	8267911
14ACX-042-230	TXV	42000	15.5	12.5	CX35-60C	SLP98UH090XV36C	8267912
14ACX-042-230	TXV	42000	16	13	CX35-60C	SLP98UH090XV48C	8267913
14ACX-042-230	TXV	42000	15.5	12.5	CX35-60C	SLP98UH090XV60C	8267914
14ACX-042-230	TXV	42000	16	13	CX35-60C	SLP98UH110XV60C	8267908
14ACX-042-230	TXV	42000	15.1	12.5	CX35-60C		9143771
14ACX-042-230	TXV	42000	16	13	CX35-60D	EL180UH135E60D	8267928
14ACX-042-230	TXV	42000	15.5	12.5	CX35-60D	EL195UH135XE60D	8267929
14ACX-042-230	TXV	42000	15.5	12.5	CX35-60D	EL296UH135XE60D	8267930
14ACX-042-230	TXV	42000	16	13	CX35-60D	SL280UH135V60D	8267931
14ACX-042-230	TXV	41500	14.5	12.2	CX35-60D		8267927
14ACX-042-230	TXV	41500	14.25	12.2	CX38-49C		10546731

NOTES:

TXV = Matched with Thermostatic Expansion Valve.

RFC = Matched with RFC metering device.

Ratings are AHRI certified to AHRI Standard 210/240 (with 25 ft. of connecting refrigerant lines); 95°F outdoor air temperature, 80°F db / 67°F wb entering evaporator air. All ratings include the use of a blower time delay relay (TDR). All Lennox variable-speed furnaces and Air Handlers have time delay capabilities. Other Furnaces and Air Handlers may require an optional time delay relay (**58M81**) for field installation. See furnace or air handler specifications to determine if relay is needed.

Also see Expansion Valve Kit Usage Table.

REVISIONS

Sections	Description of Change
AHRI System Matches	Updated



Visit us at www.lennox.com

For the latest technical information, www.LennoxPROs.com

Contact us at 1-800-4-LENNOX

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

©2017 Lennox Industries, Inc.