

SUBMITTAL DATA MODE SELECTION BOX V8MSBB02 VRF HEAT RECOVERY

Job:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For:

FEATURES

Allows simultaneous heating and cooling of multiple zones on VRF Heat Recovery outdoor units.

- Brazed fittings for outdoor unit pipe connections
- Removable panels for ease of maintenance
- Flare fittings for indoor unit pipe connection
- Dedicated sub-cooling circuit for each port

Product Warranty

All covered components - One year limited warranty.

SPECIFICATIONS		
Number of Ports		2
Maximum Indoor Units per Port		4
Maximum Capacity per Port (Btu/h)		54,000
Total Connected Capacity (Btu/h)		≤ 96,000
ELECTRICAL DATA		
Power Supply (V/Hz/Φ)		208-230/60/1
DIMENSIONS		
Unit Dimensions (in)	Height	9
	Width	23-5/8
	Depth	24-3/4
PIPING CONNECTIONS		
Outdoor Unit (in)	Liquid Pipe	1/2
	H.P. Gas Pipe	3/4
	L.P. Gas Pipe	7/8
Indoor Unit (in)	Liquid Pipe	3/8
	Gas Pipe	5/8
Condensate drain connection (in)		1
Shipping Weight (lb)		60
Net Weight (lb)		43








SUBMITTAL DATA MODE **SELECTION BOX** V8MSBB02

VRF HEAT RECOVERY

DIMENSIONS - INCHES (MM)

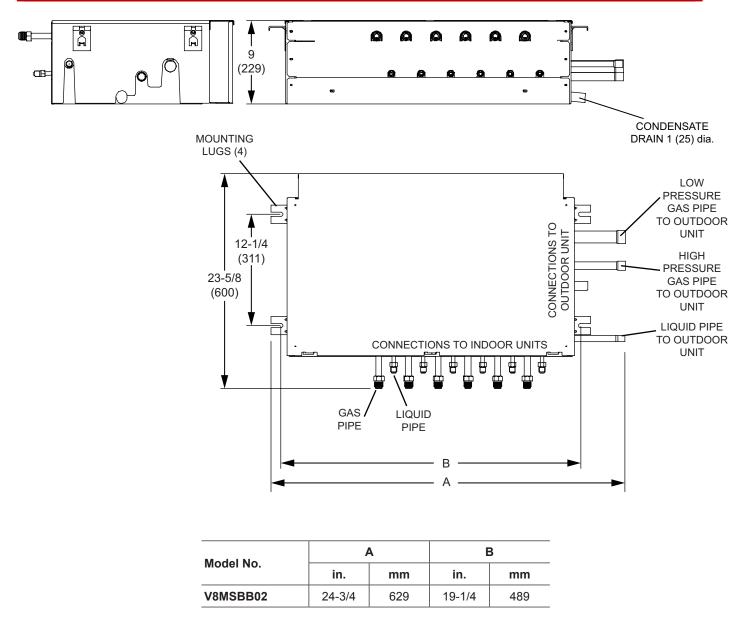

Model No.	Pipe Diameter - in.						
	Cor	nnections to Outdoor Unit		Connections to Indoor Unit			
model No.	Low Pressure Gas Pipe	High Pressure Gas Pipe	Liquid Pipe	¹ Liquid Pipe	² Gas Pipe		
V8MSBB02	7/8	3/4	1/2	3/8	5/8		

¹ 3/8 x 1/4 in. adaptor furnished for liquid pipe connection to outdoor unit (if required).

² 5/8 x 1/2 in. adaptor furnished for gas pipe connection to outdoor unit (if required).

 NOTE – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability.

 Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury.

 Installation and service must be performed by a qualified installer and servicing agency.

 495208 (201508)

 ©2015 Let