

Job:
Location:
Schedule No.:
System Designation:

Engineer:
Architect:
Location:
Date:

For: Reference Approval Review Construction

Wall Mounted Ductless Indoor Unit

FEATURES

- Pre Heat Function
- Auto Swing Louvers
- Flare Connections
- Refrigerant R-410A
- Auto Addressing
- Electronic Expansion Valve
- LED Display
- Seven capacity sizes from 7,000 to 30,000 Btu/h
- Auto Restart
- High-Efficiency DC Motor

WARRANTY

- 10-year limited warranty.*See warranty for details.

SPECIFICATIONS

PERFORMANCE

Cooling Capacity ¹ (Btu/h)		15,000
Heating Capacity ¹ (Btu/h)		17,100
Airflow (CFM)	Low/Medium/High	300/340/400
External Static Pressure (in. WC)		0
Sound (dBA)	Low/Medium/High	35.2/36.3/38.6

ELECTRICAL DATA

Power Supply (Volts/Hertz/Phase)	208-230/60/1
Minimum Circuit Ampacity (MCA)	0.34
Maximum Overcurrent Protection (MOCP)	15
Cooling Power Input ² (W)	35
Cooling Rated Current (A)	0.35
Heating Power Input ² (W)	35
Heating Rated Current (A)	0.35
Indoor Fan Motor Input (W)	26(H:0Pa)

DIMENSIONS

Unit Dimensions (in)	Width	39
	Height	12-3/8
	Depth	8-3/4
Liquid Pipe Connection (in) (I.D.)		1/4
Gas Pipe Connection (in) (I.D.)		1/2
Condensate Drain Connection - Gravity (in) (O.D.)		5/8 (1)
Net Weight (lb)		30
Shipping Weight (lb)		38



OPTIONAL ACCESSORIES

Non-Programmable Controller	V0STAT54P-3
Programmable Wired Controller	V0STAT51P-3
Infrared Wireless Controller	V0STAT52P-1
Occupancy Sensor	V0SNSR78P-3
HHE Relay Kit	V0CTRL92P-3
Hotel Keycard Interface	V0CTRL88P-1
Condensate Pumps (Reference Condensate Pump Selection Guide)	-


NOTES

1. Cooling and Heating capacity data is rated at the following conditions:
Cooling: 80°FDB / 67°FWB Indoor, 95°FDB
Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor.
2. Power Input values are rated at high fan speed.




DIMENSIONAL DRAWINGS - INCHES (MM)


VWMB015H4

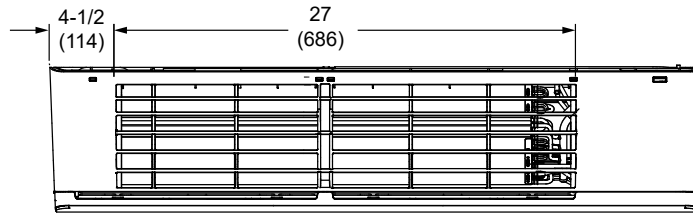


TOP VIEW




SIDE VIEW

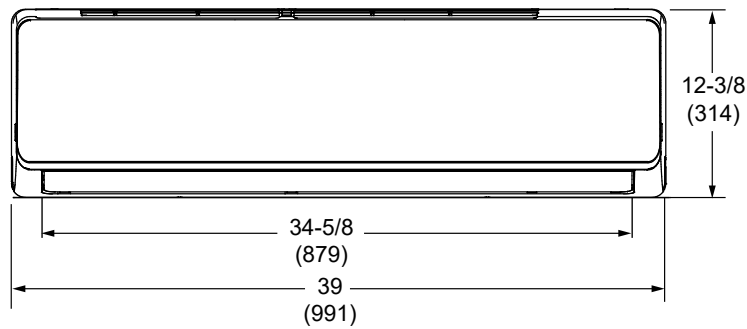

FRONT VIEW



SIDE VIEW

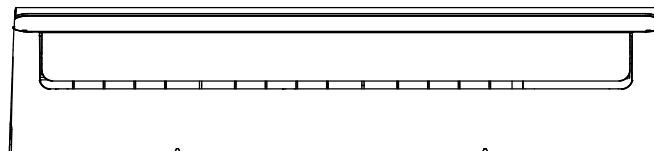

BOTTOM VIEW