



SUBMITTAL DATA - MINI-SPLIT SYSTEMS

(1) MS8-Z0-30P4 with (1) MS8-HI-09P1 + (2) MS8-HI-12P1

Multi-Zone Heat Pump

Job: _____
 Location: _____
 Engineer: _____
 Schedule No.: _____
 System Designation: _____

Engineer: _____
 Architect: _____
 Location: _____
 Date: _____
 For: Reference Approval Review Construction

FEATURES

- Variable Frequency Rotary Compressor (R-410A)
- DC Inverter Control
- Compressor Crankcase Heater
- High Pressure Discharge Temperature Protection
- Reversing Valve
- Defrost Control
- Low Voltage Protection
- Indoor Coil Freeze Protection
- Indoor Unit Microprocessor
- Oscillating Air Deflection Louvers
- Turbo Function Blower
- Wireless Remote Control

PRODUCT WARRANTY

Compressor - limited warranty for five years.
 All other covered components - five years in residential installations and one year in non-residential installations.

OUTDOOR UNIT - MS8-Z0-30P4

Number of Zones		3
SEER/EER		16.00 / 7.30
HSPF - Region IV		8.20
AHRI Reference No.		5454434
Cooling Capacity (Btuh)		29,000
Heating Capacity (Btuh)	High	30,400
	Low	16,500
Ambient Temp. Operating Range (°F)	Cooling	23 to 118
	Heating	5 to 80
Connections	Liquid line o.d. - flare (in.)	1/4
	Suction line o.d. - flare	3/8
Refrigerant (R-410A) furnished		4 lbs. 8 oz.
Outdoor Fan Motor	Diameter - in.	20-1/2
	No. of blades	3
	Cfm (High/Standard/Low)	3300/2900/2400
	Rpm (High/Standard/Low)	690/600/540
	Watts	60
Shipping Data - lbs.		148

ELECTRICAL DATA

	Line voltage data - 60 hz - 1ph	208 / 230V
	Maximum overcurrent protection (amps)	40
	Minimum circuit ampacity	25
Compressor	Locked rotor amps	45
	Rated load amps	13
Compressor	High	650 / 980
Power Input (W) Cooling/Heating	Standard	3450 / 2850
	Low	4500 / 3950
Outdoor Fan Motor	Rated load amps	0.59
	Output (W)	60

OPTIONAL ACCESSORIES - OUTDOOR

Description	Cat. No.
Condenser Pad (18 x 36 x 2)	48X92
Disconnects	30 amp, fused, 1 ph 27P37
	60 amp, non-fused, 1 ph 27P39
Fuses	30A 83P75
	60A 83P77
Line Sets	1/4 in. x 3/8 in. x 25 ft. 90X53
	1/4 in. x 3/8 in. x 50 ft. X0258
Male Flare Adaptor	5/16 in. quick connect x 1/4 in. MF Y0576
Wall Bracket	30 in. Y5020
Whips	10 Gauge - 1/2 in. x 6 ft. 29P54
	8 Gauge - 3/4 in. x 6 ft. 27P44

INDOOR UNIT - MS8-HI-09P1 / MSI-HI-12P1

Model No.	(1) MS8-HI-09P1	(2) MS8-HI-12P1
Connections (in.) o.d. flare	Liquid/Suction 1/4 / 3/8	1/4 / 3/8
Line Sets Required	(1) 1/4 in. x 3/8 in.	(2) 1/4 in. x 3/8 in.
Indoor Blower	Maximum 305	335
Air Volume	High 275	275
	Medium 255	255
	Low 220	220
Indoor Blower	D x L (in.) 3.6 x 25.4	3.6 in. x 25.4
Shipping Data - lbs.	31	29

ELECTRICAL DATA

Line voltage data - 60 hz - 1ph	208/230V	208/230V
Rated Load Amps	0.20	0.20
Output (W)	20	20


OPTIONAL ACCESSORIES - INDOOR

Condensate Pump		
3.70 US gph, 26 ft. lift - 115V	X8250	X8250
3.70 US gph, 26 ft. lift, 230V	X8251	X8251
7.9 US gph, 35 ft. lift - 120/240V	Y5170	Y5170
Indoor/Outdoor Wiring Cable		
14 Gauge, 4 conductor wire, THHN, 250 ft.	Y2067	Y2067
Wireless Remote Control Holder	Y5073	Y5073

SOUND DATA (Sound Rating Number dBA)


Outdoor Unit Pressure		59
Indoor Unit Pressure	Low	32
	Medium	33
	High	36
	Maximum	39
		42

INDOOR UNIT

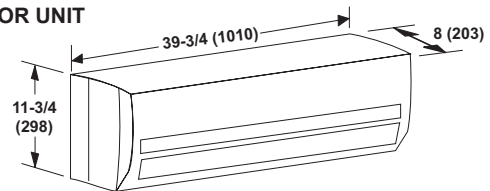

WIRELESS REMOTE CONTROL

OUTDOOR UNIT

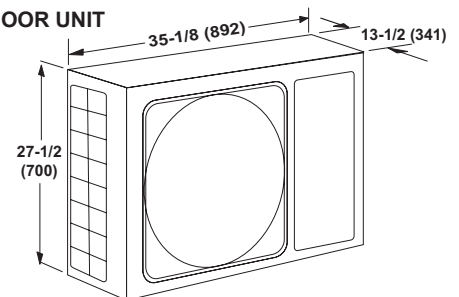

Intertek

NOTE - Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

495037 (201210)

©2012 Lennox Industries Inc.