



SUBMITTAL DATA - **OUTDOOR**

UNIT VPA072L4M-2Y

LOW AMBIENT HEATING VRF HEAT PUMP

Job: _____
Location: _____
Schedule No.: _____
System Designation: _____

Engineer: _____
Architect: _____
Date: _____
For: Reference Approval Review Construction

FEATURES

- 75% Heating Capacity at -13°F
- 100% Heating Capacity at 15°F
- Built-in Base Pan Heater
- Hinged electrical box for ease of maintenance
- High efficiency DC Inverter scroll compressor

SPECIFICATIONS

| PERFORMANCE | | |
|---------------------------------------|--------------------|--------|
| Cooling Capacity ¹ (Btu/h) | Nominal | 72,000 |
| | Rated ² | 69,000 |
| EER | Ducted | 11.80 |
| | Non-Ducted | 13.00 |
| IEER | Ducted | 21.50 |
| | Non-Ducted | 23.00 |
| Heating Capacity ¹ (Btu/h) | | 77,000 |
| COP ₄₇ | Ducted | 3.68 |
| | Non-Ducted | 4.05 |
| COP ₁₇ | Ducted | 2.25 |
| | Non-Ducted | 2.53 |
| ELECTRICAL DATA | | |
| Power Supply ³ (V/Hz/Ph) | 208-230/60/3 | |
| Minimum Circuit Ampacity (A) | 54.7 | |
| Maximum Overcurrent Protection (A) | 70 | |
| Compressor RLA (A) | 20/19 | |
| No. of Compressors | 2 | |
| Outdoor Fan Power Input (W) | 750/750 | |
| Outdoor Fan FLA (A) | 4.1/4.1 | |
| GENERAL DATA | | |
| Connection Ratio | 50% to 130% | |
| Max # of Indoor Units | 13 units | |
| Refrigerant type | R-410A | |
| Factory refrigerant charge | 22 lbs. | |
| DIMENSIONS | | |
| Unit Dimensions (in.) | Height | 63-1/8 |
| | Width | 49-1/4 |
| | Depth | 30-1/8 |
| Liquid Pipe Connection (in.) | 1/2 | |
| Gas Pipe Connection (in.) | 7/8 | |
| Net Weight (lb) | 770 | |



WARRANTY⁴

- Compressor - 10 year limited warranty
- All other components - 10 year limited warranty

NOTES

1. Cooling and Heating Capacity data is rated at the following conditions:
Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor
Heating: 70°FDB Indoor, 47°FDB / 43°FWB Indoor
2. Complies with AHRI 1230-2014 testing standards
3. Operating Voltage Range: 191V to 247V
4. See Warranty for Details






SUBMITTAL DATA - **OUTDOOR UNIT**


VPA072L4M-2Y

LOW AMBIENT HEATING VRF HEAT PUMP

DIMENSIONS - INCHES (MM)

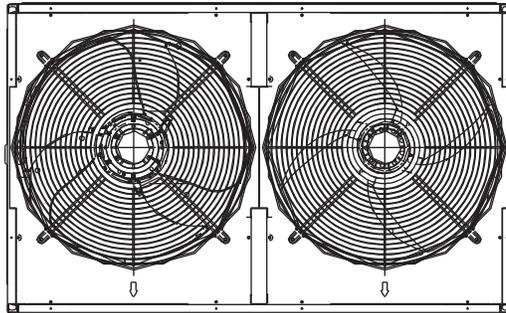

TOP VIEW

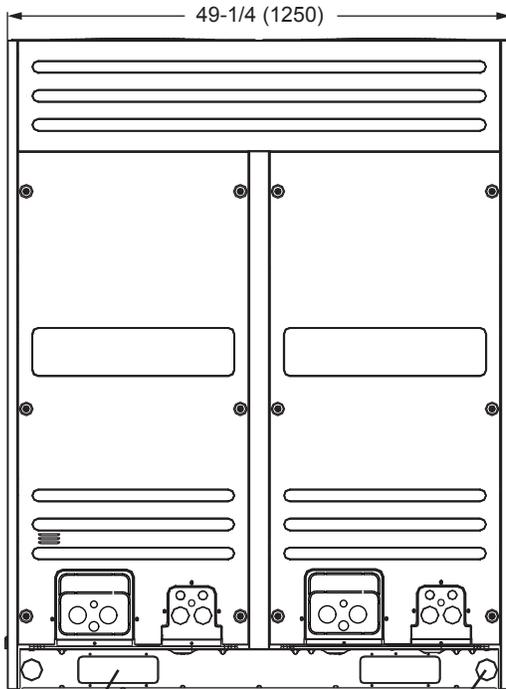


FORKLIFT SLOT
(BOTH SIDES)

LIFTING HOLES
(FOR RIGGING)

FRONT VIEW




AIR FLOW

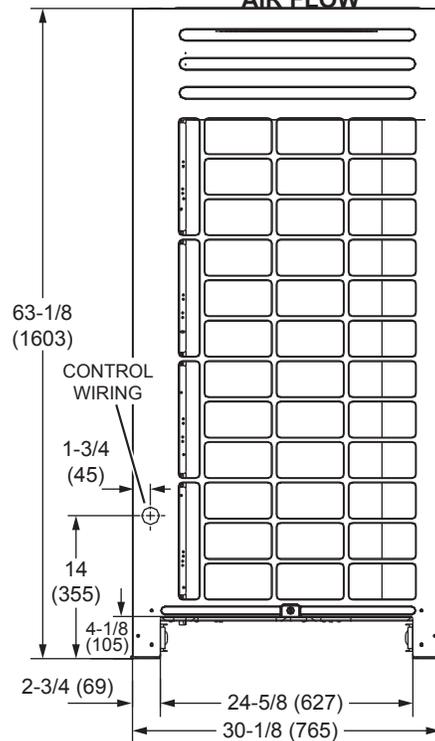

AIR FLOW

SIDE VIEW

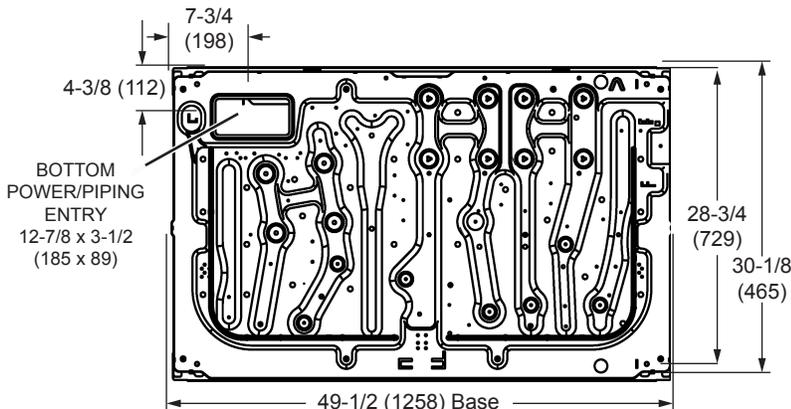

BOTTOM
POWER/PIPING
ENTRY
12-7/8 x 3-1/2
(185 x 89)

BASE VIEW

DISCLAIMER – Due to Lennox' ongoing commitment to quality, Specifications, Ratings and Dimensions subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.

495560 (201808)

©2018 Lennox Industries Inc.